

BENCHMARK:actionMessageBenchmark

run ID:

LJ461

Timestamp:

11/29/19 10:17:36

HELICS version:

2.3.1

generator:

Visual Studio 16 2019

system:

Windows

system version:

10.0.18362

platform:

C++ compiler:

MSVC

C++ compiler version:

19.23.28106.4

compiler string:

/DWIN32 /D\_WINDOWS /W3 /GR /EHsc /MD /O2 /Ob2 /DNDEBUG /machine:x64 /EHsc;/std:c++14

host name:

SIRIUS

host processor:


AMD64

CPU core count:


32

processor speed (MHz):


3394

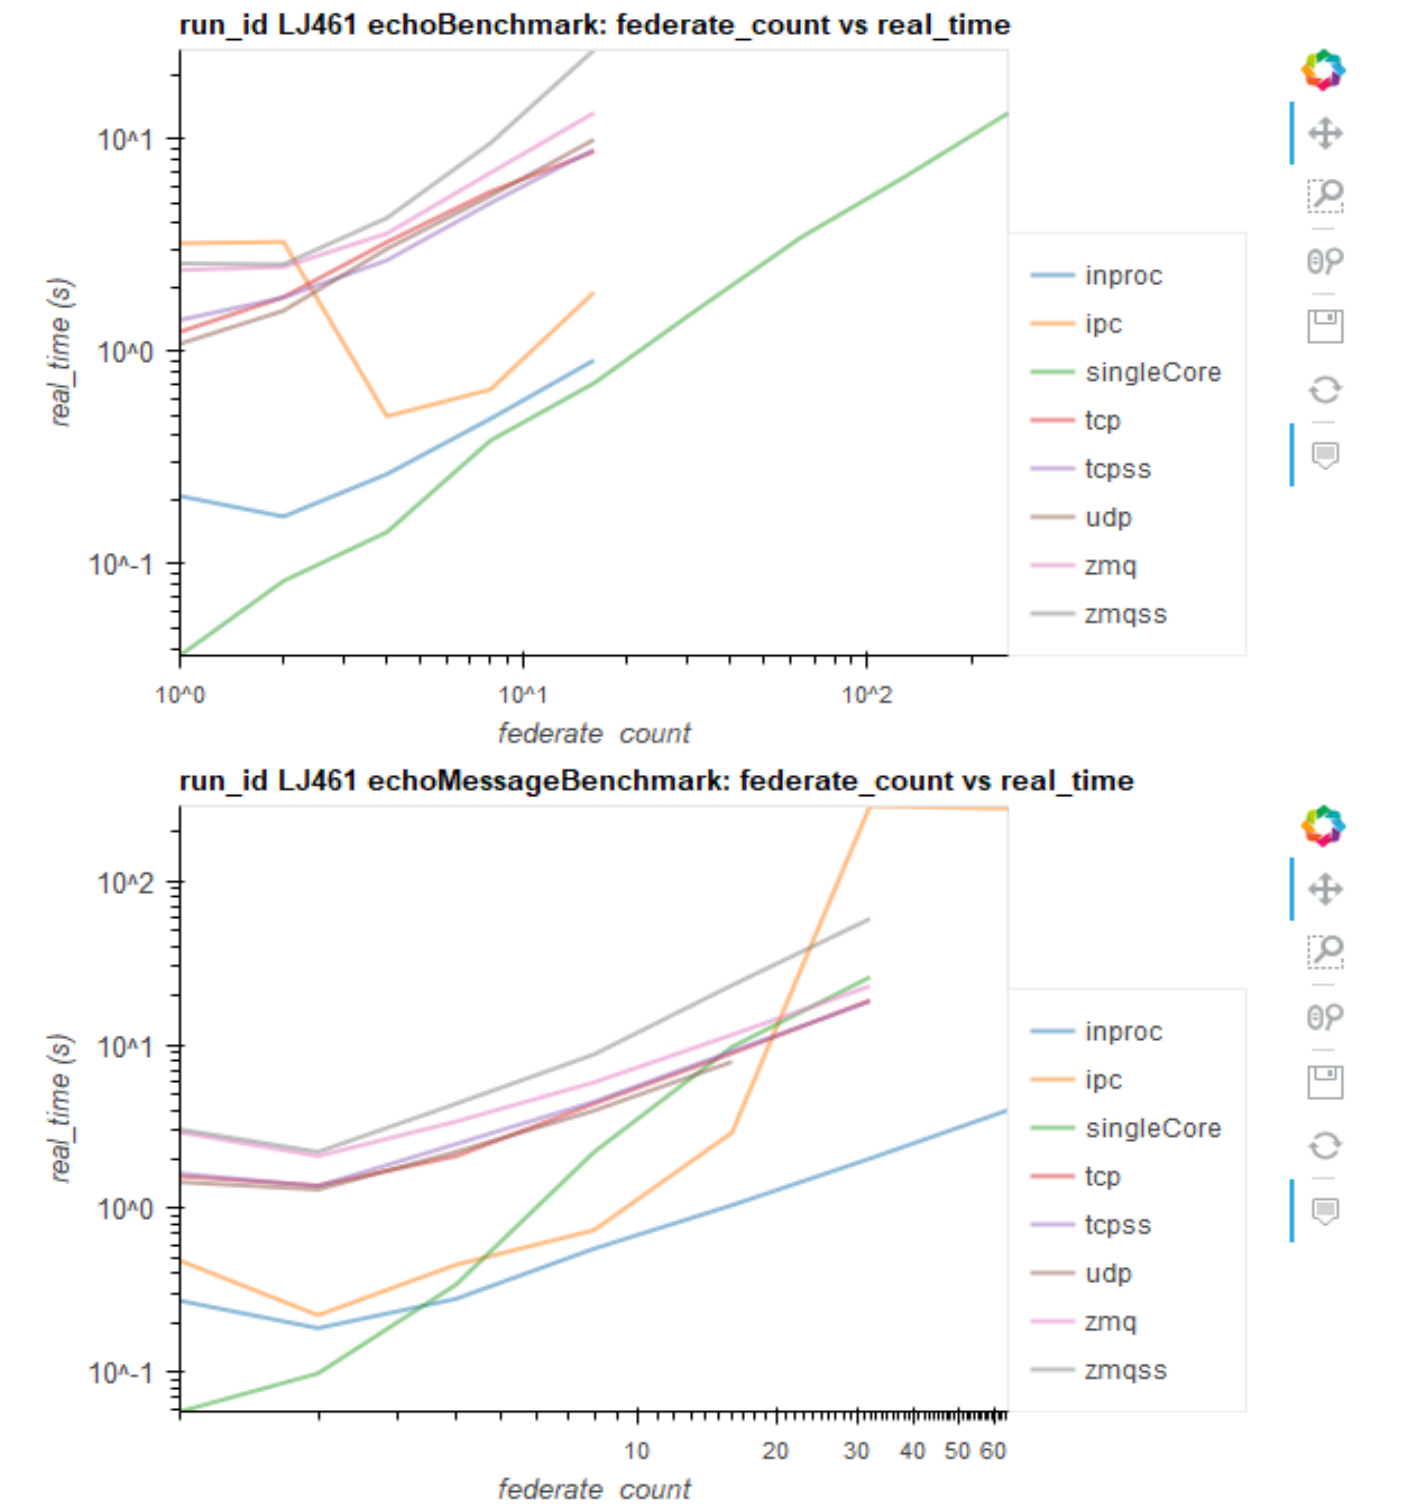


run\_id LJ461 messageLookup, core\_type=inproc, fed\_ct=2: interface\_count vs real\_

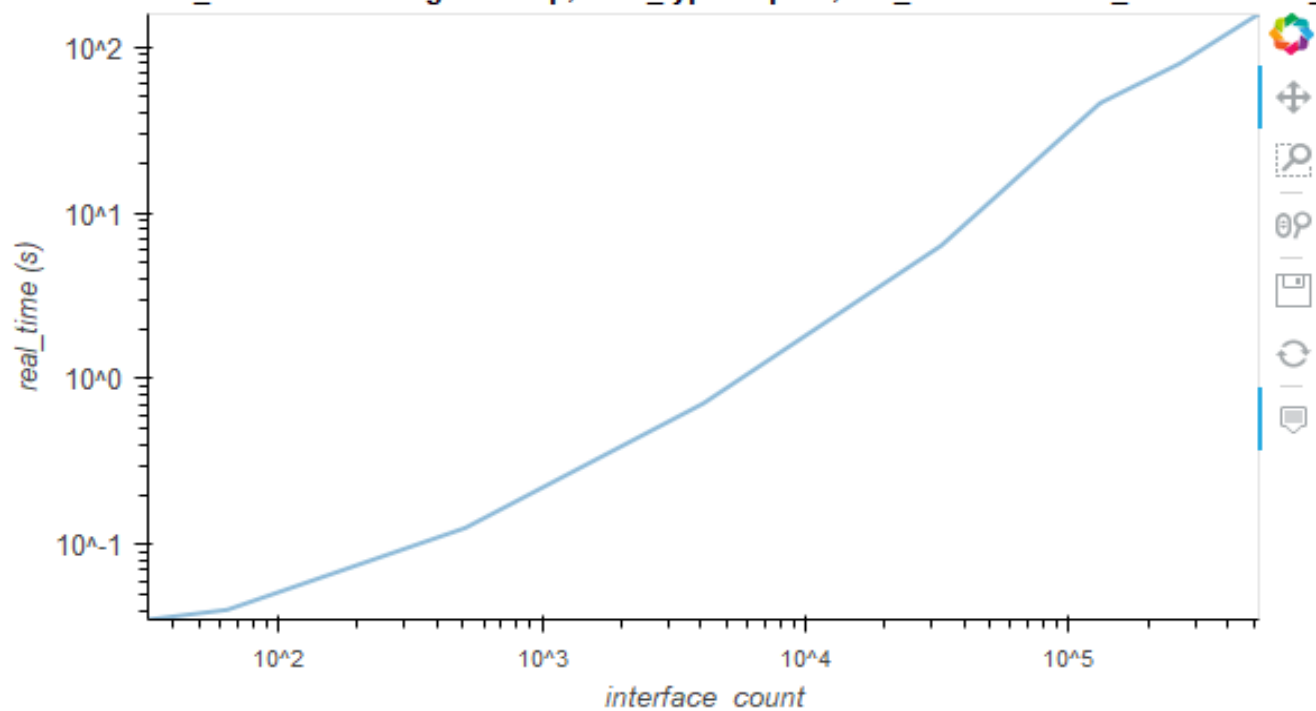


run\_id LJ461 messageLookup, core\_type=inproc, fed\_ct=64: interface\_count vs real\_t

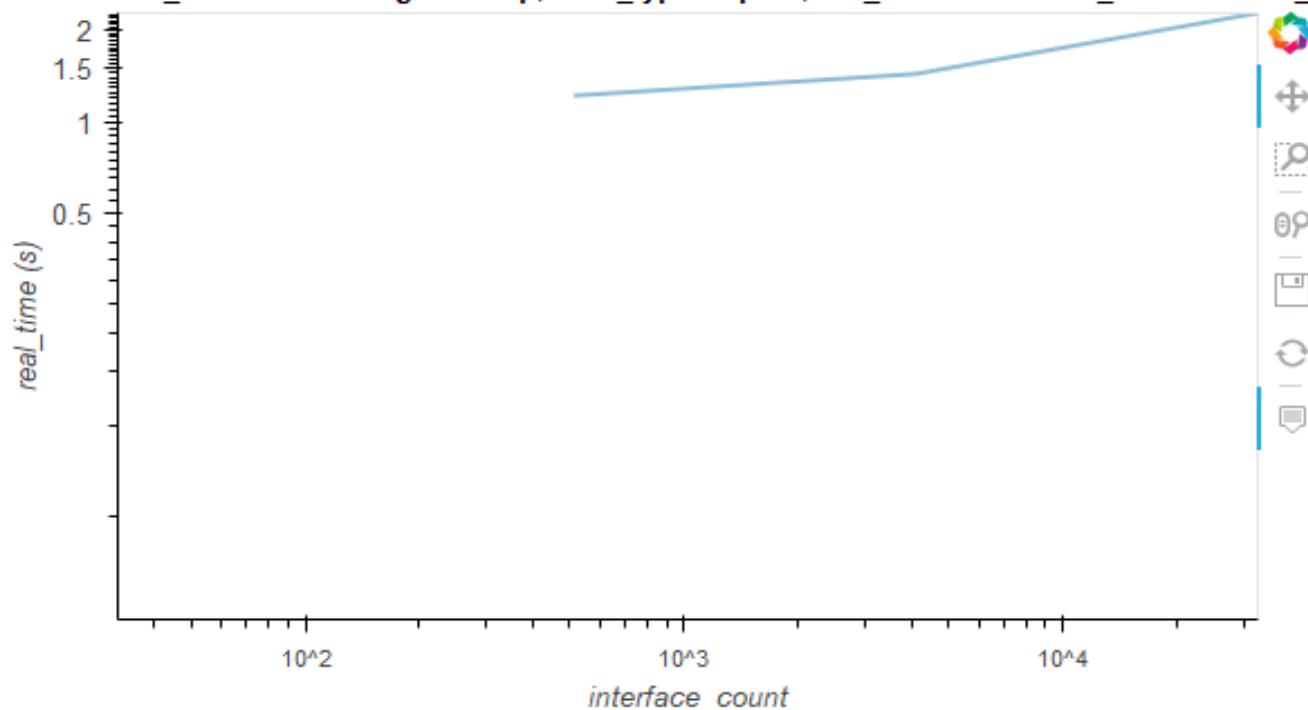


run\_id LJ461 messageLookup, core\_type=inproc, fed\_ct=8: interface\_count vs real\_tim

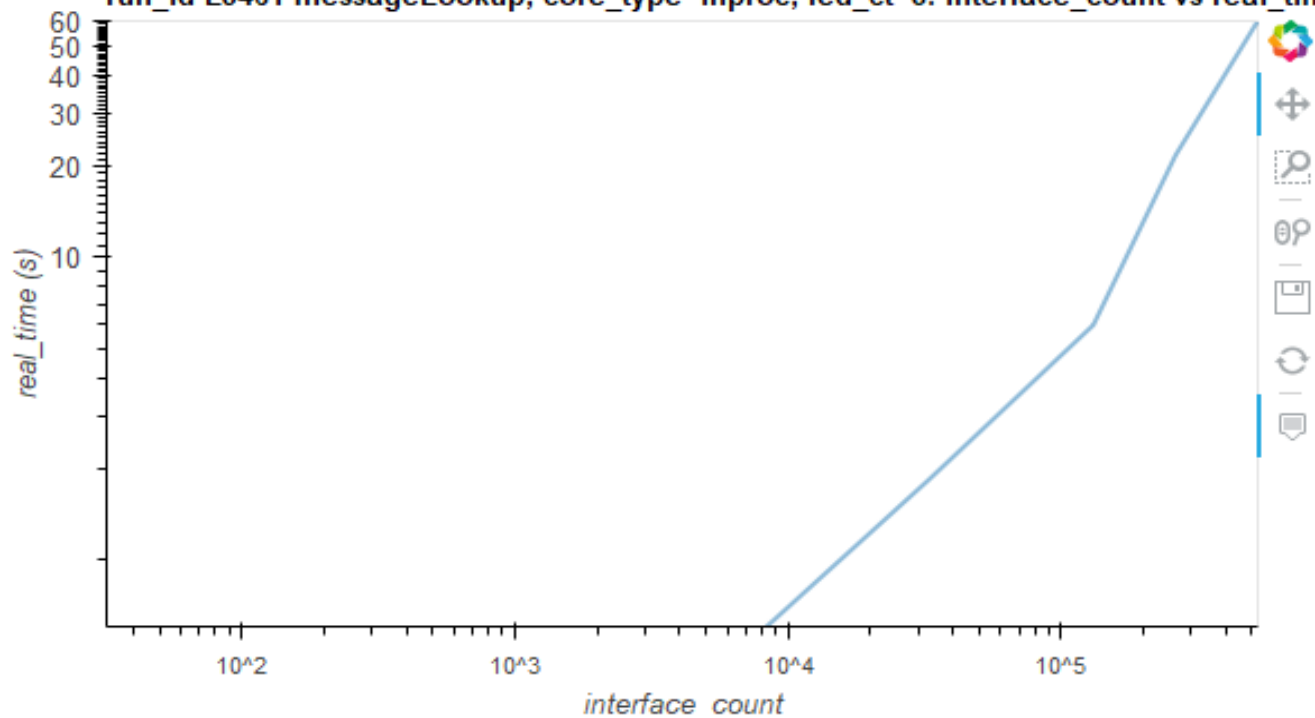


run\_id LJ461 messageSend, core\_type=singleCore: message\_size vs real\_time

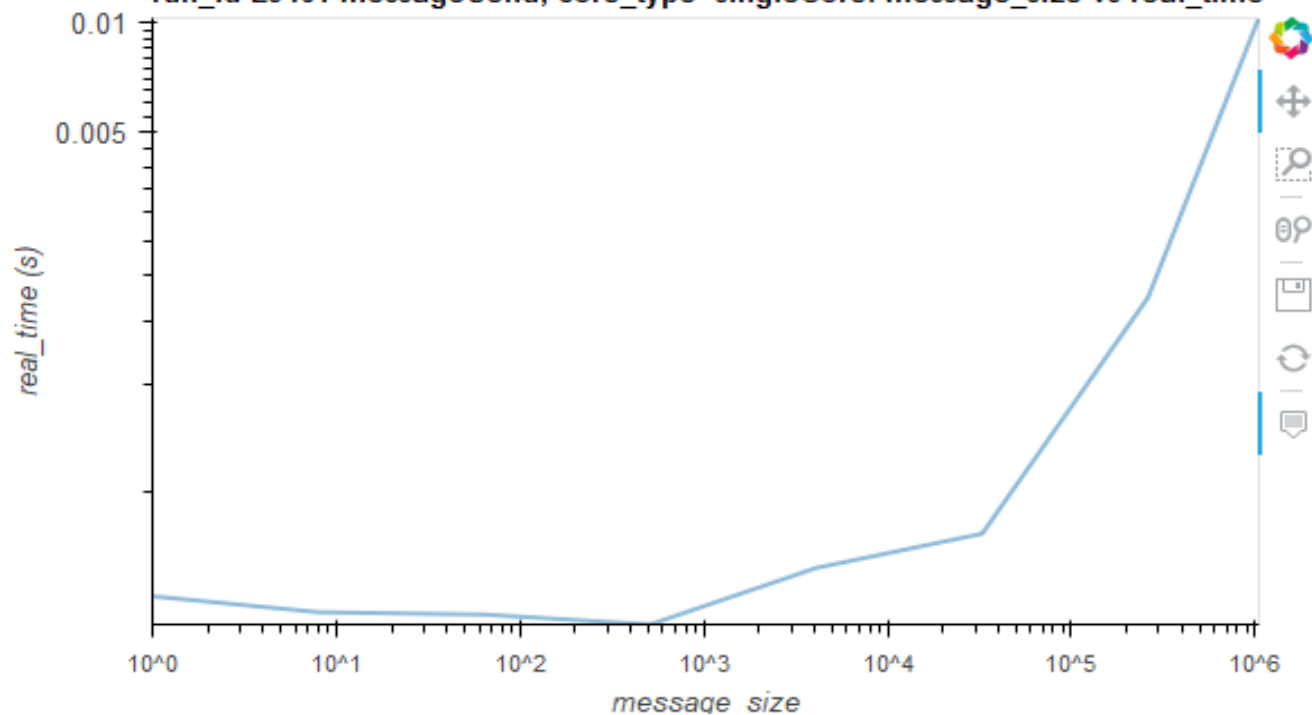


run\_id LJ461 messageSend, msg\_ct=1: message\_size vs real\_time

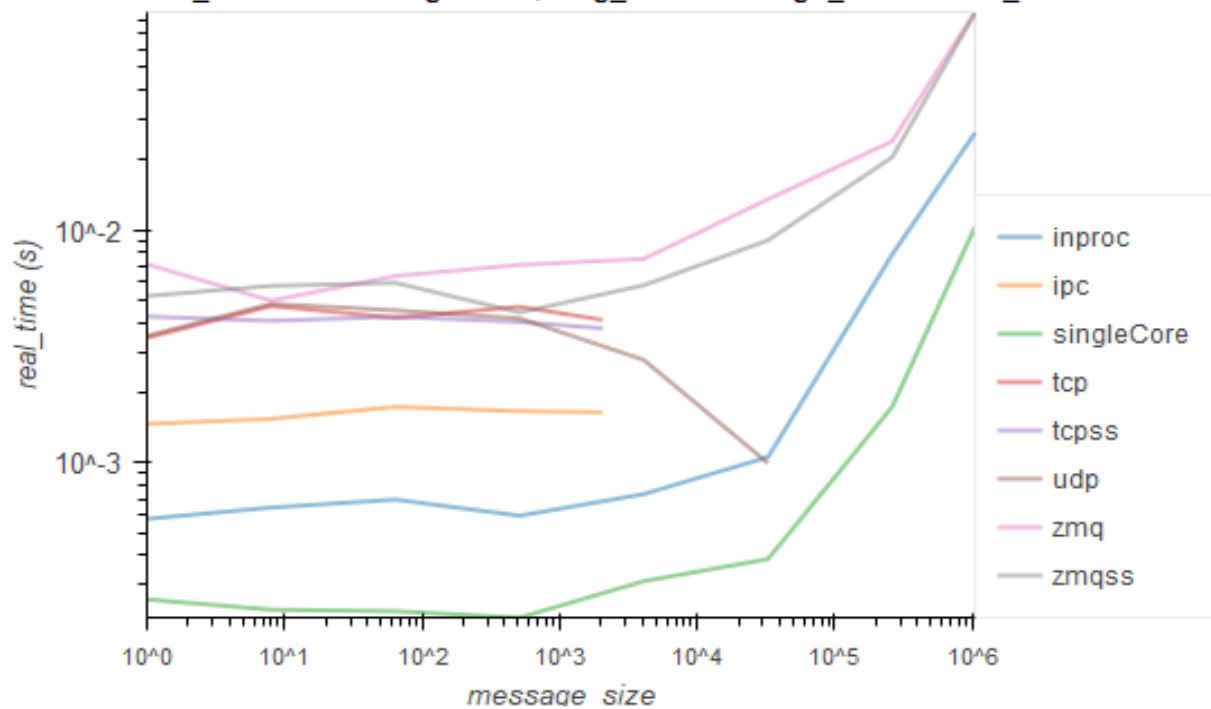

run\_id LJ461 messageSend, msg\_sz=1: message\_count vs real\_time

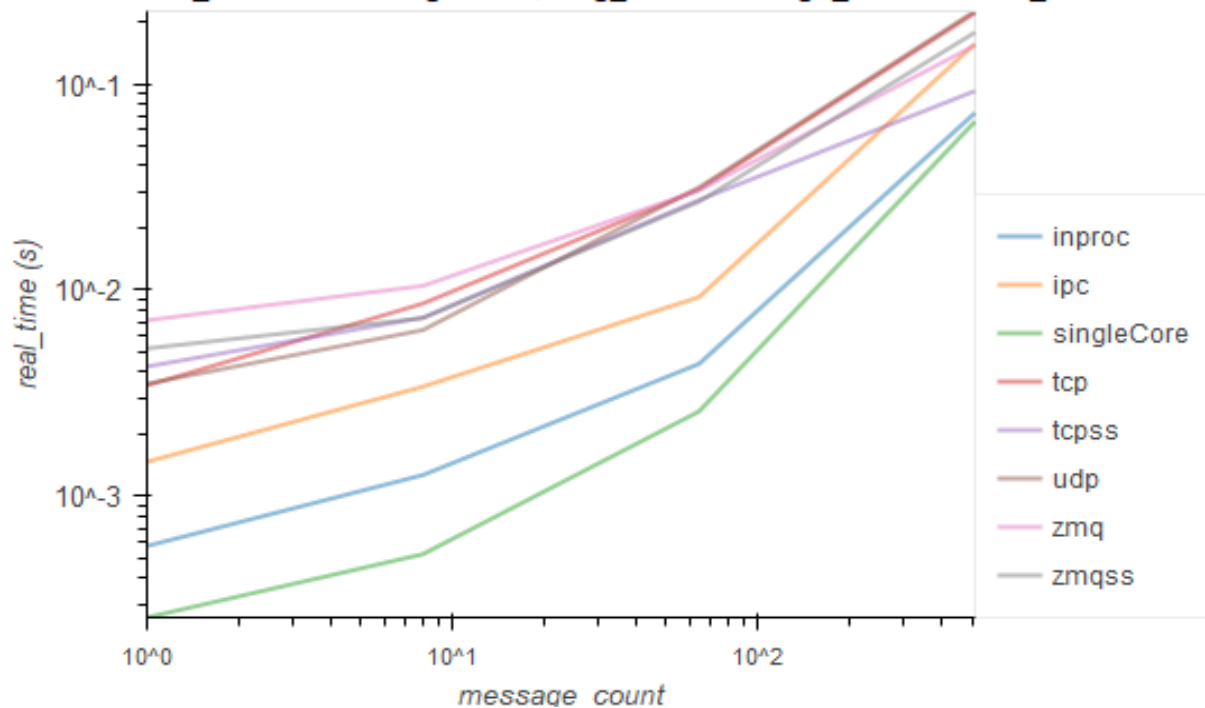

run\_id LJ461 pholdBenchmark: federate\_count vs real\_time

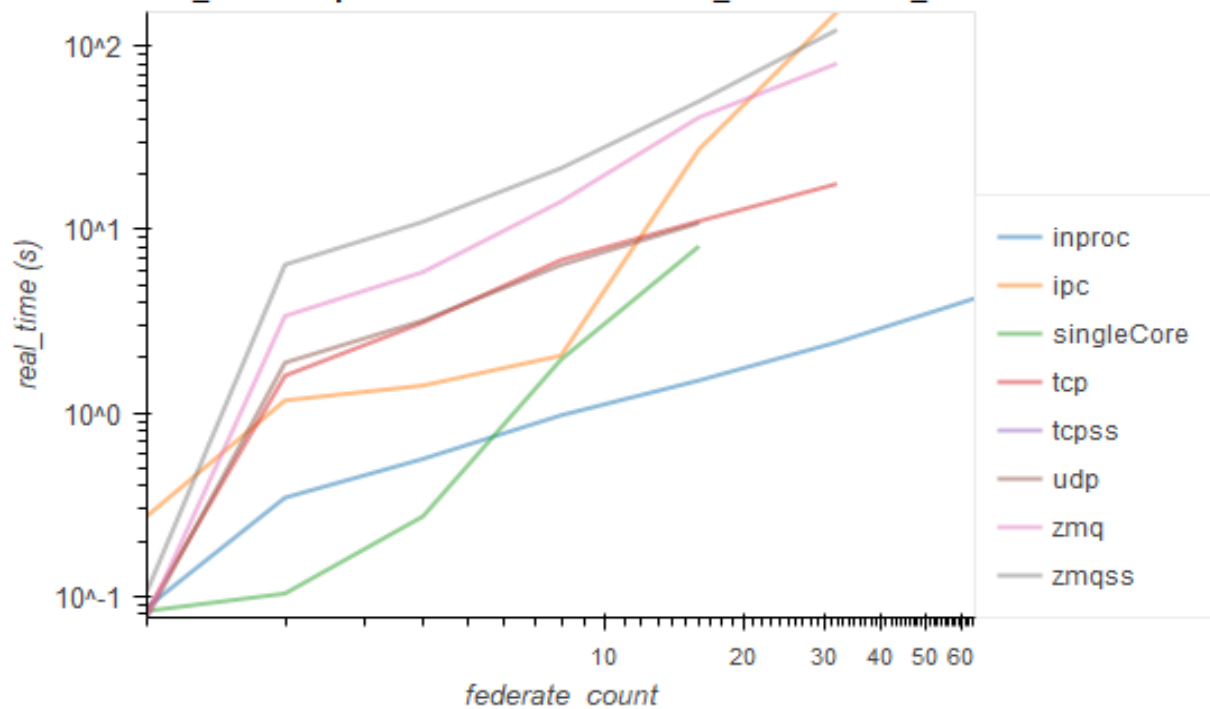

run\_id LJ461 ringBenchmark: federate\_count vs real\_time

