

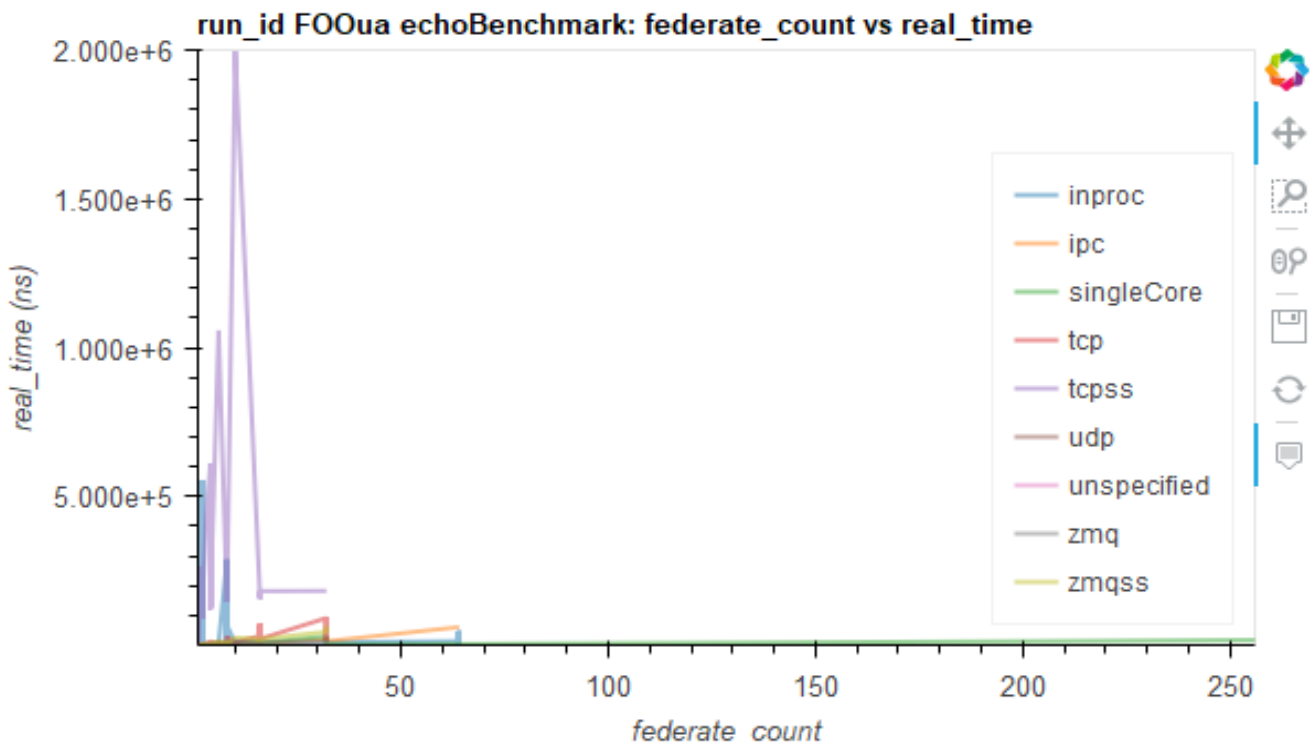



```
run ID: FOOua
Timestamp: 2019-11-30 17:58:33
HELICS version: 2.3.1
generator: Unix Makefiles
system: Linux
system version: 5.2.15-200.fc30.x86_64:
platform:
C++ compiler: Clang
C++ compiler version: 8.0.0
compiler string: -O2 -DNDEBUG $<${COMPILE_LANGUAGE:CXX}:-std=c++14>
host name: localhost.localdomain
host processor: x86_64
CPU core count: 4
processor speed (MHz): 4000
```

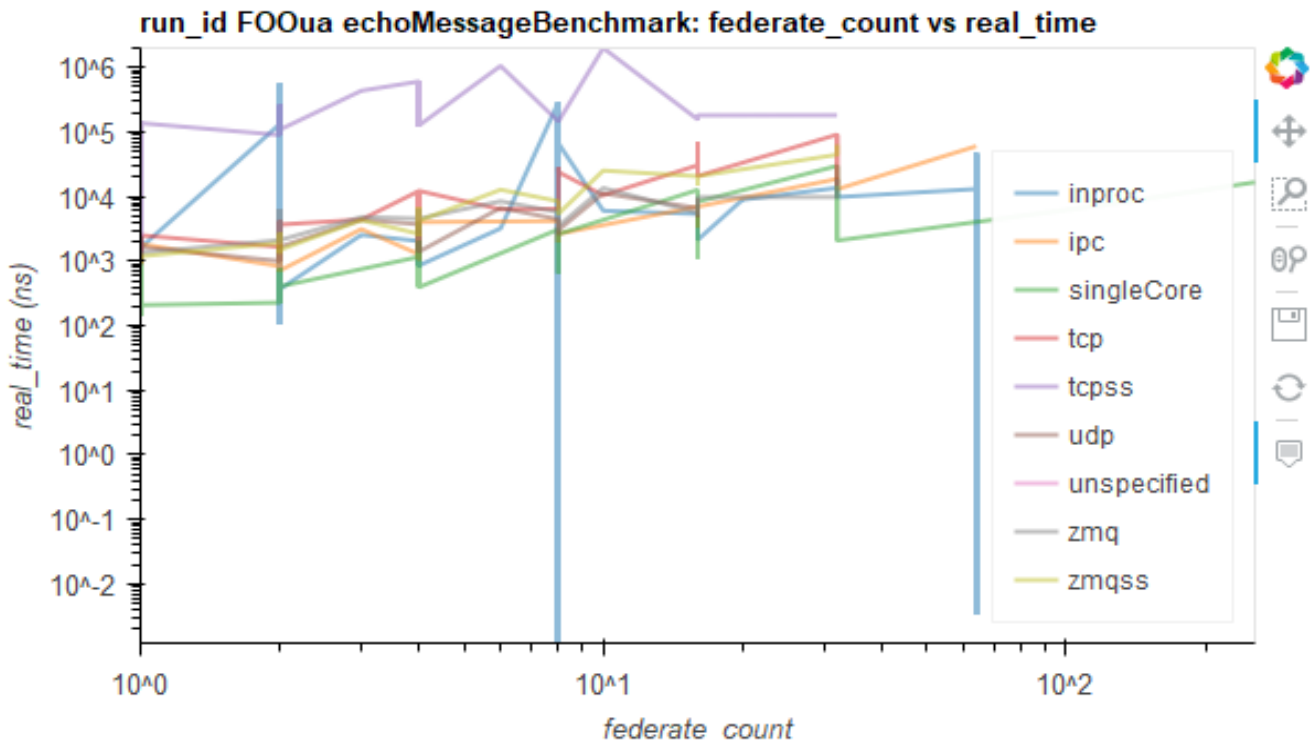


run\_id FOOua messageLookupBenchmark: interface\_count vs real\_time

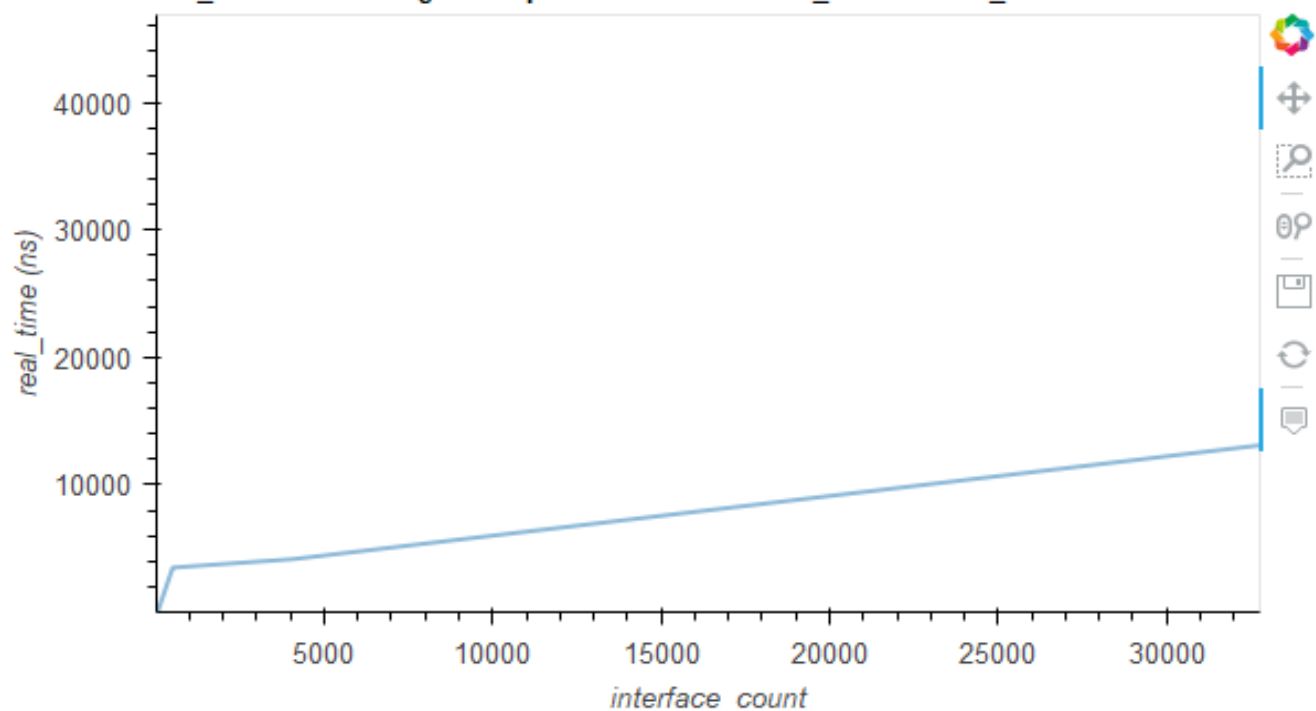


run\_id FOOua messageSendBenchmark, core\_type singleCore: message\_size vs real\_tim

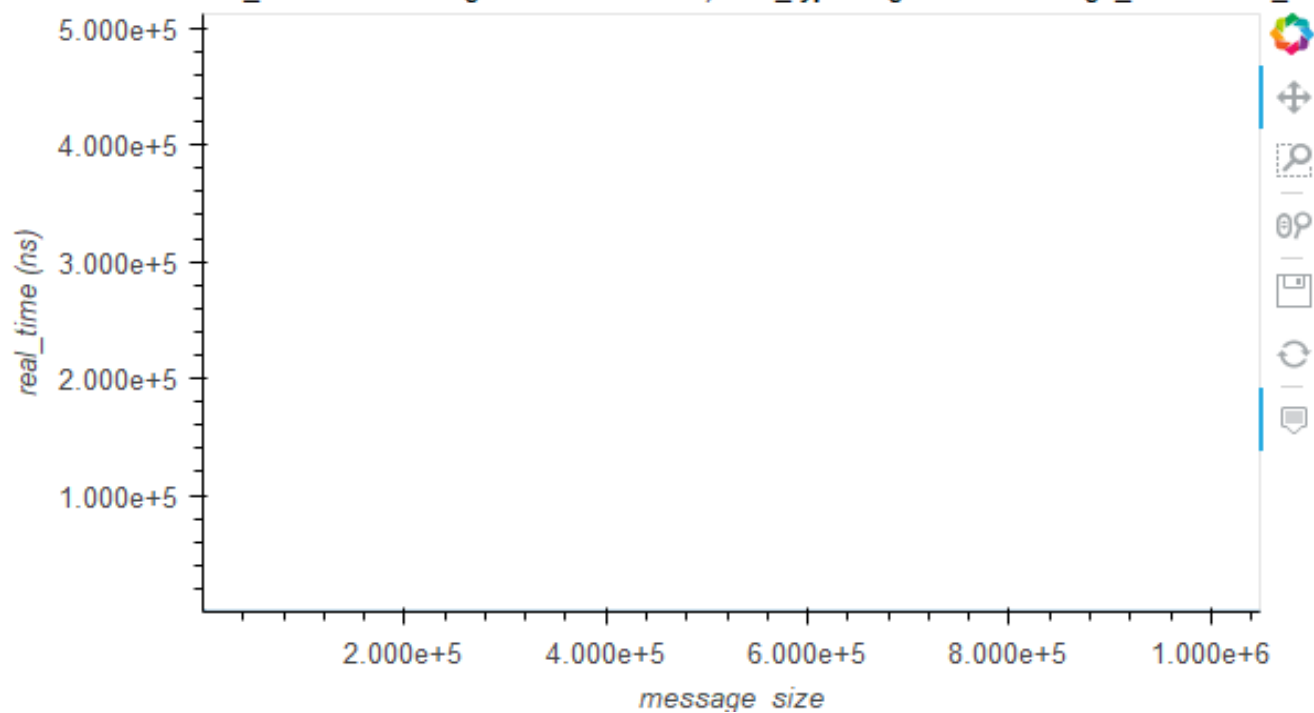


run\_id FOOua messageSendBenchmark, message\_count = 1: message\_size vs real\_time

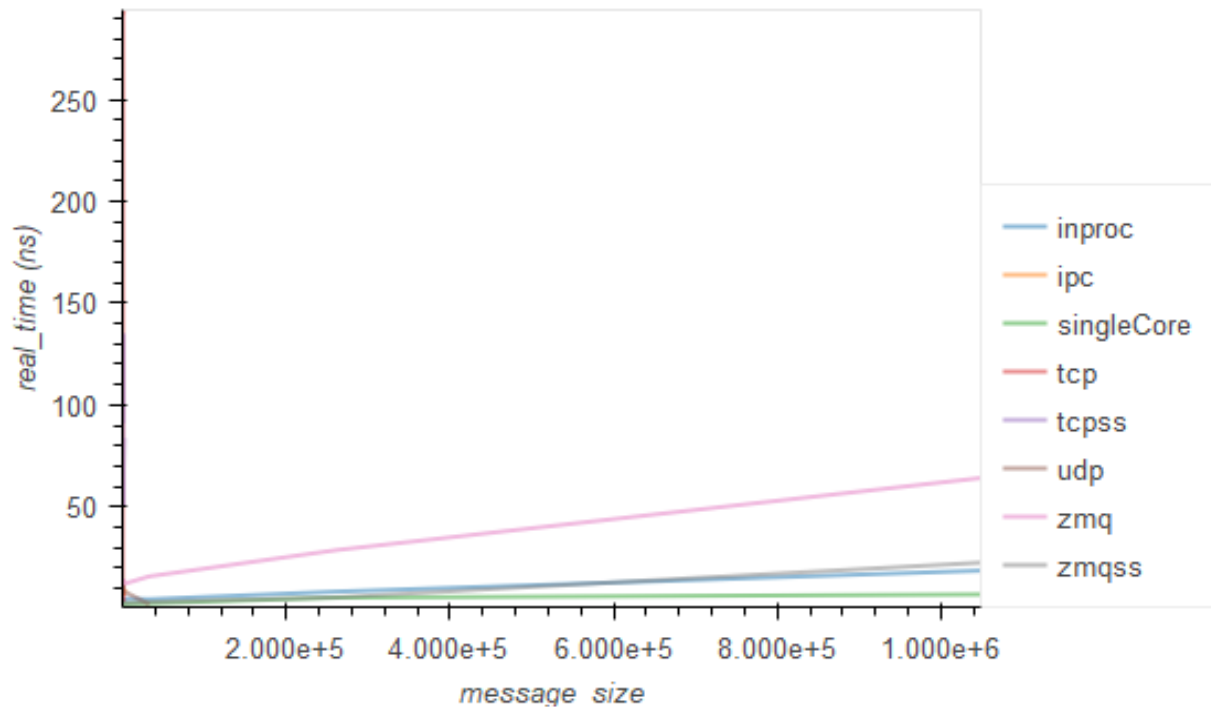

run\_id FOOua messageSendBenchmark, message\_size = 1: message\_count vs real\_time

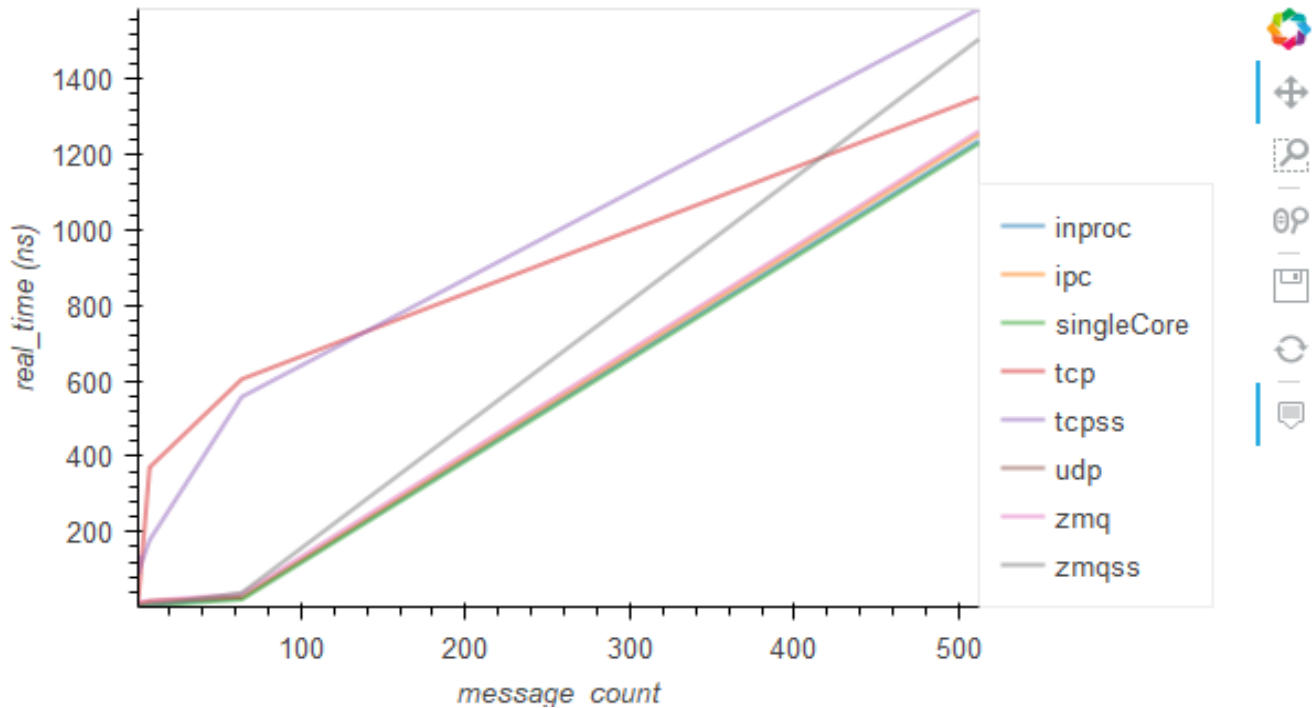

### run\_id FOOua pholdBenchmark: federate\_count vs real\_time

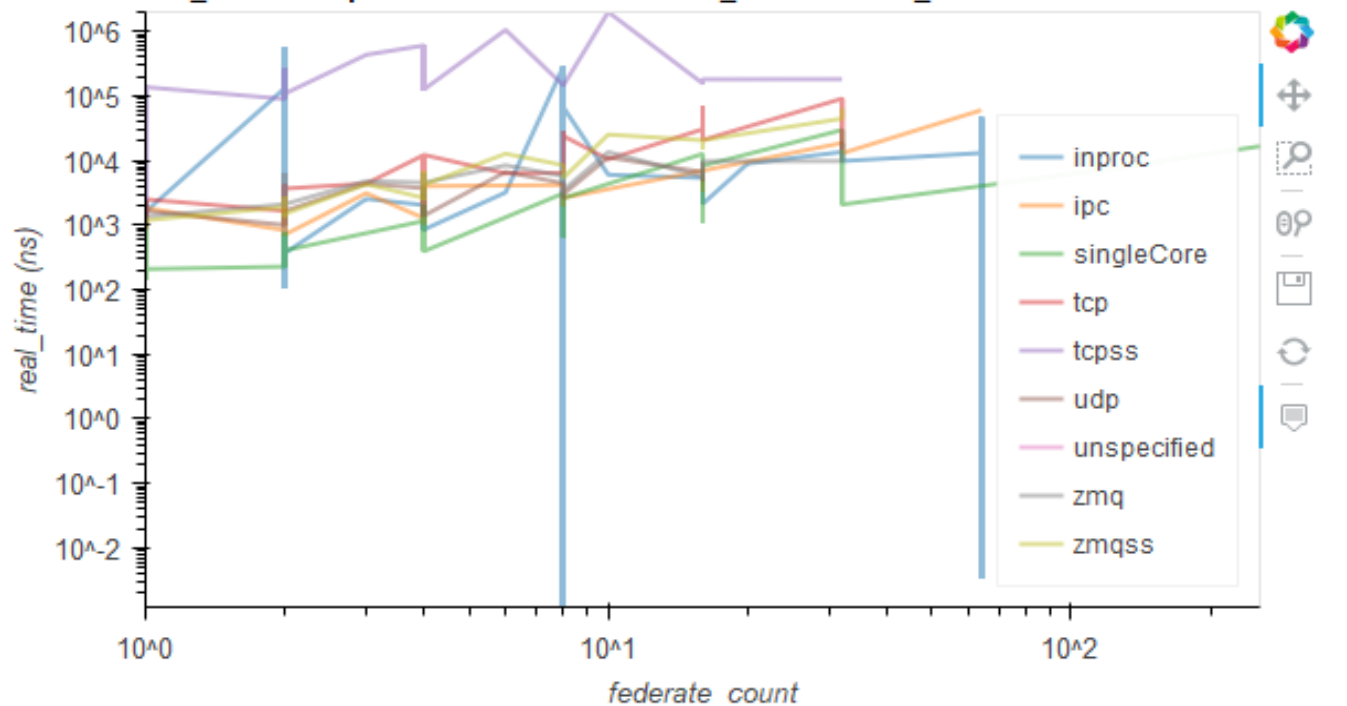

### run\_id FOOua ringBenchmark: federate\_count vs real time

