```
BENCHMARK:              actionMessageBenchmark

run ID:                 mrVM5
Timestamp:              2019-12-04 16:38:49
HELICS version:         2.3.1
generator:              Unix Makefiles
system:                 Linux
system version:         4.4.0-17763-Microsoft:
platform:
C++ compiler:           Clang
C++ compiler version:   6.0.0
compiler string:          -O3 -DNDEBUG  $<$<COMPILE_LANGUAGE:CXX>:-std=c++14>
host name:              STEADMAN
host processor:         x86_64
CPU core count:         8
processor speed (MHz):  3501
```
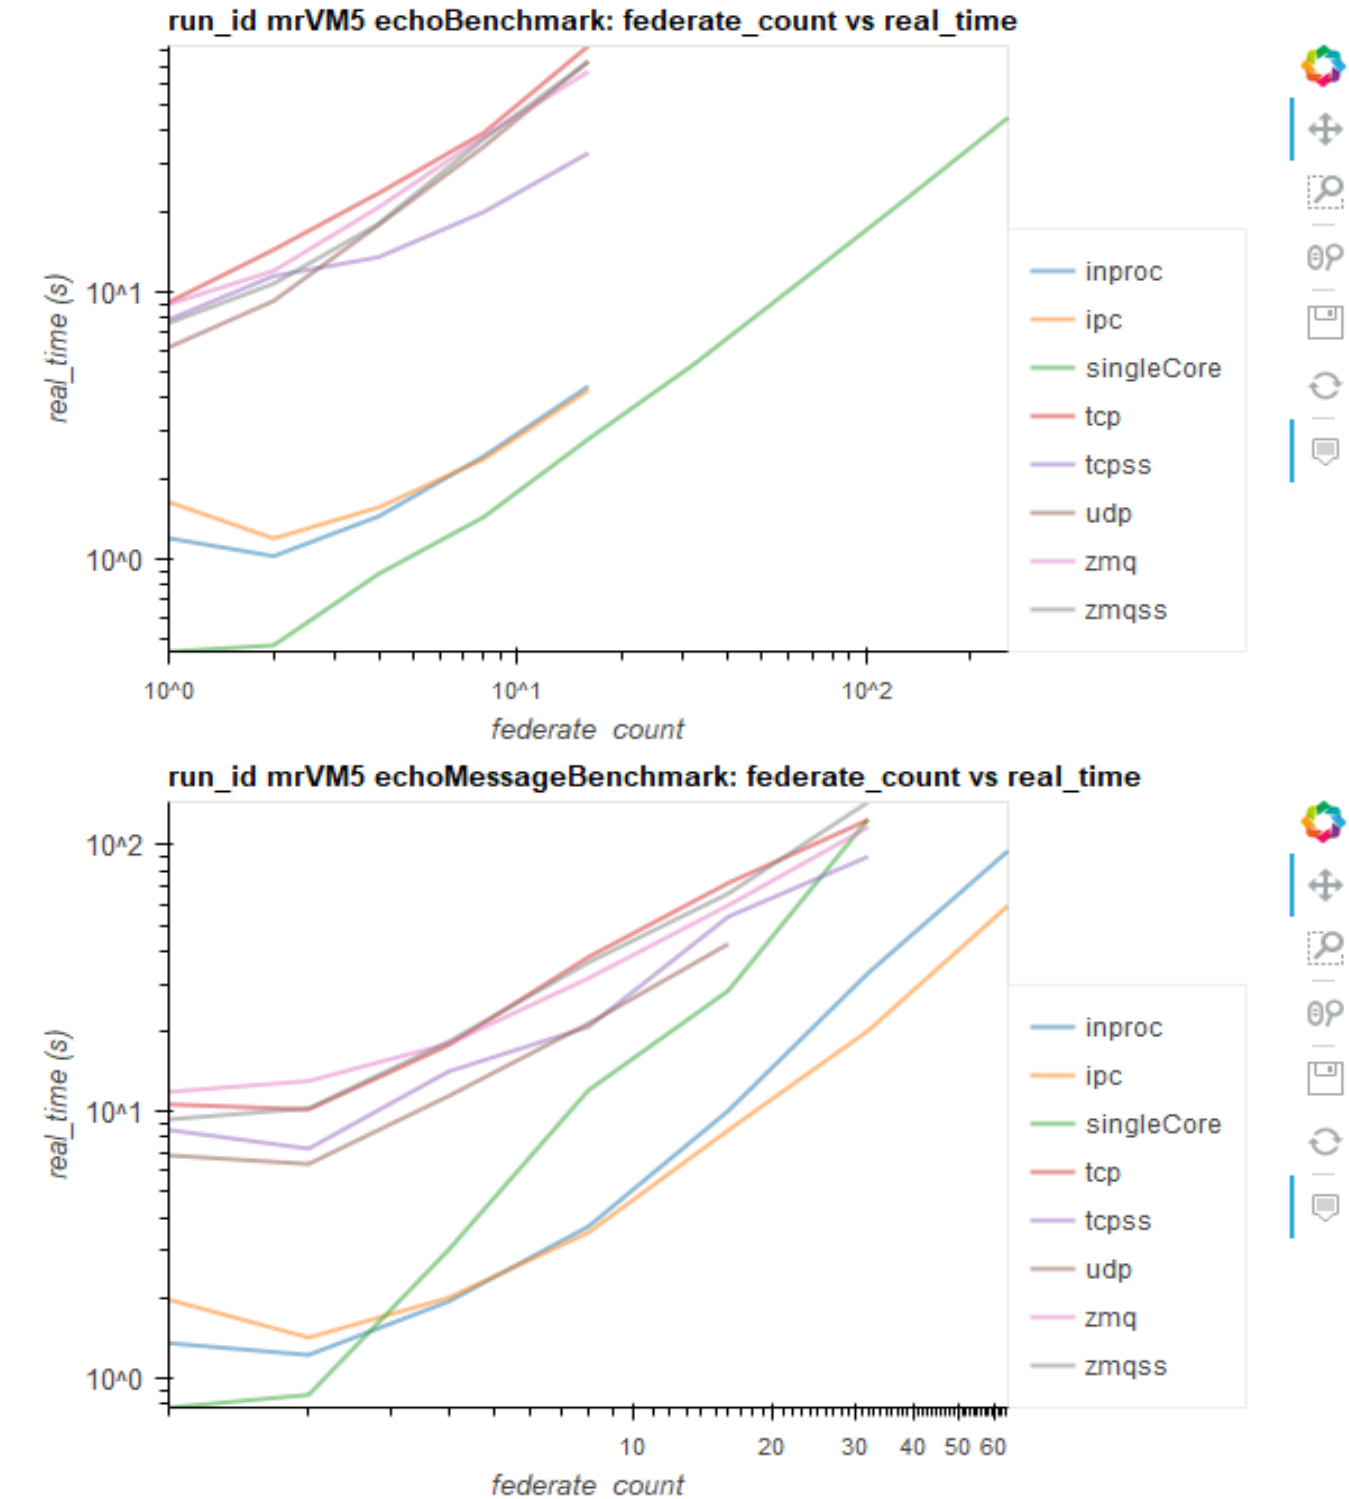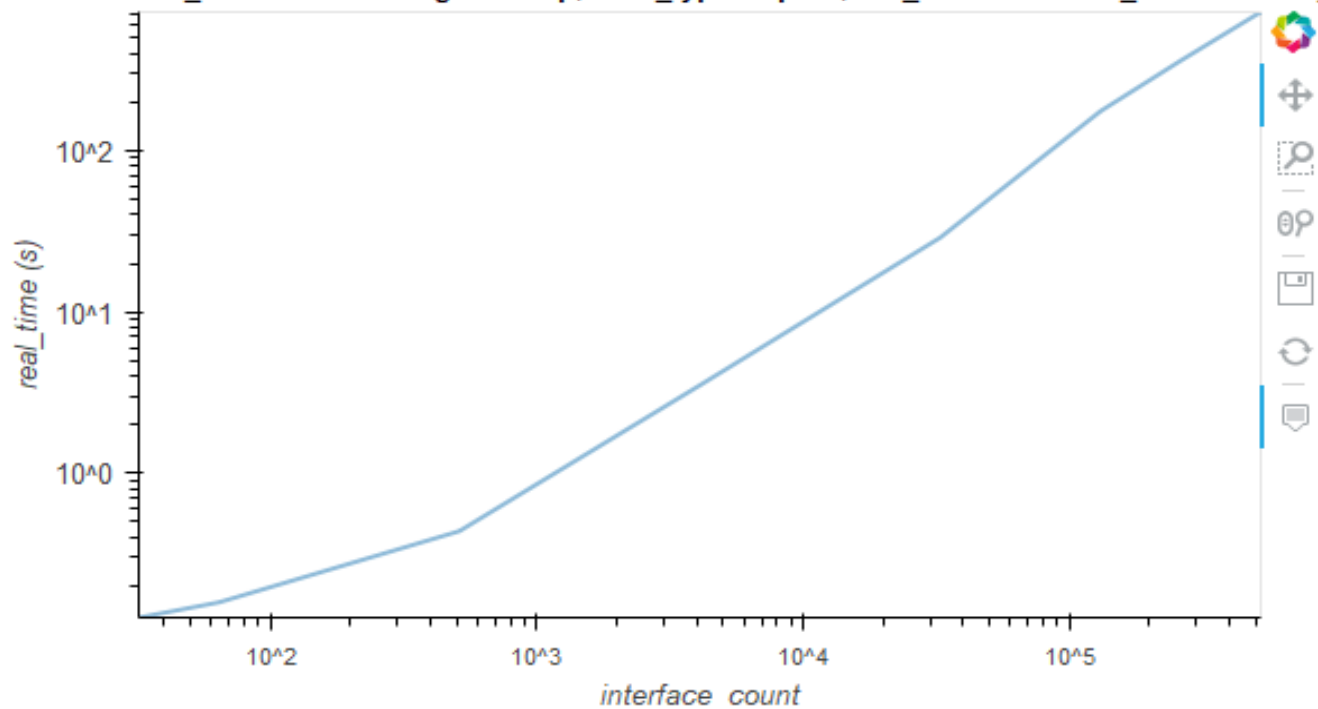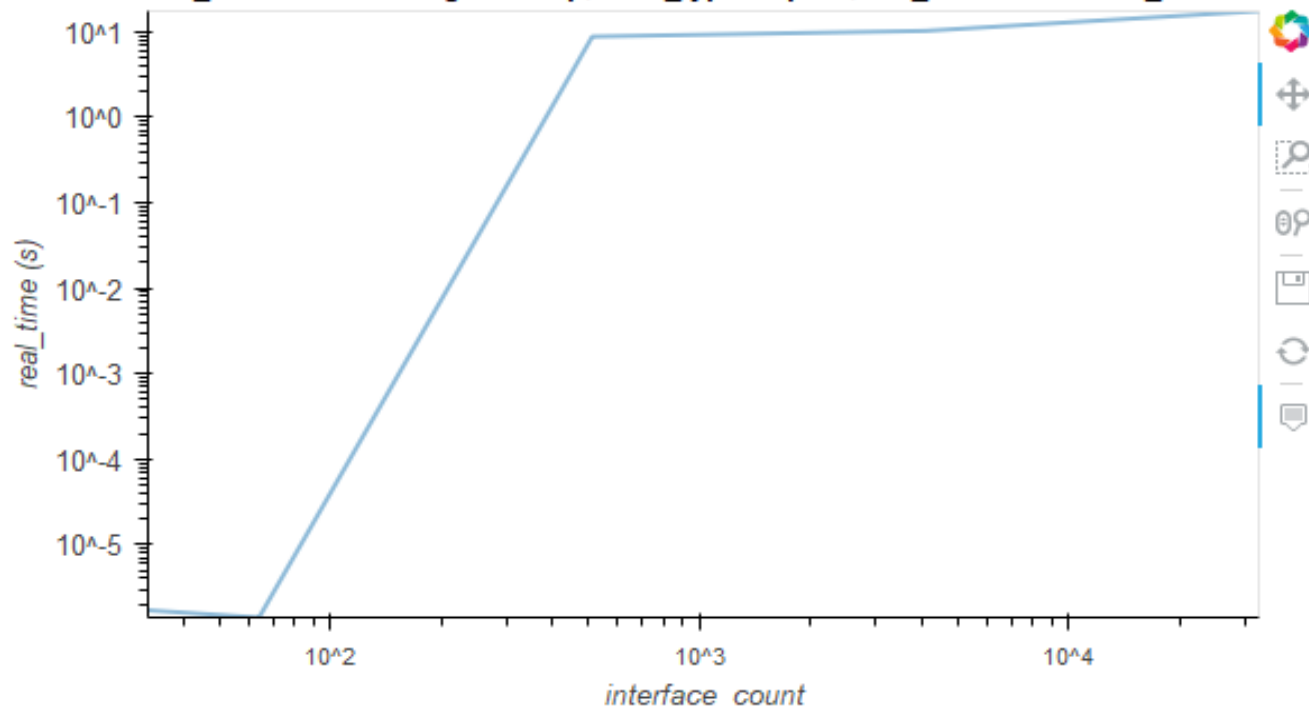

run_id mrVM5 echoBenchmark: federate_count vs real_time

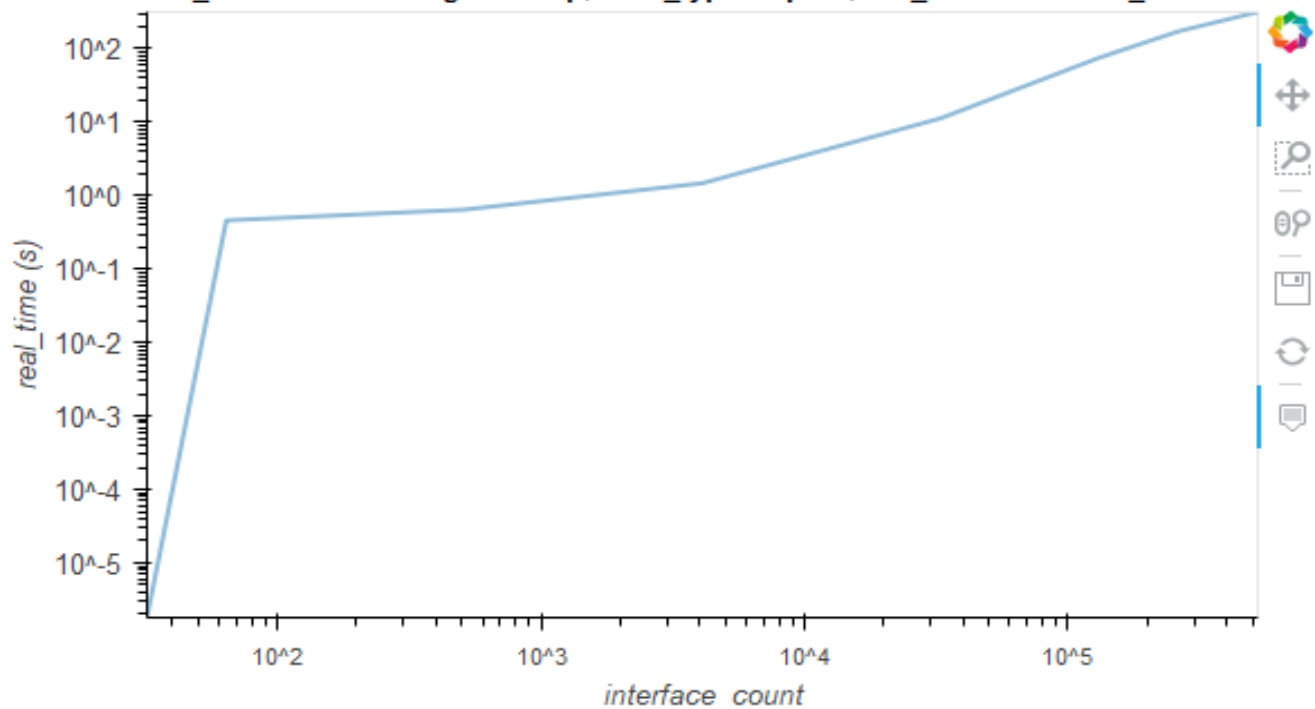run_id mrVM5 echoMessageBenchmark: federate_count vs real_time

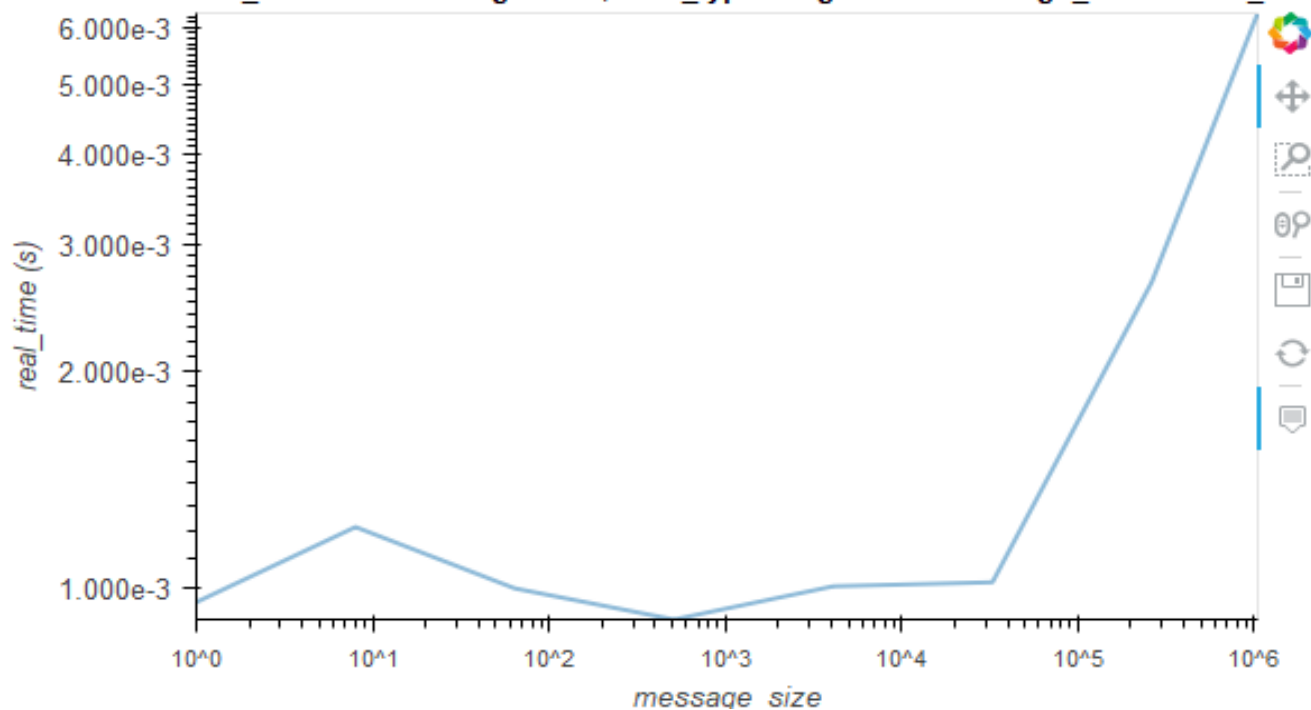## run_id mrVM5 messageLookup, core_type=inproc, fed_ct=2: interface_count vs real_

run_id mrVM5 messageLookup, core_type=inproc, fed_ct=64: interface_count vs rea

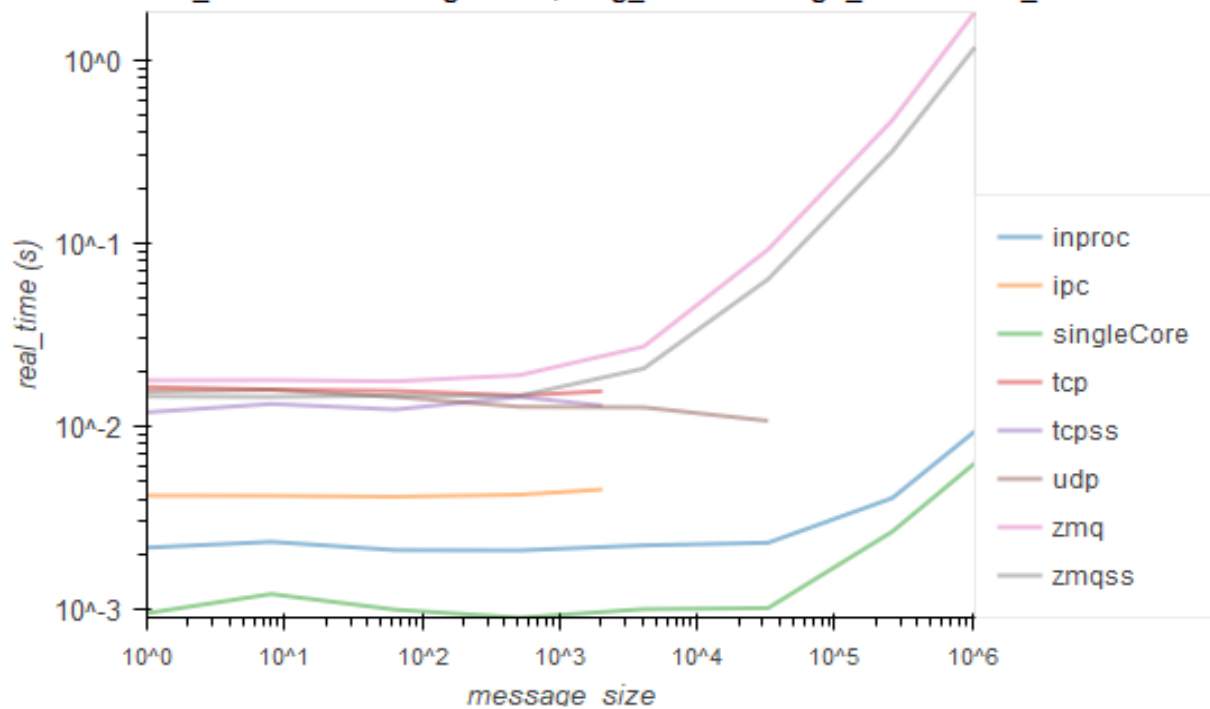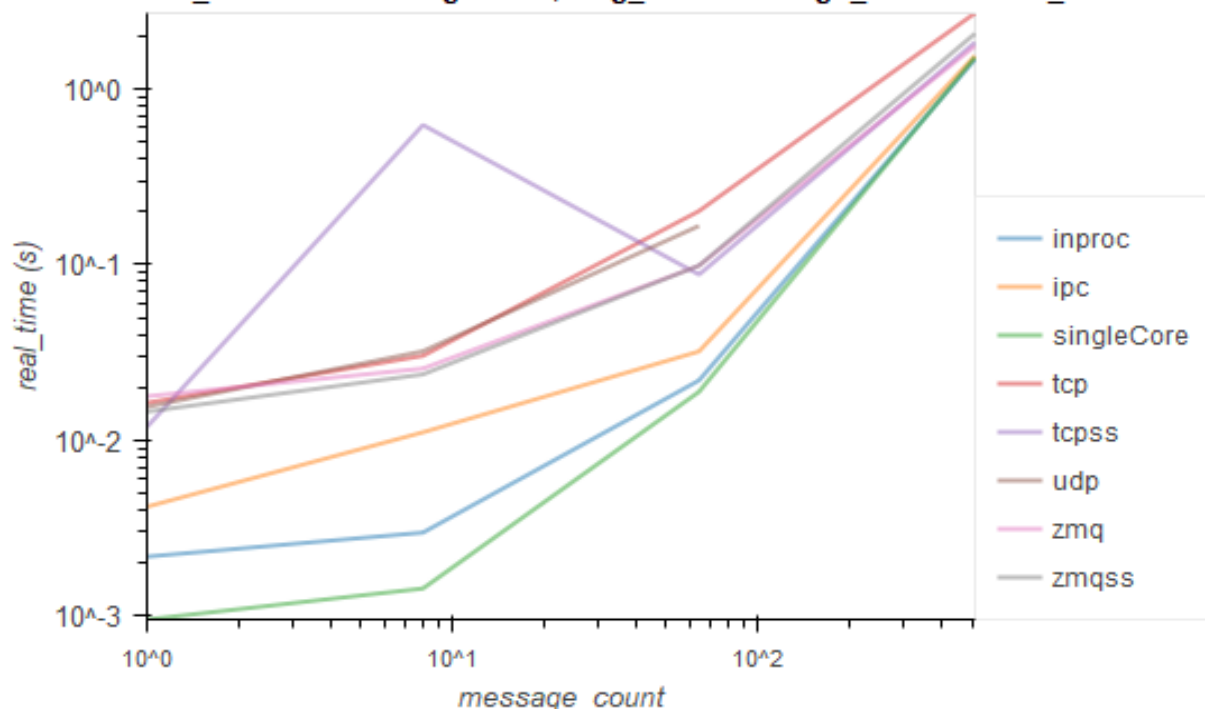## run_id mrVM5 messageLookup, core_type=inproc, fed_ct=8: interface_count vs real

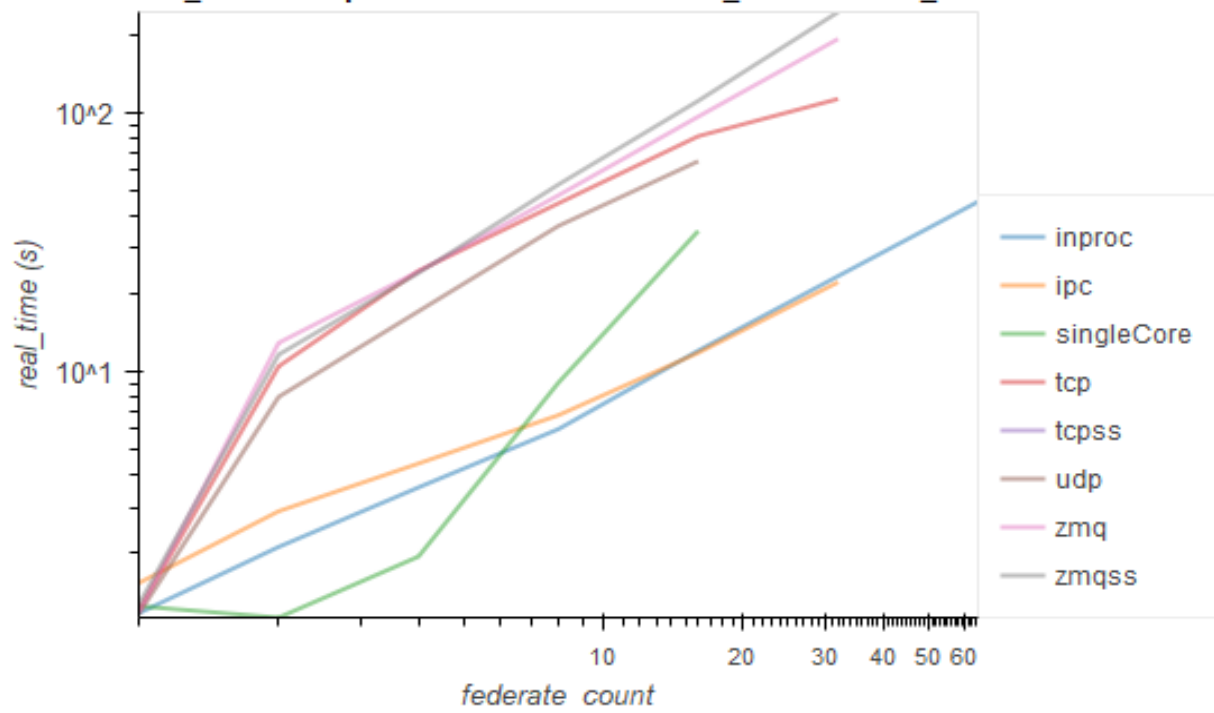## run_id mrVM5 messageSend, core_type=singleCore: message_size vs real_time

run_id mrVM5 messageSend, msg_ct=1: message_size vs real_time

run_id mrVM5 messageSend, msg_sz=1: message_count vs real_time

run_id mrVM5 pholdBenchmark: federate_count vs real_time

Legend:
- inproc
- ipc
- singleCore
- tcp
- tcpss
- udp
- zmq
- zmqss

run_id mrVM5 ringBenchmark: federate_count vs real_time

Legend:
- inproc
- ipc
- tcp
- tcpss
- udp
- zmq
- zmqss