```
BENCHMARK:              actionMessageBenchmark

run ID:                 LJ461
Timestamp:              11/29/19 10:17:36
HELICS version:         2.3.1
generator:              Visual Studio 16 2019
system:                 Windows
system version:         10.0.18362
platform:
C++ compiler:           MSVC
C++ compiler version:   19.23.28106.4
compiler string:         /DWIN32 /D_WINDOWS /W3 /GR /EHsc /MD /O2 /Ob2 /DNDEBUG /machine:x64 /EHsc;/std:c++14
host name:              SIRIUS
host processor:         AMD64
CPU core count:         32
processor speed (MHz):  3394
```
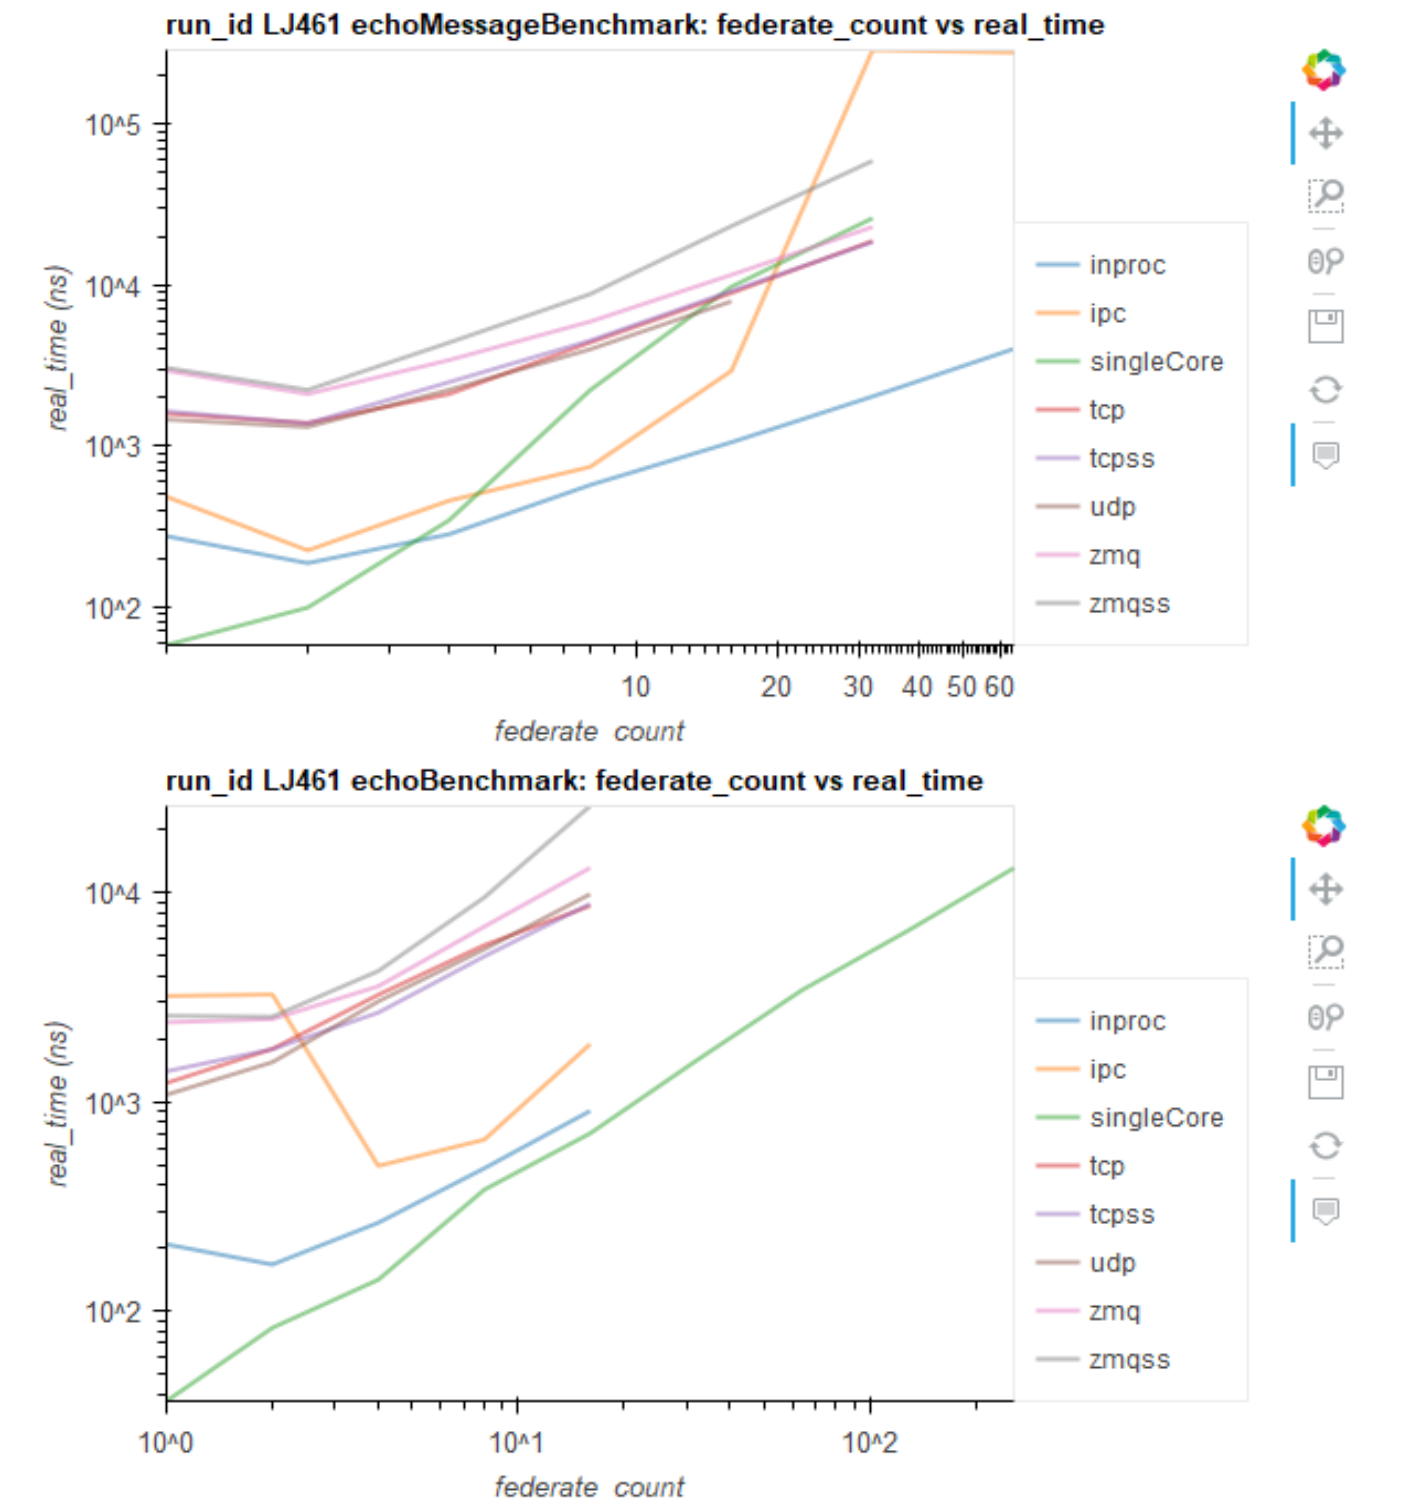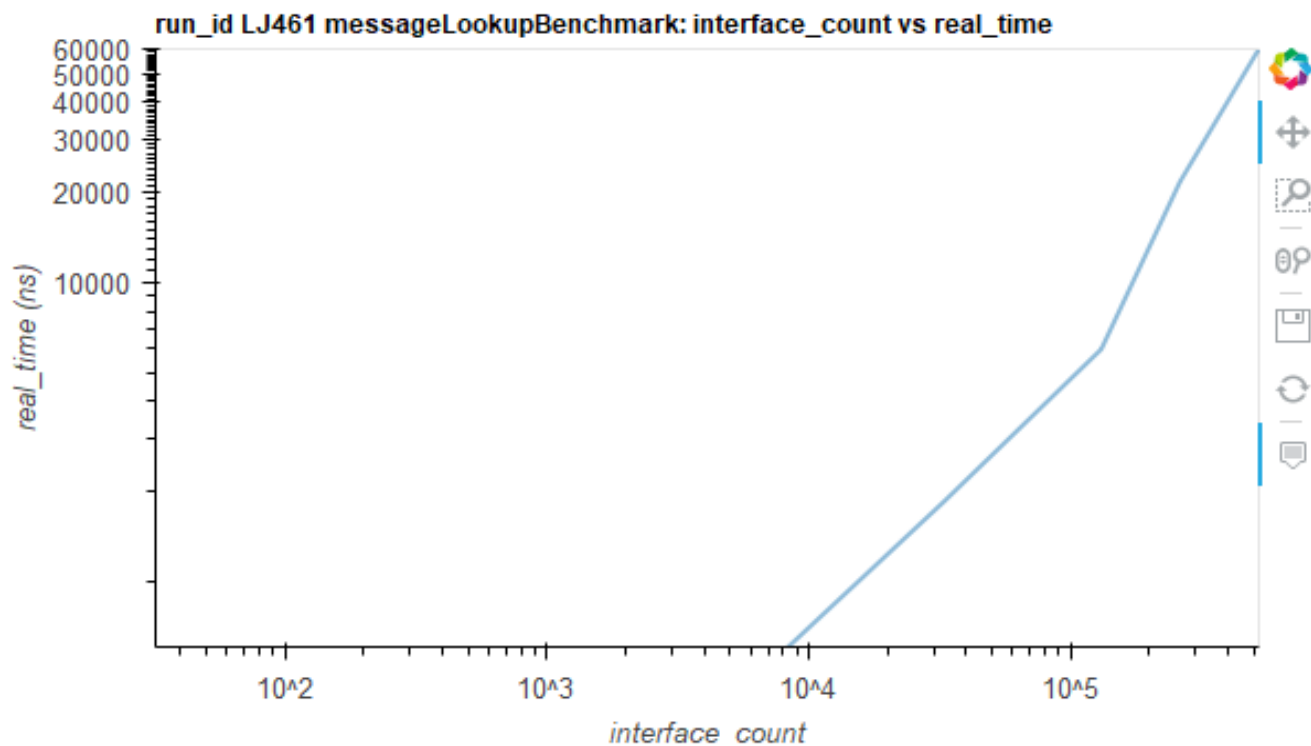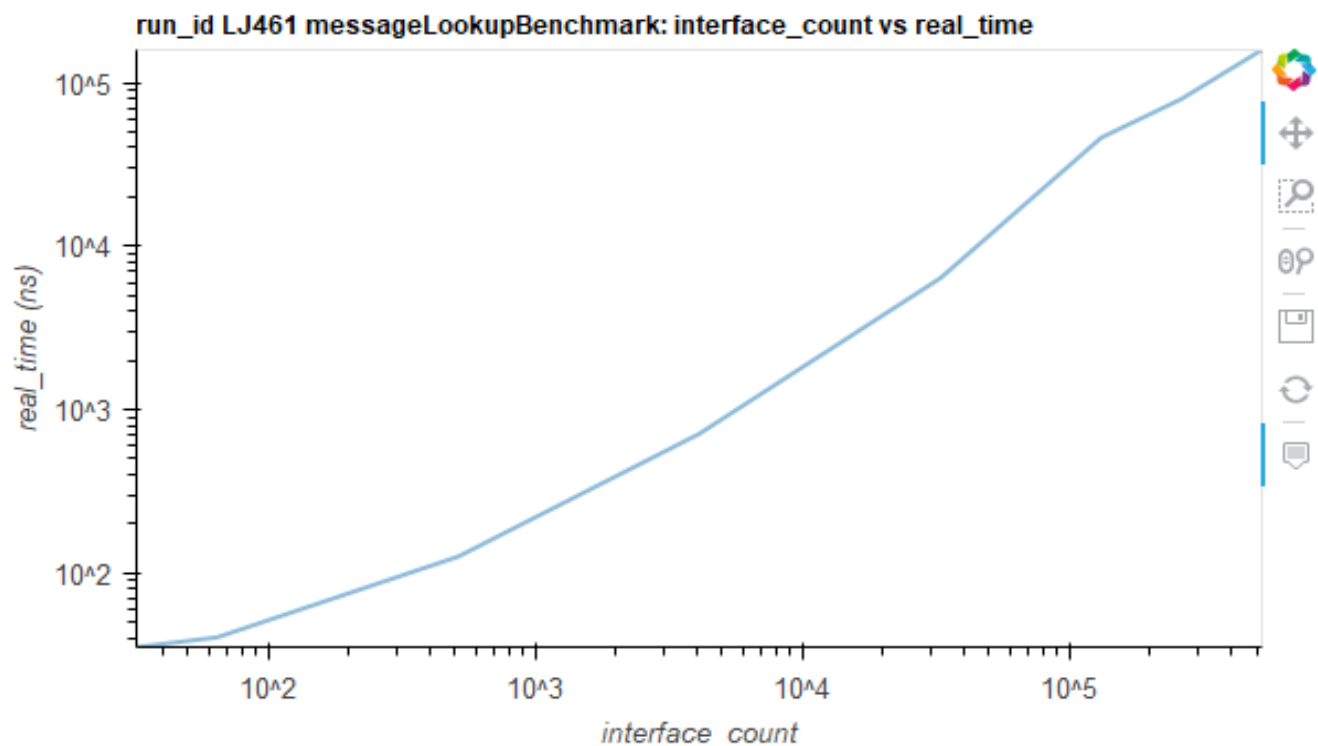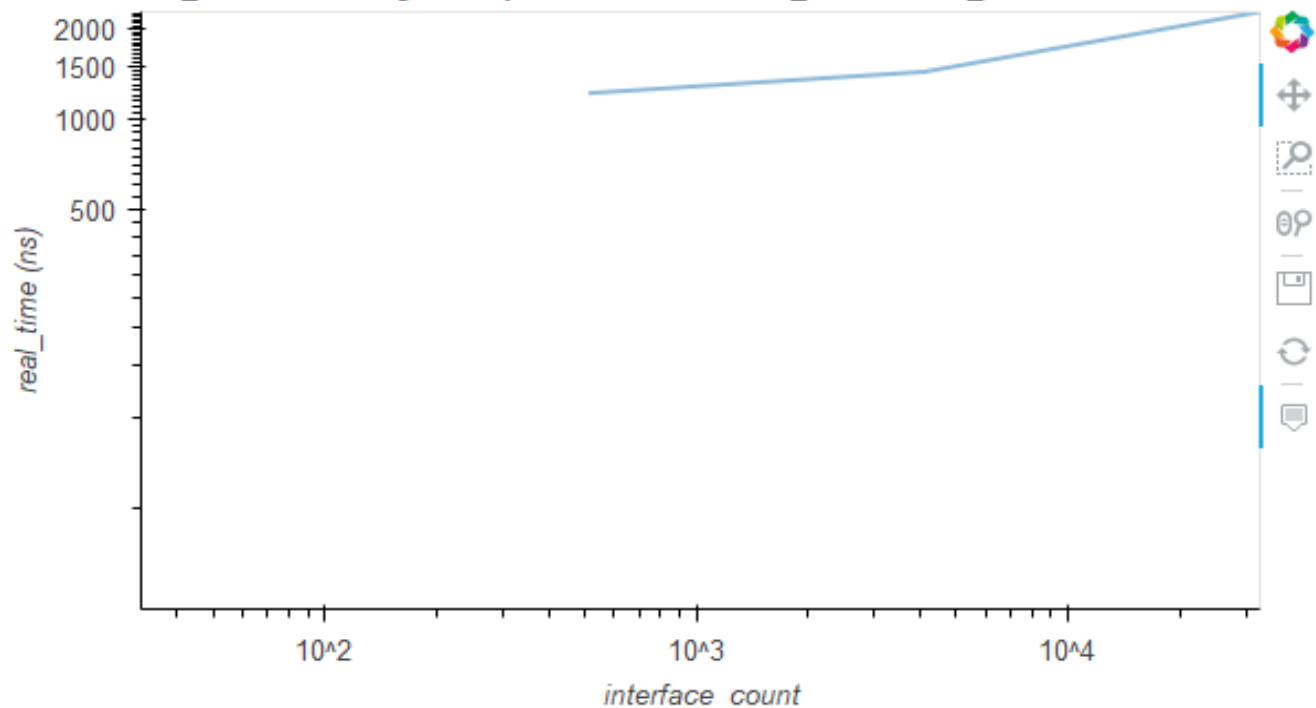
run_id LJ461 echoMessageBenchmark: federate_count vs real_time

run_id LJ461 echoBenchmark: federate_count vs real_time

run_id LJ461 messageLookupBenchmark: interface_count vs real_time

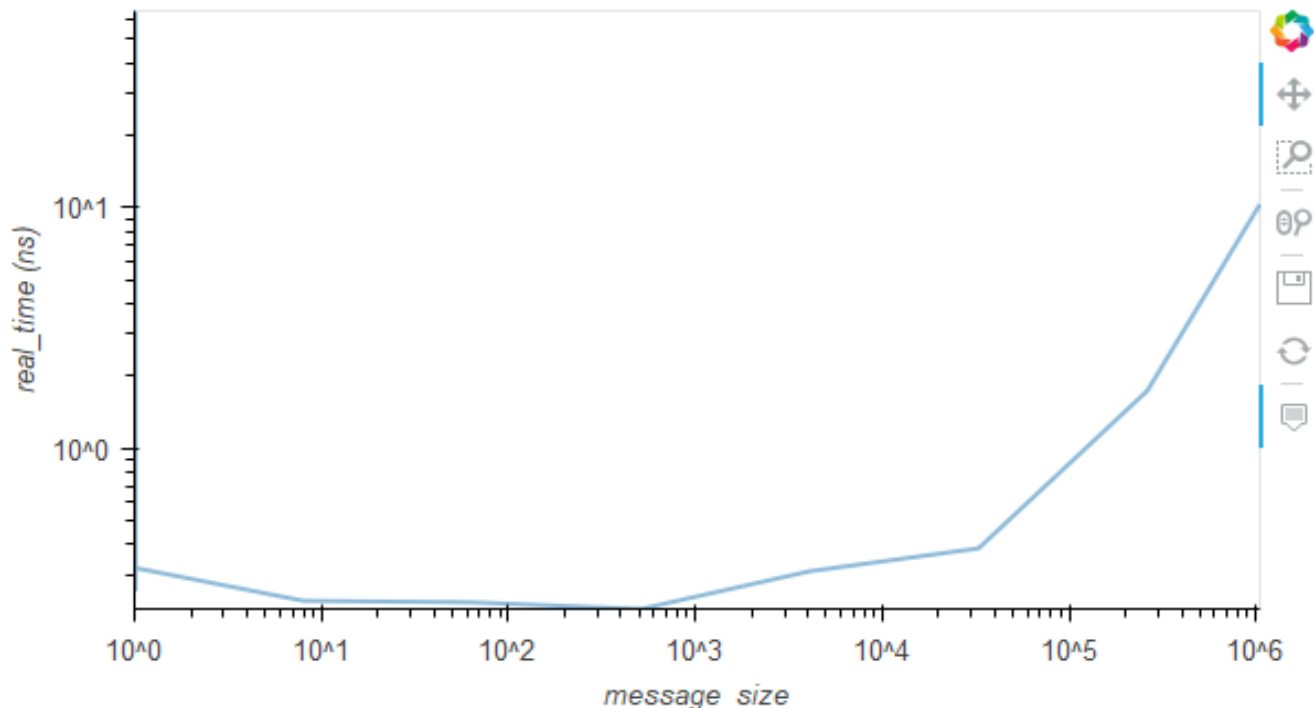**run_id LJ461 messageLookupBenchmark: interface_count vs real_time**
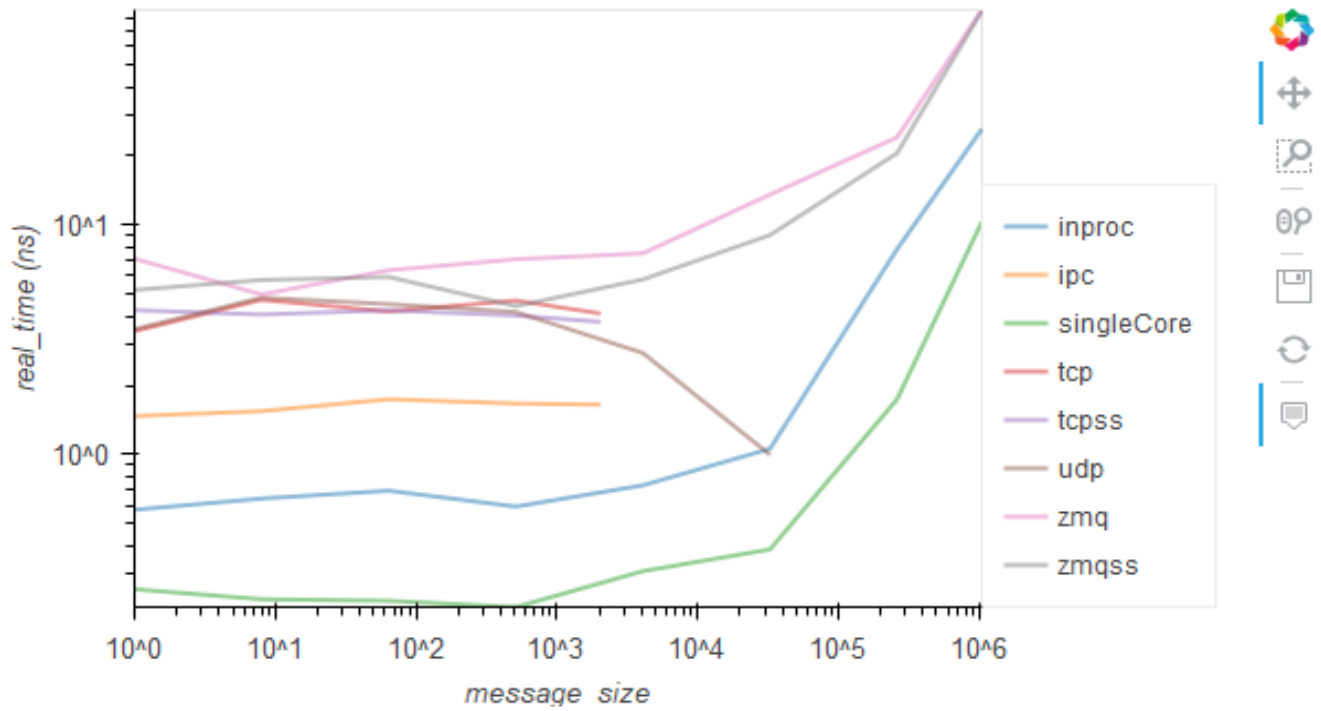
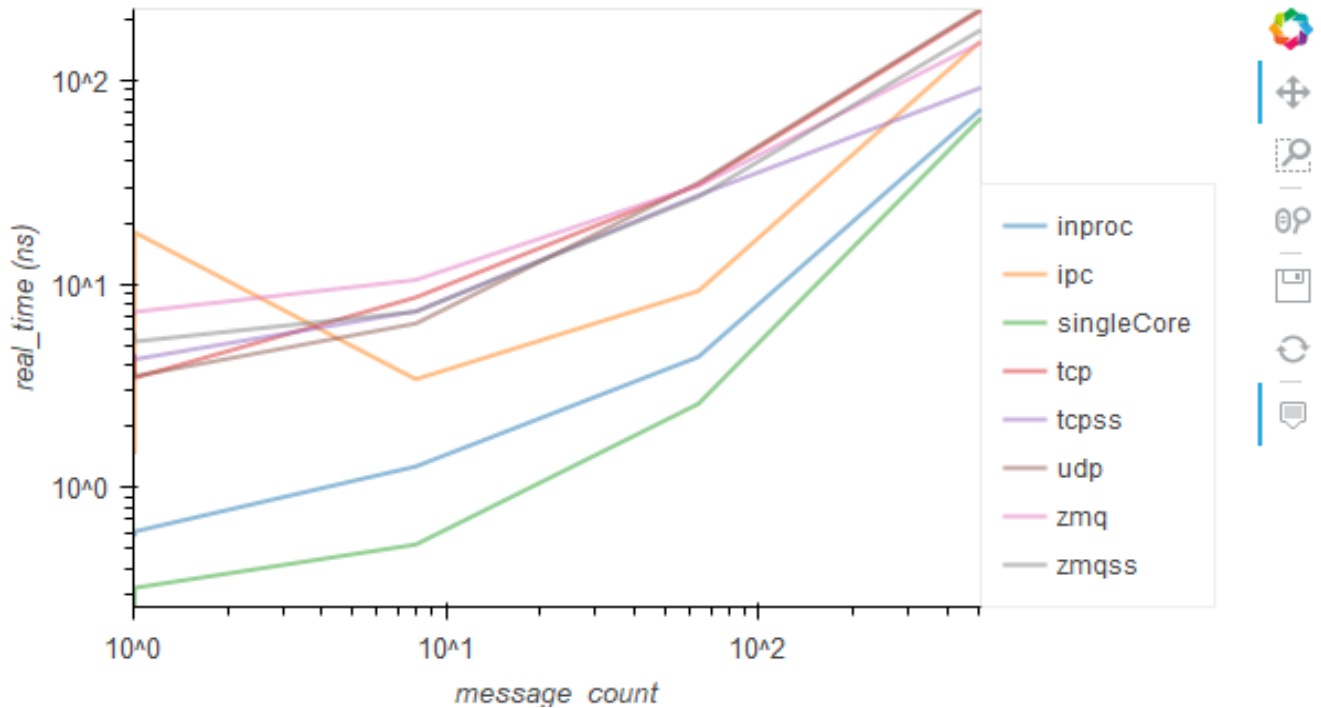## run_id LJ461 messageLookupBenchmark: interface_count vs real_time

run_id LJ461 messageSendBenchmark, core_type singleCore: message_size vs real_time
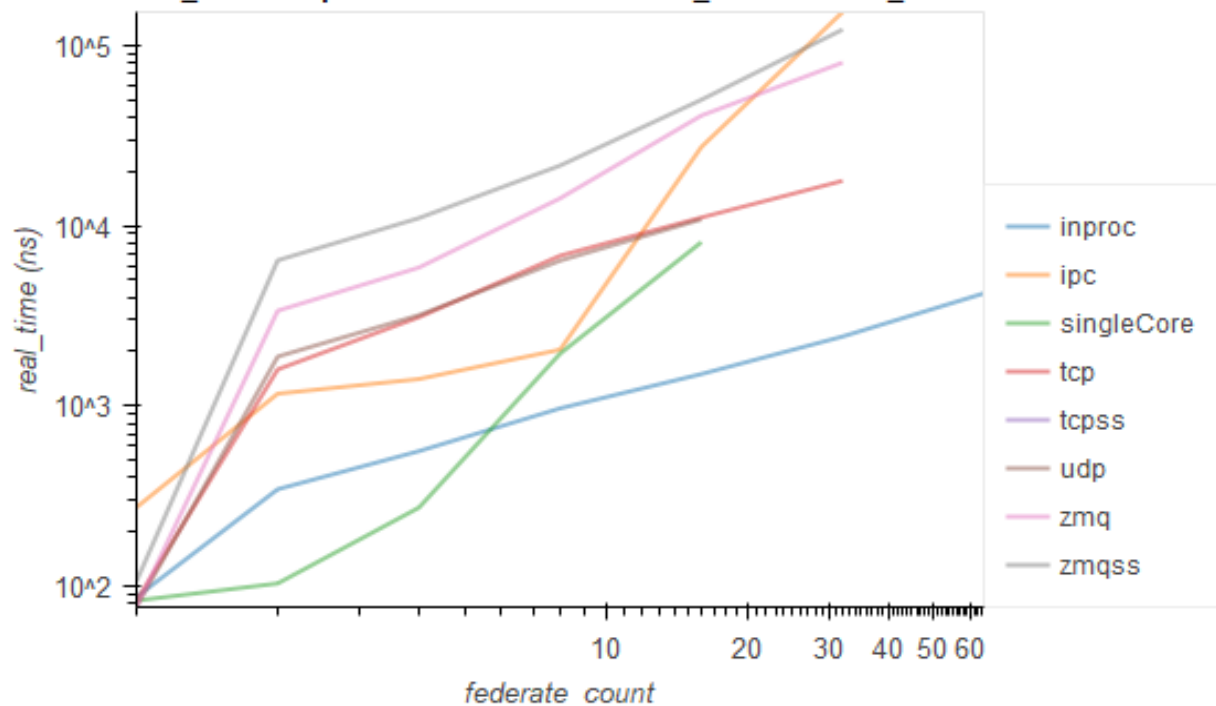
run_id LJ461 messageSendBenchmark, message_count = 1: message_size vs real_time

run_id LJ461 messageSendBenchmark, message_size = 1: message_count vs real_time

run_id LJ461 pholdBenchmark: federate_count vs real_time

run_id LJ461 ringBenchmark: federate_count vs real_time