


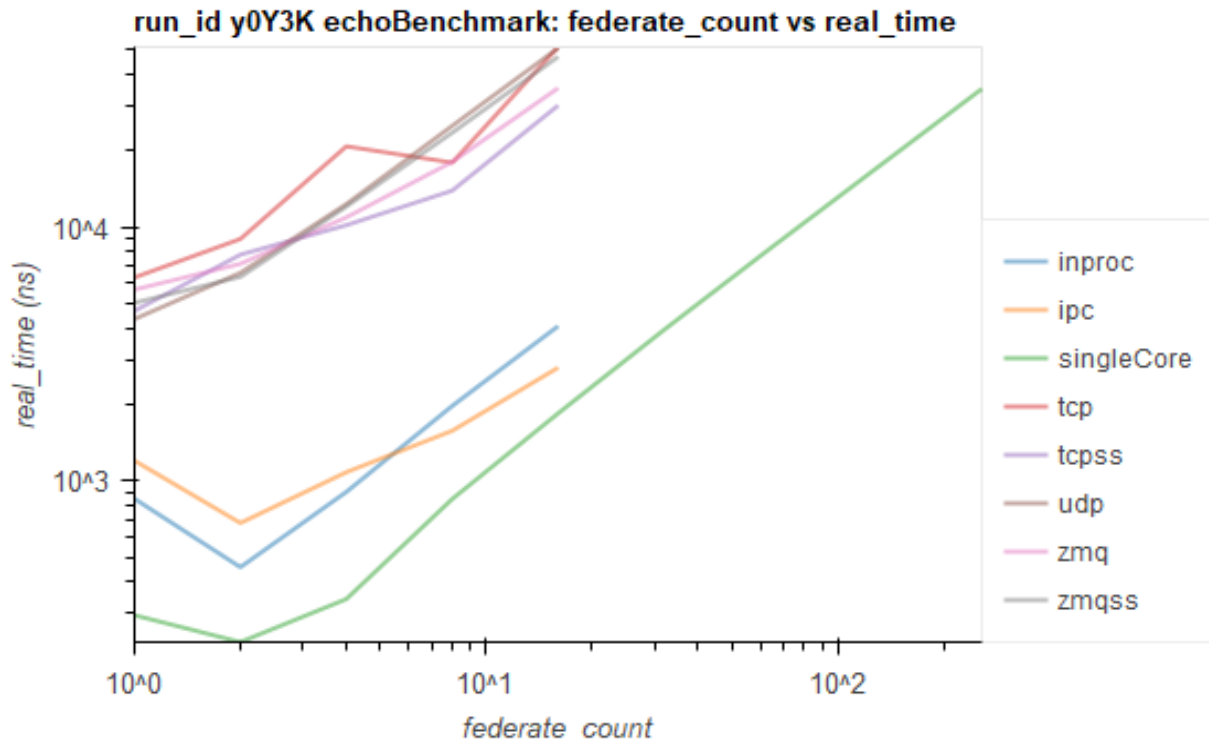
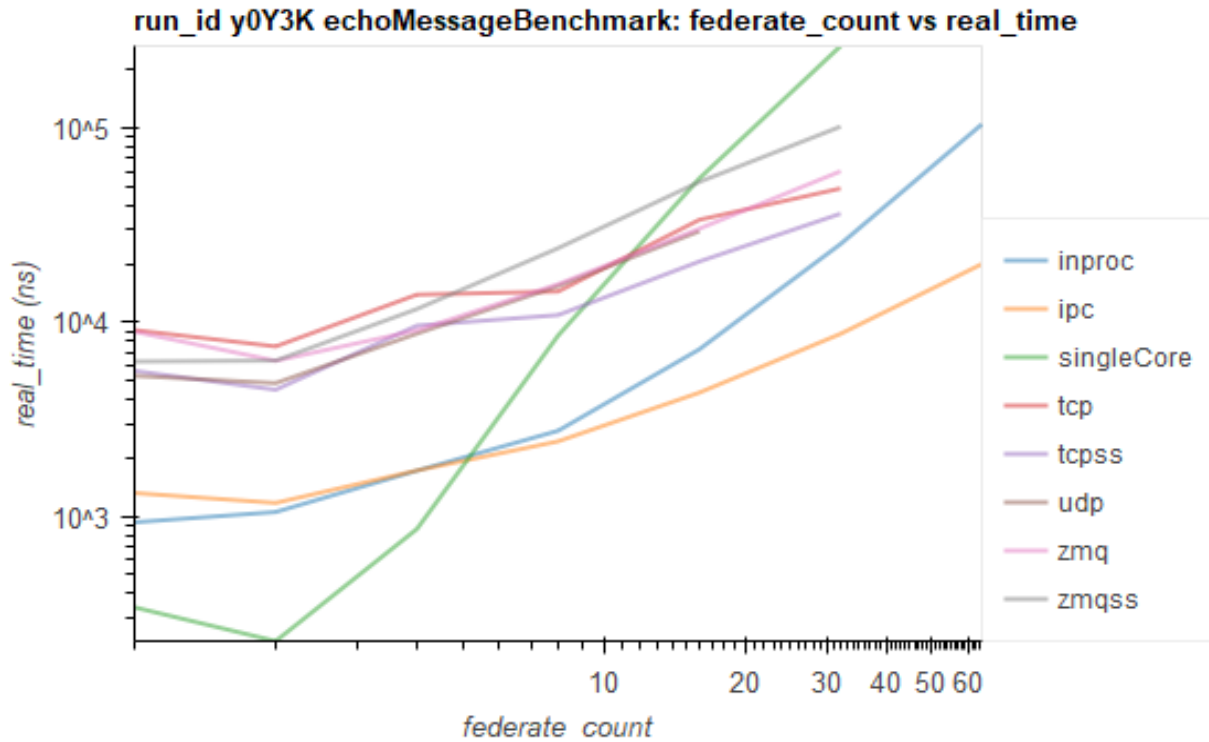


```
run ID: y0Y3K
Timestamp: 2019-12-03 17:14:40
HELICS version: 2.3.1
generator: Unix Makefiles
system: Linux
system version: 4.4.0-17763-Microsoft:
platform:
C++ compiler: GNU
C++ compiler version: 7.4.0
compiler string: -O3 -DNDEBUG $<${COMPILE_LANGUAGE:CXX}:-std=c++14>
host name: STEADMAN
host processor: x86_64
CPU core count: 8
processor speed (MHz): 3501
```

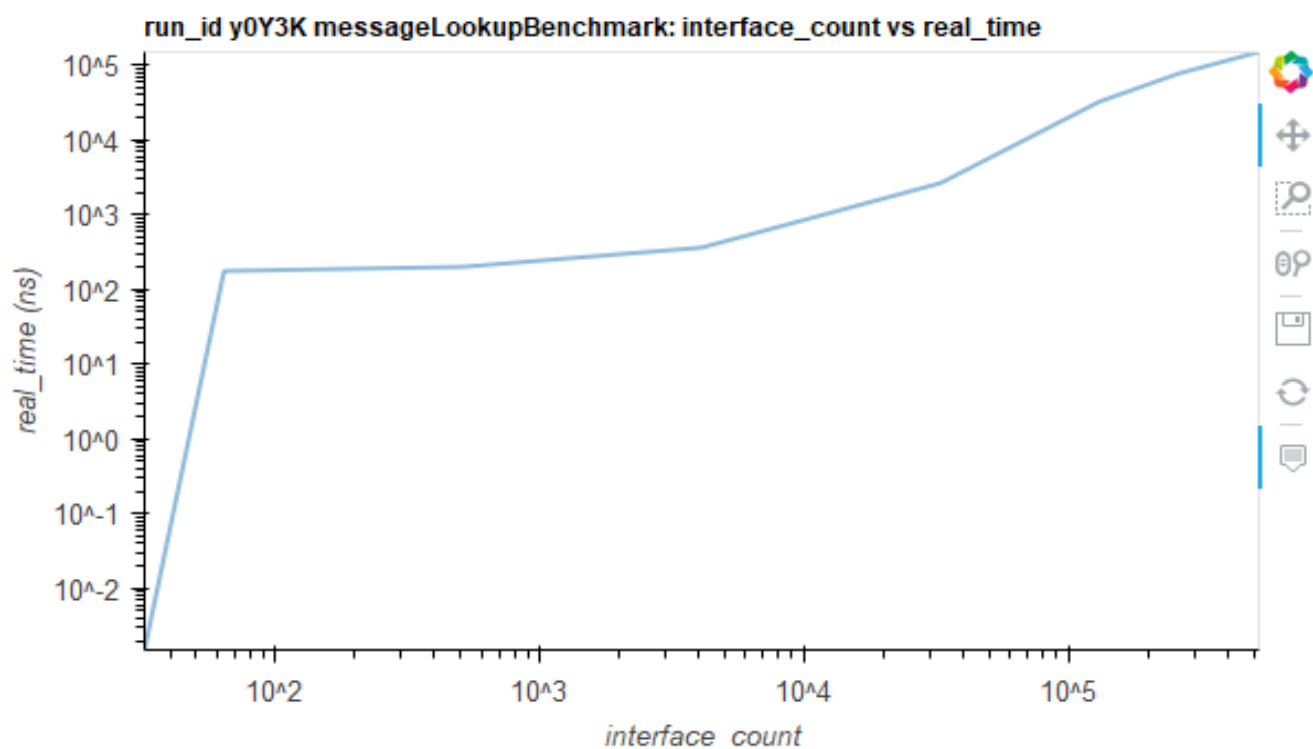


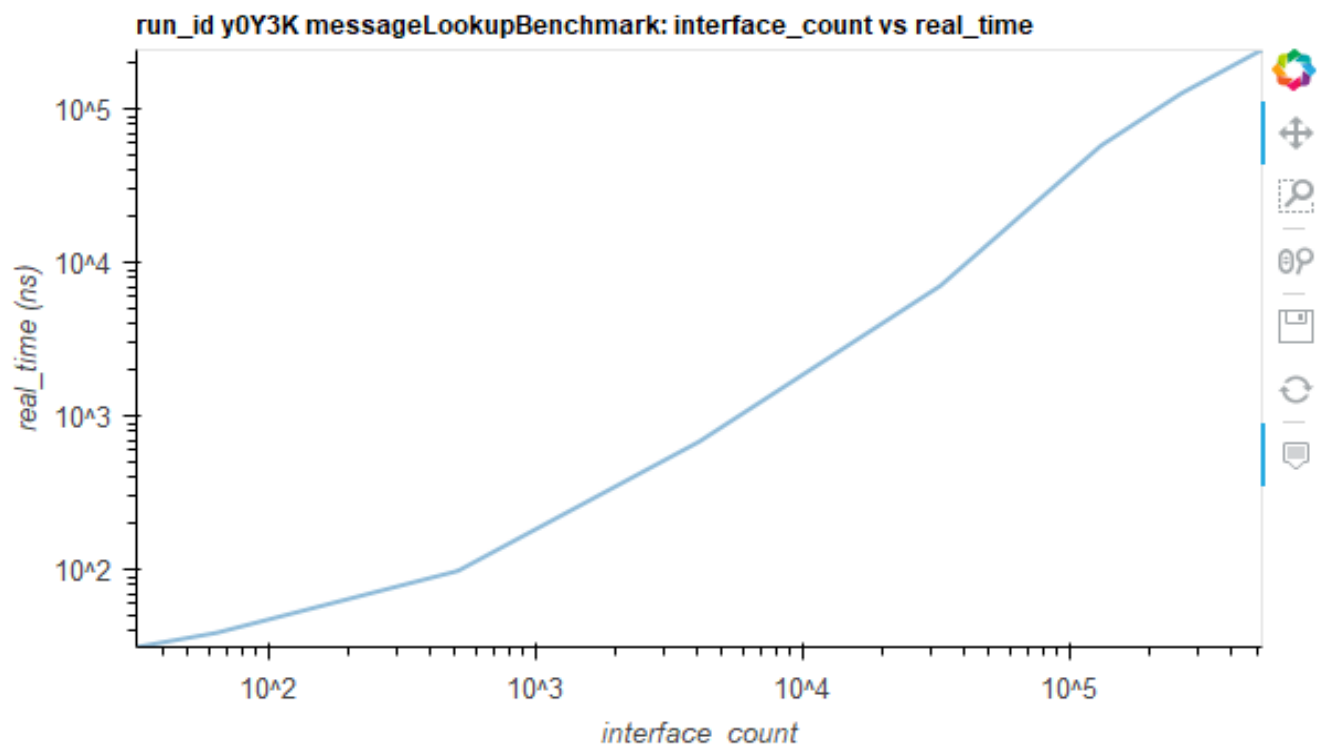


run\_id y0Y3K messageLookupBenchmark: interface\_count vs real\_time

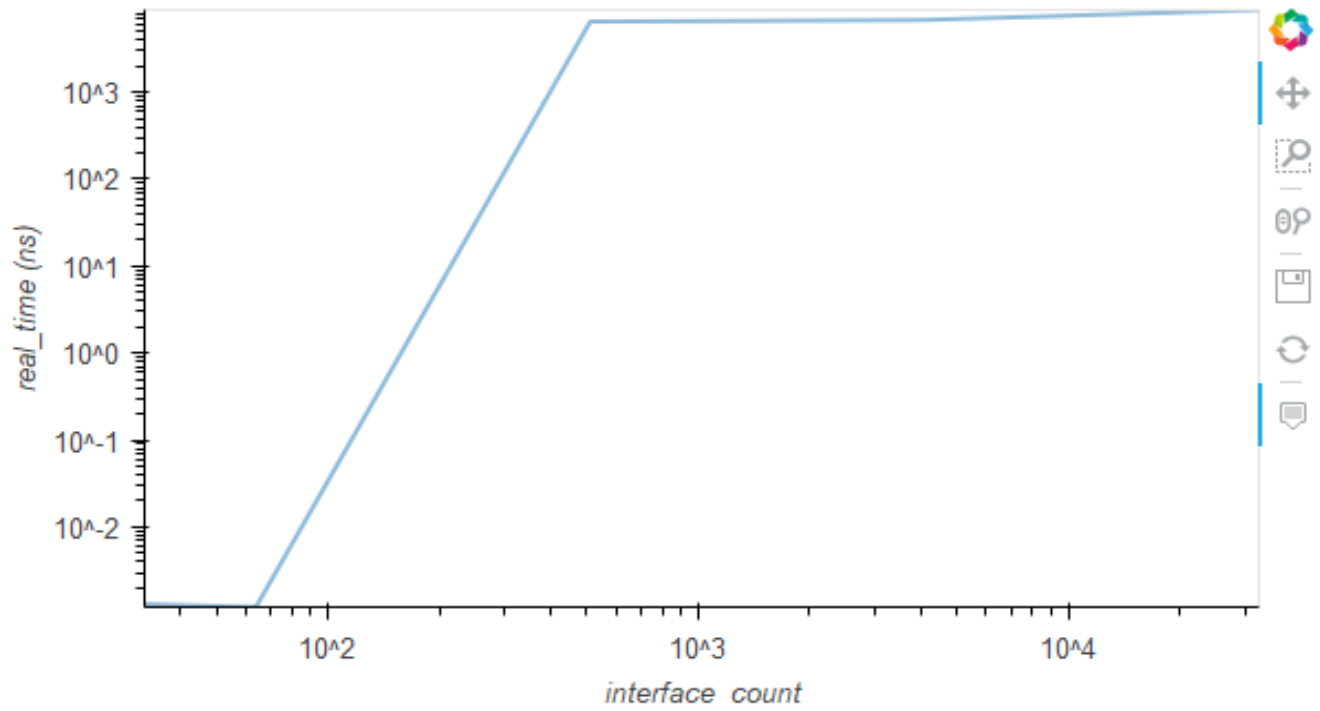


run\_id y0Y3K messageSendBenchmark, core\_type singleCore: message\_size vs real\_time

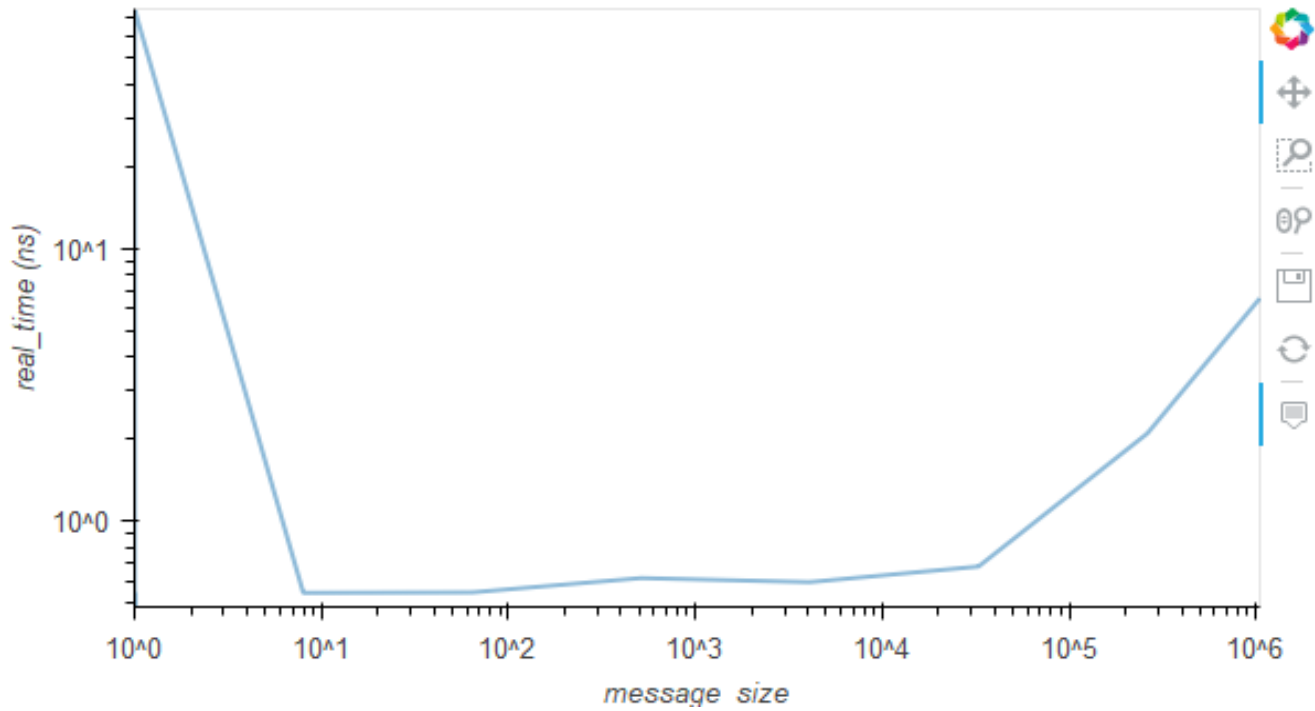


run\_id y0Y3K messageSendBenchmark, message\_count = 1: message\_size vs real\_time

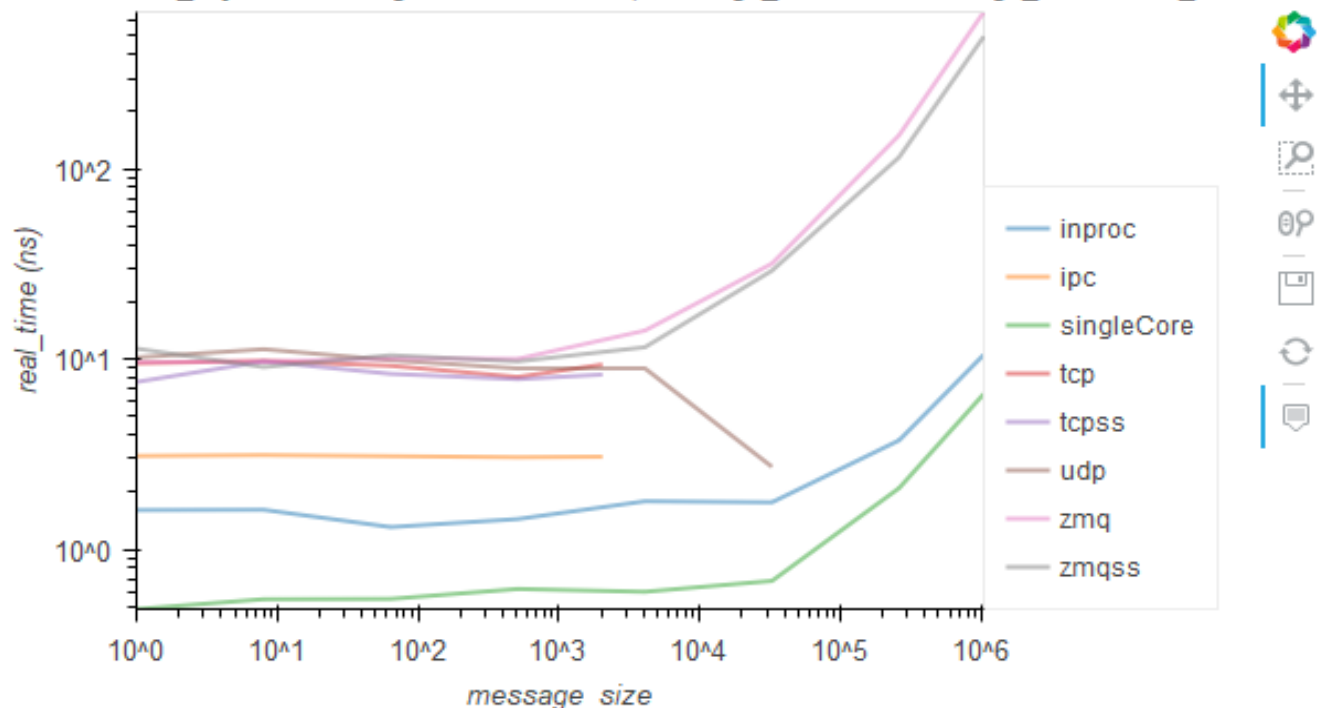

run\_id y0Y3K messageSendBenchmark, message\_size = 1: message\_count vs real\_time

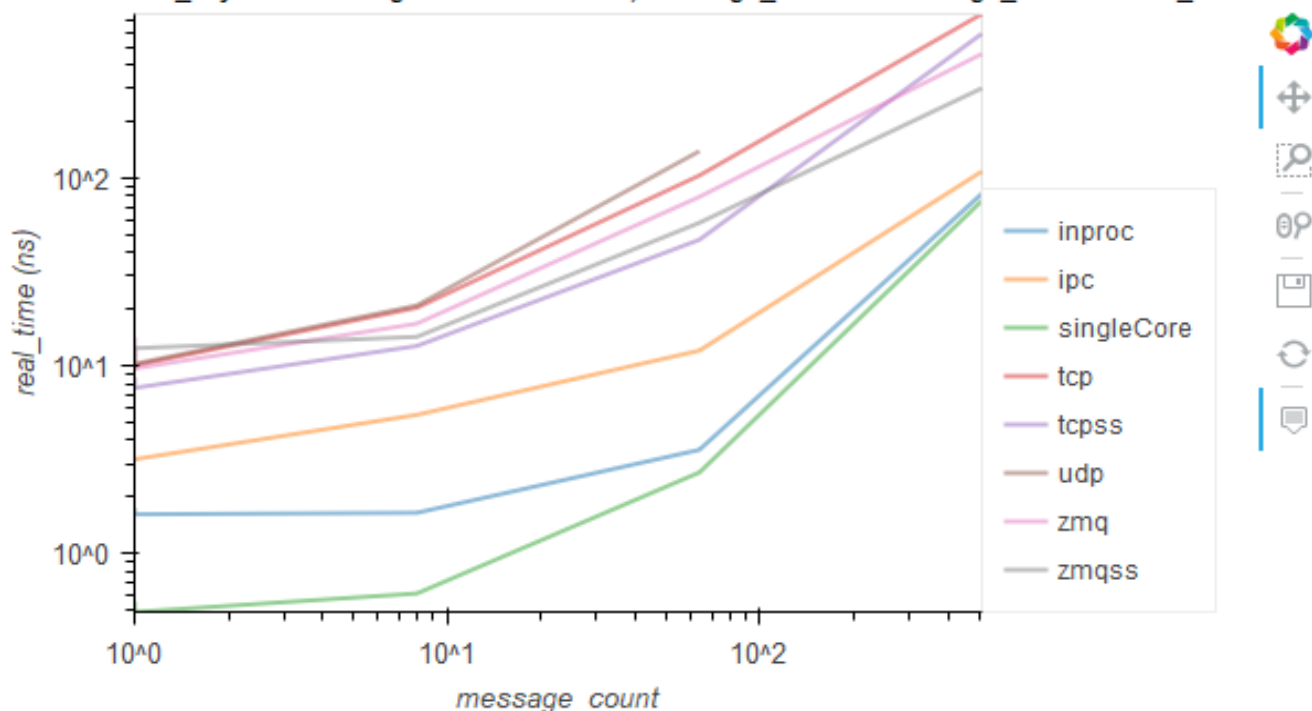

run\_id y0Y3K pholdBenchmark: federate\_count vs real\_time

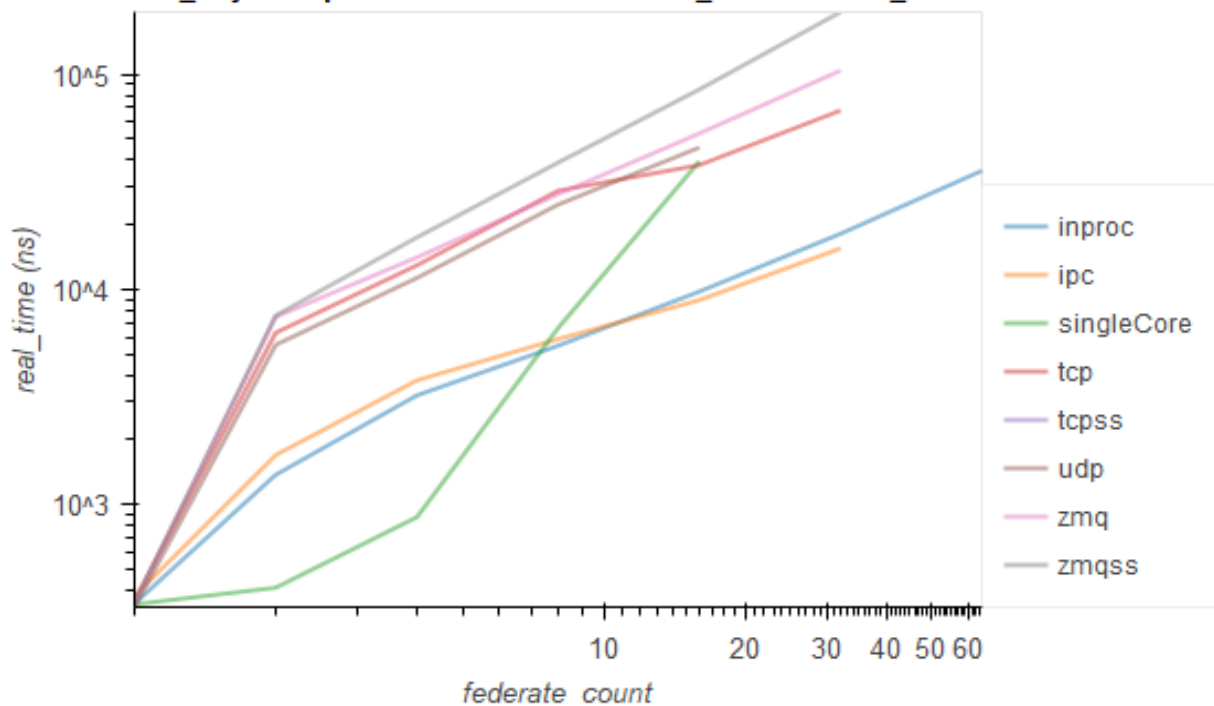

run\_id y0Y3K ringBenchmark: federate\_count vs real\_time

