
SDK Installation

Release 1.4.1

Software and Controls Group

Oct 04, 2018

Contents

1	Required Hardware	1
2	Development Platform	2
2.1	Operating System	2
2.1.1	Preparing for Installation	2
2.1.2	Booting the Installation	3
2.1.3	Installing Using Anaconda	4
2.2	Repository Configuration	6
2.3	Advanced System Configuration	6
2.3.1	User Authentication using LDAP	7
2.3.2	Mounting Home Directories using NFS	8
2.4	Package List	9
2.5	Node Installation	9
2.6	MongoDB Configuration	9
2.7	Infiniband Configuration (optional)	10
2.8	Ethercat Configuration	10
2.9	Real-time Configuration (optional)	11
2.10	Network Time Protocol Configuration	11
2.11	Precision Time Protocol Configuration (optional)	12
3	Software Development Kit (SDK)	13

REQUIRED HARDWARE

Minimum hardware requirements for development machines:

- Intel Pentium 4 or higher, 2 GHz CPU
- 1 GB Memory
- 20 GB Hard drive

Typical GMT OCS development machine specs:

- Intel Xeon E3 or higher, 3.2 GHz CPU
- 4 - 8 GB Memory
- 120 - 250 GB Hard drive

DEVELOPMENT PLATFORM

The development platform is no longer distributed as a standalone ISO file. Instead, the following guide is provided to assist with hardware, operating system and third-party software configuration required for running the OCS SDK. Some key areas, such as disk partitioning, user authentication and NFS mounting of home directories, depend on individual factors at each partner institution and should therefore be considered examples only.

Benefits of this approach versus distributing the complete ISO include the ability to support different network, hardware and software platforms used for software development by different partner institutions, as well as allowing for separate upgrade schedules for the Development Platform and Software Development Kit without affecting ongoing subsystem software development.

Note: At GMTO, these instructions are formalized using Kickstart files and installed via the network using tools such as Cobbler. The GMTO DevOps team can provide assistance in setting up a similar system for development at partner institutions, if required.

2.1 Operating System

The SDK is currently configured to run on the **Fedora 26 Server** Linux Operating System.

1. The ISO file can be downloaded from the Fedora website: https://download.fedoraproject.org/pub/fedora/linux/releases/26/Server/x86_64/iso/

Alternatively, download the file directly from the terminal:

```
$ curl -L -O https://download.fedoraproject.org/pub/fedora/linux/  
releases/26/Server/x86_64/iso/Fedora-Server-dvd-x86_64-26-1.5.iso
```

2. Install the operating system on the development machine by either creating a bootable USB drive or via network installation using tools such as Cobbler and Kickstart. Other options include running Fedora 26 in a Virtual Machine or Docker Containers, however, the use of virtualization and its impact on connecting to actual hardware has not been fully tested.

Warning: The real-time Linux kernel requires the root partition to be an **ext4** file system. Please ensure that this is configured correctly in the disk partitioning settings.

2.1.1 Preparing for Installation

Full instructions for downloading Fedora 26 and preparing various types of boot media in different environments can be found here: https://docs.fedoraproject.org/f26/install-guide/install/Preparing_for_Installation.html

Alternatively, the following command-line instructions may be used on OSX or Linux:

Warning:

- The USB drive needs a minimum capacity of 3GB
- Ensure that you properly identify the device assigned to the USB drive
- The entire USB drive will be erased!

OSX - with a drive on /dev/disk2

```
$ diskutil list
$ sudo diskutil unmountDisk /dev/disk2
$ sudo dd bs=4m if=Fedora-Server-dvd-x86_64-26-1.5.iso of=/dev/rdisk2
```

Linux - with a drive on /dev/sdb

```
$ sudo umount /dev/sdb*
$ sudo dd bs=4M if=Fedora-Server-dvd-x86_64-26-1.5.iso of=/dev/sdb
```

[\[back to top\]](#)

2.1.2 Booting the Installation


Full instructions for booting from prepared Fedora 26 installation media can be found here: https://docs.fedoraproject.org/f26/install-guide/install/Booting_the_Installation.html

The following instructions are applicable to the HDK:

1. Configure your BIOS to boot from USB

This step is vendor specific. On the Beckhoff Industrial PC (IPC) provided with the Hardware Development Kit (HDK):

- 1.1 Insert the USB drive into the IPC and power up the system
- 1.2 Enter the BIOS settings by pressing the key.
- 1.3 In the Boot panel, set Option #1 to [USB Stick].

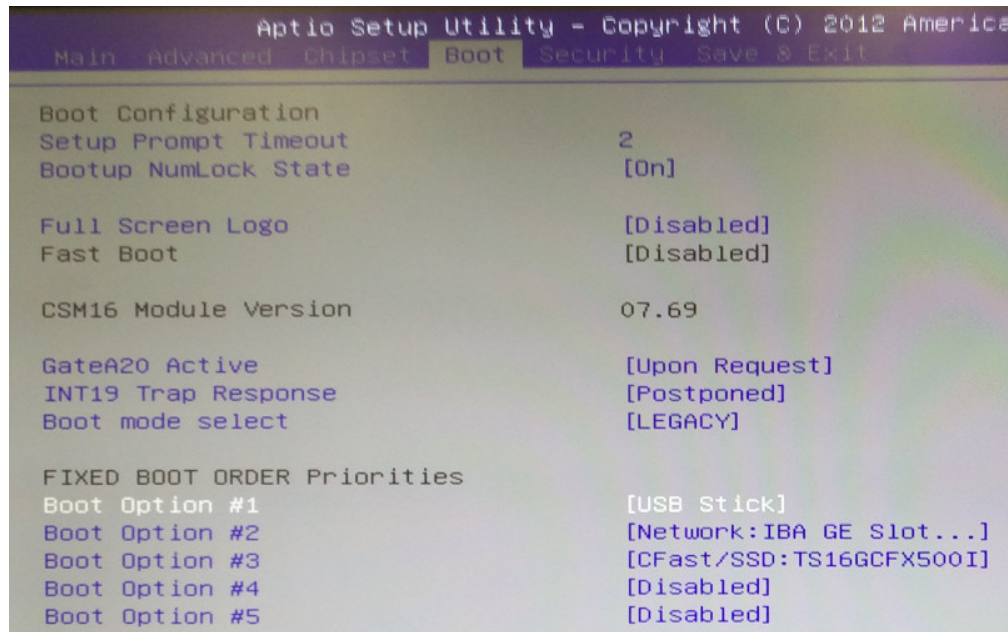

1.4 Select 'Save & Exit'; the system will reboot

2. OS Installation

Warning:

- Your system drive will be reformatted and erased! For HDK, **do not** use the Beckhoff CFast card with TwinCAT3!

2.1 Once the system is back up, select the 'Install Fedora 26' option

[\[back to top\]](#)

2.1.3 Installing Using Anaconda

The installation for the Server version of Fedora may be completed using the Anaconda Installer in either Graphical or Text Mode. Full instructions can be found here: https://docs.fedoraproject.org/f26/install-guide/install/Installing_Using_Anaconda.html

Note: To boot the installer in text mode, add the boot option `inst.text` to the command line boot menu and select option 2 (Use text mode) from the subsequent menu. Text mode has some limitations, such as not being able to select a custom partitioning scheme.

Ensure that all items listed are configured appropriately, ready for installation.

```

1) Start VNC
2) Use text mode

Please make a selection from the above ['c' to continue, 'q' to quit, 'r' to
refresh]: 2
=====
Installation

1) [x] Language settings                2) [!] Time settings
   (English (United States))           (Timezone is not set.)
3) [!] Installation source              4) [!] Software selection
   (Processing...)                     (Processing...)
5) [!] Installation Destination          6) [x] Network configuration
   (No disks selected)                 (Wired (enp0s3) connected)
7) [!] Root password                    8) [!] User creation
   (Password is not set.)              (No user will be created)

Please make a selection from the above ['b' to begin installation, 'h' to help,
'q' to quit, 'r' to refresh]: _
anaconda11:main* 2:shell 3:log 4:storage-log >Switch tab: Alt+Tab | Help: F1

```

1. **Language settings** - English (US)
2. **Time settings** - Select the appropriate Time Zone (for example America/Los_Angeles)
3. **Installation source** - Local media (CD/DVD)
4. **Software Selection** - Default packages are sufficient for now
5. **Installation Destination** - Select the appropriate drive for installation and whether to use the entire drive. Custom partitioning can be configured here as well. The default Partition Scheme to use is LVM. Ensure that the file system is set to ext4 for the RT kernel to work.
6. **Network Configuration** - At least one interface with internet access should be configured
7. **Root Password** - Set a secure root password
8. **User Creation** - Create the default user. The default user for a typical GMT development environment is gmt.o. This user should have Administrator access.

Warning: The real-time Linux kernel requires the root partition to be an **ext4** file system. Please ensure that this is configured correctly in the disk partitioning settings.

The following extract from the GMT0 kickstart file shows settings used for automated PXE installs:

```

# -- Installation Parameters -----
↪-----
install                # Install, instead of Upgrade
reboot                 # Reboot after installation
text                   # Use text mode install
keyboard us            # System keyboard
lang en_US             # System language
timezone America/Los_Angeles # System timezone
bootloader --location=mbr # Bootloader configuration
clearpart --all --initlabel # Partition clearing_
↪information
skipx                  # Skip X11 configuration

```

```

# -- Security Settings -----
↪-----
auth --useshadow --enablemd5                # Use shadow passwords
firewall --enabled                          # Firewall configuration
selinux --disabled                          # SELinux configuration
rootpw --iscrypted $default_password_crypted # Root password

# -- User configuration -----
↪-----
user --name=gmt0 --password=gmt0 --plaintext

# -- Disk Partitioning -----
↪-----
clearpart --drives=sda                      # Remove existing partitions
zerombr                                     # Clear the Master Boot Record
part /boot --label=/boot --asprimary --size=500 --fstype=ext4 --ondisk=sda
part swap --recommended --ondisk=sda
part / --label=/ --fstype=ext4 --grow --ondisk=sda

```

After installation, the system will reboot. Remove the boot drive (USB drive or network mount) and select the default kernel.

[\[back to top\]](#)

2.2 Repository Configuration

Some required RPMs are built by GMT0 and need to be downloaded from the GMT0 Yum Repository, currently hosted on Amazon Web Services.

To add the GMT repositories:

1. Add the file `/etc/yum.repos.d/gmt.repo` with the following content:

```

[gmt]
name=GMT $releasever - $basearch
baseurl=http://52.52.46.32/srv/gmt/yum/stable/$releasever/
gpgcheck=0
enabled=1

```

2. Add the file `/etc/yum.repos.d/gmt-updates.repo` with the following content:

```

[gmt-updates]
name=GMT $releasever - $basearch - Updates
baseurl=http://52.52.46.32/srv/gmt/yum/updates/$releasever/
gpgcheck=0
enabled=1

```

2.3 Advanced System Configuration

In a distributed computing environment, used by multiple developers, it is very convenient to use a centralized LDAP server for User Authentication and automatically mount `/home` directories from a network drive. The LDAP and NFS server configuration is network-dependent. The following instructions can be used as guidelines when configuring individual development machines to make use these services, if available.

Note: This configuration is currently optional. The alternative is to add users manually and manage permissions locally on each development machine.

2.3.1 User Authentication using LDAP

Managing user credentials in a centralized server allows developers to log into any development machine without the need to duplicate the configuration for each new machine.

Official Fedora Documentation for setting up a Directory Server using OpenLDAP can be found here: https://docs.fedoraproject.org/f26/system-administrators-guide/servers/Directory_Servers.html

The following instructions are for configuring **development machines** to use the LDAP server on the network and should be seen as an example to be tailored to the actual network it's running on.

1. Install the necessary packages as root

```
$ dnf install -y openldap-clients sssd nss-pam-ldapd
```

2. Edit `/etc/openldap/ldap.conf` and set the following options:

```
URI ldap://<ldap_server_ip>
BASE dc=gmt0,dc=org
```

where `<ldap_server_ip>` is the IP Address of the LDAP server and `dc=gmt0,dc=org` should reflect the configuration in the LDAP server.

3. Edit `/etc/nslcd.conf` and set the following options:

```
uri ldap://<ldap_server_ip>
base dc=gmt0,dc=org
```

where `<ldap_server_ip>` is the IP Address of the LDAP server and `dc=gmt0,dc=org` should reflect the configuration in the LDAP server.

4. Edit `/etc/nsswitch.conf` and set the following options:

```
passwd:      files sss ldap
shadow:      files sss ldap
group:       files sss ldap
netgroup:    files sss ldap
automount:   files ldap
```

5. Create file `/etc/sss/sss.conf` and set the following options:

```
[domain/default]
autofs_provider = ldap
cache_credentials = True
krb5_realm = #
ldap_search_base = dc=gmt0,dc=org
id_provider = ldap
auth_provider = ldap
chpass_provider = ldap
ldap_uri = ldap://<ldap_server_ip>/
ldap_id_use_start_tls = False
ldap_tls_cacertdir = /etc/openldap/cacerts
ldap_tls_reqcert = allow
```

```
[sssd]
services = nss, pam, autofs
config_file_version = 2
domains = default
[nss]
homedir_substring = /home
[pam]
[sudo]
[autofs]
[ssh]
[pac]
[ifp]
```

where `<ldap_server_ip>` is the IP Address of the LDAP server and `dc=gmt0,dc=org` should reflect the configuration in the LDAP server.

6. Enable sssd

```
$ chmod 0600 /etc/sss/sss.conf
$ systemctl enable sssd
```

7. Edit /etc/sysconfig/authconfig and set the following options:

```
USEMKHOMEDIR=yes
USELDAPAUTH=yes
USELDAP=yes
```

8. Enable nslcd

```
$ systemctl enable nslcd
```

9. Reload configuration

```
$ authconfig --updateall
```

- Optionally, use LDAP to grant sudo access to developers within a group. This needs to be configured correctly on the LDAP server. For example, if a group has been defined in the LDAP server with name `%dev`, containing all the developers that may access this machine, add the following line to the `/etc/sudoers` file via `visudo`. This command needs to be run as root.

```
%dev ALL=(ALL) ALL
```

Alternatively, configure sudo access for specific users only.

[\[back to top\]](#)

2.3.2 Mounting Home Directories using NFS

In a distributed computing environment used by multiple developers, it is useful to be able to automatically mount `/home` directories from a network drive so that development files can be easily transferred from one machine to another.

The following instructions are for configuring **development machines** to use available NFS directories on the network and should be seen as an example to be tailored to the actual network it's running on.

- Install the necessary packages

```
$ sudo dnf install -y nfs-utils
```

2. Create an export directory

```
$ mkdir /export
```

3. Add the following line to the /etc/fstab file:

```
<nfs_ip>:/export/home /home nfs noauto,nofail,x-systemd.automount,x-
↪systemd.requires=network-online.target,x-systemd.device-timeout=1,
↪timeo=14,noacl 0 0
```

where <nfs_ip> is the IP Address of the server where the home directories are stored.

[back to top]

2.4 Package List

The following RPM packages should be installed by an Administrative user for use in the development environment:

1. Install Common OS Utilities

```
$ sudo dnf install -y xorg-x11-xauth urw-fonts wget net-tools pciutils
$ sudo dnf install -y strace rpl bash-completion sed
```

2. Install Development Tools

```
$ sudo dnf install -y autoconf automake cmake elfutils gcc gdb libtool
$ sudo dnf install -y cpp cscope ctags gc gcc-c++ gcc-gdb-plugin glibc-devel
$ sudo dnf install -y glibc-headers kernel-headers libstdc++-devel
$ sudo dnf install -y flex git libcurl-devel
$ sudo dnf install -y python3-sphinx python3-sphinx_rtd_theme
```

3. Install OCS Dependencies

```
$ sudo dnf install -y rdma librdmacm-devel
$ sudo dnf install -y boost-devel freeopcu freeopcu-devel
```

2.5 Node Installation

1. Download and install **Node version 8**

```
$ curl -sL https://rpm.nodesource.com/setup_8.x | sudo bash -
$ sudo dnf install -y nodejs
```

2. Install necessary node packages:

```
$ sudo npm install -g coffeescript webpack webpack-cli raw-loader
```

2.6 MongoDB Configuration

1. Install the necessary packages:

```
$ sudo dnf install -y mongodb mongodb-server
```

2. Configure the firewall

```
$ sudo firewall-offline-cmd --direct --add-rule ipv4 filter INPUT 0 -p tcp --  
→dport 27017 -j ACCEPT
```

2. Enable the MongoDB service

```
$ sudo systemctl enable mongod  
$ sudo systemctl start mongod
```

3. Check that the MongoDB service is up

```
$ sudo systemctl status -l mongod
```

2.7 Infiniband Configuration (optional)

Infiniband is a low-latency networking communications protocol that requires specialized hardware. The following configuration steps should be used as a guide when configuring Infiniband communications.

1. Install the necessary packages

```
$ sudo dnf install -y infiniband-diags opensm libmlx4
```

2. Edit /etc/rdma/mlx4.conf and add the following line:

```
01:00.0 auto auto
```

3. Find the interface used for Infiniband and edit the corresponding configuration file (for example /etc/sysconfig/network-scripts/ifcfg-ib0) to set the following options:

```
DEVICE=ib0  
ONBOOT=yes  
TYPE=Infiniband  
BOOTPROTO=none  
IPADDR=<ib_ip_address>  
NETMASK=<ib_netmask>
```

where <ib_ip_address> is the static IP Address associated with the Infiniband network interface and <ib_netmask> is the netmask used for the infiniband subnet.

4. Enable Infiniband Services

```
$ sudo systemctl enable opensm  
$ sudo systemctl enable rdma
```

2.8 Ethercat Configuration

EtherCAT is a high-speed fieldbus communication system used for real-time control. The following configuration steps should be used as a guide when configuring EtherCAT communications.

1. Install the real-time kernel and relevant packages

```
$ sudo dnf install -y --nogpgcheck kernel-3.14.73-rt78.x86_64 ethercat-devel
```

2. Select the Ethernet interface to be used for EtherCAT communication (e.g. `enp4s0`) and edit the corresponding configuration file (e.g. `/etc/sysconfig/network-scripts/ifcfg-enp4s0`) to set the following options:

```
BOOTPROTO=none
ONBOOT=no
```

3. Check the Hardware Address of the selected EtherCAT network interface

```
$ ifconfig
```

4. Edit `/etc/ethercat.conf` and set the following configuration option:

```
MASTER0_DEVICE="<mac_address>"
```

where `<mac_address>` is the hardware address associated with the Ethercat network interface.

5. Edit `/usr/lib/systemd/system/ethercat.service` and uncomment the following line:

```
Before=network.service
```

6. Reboot into the RT Kernel, if you're not in it already.
7. Enable the Ethercat service

```
$ sudo systemctl enable ethercat
$ sudo systemctl start ethercat
```

8. Test the Ethercat configuration

```
$ ethercat master
$ ethercat slaves
```

If the “ethercat master” command does not produce the correct output, ensure that you’re currently running the real-time kernel. If the “ethercat slaves” command produces no output, check that the ethernet cable is connected to the correct port as configured above.

2.9 Real-time Configuration (optional)

1. Edit `/etc/security/limits.d/99-realtime.conf` and add the following options:

```
@realtime - rtprio 99
@realtime - memlock unlimited
```

2. Add a new group and add the “gmto” user to it.

```
$ sudo groupadd -f -g 2001 realtime
$ sudo usermod --groups realtime gmt0
```

2.10 Network Time Protocol Configuration

For general network timekeeping, use NTP, unless Precision Time Protocol is required.

1. Install the necessary packages:

```
$ sudo dnf install -y chrony
```

2. Enable the NTP Service

```
$ sudo systemctl enable chronyd
```

2.11 Precision Time Protocol Configuration (optional)

1. Install the necessary packages:

```
$ sudo dnf install -y linuxptp
```

2. Edit /etc/ptp4l.conf and add the following options:

```
[global]
slaveOnly      1
verbose        1
time_stamping  software
summary_interval 6
[enp3s0]
```

where [enp3s0] should be set to the interface to use for PTP.

3. Edit /etc/sysconfig/phc2sys and add the following options:

```
OPTIONS="-a -r -u 60"
```

4. Edit /etc/sysconfig/ptp4l and add the following options:

```
OPTIONS="-f /etc/ptp4l.conf -i enp3s0"
```

5. Configure access through the firewall

```
$ sudo firewall-offline-cmd --direct --add-rule ipv4 filter INPUT 0 -p udp --
→dport 319:320 -j ACCEPT
```

6. Enable the ptp service

```
$ sudo systemctl enable ptp4l
```

SOFTWARE DEVELOPMENT KIT (SDK)

The Software Development Kit is distributed as a TAR file and can be downloaded from the GMTO release server.

The SDK should be installed in a **Global GMT Software Location**, defined by the GMT_GLOBAL environment variable (default value: /opt/gmt). A **Local Working Directory**, unique for each individual developer (GMT_LOCAL). The local working directory typically resides underneath the /home/<username> directory.

1. Create the **Global GMT Software Location**:

```
$ sudo mkdir /opt/gmt
```

2. Download the latest SDK distribution and install in the **Global GMT Software Location**:

```
$ sudo wget -P /opt/gmt http://52.52.46.32/srv/gmt/releases/sdk/linux/gmt-  
→sdk-1.4.1.tar.gz  
$ cd /opt/gmt  
$ sudo tar -xvzf gmt-sdk-1.4.1.tar.gz
```

3. Create a **Local Working Directory**

```
$ mkdir <local_working_dir>
```

where <local_working_dir> is in the current users' home directory, typically /home/<username>/<path_to_working_dir>. The GMT software modules developed by the user are created in this folder.

4. Add the following lines to your .profile (or .kshrc or .bashrc depending on your preferred shell)

```
$ export GMT_GLOBAL=/opt/gmt  
$ export GMT_LOCAL=<local_working_dir>  
$ source $GMT_GLOBAL/bin/gmt_env.sh
```

This will ensure that the environment variables are correctly configured when opening a new terminal. Please log out and back in for the changes to take effect. To configure the environment for the current shell, run the commands manually.

5. Check the values of the environment variables:

```
$ gmt_env
```

6. Initialize the Development Environment:

```
$ cd $GMT_LOCAL  
$ gds init
```

The correct folders will be created in the \$GMT_LOCAL directory for use when compiling and running modules.

Ensure that the **bundles.coffee** and **ocs_local_bundle.coffee** files exist, copying them from \$GMT_GLOBAL if need be.

```
$ mkdir $GMT_LOCAL/etc/bundles
$ cp $GMT_GLOBAL/etc/bundles/bundles.coffee $GMT_LOCAL/etc/bundles/
$ cp $GMT_GLOBAL/etc/bundles/ocs_local_bundle.coffee $GMT_LOCAL/etc/bundles/
```

Edit bundles.coffee to point to the ocs_local_bundle.coffee file

```
module.exports =
  ocs_local_bundle: {scope: "local", desc: "GMT iSample and HDK bundle"}
```

Edit ocs_local_bundle.coffee to include the isample and HDK modules

```
module.exports =
name:      "local"
desc:      "List of local development modules"
elements:
  isample_dcs: { active: true, test: false, developer: 'gmto', domain: 'idcs' }
  hdk_dcs:     { active: true, test: false, developer: 'gmto', domain: 'idcs' }
```

Install local Node Modules

```
$ cd $GMT_LOCAL
$ cp $GMT_GLOBAL/package.json ./
$ npm install
```

Finally, create the **modules** directory

```
$ cd $GMT_LOCAL
$ mkdir modules
```

[back to top]