

# Cucumber Report

Apr 26, 2023, 11:43:52 PM

**Start : Apr 26, 11:43:44.603 PM**

**End : Apr 26, 11:43:50.194 PM**

**Duration : 5.591 s**

*Features*

*Scenarios*

*Steps*

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 0  
FAILED - 1  
SKIPPED - 0

PASSED - 3  
FAILED - 1  
SKIPPED - 0



| Feature           |          | Scenario |   |   |   | Step |   |   |   |
|-------------------|----------|----------|---|---|---|------|---|---|---|
| Name              | Duration | T        | P | F | S | T    | P | F | S |
| <u>Post_Admin</u> | 5.591 s  | 1        | 0 | 1 | 0 | 4    | 3 | 1 | 0 |

| <b>Tag</b>    | <b>Scenario</b> |                 |                 |                 | <b>Feature</b>  |                 |                 |                 |
|---------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|
| <b>Name</b>   | <b><i>T</i></b> | <b><i>P</i></b> | <b><i>F</i></b> | <b><i>S</i></b> | <b><i>T</i></b> | <b><i>P</i></b> | <b><i>F</i></b> | <b><i>S</i></b> |
| @ApiPostAdmin | 1               | 0               | 1               | 0               | 1               | 0               | 1               | 0               |





| # | Feature Name      | T | P | F | S | Duration |
|---|-------------------|---|---|---|---|----------|
| 1 | <u>Post_Admin</u> | 1 | 0 | 1 | 0 | 5.591 s  |

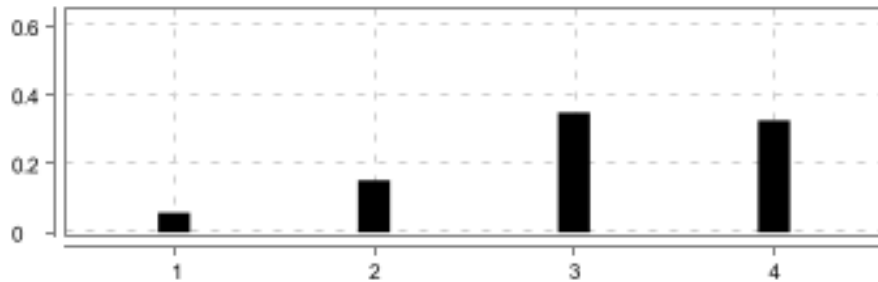



| # | Feature Name      | Scenario Name              | T | P | F | S | Duration |
|---|-------------------|----------------------------|---|---|---|---|----------|
| 1 | <u>Post_Admin</u> | <u>TC01_Validate_Admin</u> | 4 | 3 | 1 | 0 | 5.577 s  |

## Post\_Admin

|  |                           |           |   |           |   |
|--|---------------------------|-----------|---|-----------|---|
| <b>FAILED</b>                          | <b>DURATION - 5.591 s</b> | Scenarios |  | Steps     |  |
| / 11:43:44.603 PM // 11:43:50.194 PM / |                           | Total - 1 |   | Total - 4 |   |
|  |                           | Pass - 0  |   | Pass - 3  |   |
|  |                           | Fail - 1  |   | Fail - 1  |   |
|  |                           | Skip - 0  |   | Skip - 0  |   |

## TC01\_Validate\_Admin

|   |  |   |   |  |  |
|---|--|---|---|--|--|
| <div>FAILED</div> <div>DURATION - 5.577 s</div>   |  | <div></div> | <div>Steps</div> <div>Total - 4</div> <div>Pass - 3</div> <div>Fail - 1</div> <div>Skip - 0</div> |  | <div></div> |
| <div>/ 11:43:44.617 PM // 11:43:50.194 PM /</div> |  |   |   |  |  |
| <div>Post_Admin</div>                             |  |   |   |  |  |
| <div>@ApiPostAdmin</div>                          |  |   |   |  |  |
|   |  |   |   |  |  |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
| 1 | Given Set the Url admin_post  | PASSED | 0.057 s  |
| 2 | And Set the expected data admin_post  | PASSED | 0.152 s  |
| 3 | When Send the request and get the response admin_post   | PASSED | 0.349 s  |
| 4 | Then Do assertion admin_post<br>java.lang.RuntimeException: com.fasterxml.jackson.databind.exc.UnrecognizedPropertyException: Unrecognized field "path" (class pojos.Admin_Pojo), not marked as ignorable (3 known properties: "httpStatus", "object", "message") at [Source: (String){"path":"/admin/save","error":"Unauthorized","message":"Full authentication is required to access this resource","status":401}]; line: 1, column: 10] (through reference chain: pojos.Admin_Pojo["path"])<br>at io.restassured.internal.path.json.mapping.JsonPathJackson2ObjectDeserializer.deserialize(JsonPathJackson2ObjectDeserializer.java:30)<br>at io.restassured.path.json.mapping.JsonPathObjectDeserializer\$deserialize.call(Unknown Source)<br>at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45)<br>at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:125)<br>at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:139)<br>at io.restassured.internal.mapping.Jackson2Mapper.deserialize(Jackson2Mapper.groovy:58)<br>at io.restassured.mapper.ObjectMapper\$deserialize\$0.call(Unknown Source)<br>at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45)<br>at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:125) | FAILED | 0.326 s  |

| # | Step / Hook Details  | Status | Duration |
|---|--|--------|----------|
|   | <pre> at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:139) at io.restassured.internal.mapping.ObjectMapper.parseWithJackson2(ObjectMapping.groovy:254) at io.restassured.internal.mapping.ObjectMapper\$parseWithJackson2\$1.callStatic(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallStatic(CallSiteArray.java:53) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callStatic(AbstractCallSite.java:217) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callStatic(AbstractCallSite.java:240) at io.restassured.internal.mapping.ObjectMapper.deserialize(ObjectMapping.groovy:56) at io.restassured.internal.mapping.ObjectMapper\$deserialize\$0.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:125) at io.restassured.internal.RestAssuredResponseOptionsGroovyImpl.as(RestAssuredResponseOptionsGroovyImpl.groovy:229) at io.restassured.internal.RestAssuredResponseOptionsImpl.as(RestAssuredResponseOptionsImpl.java:169) at stepdefinitions.Api_Test.admin_controller.Admin_Controller_Post_StepDefs.doAssertionAdmin_post(Admin_Controller_Post_StepDefs.java:36) at ?.Do assertion admin_post(file:///C:/Users/Public/team11/.src/test/resources/features/ApiFeatures/Admin_Controller_Post.feature:7) Caused by: com.fasterxml.jackson.databind.exc.UnrecognizedPropertyException: Unrecognized field "path" (class pojos.Admin_Pojo), not marked as ignorable (3 known properties: "httpStatus", "object", "message") at [Source: (String) "{"path":"/admin/save","error":"Unauthorized","message":"Full authentication is required to access this resource","status":401}"; line: 1, column: 10] (through reference chain: pojos.Admin_Pojo["path"]) at com.fasterxml.jackson.databind.exc.UnrecognizedPropertyException.from(UnrecognizedPropertyException.java:61) at com.fasterxml.jackson.databind.DeserializationContext.handleUnknownProperty(DeserializationContext.java:1132) at com.fasterxml.jackson.databind.deser.std.StdDeserializer.handleUnknownProperty(StdDeserializer.java:2202) at com.fasterxml.jackson.databind.deser.BeanDeserializerBase.handleUnknownProperty(BeanDeserializerBase.java:1705) at com.fasterxml.jackson.databind.deser.BeanDeserializerBase.handleUnknownVanilla(BeanDeserializerBase.java:1683) at com.fasterxml.jackson.databind.deser.BeanDeserializer.vanillaDeserialize(BeanDeserializer.java:320) at com.fasterxml.jackson.databind.deser.BeanDeserializer.deserialize(BeanDeserializer.java:177) at com.fasterxml.jackson.databind.deser.DefaultDeserializationContext.readRootValue(DefaultDeserializationContext.java:323) at com.fasterxml.jackson.databind.ObjectMapper._readMapAndClose(ObjectMapper.java:4730) at com.fasterxml.jackson.databind.ObjectMapper.readValue(ObjectMapper.java:3677) at io.restassured.internal.path.json.mapping.JsonPathJackson2ObjectDeserializer.deserialize(JsonPathJackson2ObjectDeserializer.java:28) at io.restassured.path.json.mapping.JsonPathObjectDeserializer\$deserialize.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:125) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:139) at io.restassured.internal.mapping.Jackson2Mapper.deserialize(Jackson2Mapper.groovy:58) at io.restassured.mapper.ObjectMapper\$deserialize\$0.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:125) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:139) at io.restassured.internal.mapping.ObjectMapper.parseWithJackson2(ObjectMapping.groovy:254) at io.restassured.internal.mapping.ObjectMapper\$parseWithJackson2\$1.callStatic(Unknown Source) </pre> |        |          |

| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | <pre> at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCallStatic(CallSiteArray.java:53) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callStatic(AbstractCallSite.java:217) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.callStatic(AbstractCallSite.java:240) at io.restassured.internal.mapping.ObjectMapper.deserialize(ObjectMapping.groovy:56) at io.restassured.internal.mapping.ObjectMapper\$deserialize\$0.call(Unknown Source) at org.codehaus.groovy.runtime.callsite.CallSiteArray.defaultCall(CallSiteArray.java:45) at org.codehaus.groovy.runtime.callsite.AbstractCallSite.call(AbstractCallSite.java:125) at io.restassured.internal.RestAssuredResponseOptionsGroovyImpl.as(RestAssuredResponseOptionsGroovyImpl.groovy:229) at io.restassured.internal.RestAssuredResponseOptionsImpl.as(RestAssuredResponseOptionsImpl.java:169) at stepdefinitions.Api_Test.admin_controller.Admin_Controller_Post_StepDefs.doAssertionAdmin_post(Admin_Controller_Post_StepDefs.java:36) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:62) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:566) at io.cucumber.java.Invoker.doInvoke(Invoker.java:66) at io.cucumber.java.Invoker.invoke(Invoker.java:24) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:84) at io.cucumber.core.runner.TestStep.run(TestStep.java:56) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:84) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.lambda\$run\$0(PickleRunners.java:151) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$5(CucumberExecutionContext.java:130) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23) at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:130) at io.cucumber.junit.PickleRunners\$NoStepDescriptions.run(PickleRunners.java:148) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:144) at io.cucumber.junit.FeatureRunner.runChild(FeatureRunner.java:28) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) </pre> |        |          |



| # | Step / Hook Details   | Status | Duration |
|---|---|--------|----------|
|   | <pre> at io.cucumber.junit.FeatureRunner.run(FeatureRunner.java:137) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:196) at io.cucumber.junit.Cucumber.runChild(Cucumber.java:89) at org.junit.runners.ParentRunner\$4.run(ParentRunner.java:331) at org.junit.runners.ParentRunner\$1.schedule(ParentRunner.java:79) at org.junit.runners.ParentRunner.runChildren(ParentRunner.java:329) at org.junit.runners.ParentRunner.access\$100(ParentRunner.java:66) at org.junit.runners.ParentRunner\$2.evaluate(ParentRunner.java:293) at io.cucumber.junit.Cucumber\$RunBeforeAllHooks.evaluate(Cucumber.java:266) at io.cucumber.junit.Cucumber\$RunAfterAllHooks.evaluate(Cucumber.java:281) at io.cucumber.junit.Cucumber\$StartTestRun.evaluate(Cucumber.java:233) at io.cucumber.junit.Cucumber\$FinishTestRun.evaluate(Cucumber.java:248) at org.junit.runners.ParentRunner\$3.evaluate(ParentRunner.java:306) at org.junit.runners.ParentRunner.run(ParentRunner.java:413) at org.junit.runner.JUnitCore.run(JUnitCore.java:137) at com.intellij.junit4.JUnit4IdeaTestRunner.startRunnerWithArgs(JUnit4IdeaTestRunner.java:69) at com.intellij.rt.junit.IdeaTestRunner\$Repeater\$1.execute(IdeaTestRunner.java:38) at com.intellij.rt.execution.junit.TestsRepeater.repeat(TestsRepeater.java:11) at com.intellij.rt.junit.IdeaTestRunner\$Repeater.startRunnerWithArgs(IdeaTestRunner.java:35) at com.intellij.rt.junit.JUnitStarter.prepareStreamsAndStart(JUnitStarter.java:235) at com.intellij.rt.junit.JUnitStarter.main(JUnitStarter.java:54) </pre> <p>* Not displayable characters are replaced by '?'. </p> |        |          |