

Partials


When we have a large file we can separate it into small files and

you don't need to create a css file for it

you should not use the path because maximum './_filename' should be the path

for this

step 1

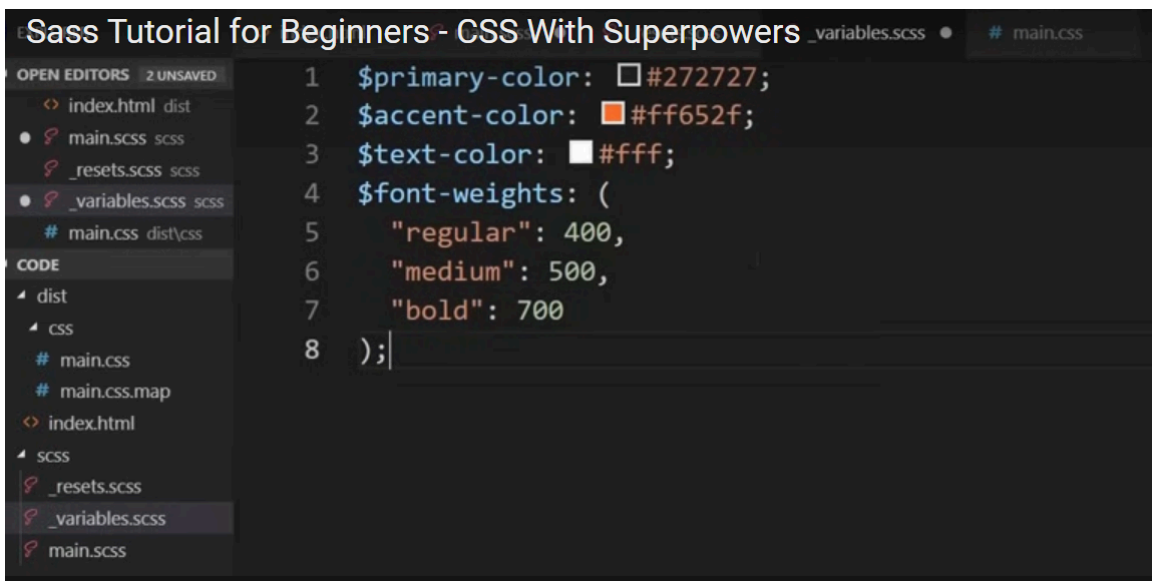

create the file with the name prefixed with the underscore

example


`_resets.scss`

`_variable.scss`

step2

you have to import the file example **`@import './resets';`**

`@import '/variable` into the another file

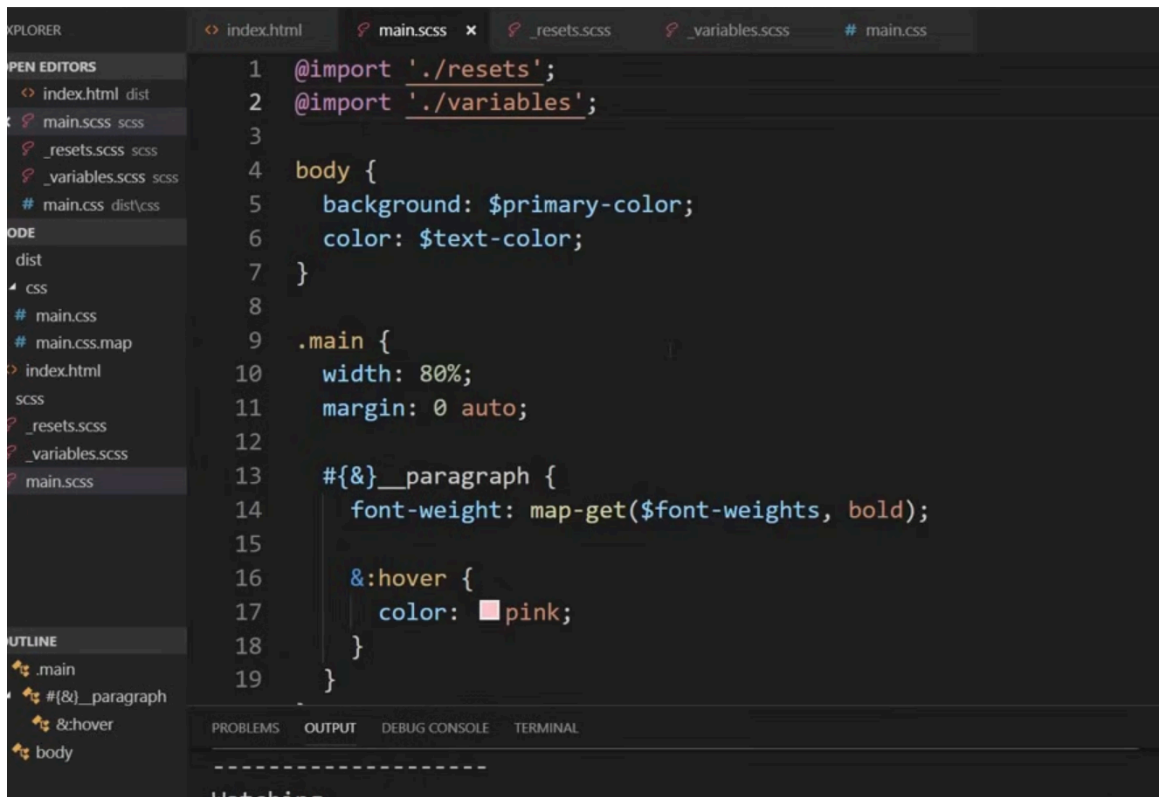

The image shows a Visual Studio Code editor window with the following components:

- Explorer (Left):** Lists files in the project, including `index.html`, `main.scss`, `_resets.scss`, `_variables.scss`, and `main.css`.
- Outline (Left):** Shows the structure of the SCSS file with nodes like `.main`, `#{&}__paragraph`, `&:hover`, and `body`.
- Main Editor:** Displays the content of `main.scss` with the following code:

```
1 @import './resets';
2 @import './variables';
3
4 body {
5   background: $primary-color;
6   color: $text-color;
7 }
8
9 .main {
10  width: 80%;
11  margin: 0 auto;
12
13  #{&}__paragraph {
14    font-weight: map-get($font-weights, bold);
15
16    &:hover {
17      color: pink;
18    }
19  }
```
- Bottom Panel:** Includes tabs for PROBLEMS, OUTPUT, DEBUG CONSOLE, and TERMINAL.