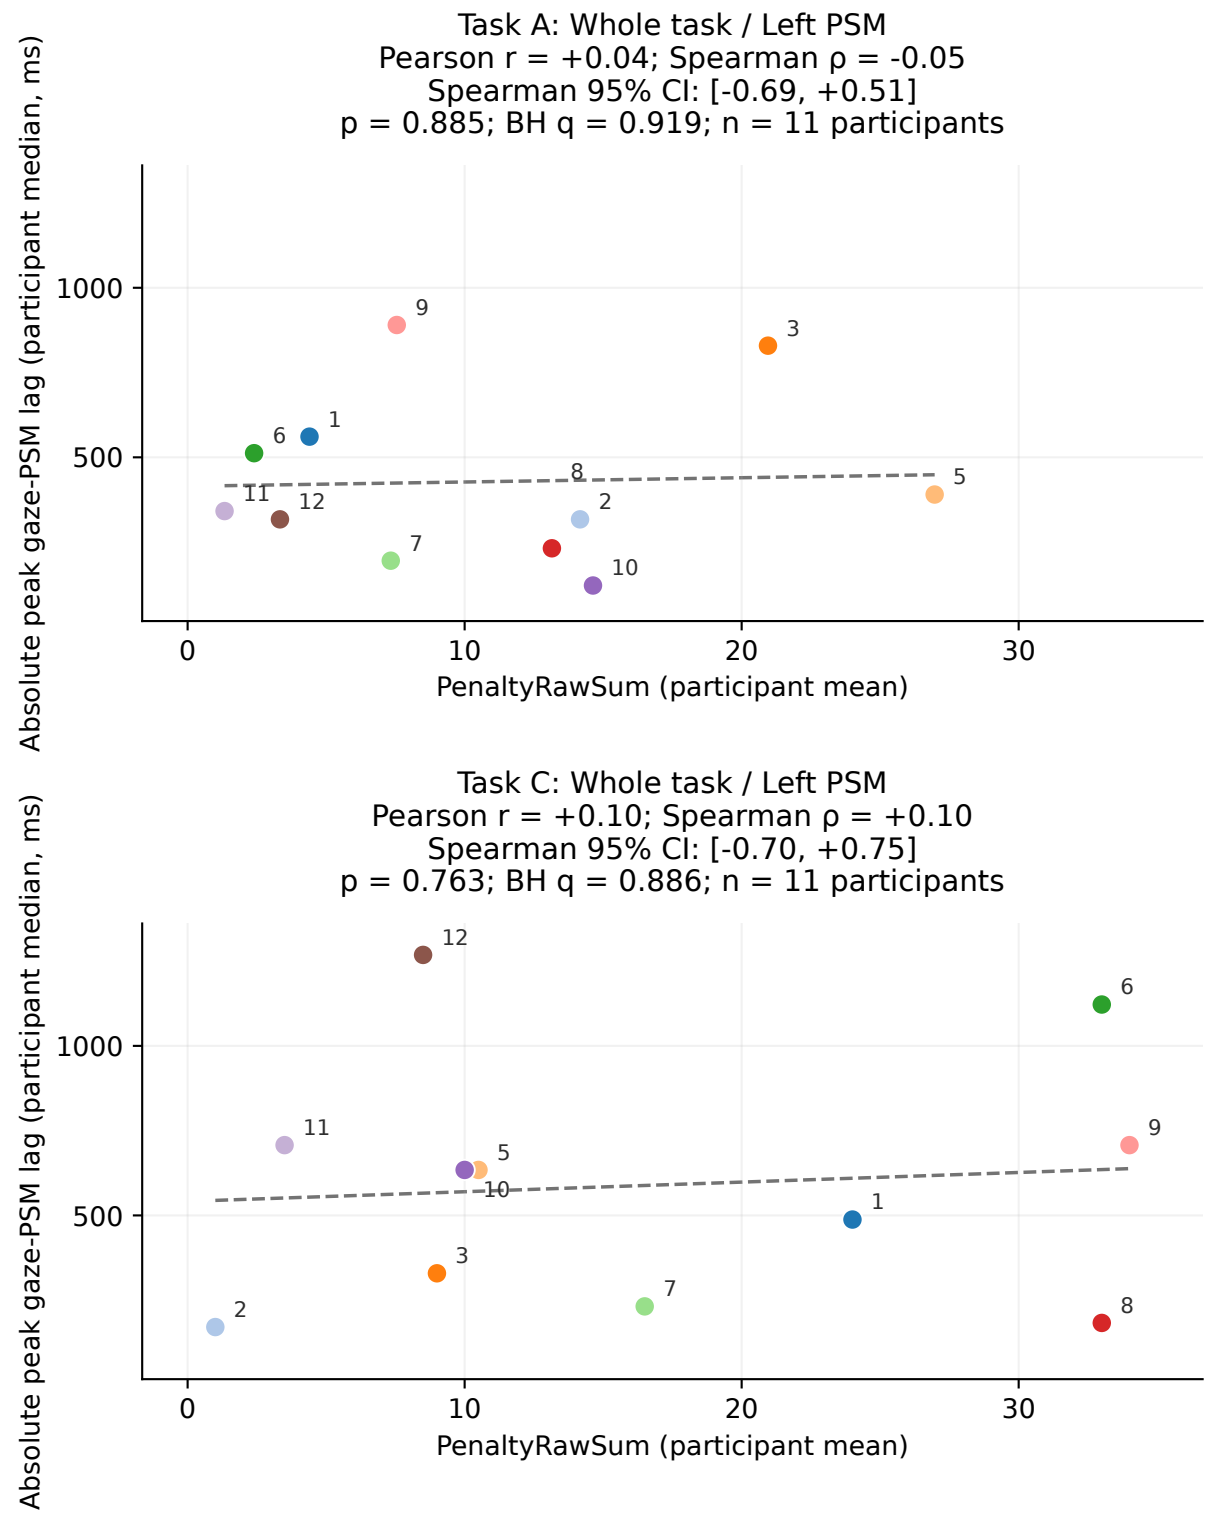
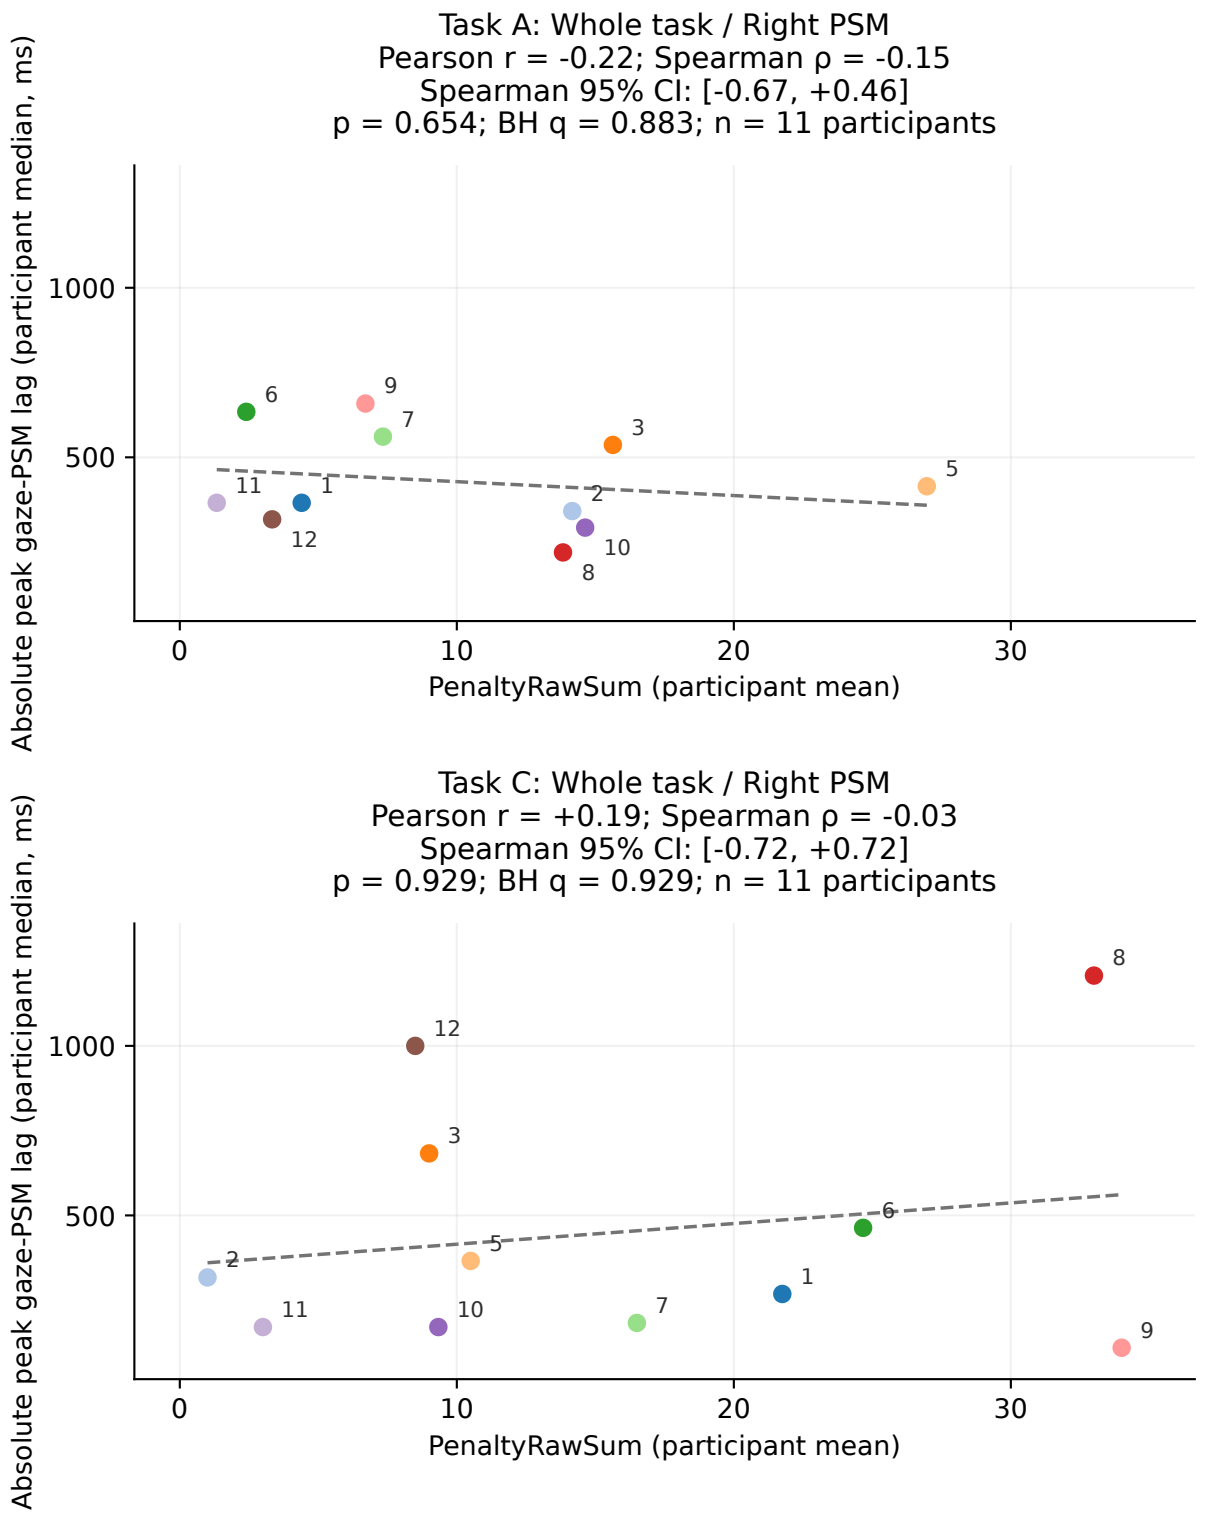
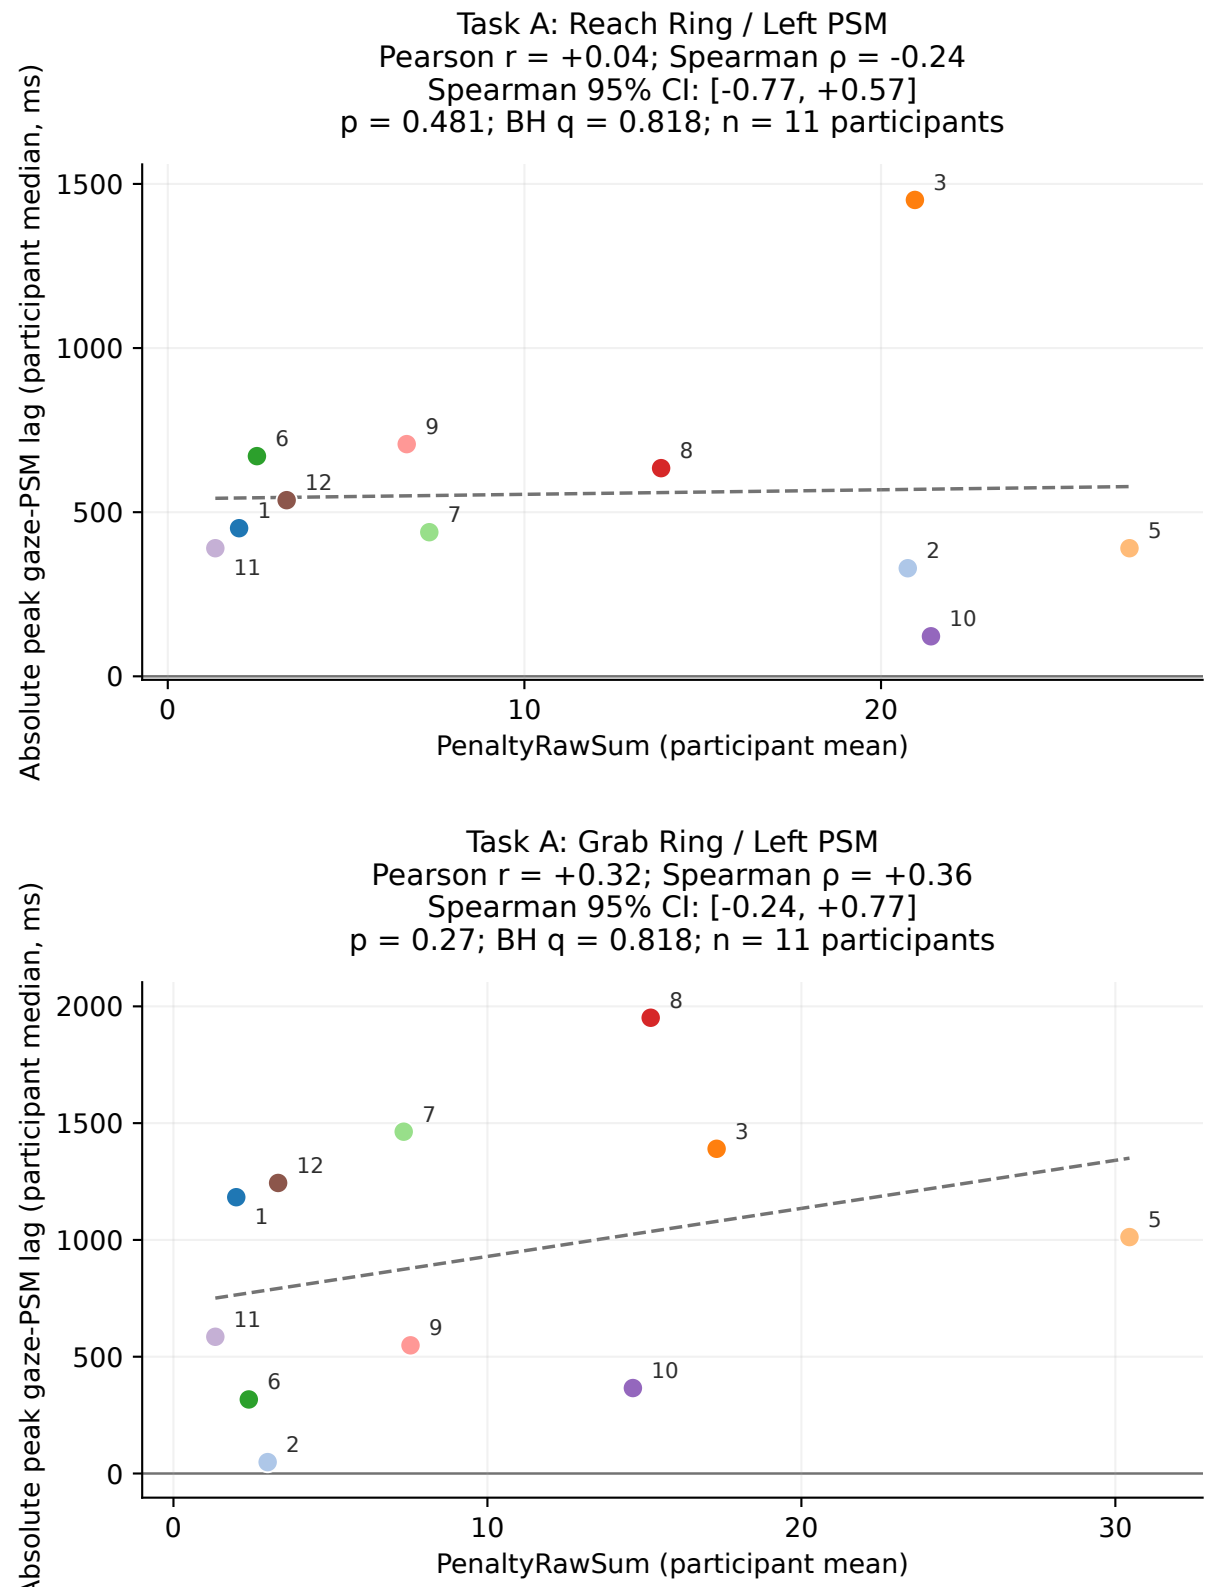
# Whole-task absolute peak lag versus PenaltyRawSum Position (primary analysis)

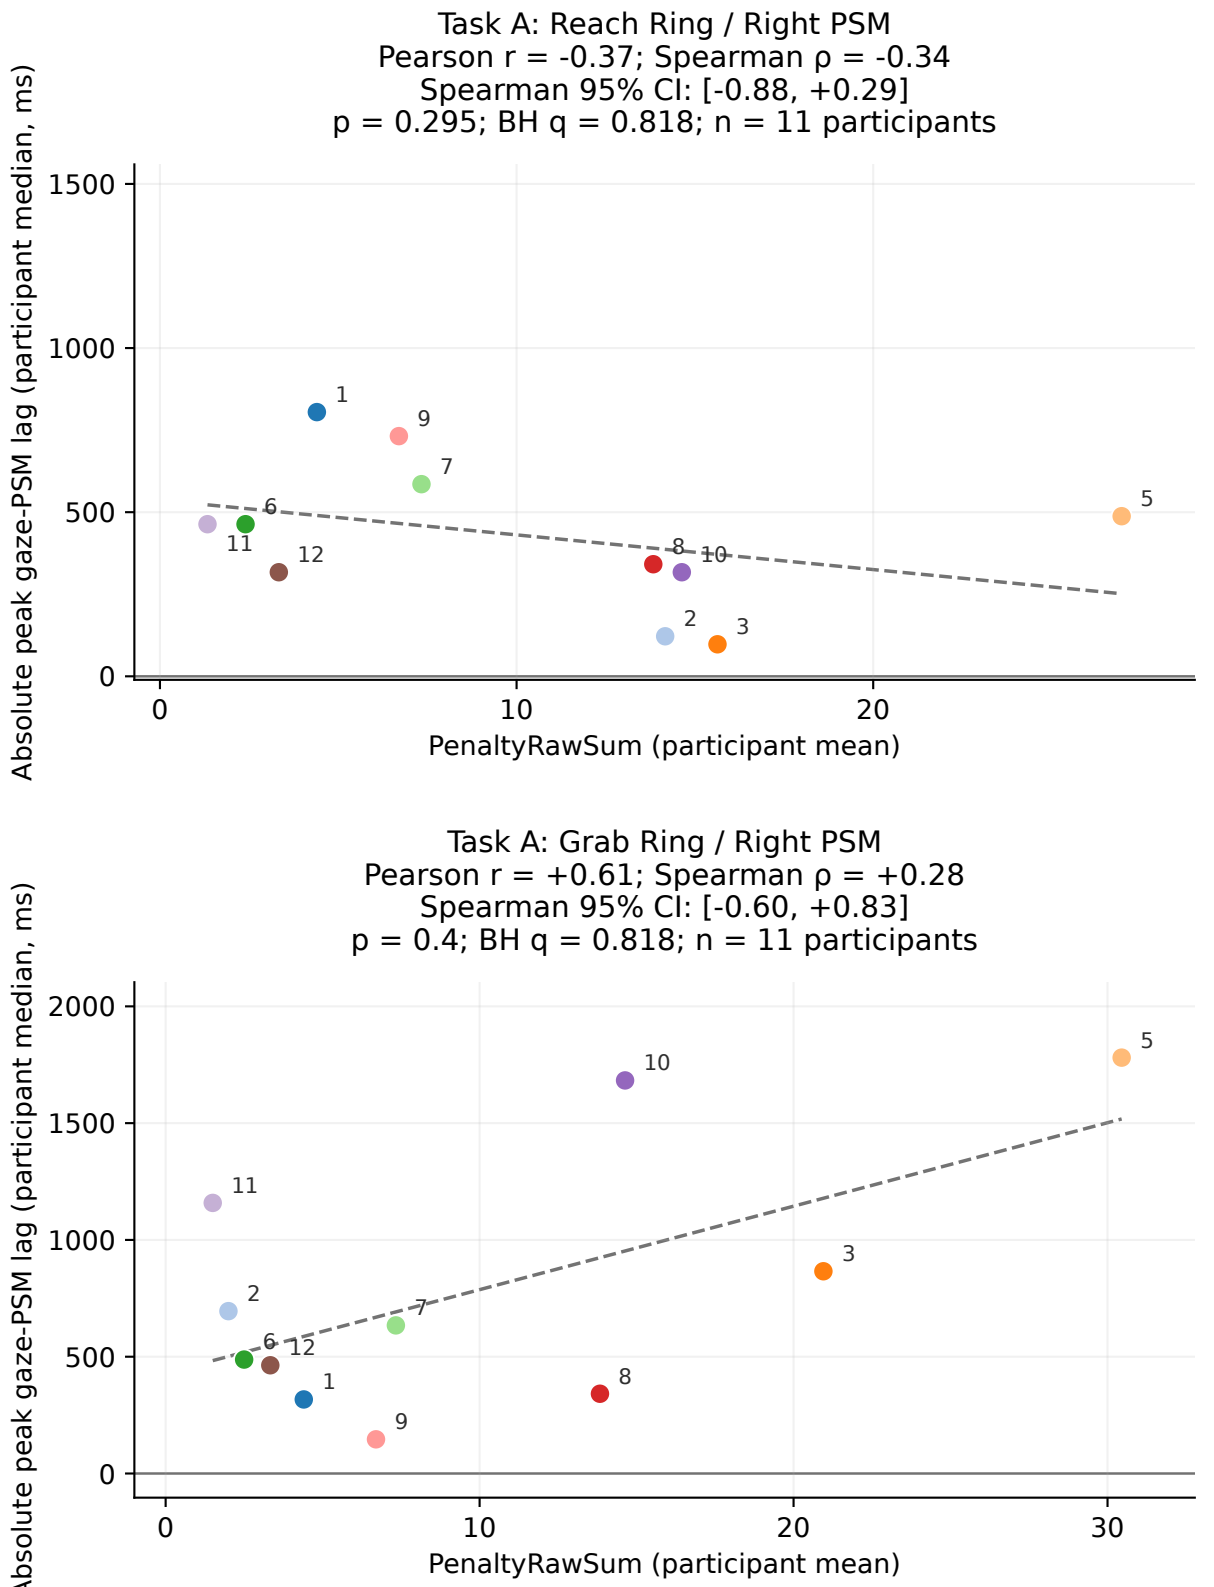



One point per participant; labels show participant IDs. Each point uses the same eligible attempts for PenaltyRawSum and absolute peak lag.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
PenaltyRawSum uses the supplied column values directly; attempts with missing PenaltyRawSum values are excluded.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.

# Task A: valid-phase absolute peak lag versus PenaltyRawSum Position (primary analysis)

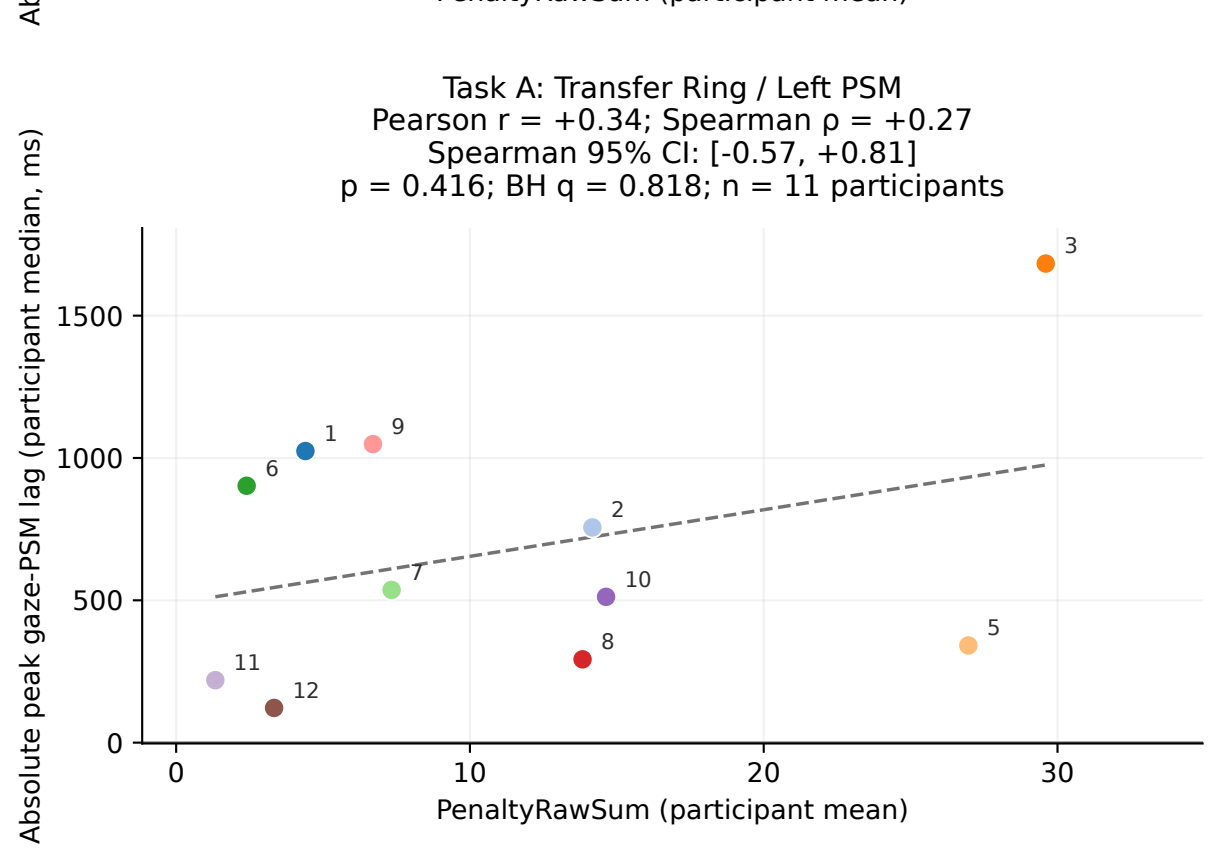


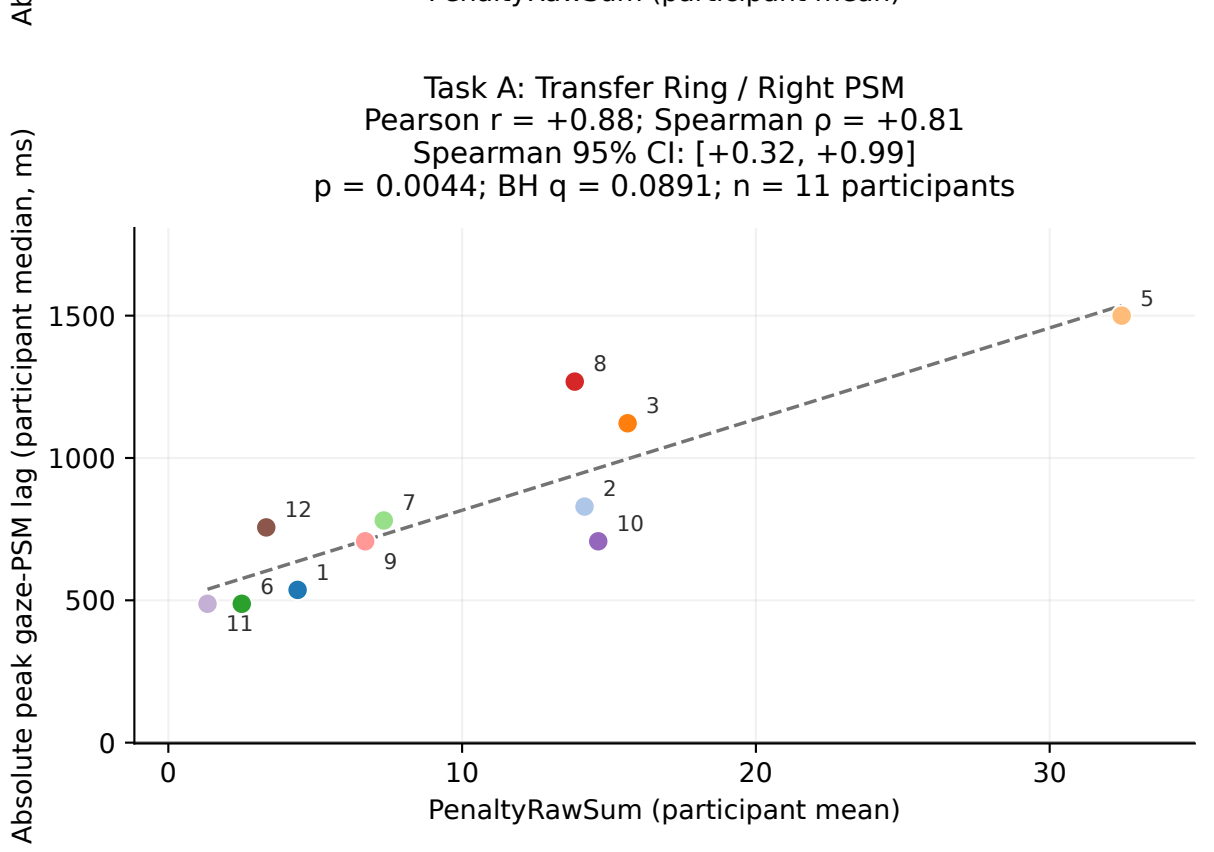



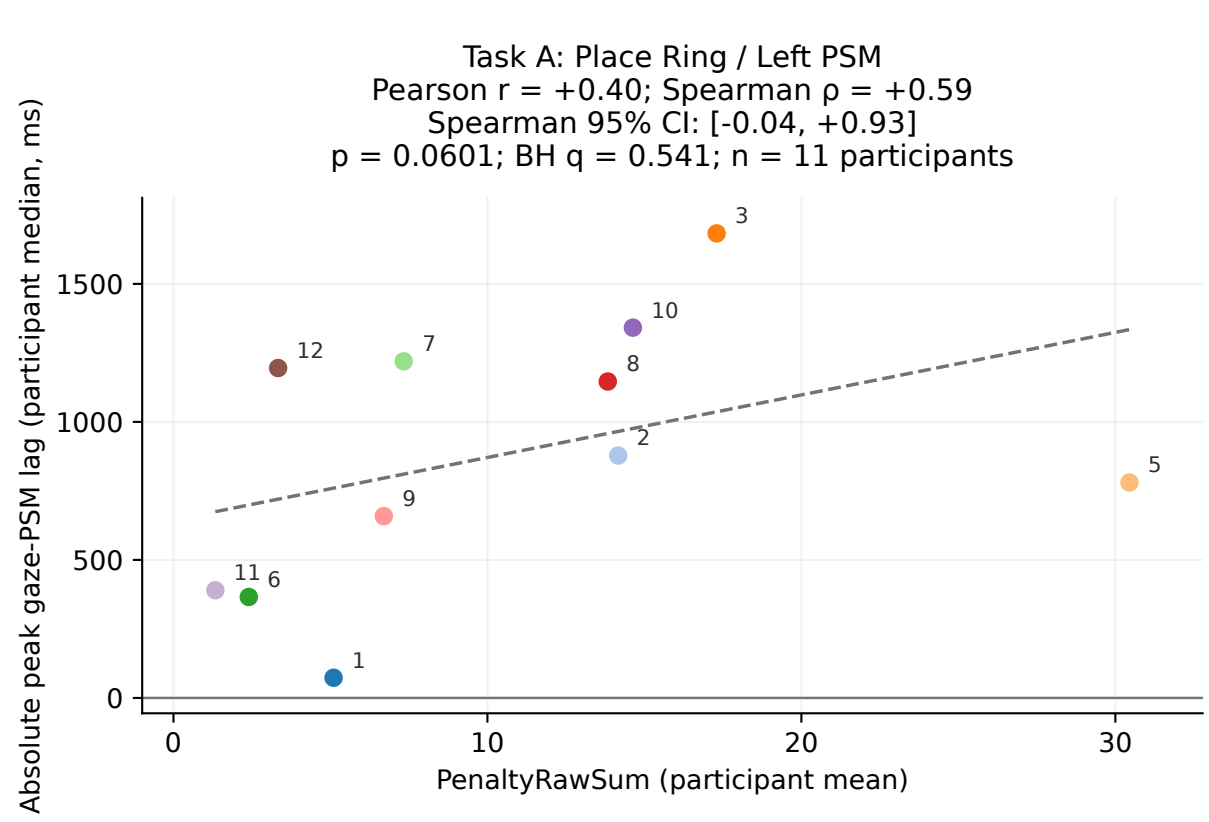


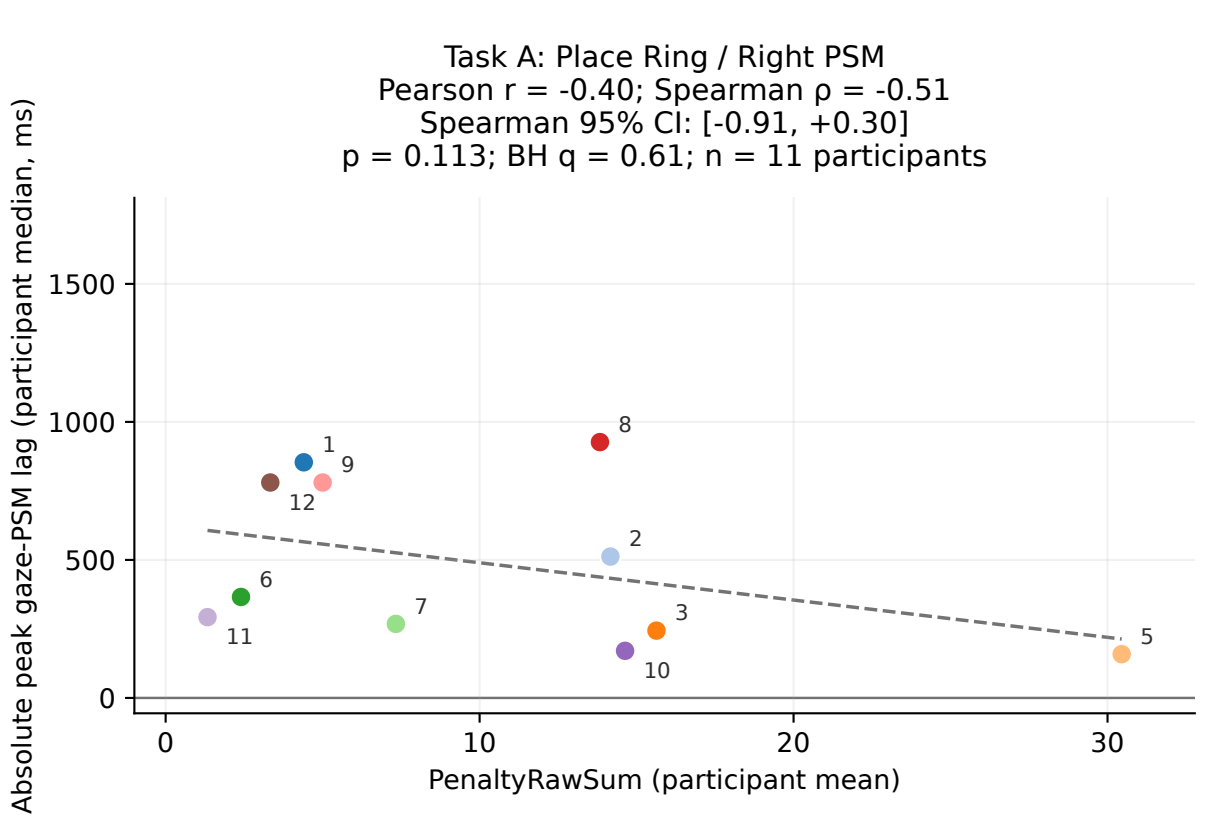




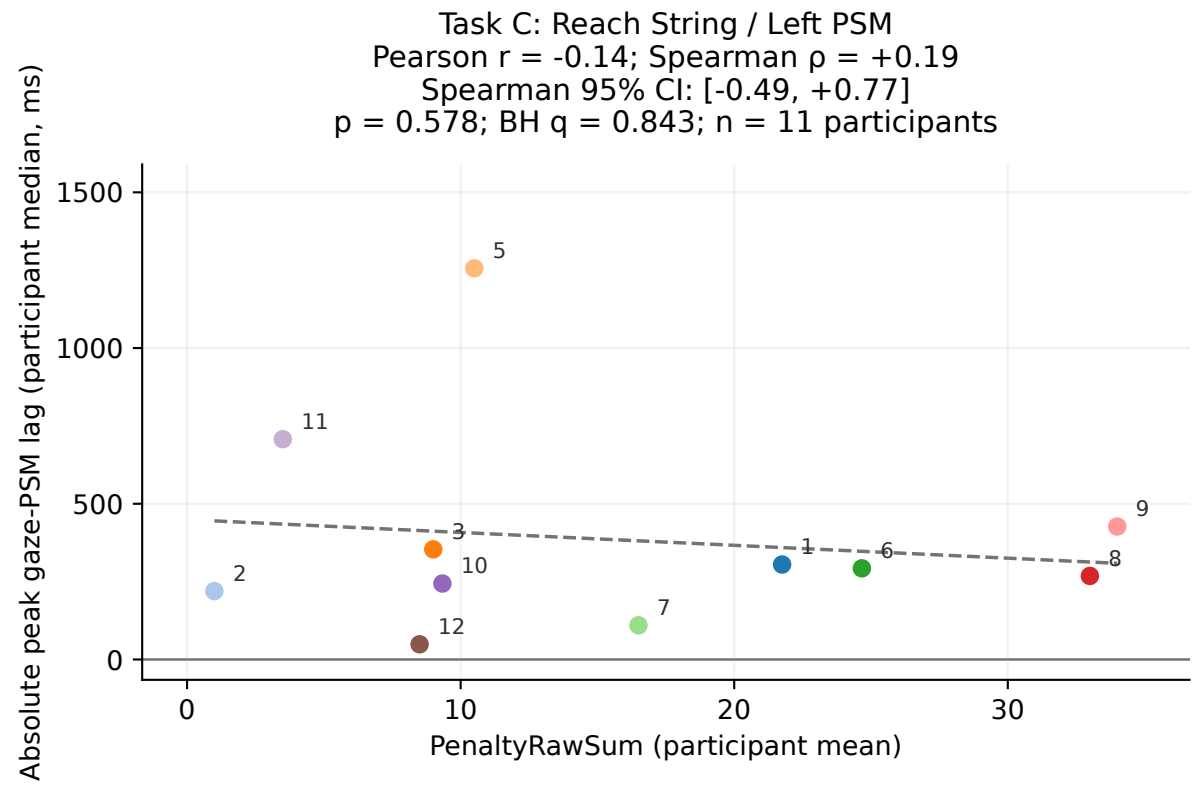



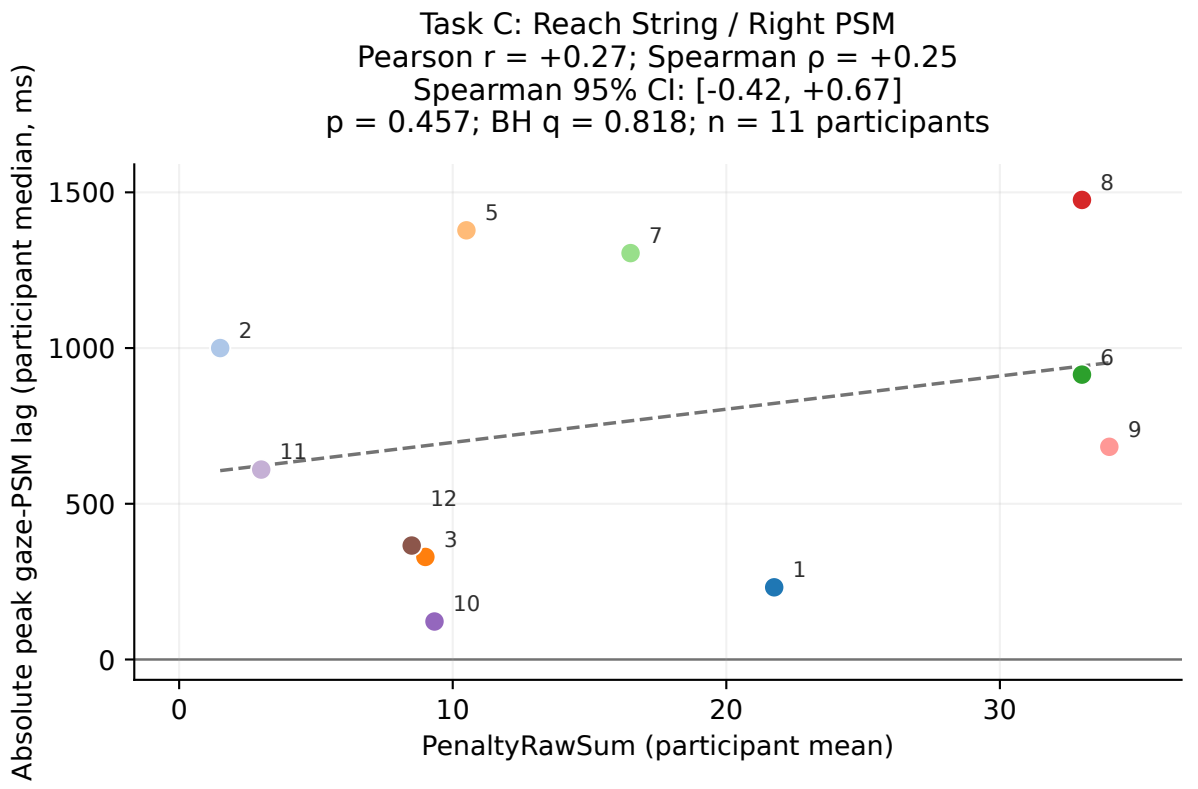



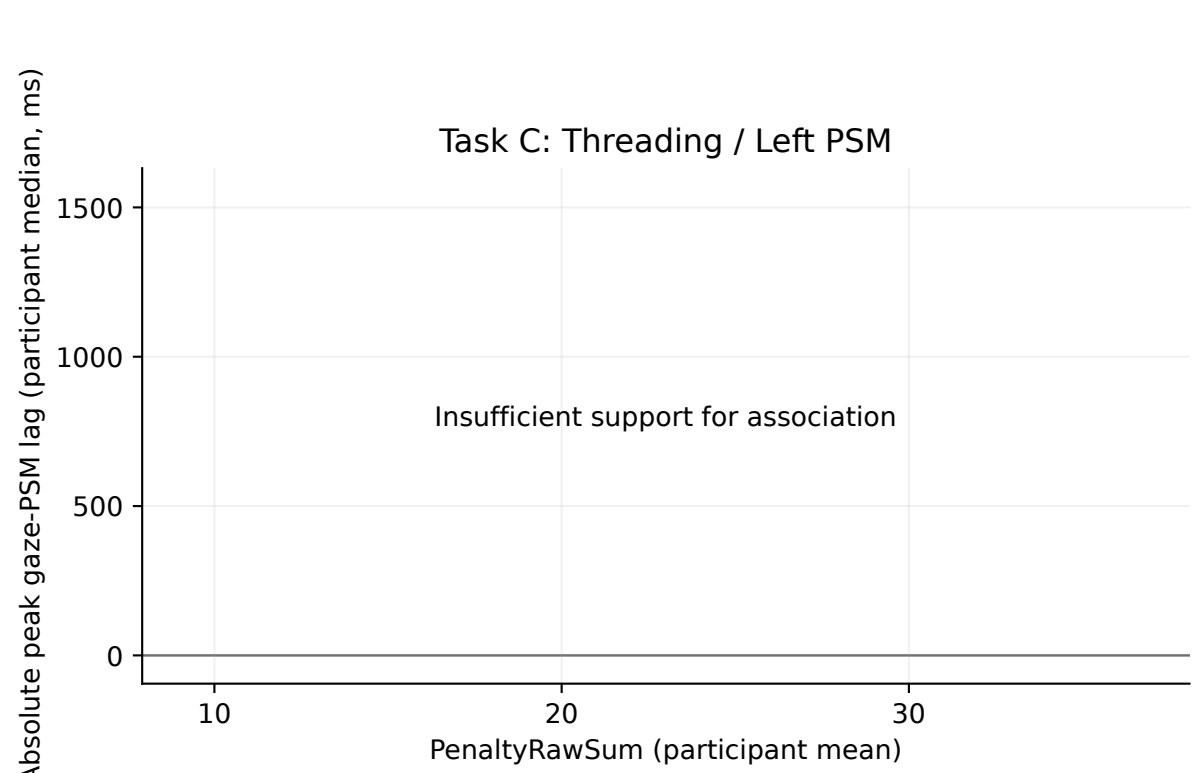



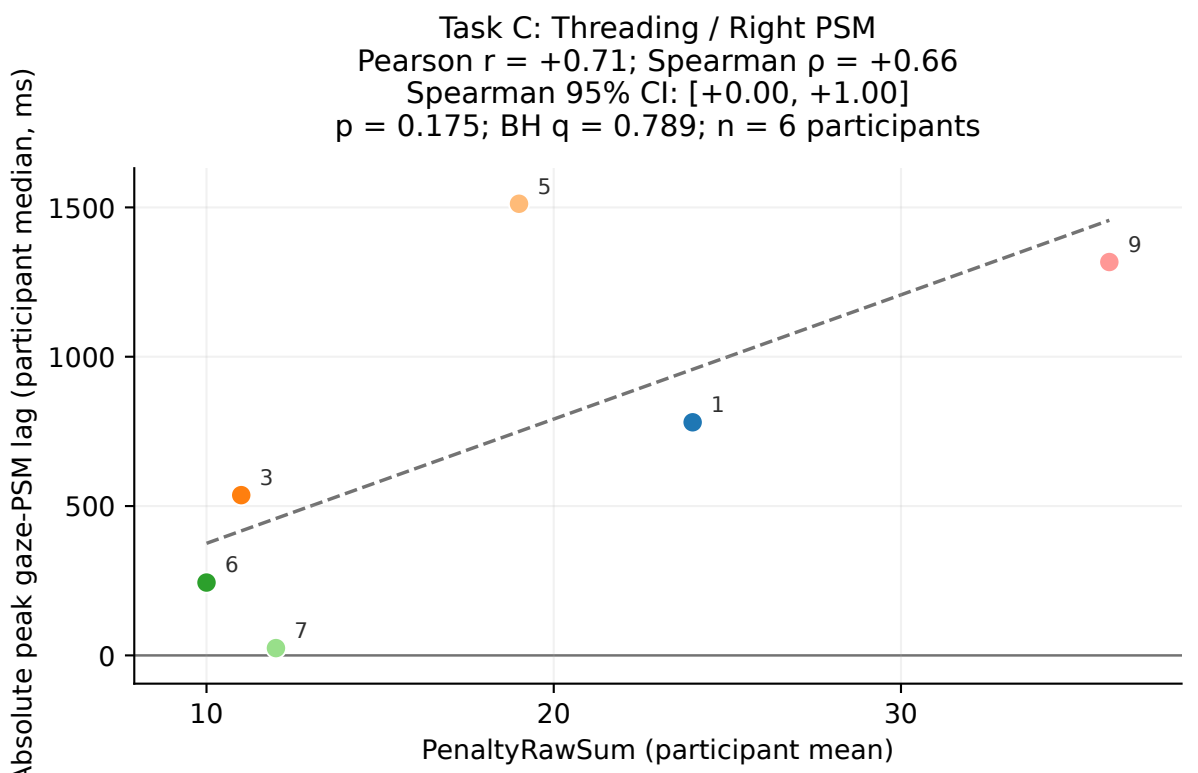

One point per participant; labels show participant IDs. Each point uses the same eligible attempts for PenaltyRawSum and absolute peak lag.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
PenaltyRawSum uses the supplied column values directly; attempts with missing PenaltyRawSum values are excluded.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.

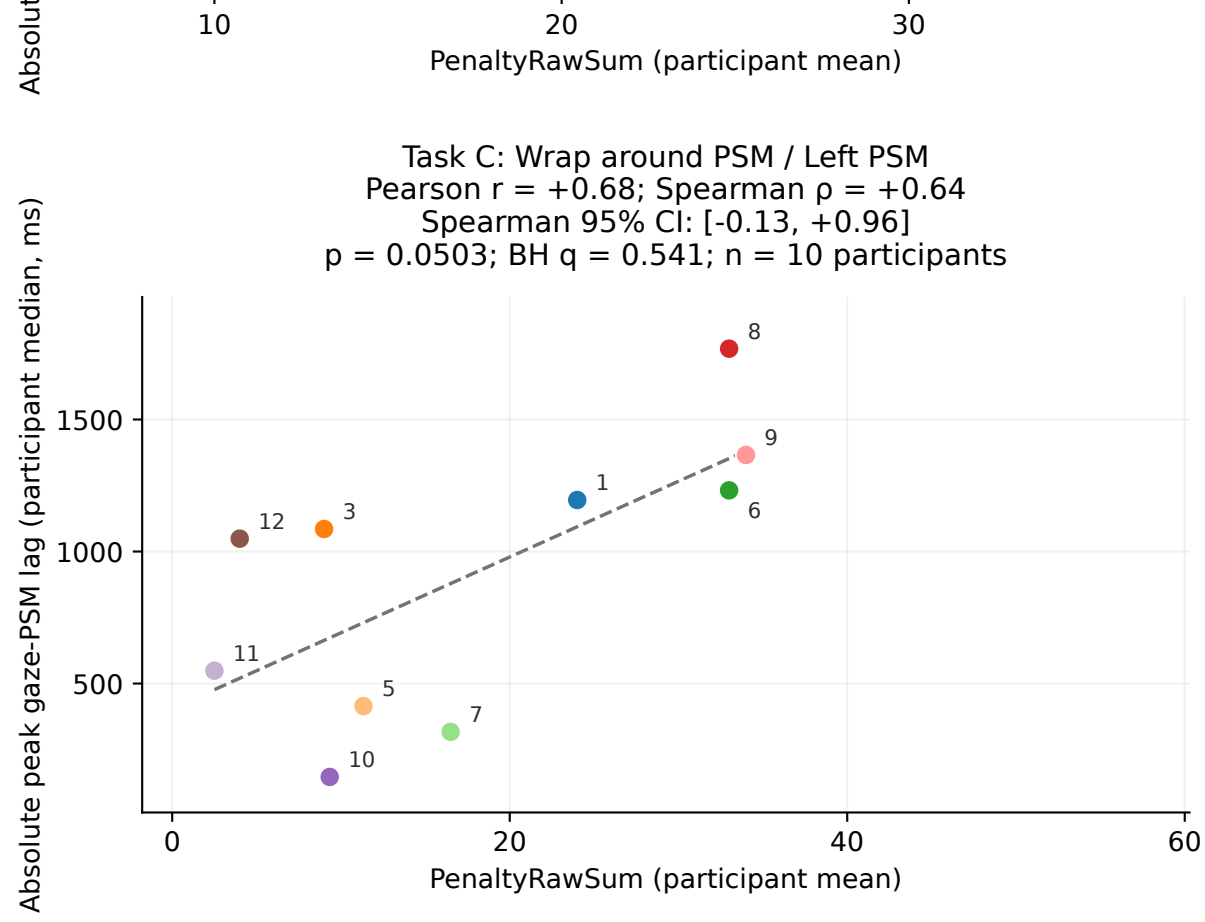
# Task C: valid-phase absolute peak lag versus PenaltyRawSum Position (primary analysis)

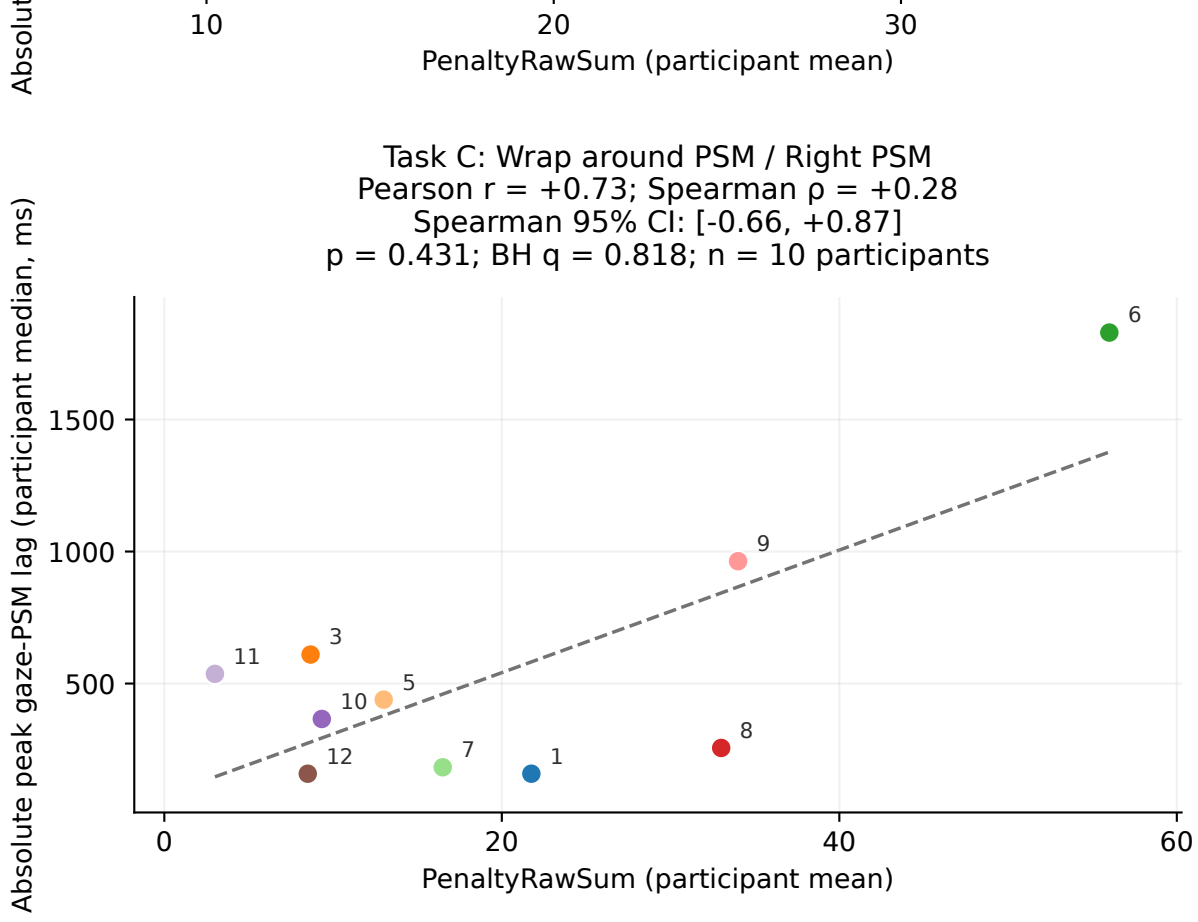


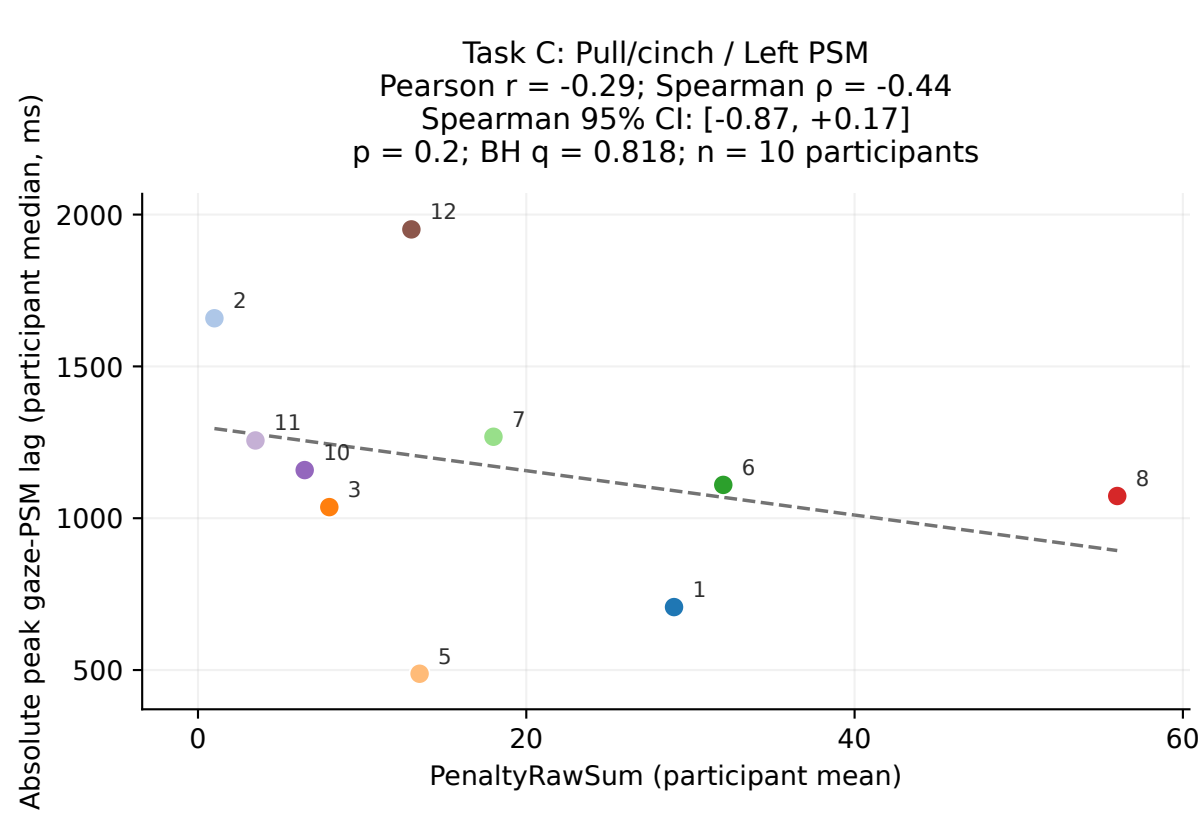



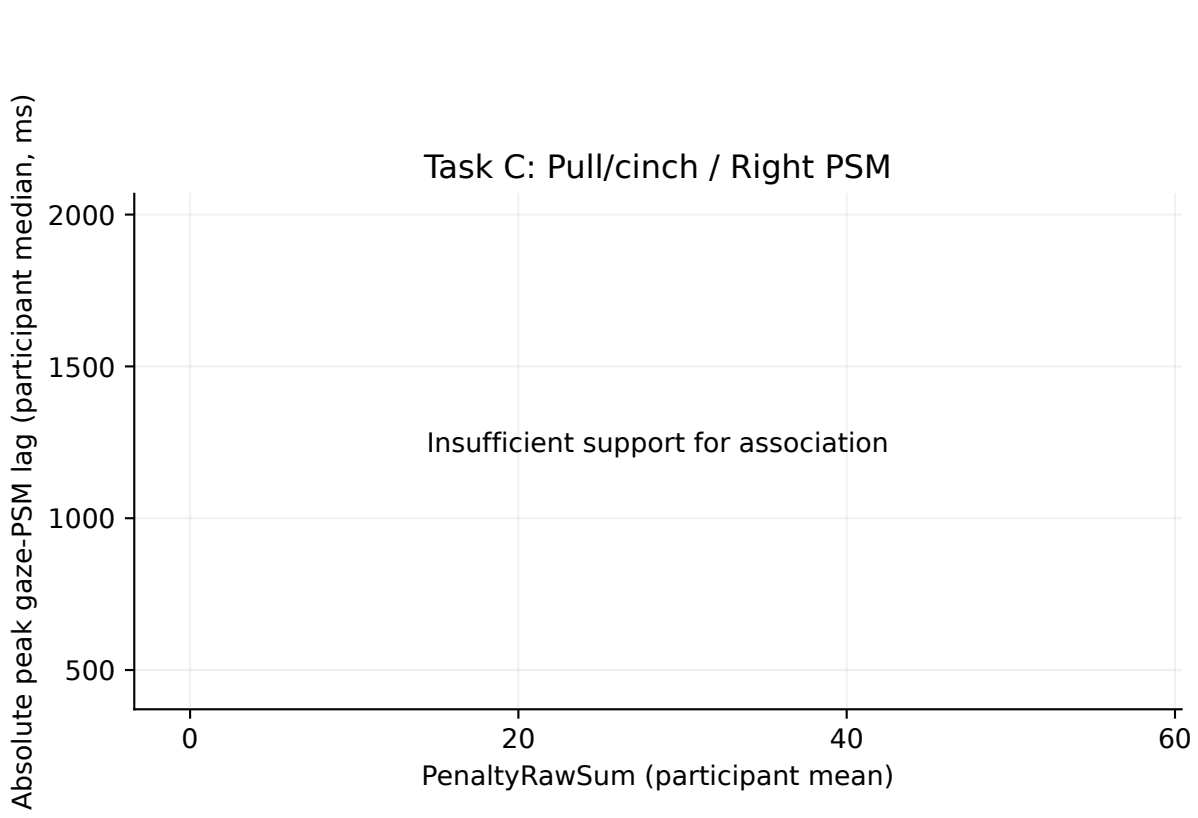




One point per participant; labels show participant IDs. Each point uses the same eligible attempts for PenaltyRawSum and absolute peak lag.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
PenaltyRawSum uses the supplied column values directly; attempts with missing PenaltyRawSum values are excluded.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.