

Whole-task peak correlation versus Performance score
Position (primary analysis)


Task A: Whole task / Left PSM
Pearson r = +0.61; Spearman ρ = +0.66
Spearman 95% CI: [+0.18, +0.90]
p = 0.0303; BH q = 0.345; n = 11 participants

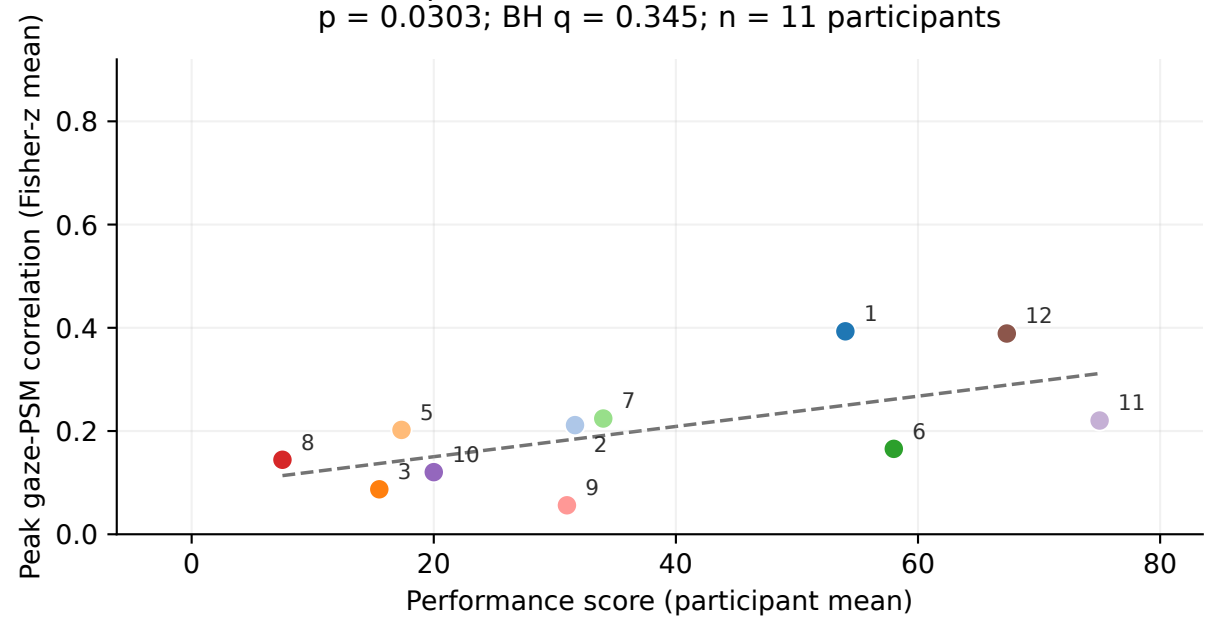


Task A: Whole task / Right PSM
Pearson r = -0.49; Spearman ρ = -0.43
Spearman 95% CI: [-0.85, +0.21]
p = 0.19; BH q = 0.737; n = 11 participants

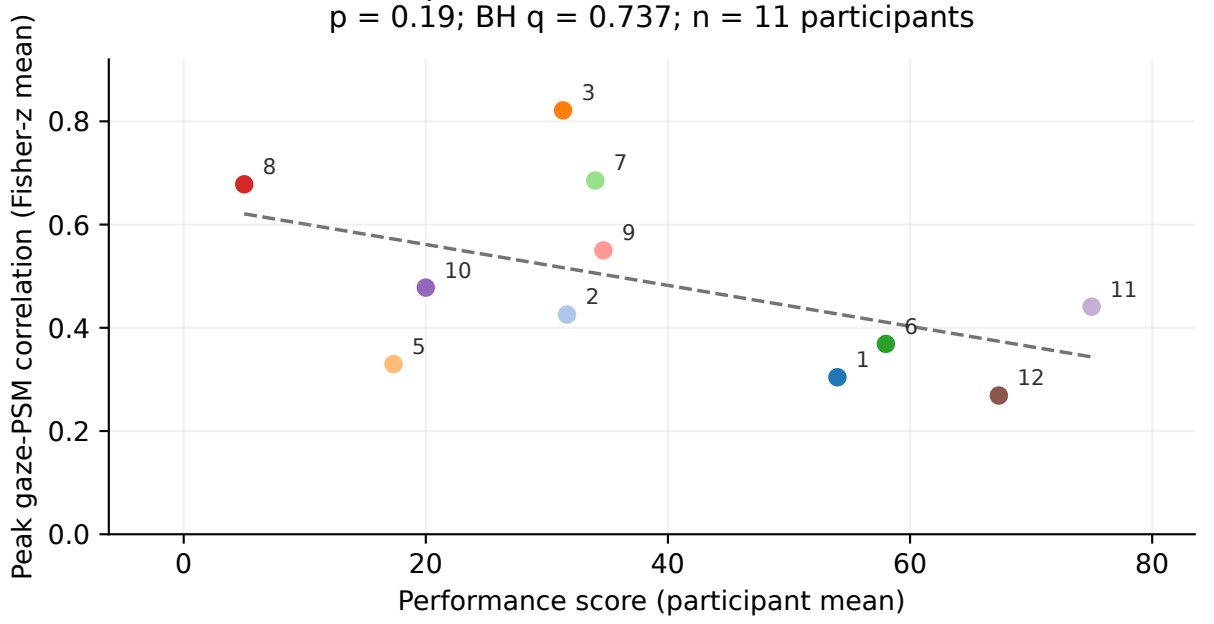

Task C: Whole task / Left PSM
Pearson r = -0.34; Spearman ρ = -0.30
Spearman 95% CI: [-0.81, +0.45]
p = 0.368; BH q = 0.851; n = 11 participants

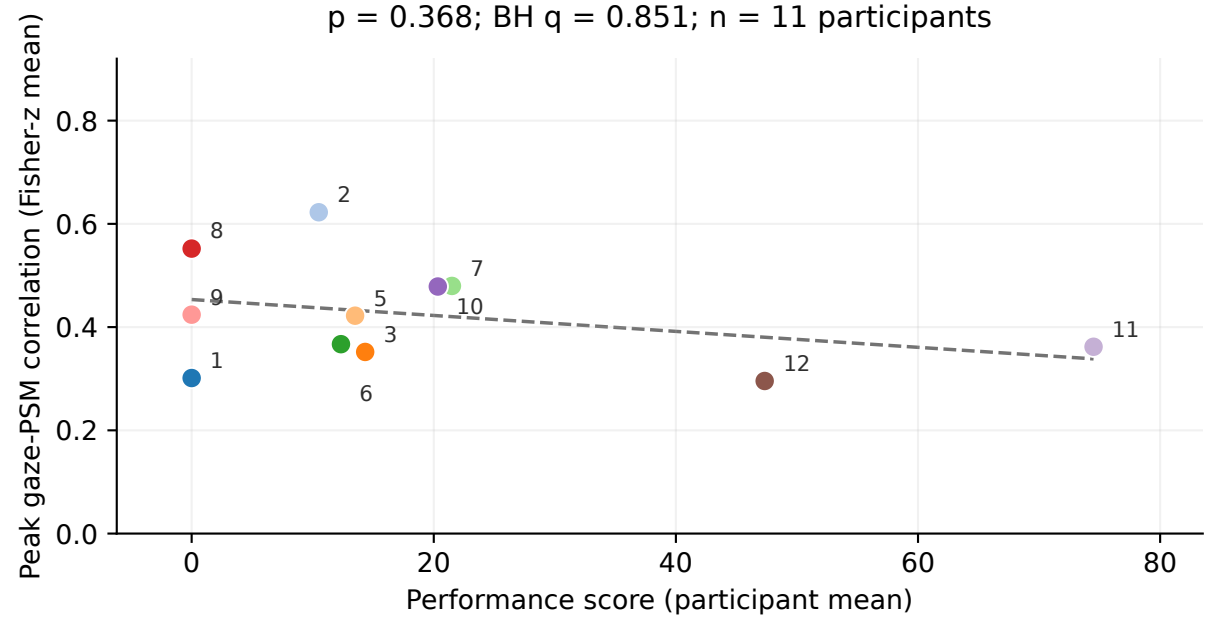



Task C: Whole task / Right PSM
Pearson r = +0.30; Spearman ρ = +0.62
Spearman 95% CI: [+0.03, +0.95]
p = 0.0445; BH q = 0.423; n = 11 participants

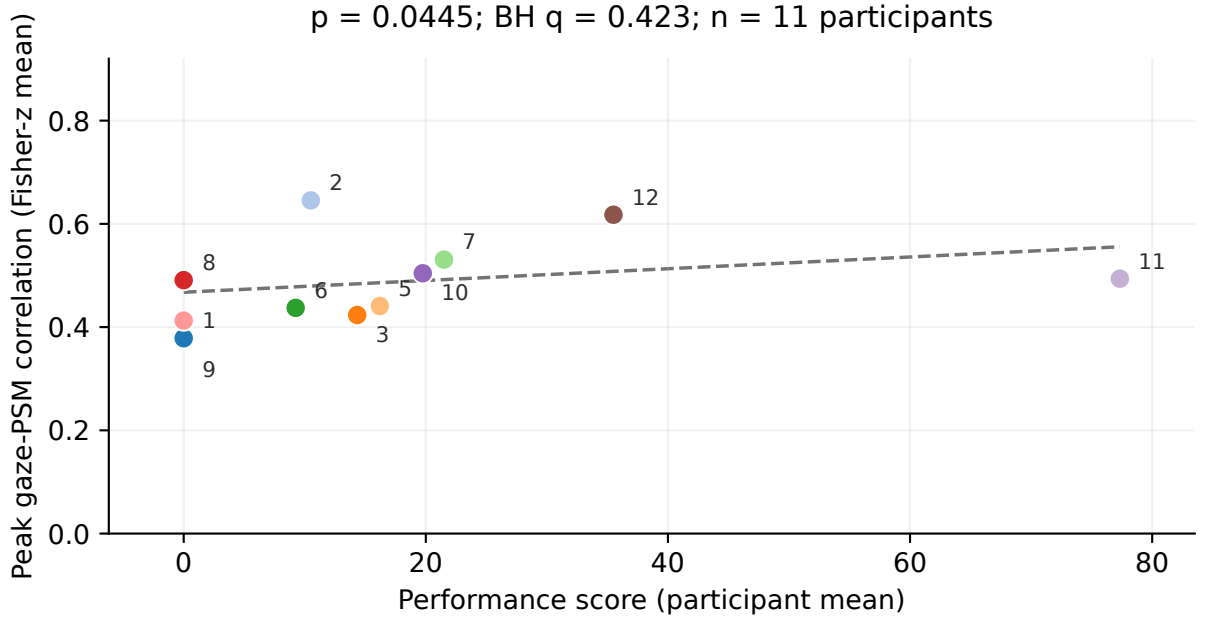



One point per participant; labels show participant IDs. Each point uses the same eligible attempts for Performance score and peak correlation.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.


Task A: valid-phase peak correlation versus Performance score
Position (primary analysis)

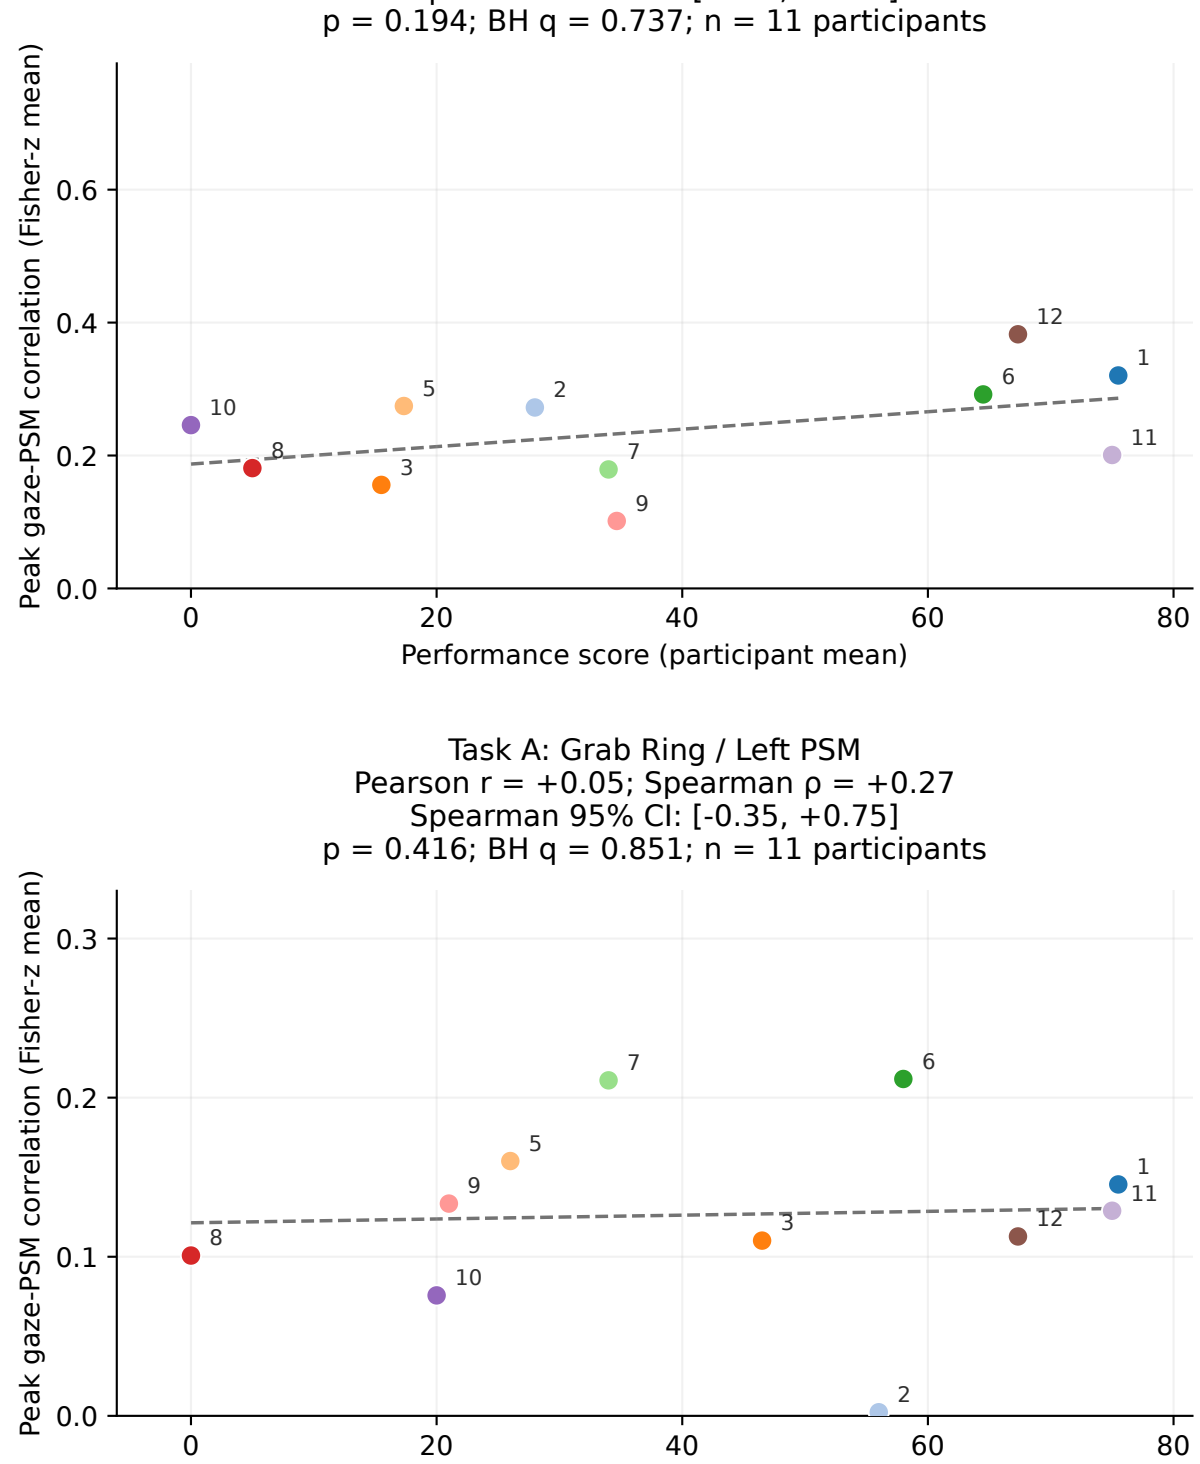


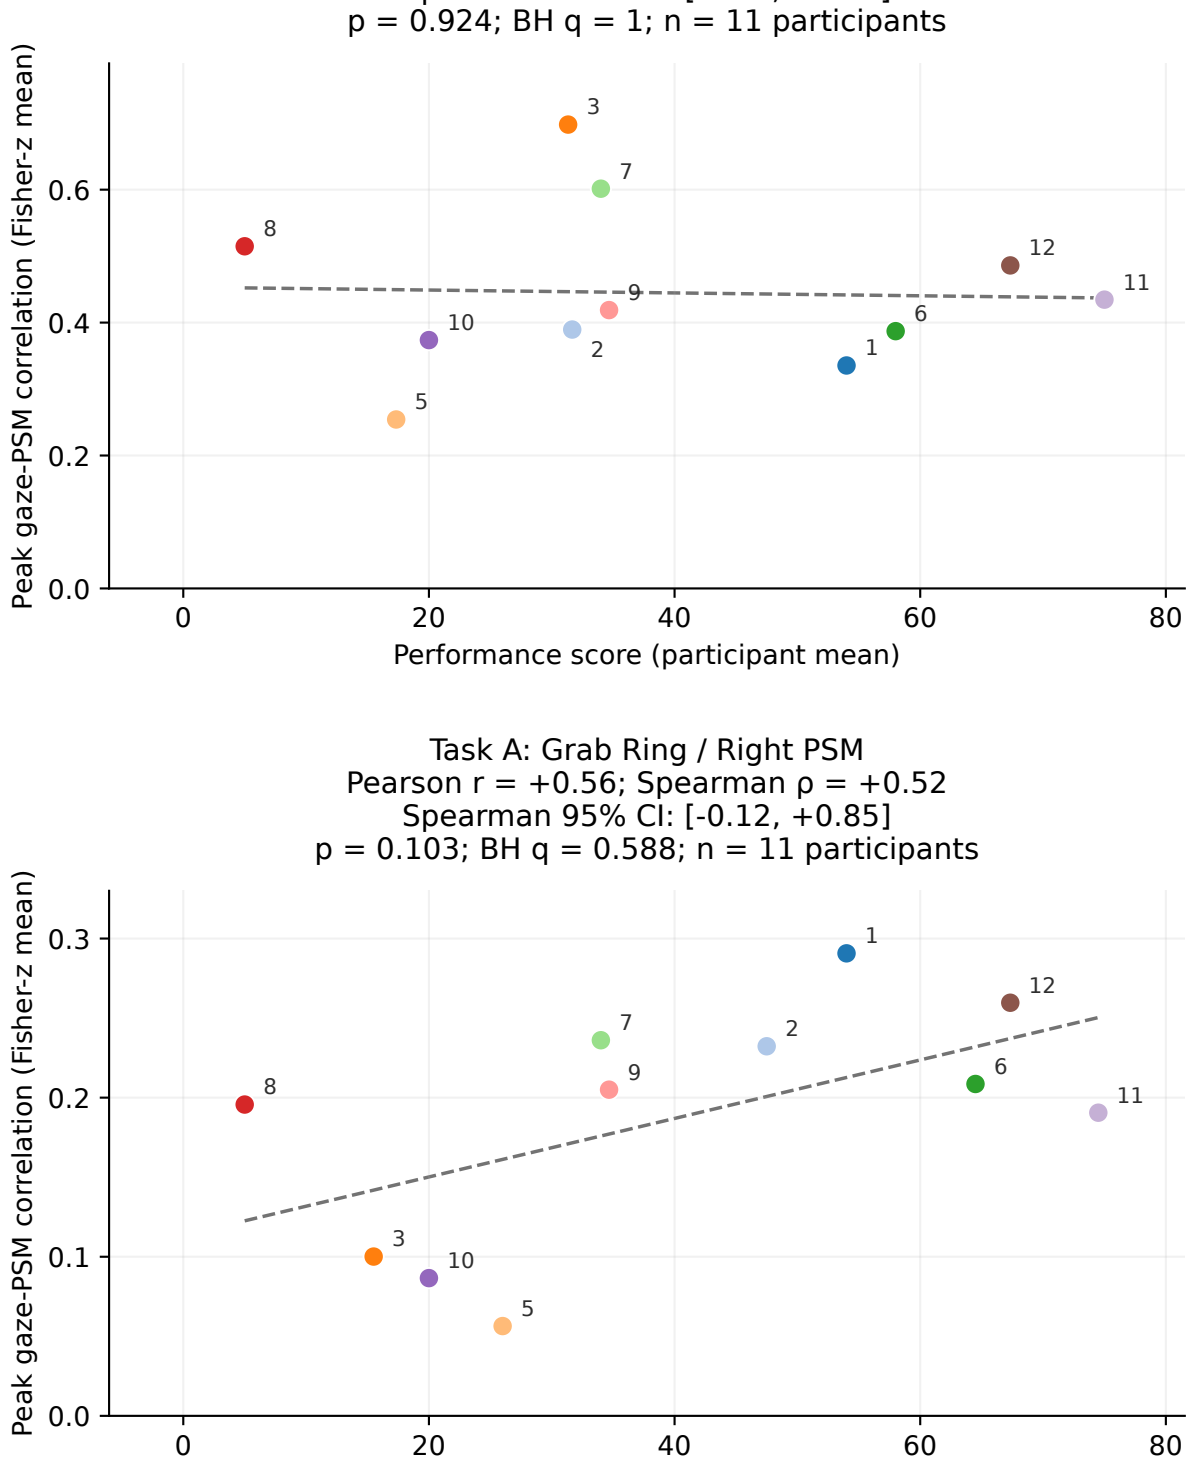

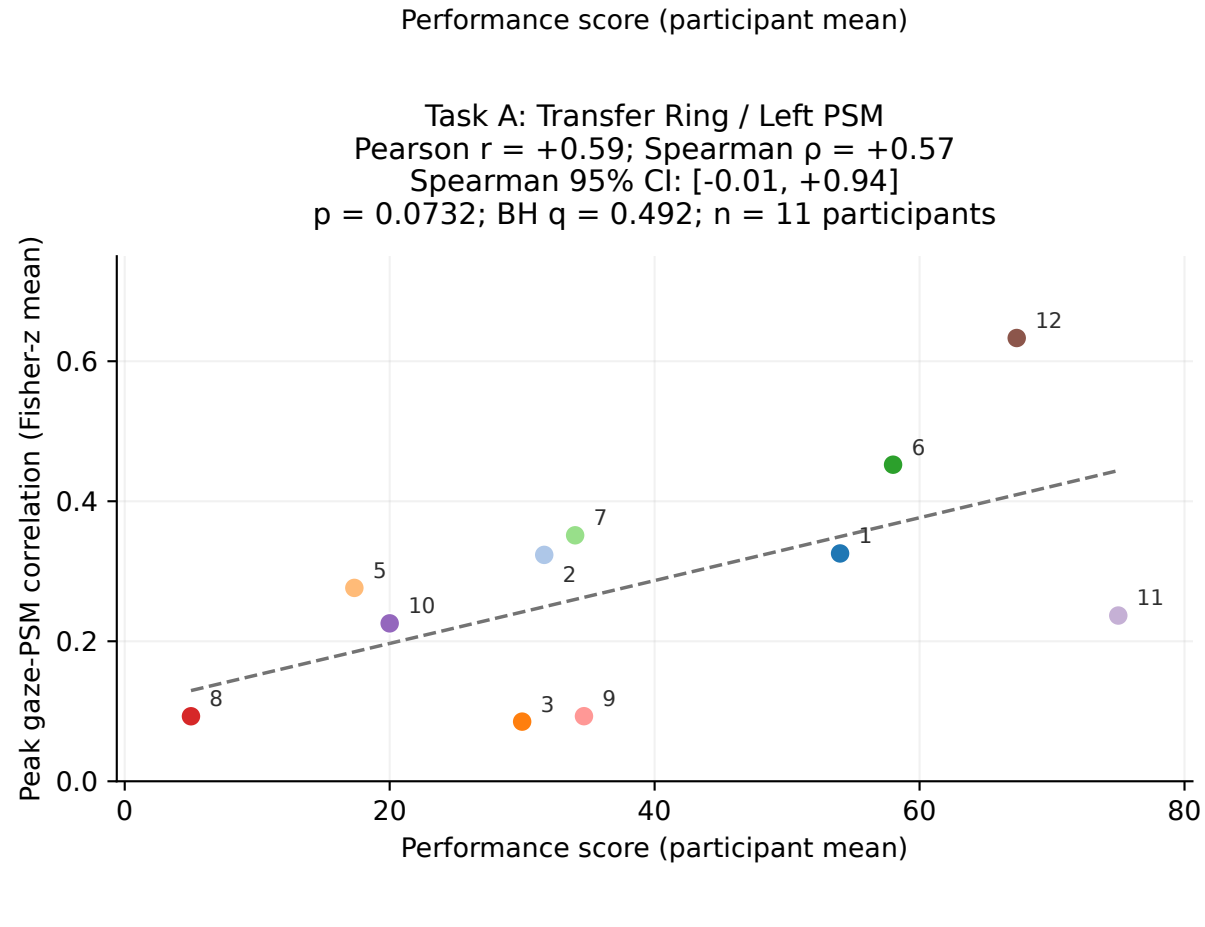

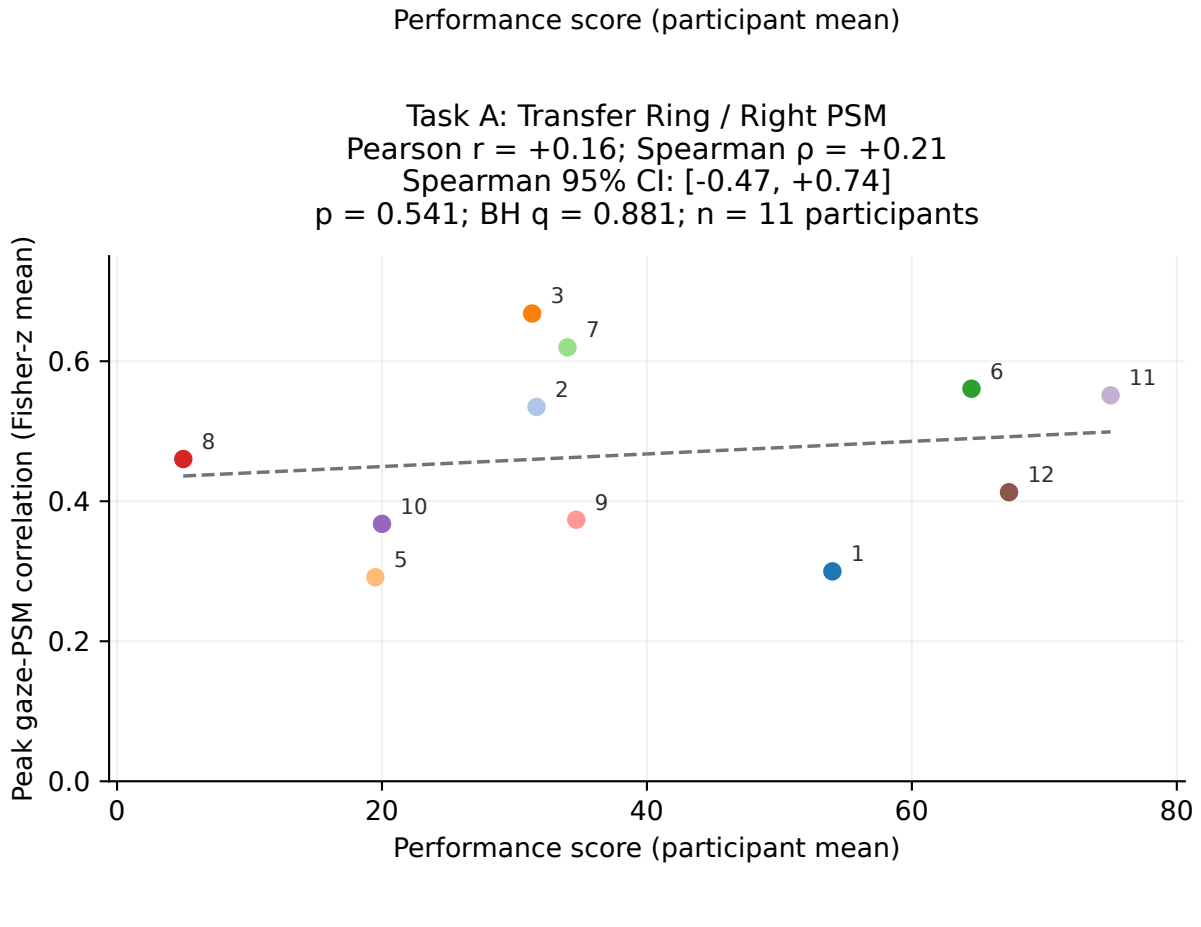


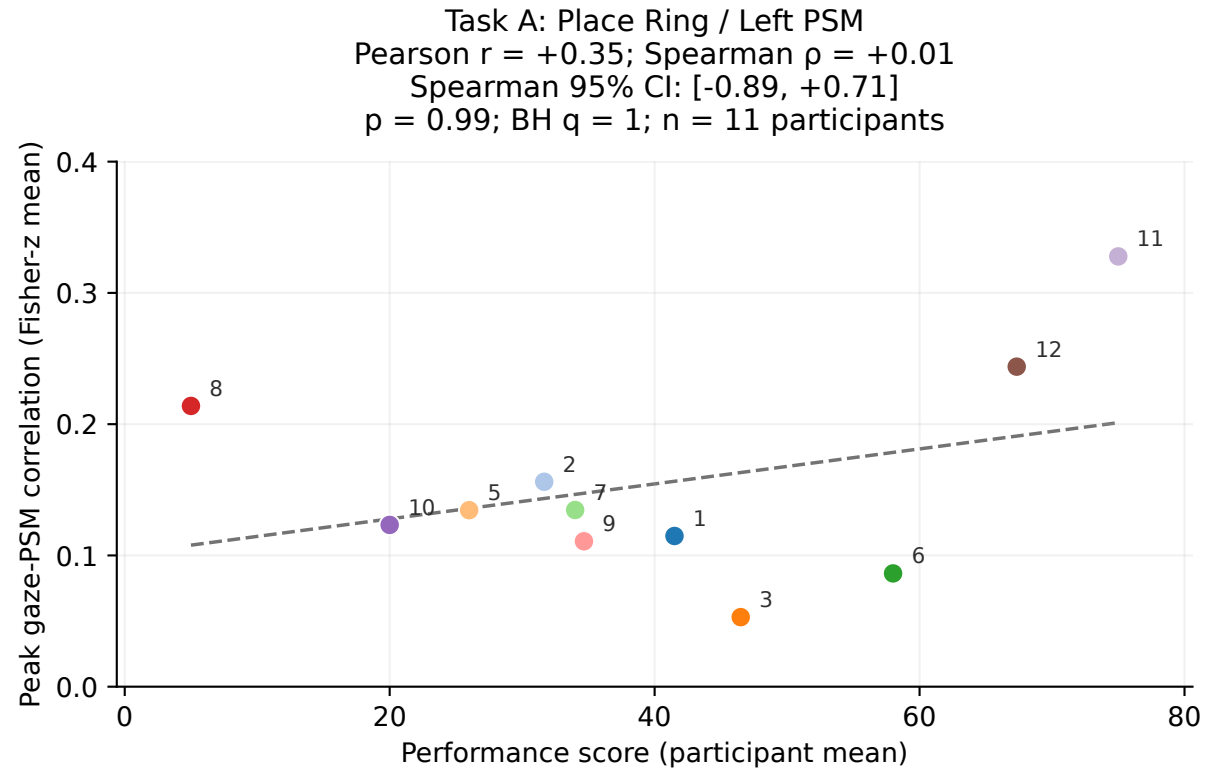


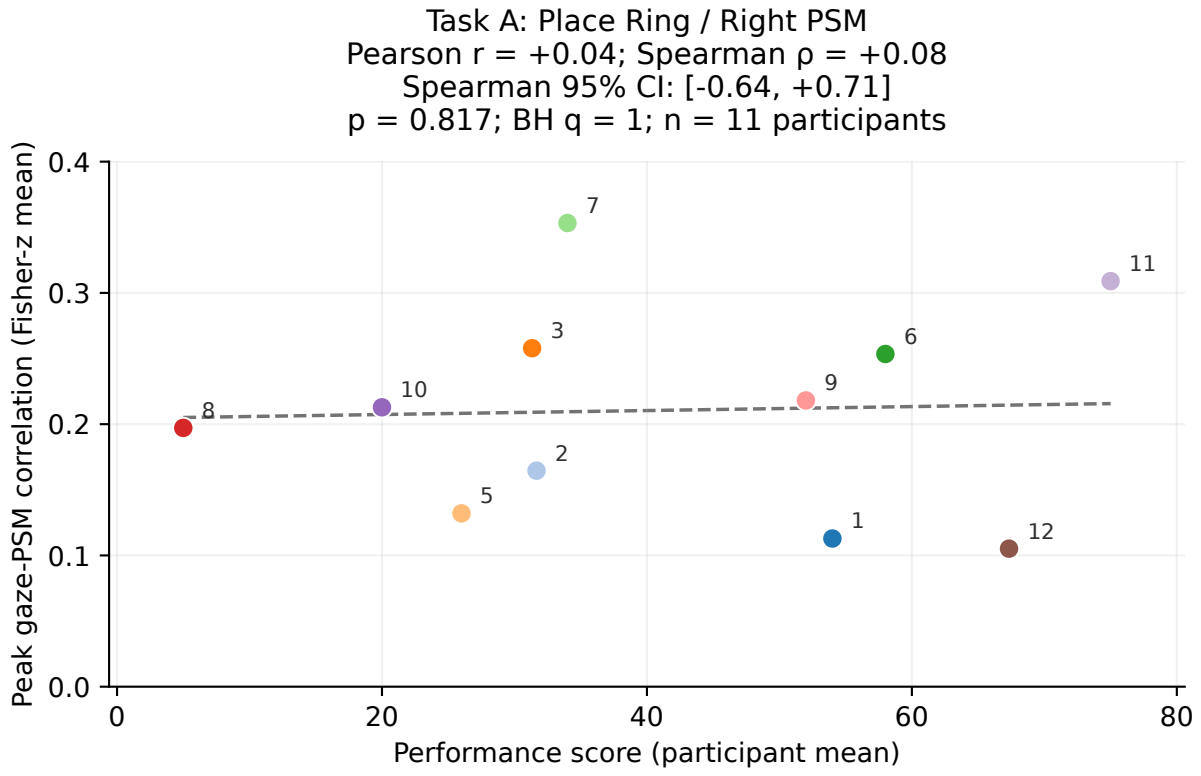



One point per participant; labels show participant IDs. Each point uses the same eligible attempts for Performance score and peak correlation.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.


Task C: valid-phase peak correlation versus Performance score
Position (primary analysis)

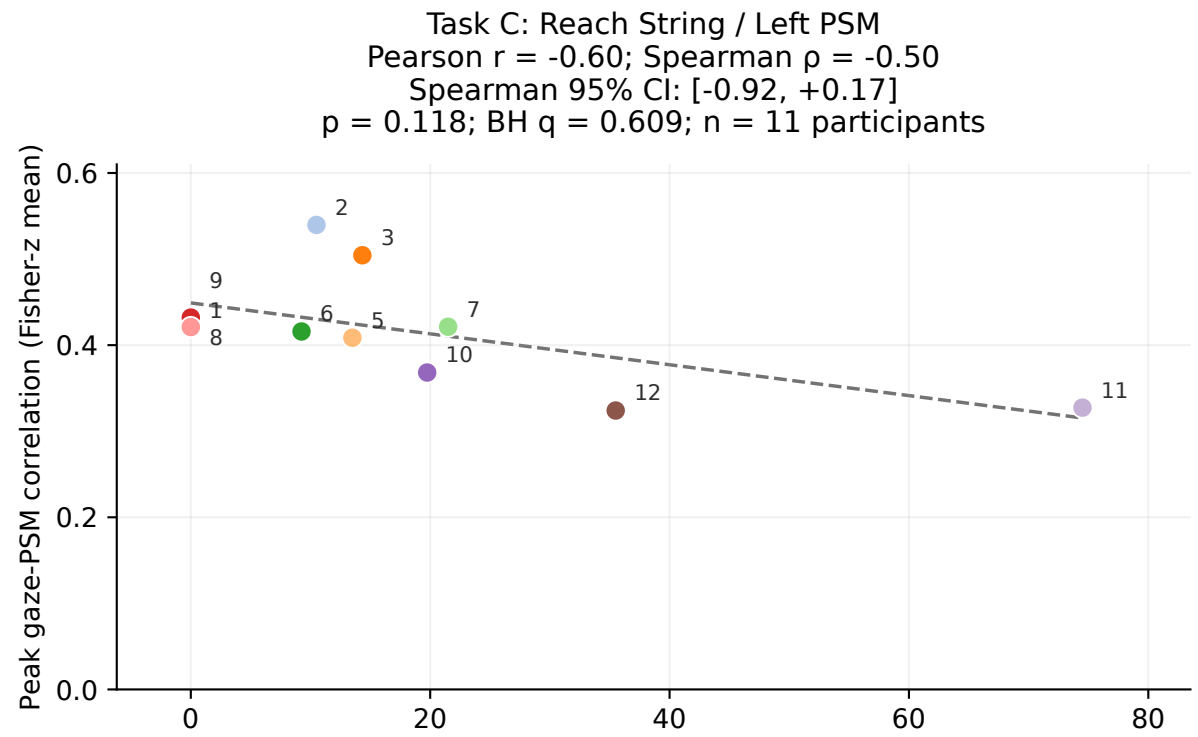


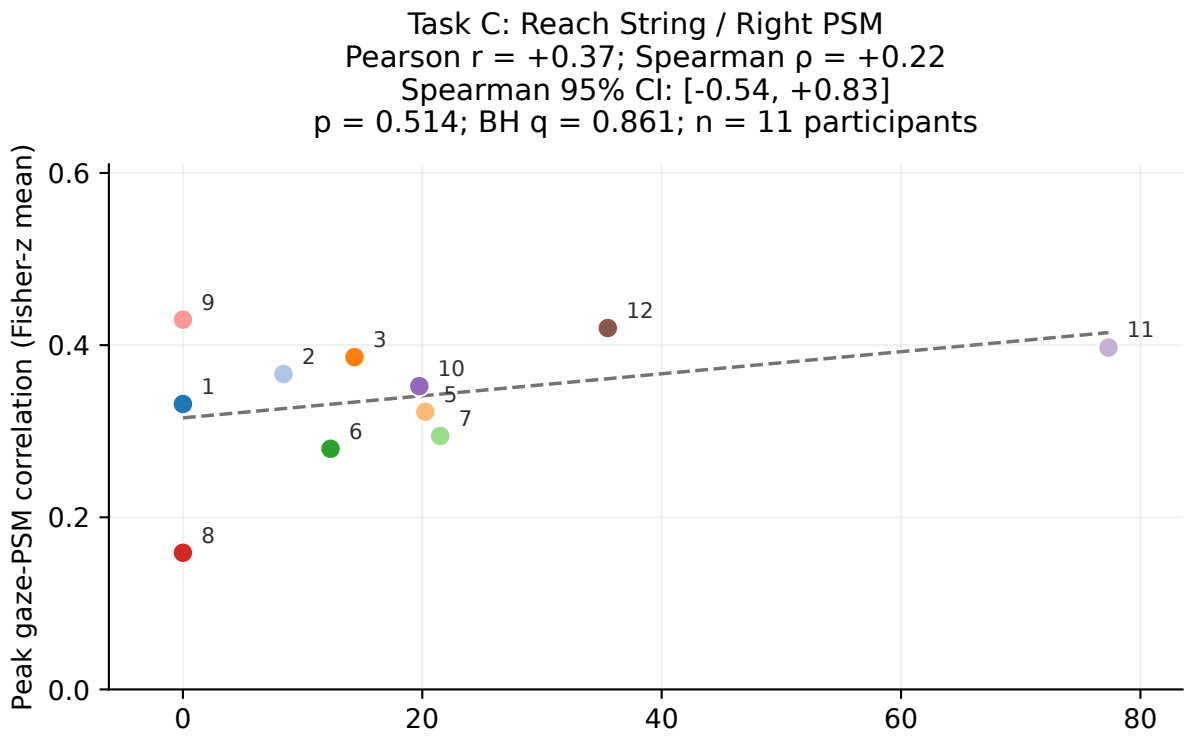


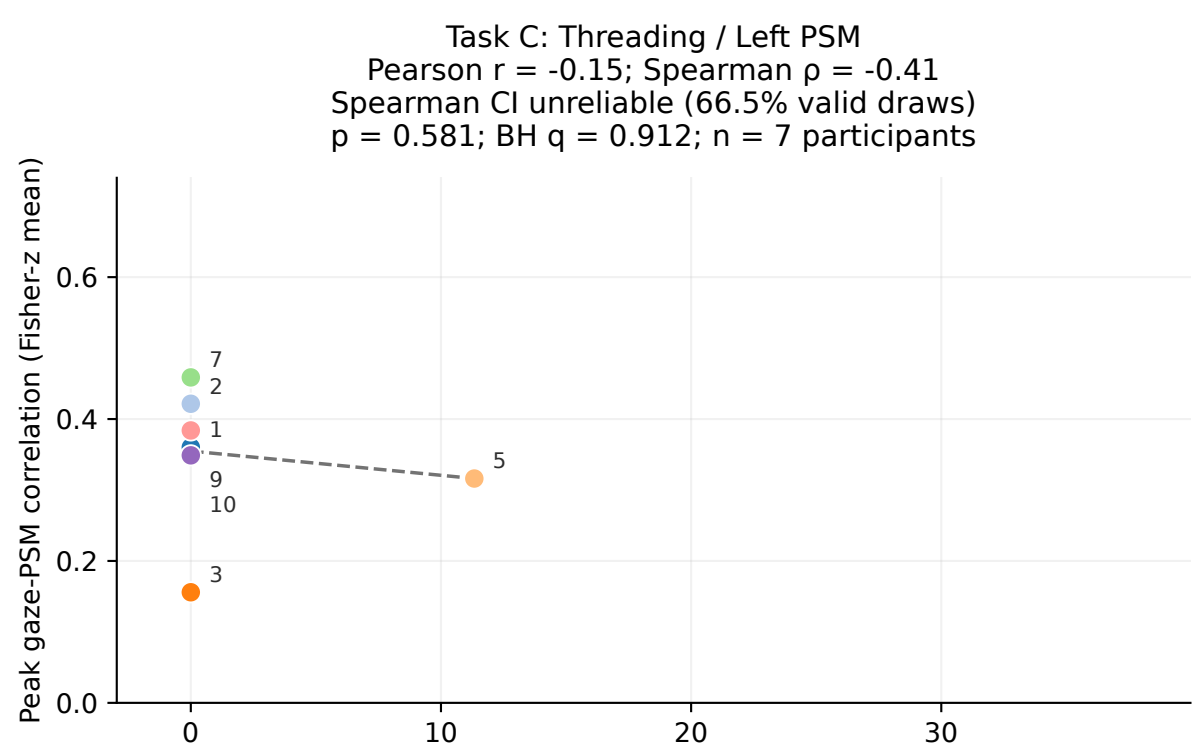


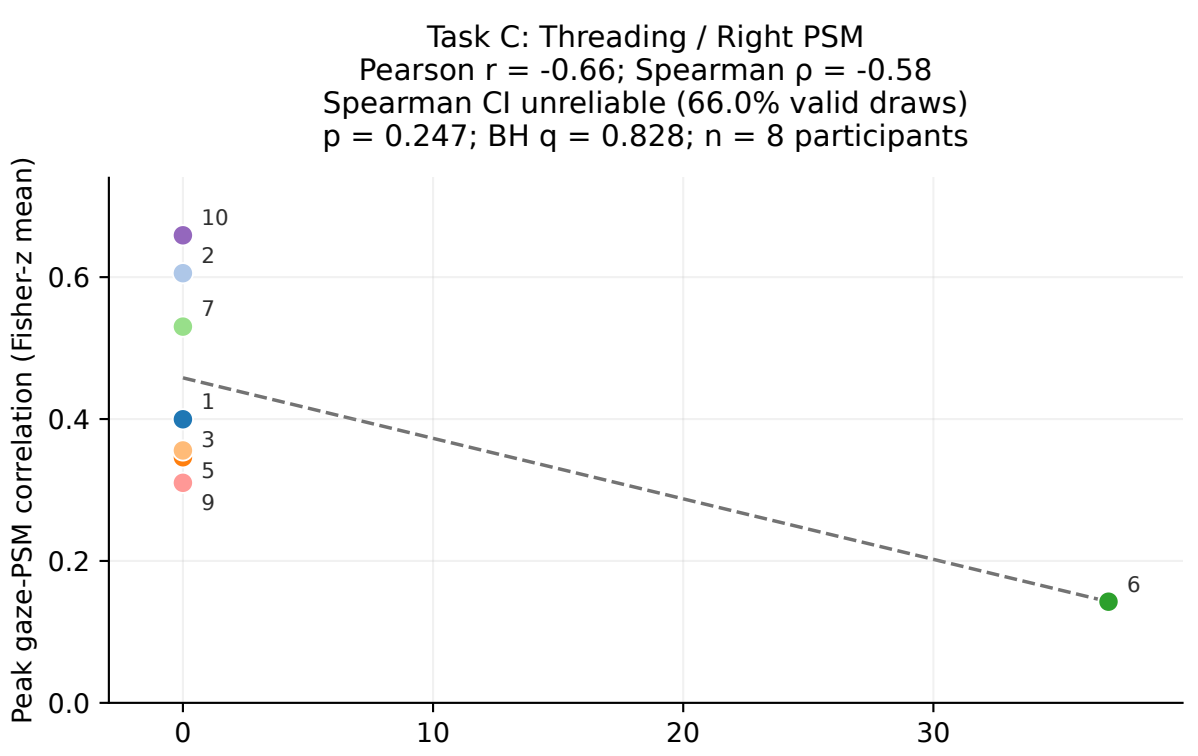

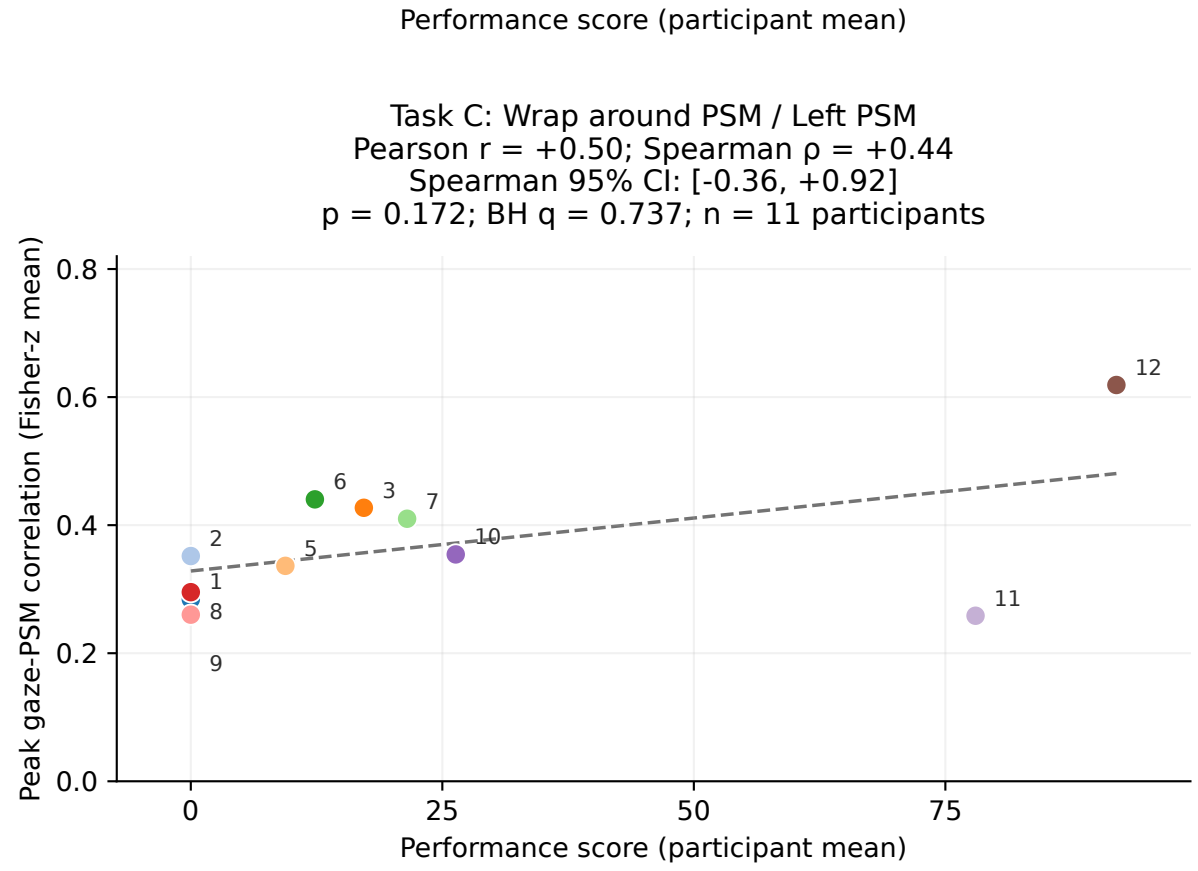

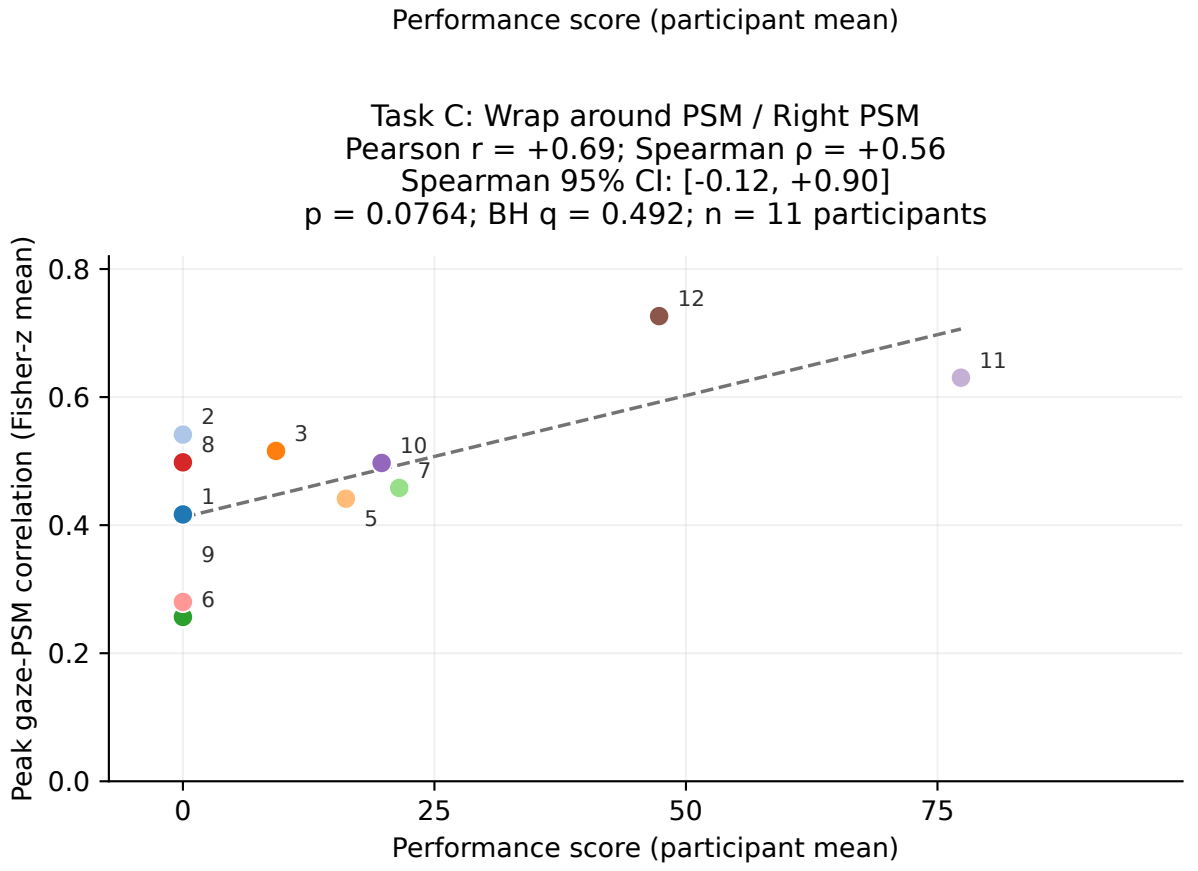

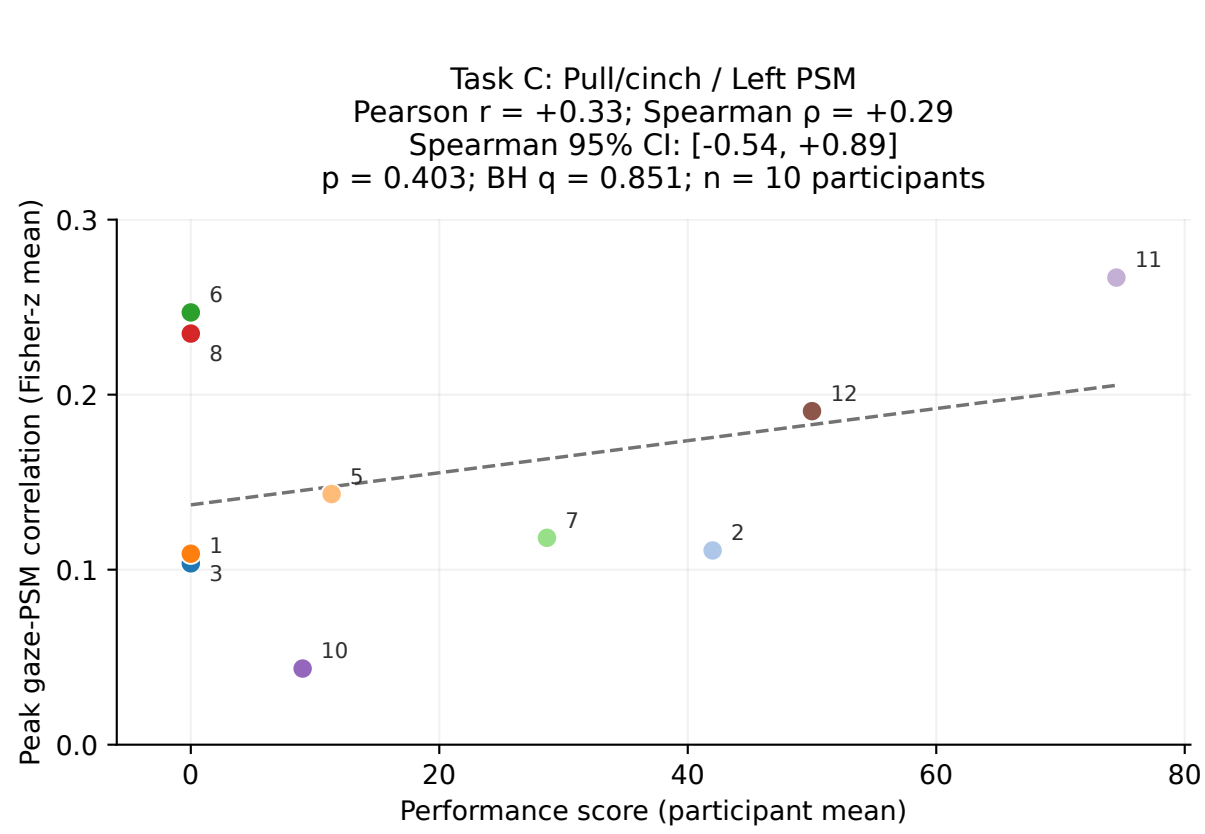

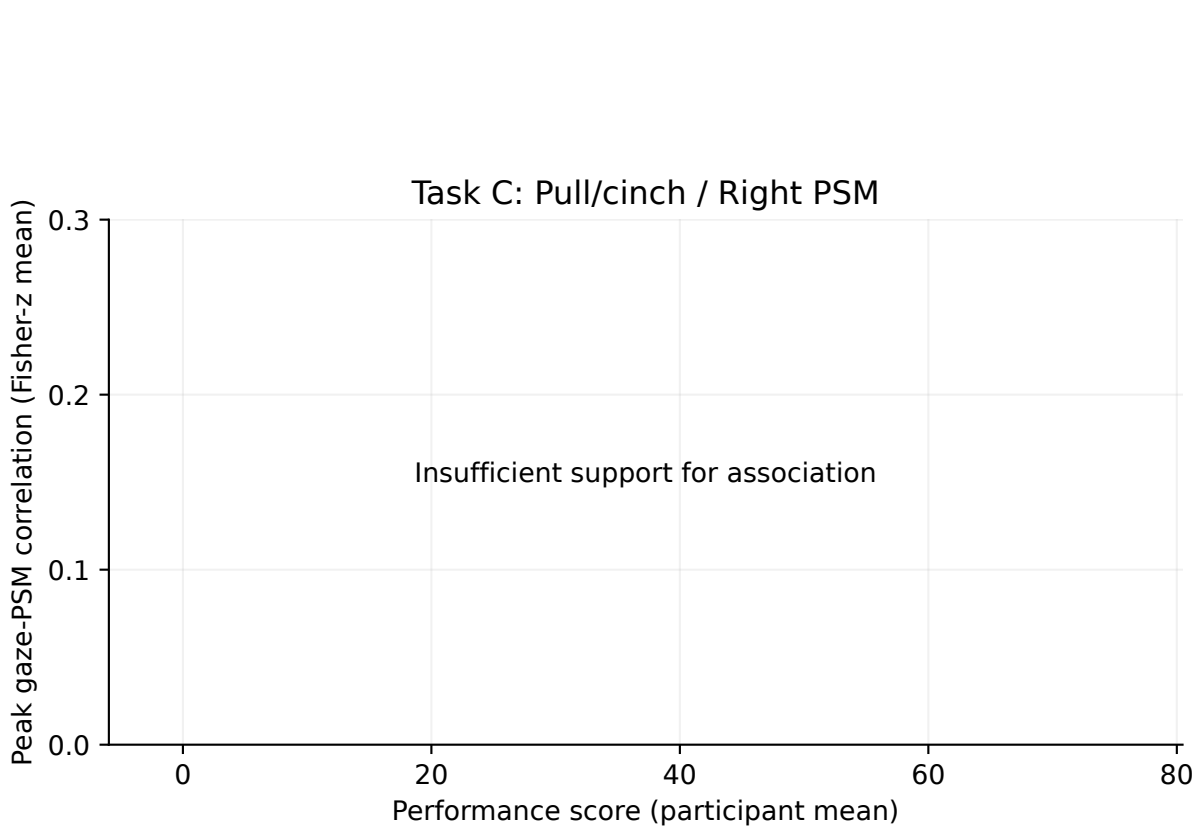

One point per participant; labels show participant IDs. Each point uses the same eligible attempts for Performance score and peak correlation.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.