

Whole-task peak correlation versus Time Position (primary analysis)


Task A: Whole task / Left PSM
Pearson r = +0.71; Spearman ρ = +0.62
Spearman 95% CI: [+0.08, +0.87]
p = 0.0486; BH q = 0.505; n = 11 participants

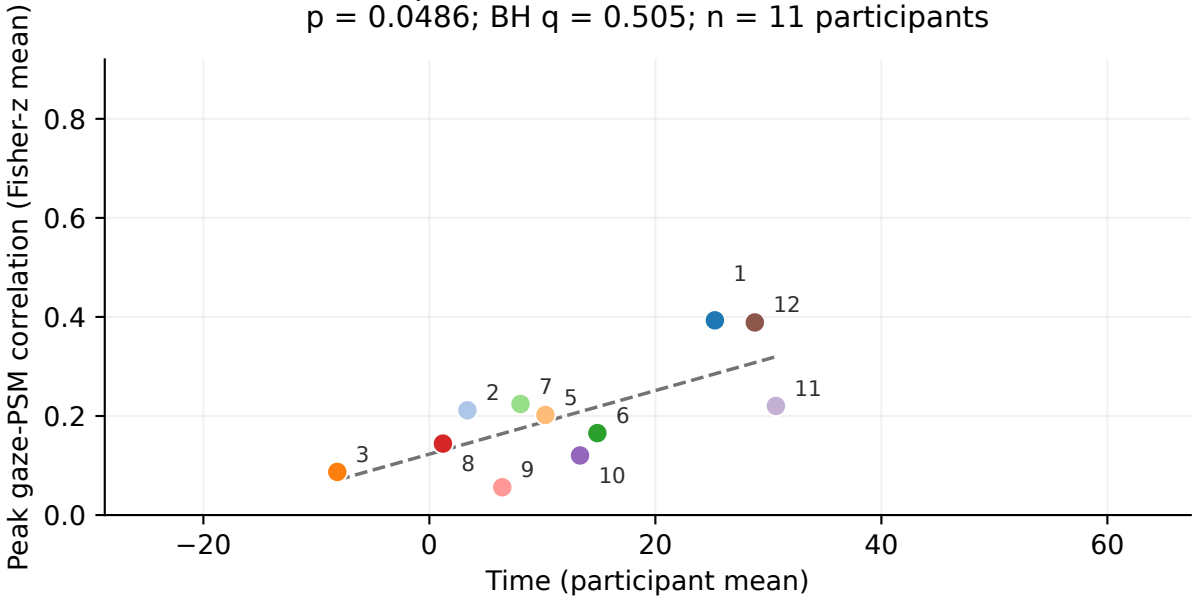


Task A: Whole task / Right PSM
Pearson r = -0.68; Spearman ρ = -0.70
Spearman 95% CI: [-0.97, -0.16]
p = 0.0206; BH q = 0.278; n = 11 participants

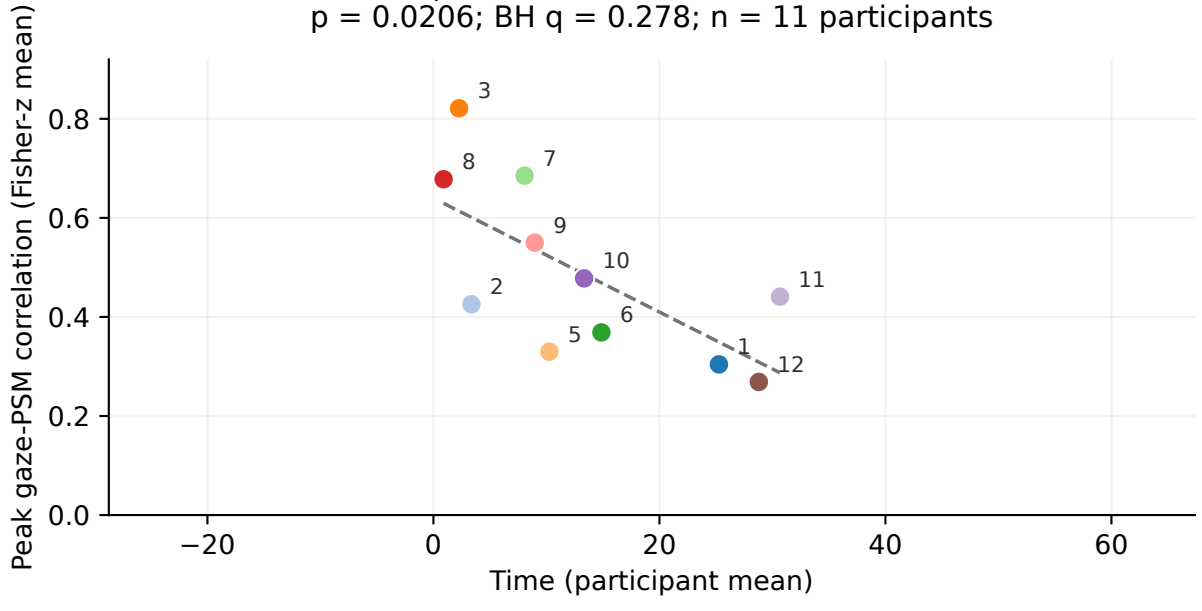

Task C: Whole task / Left PSM
Pearson r = +0.11; Spearman ρ = -0.08
Spearman 95% CI: [-0.77, +0.62]
p = 0.816; BH q = 0.937; n = 11 participants

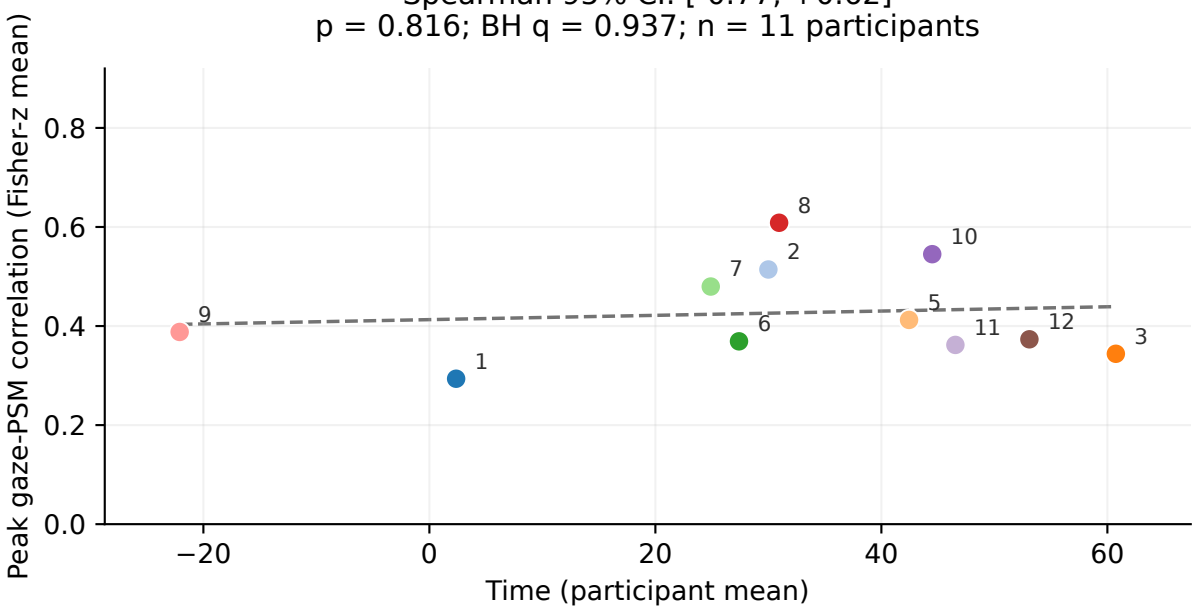



Task C: Whole task / Right PSM
Pearson r = +0.25; Spearman ρ = +0.27
Spearman 95% CI: [-0.45, +0.79]
p = 0.418; BH q = 0.937; n = 11 participants

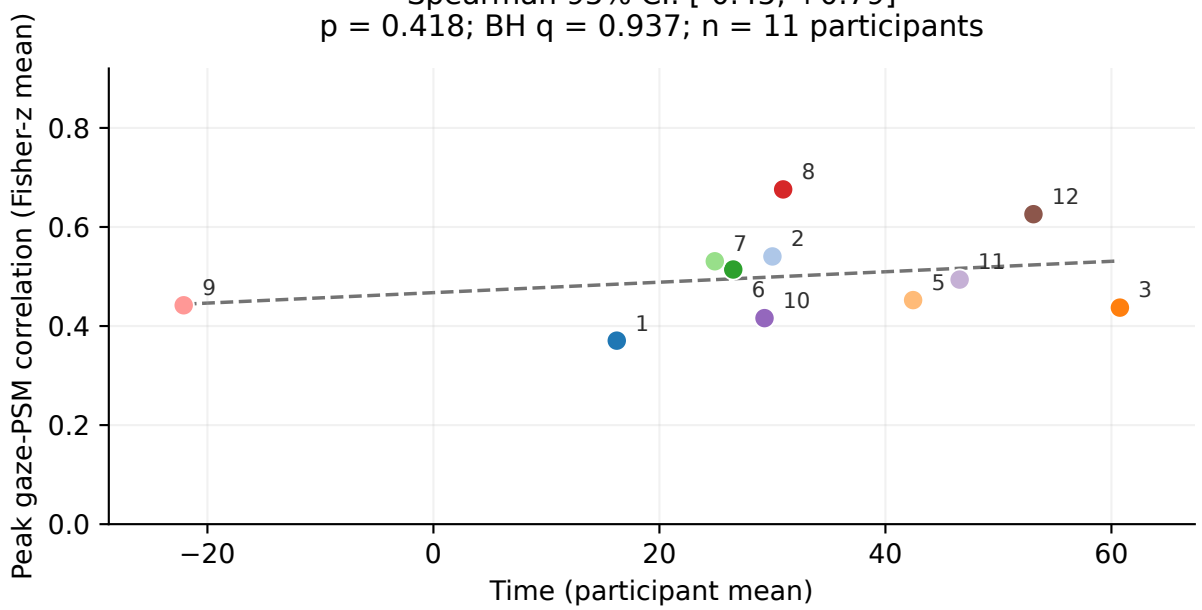



One point per participant; labels show participant IDs. Each point uses the same eligible attempts for Time and peak correlation.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
Time uses the supplied column values directly; attempts with missing Time values are excluded.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.


Task A: valid-phase peak correlation versus Time Position (primary analysis)

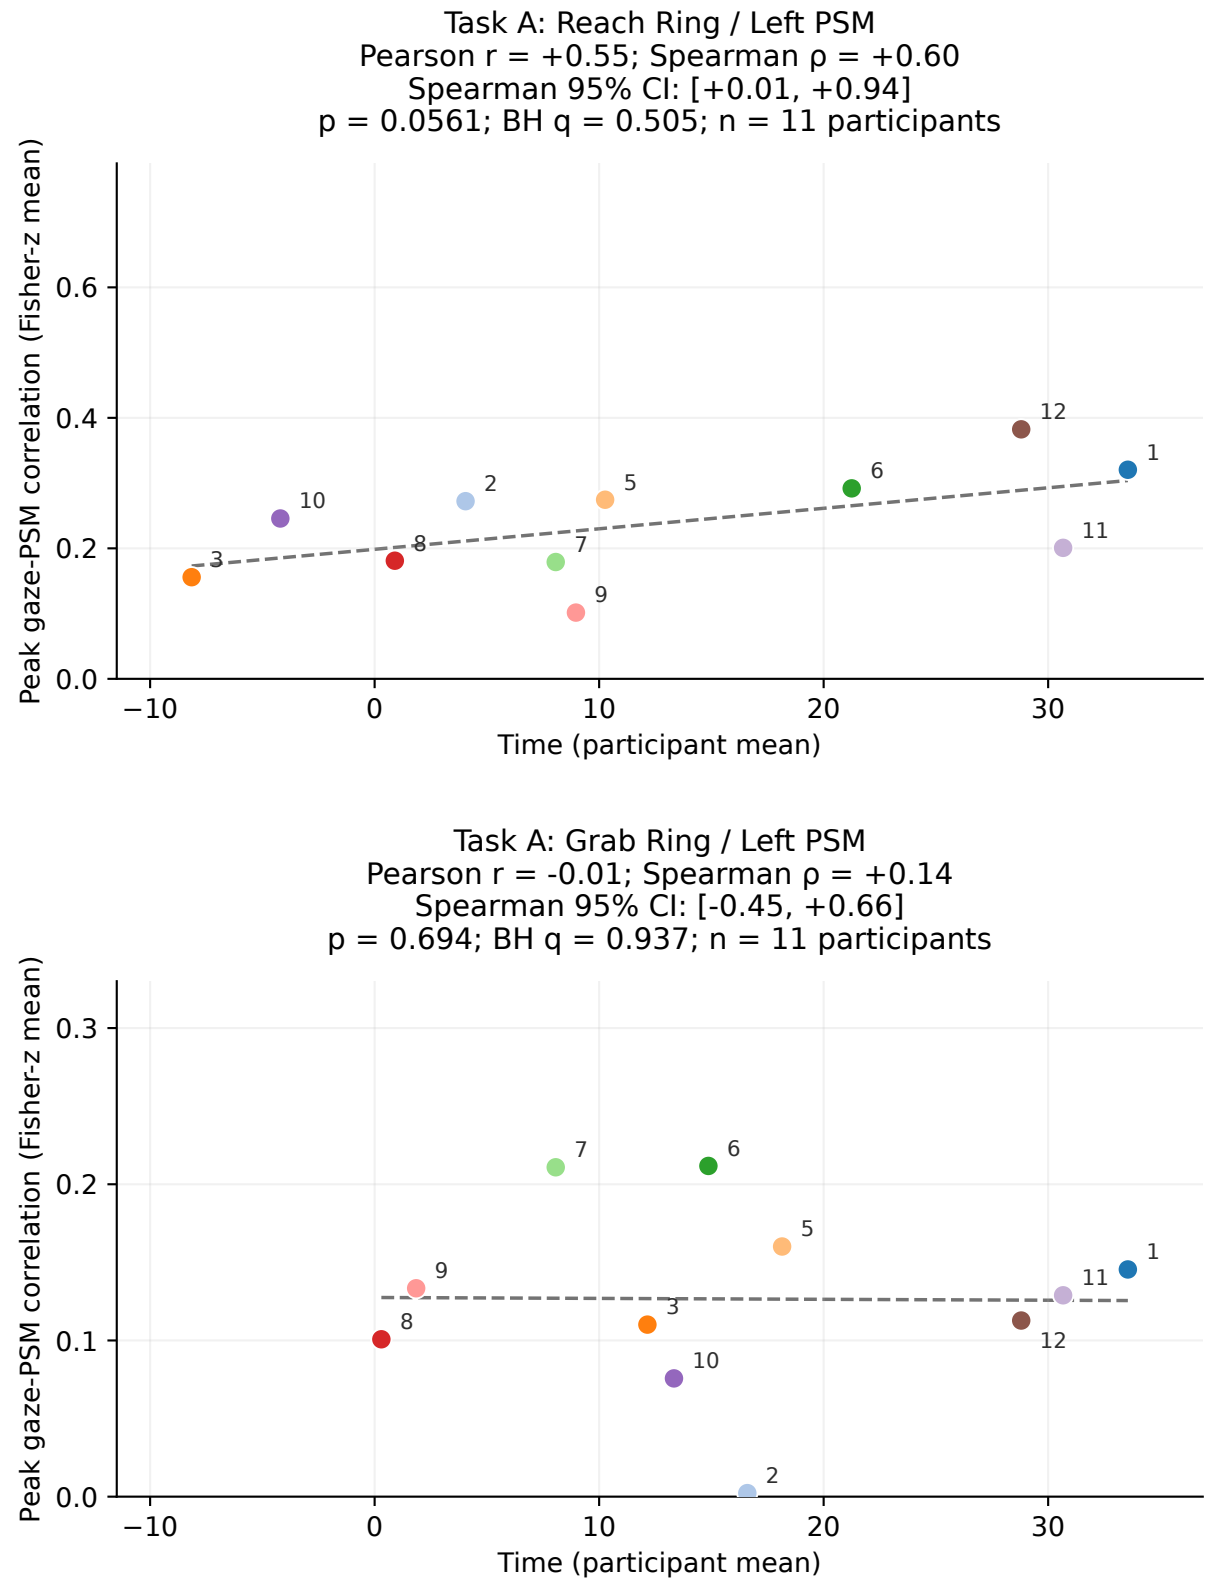


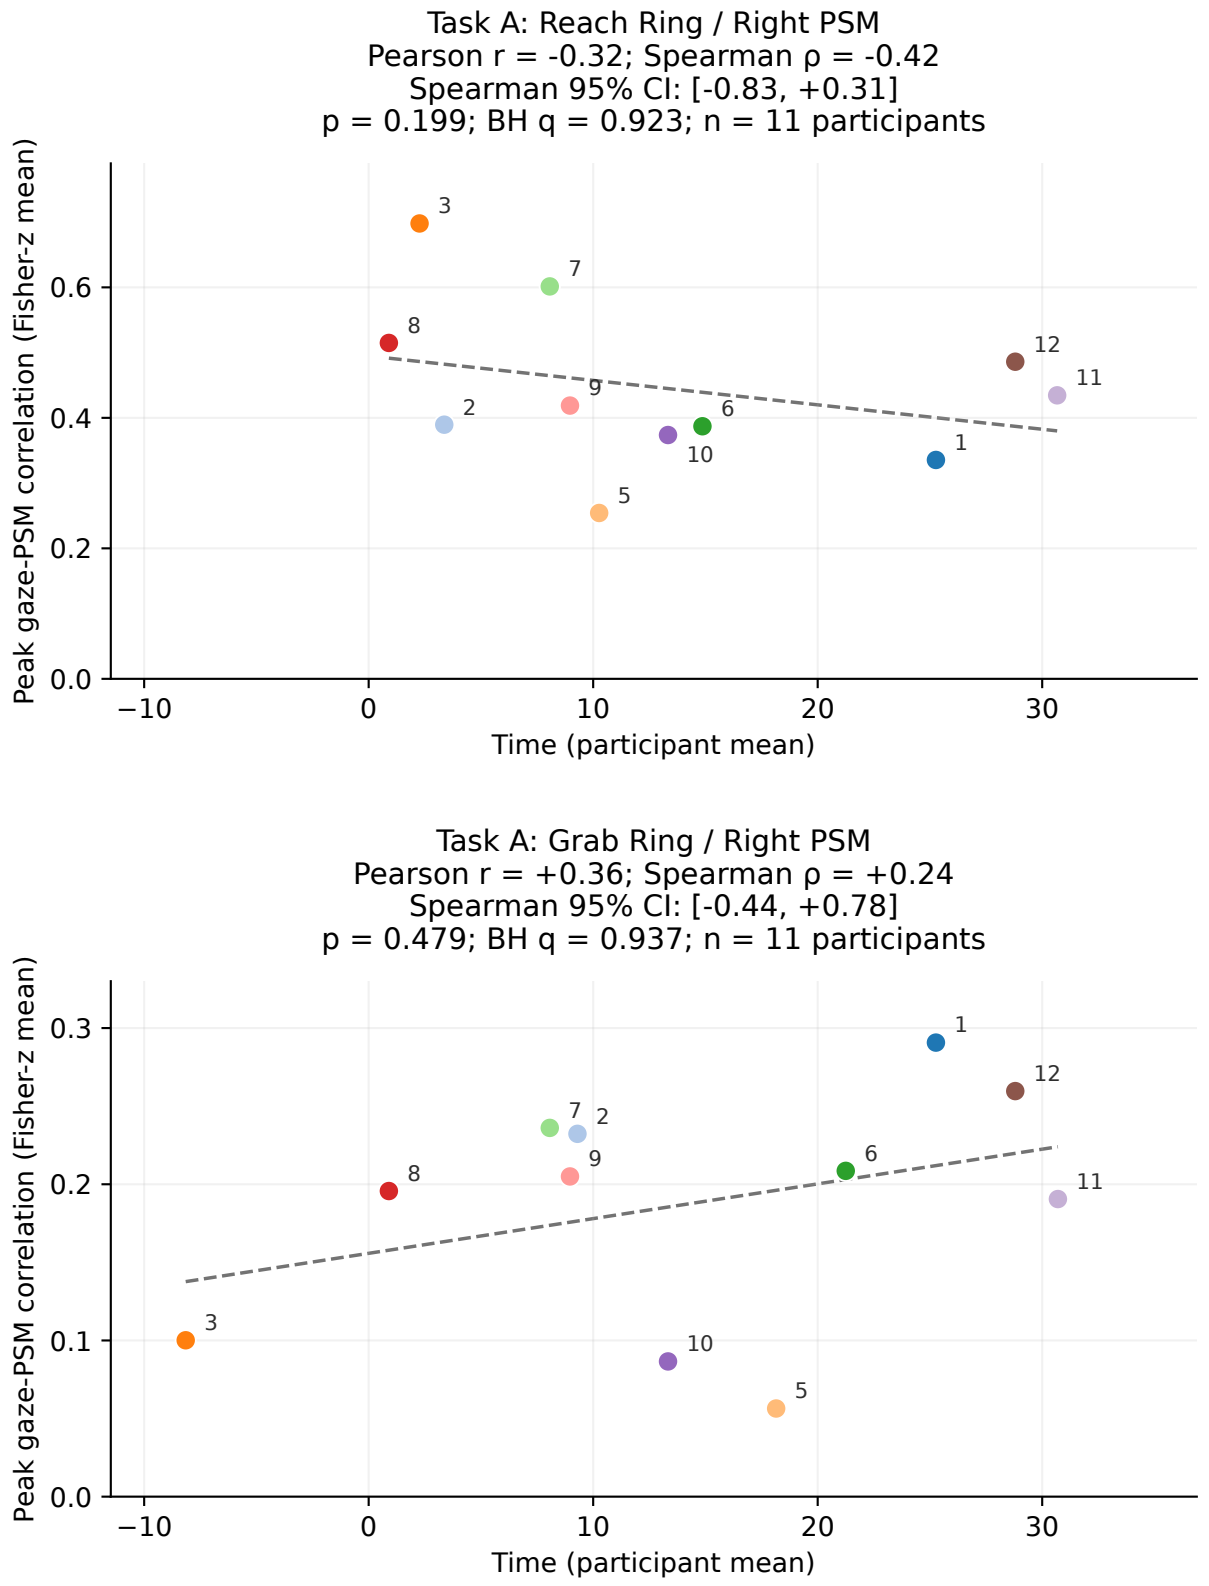

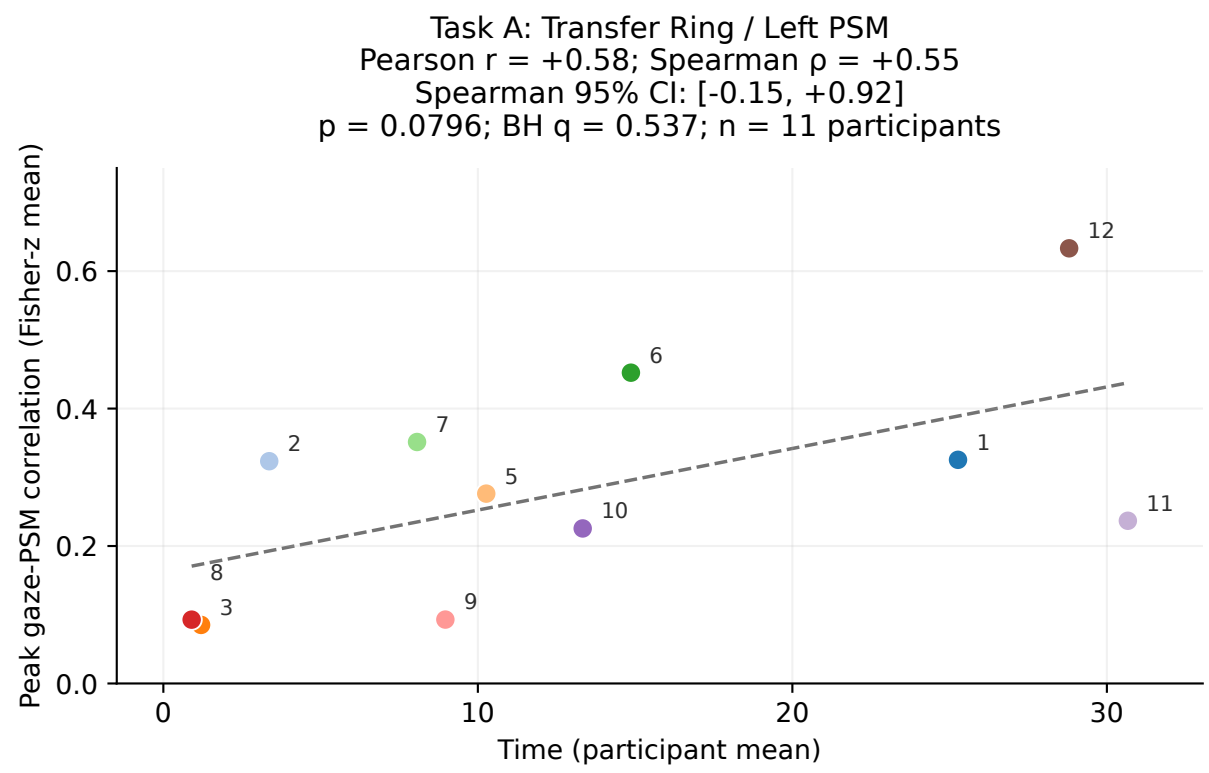

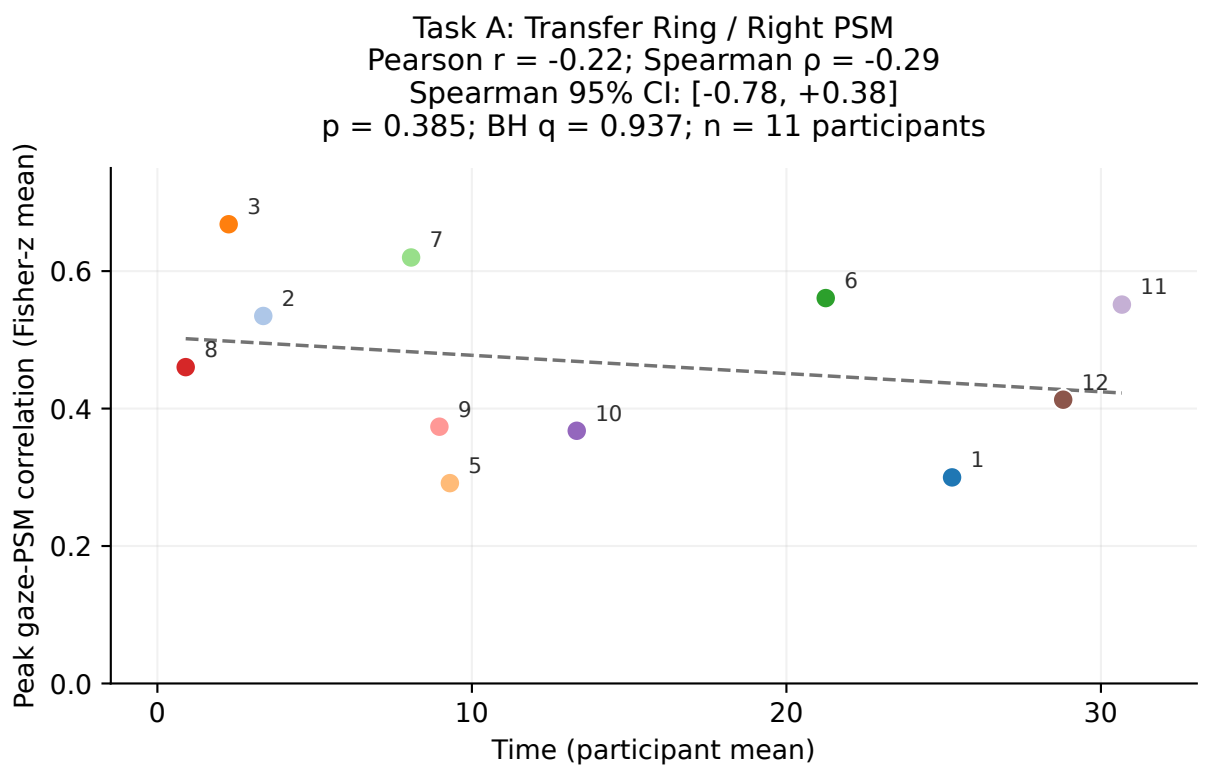


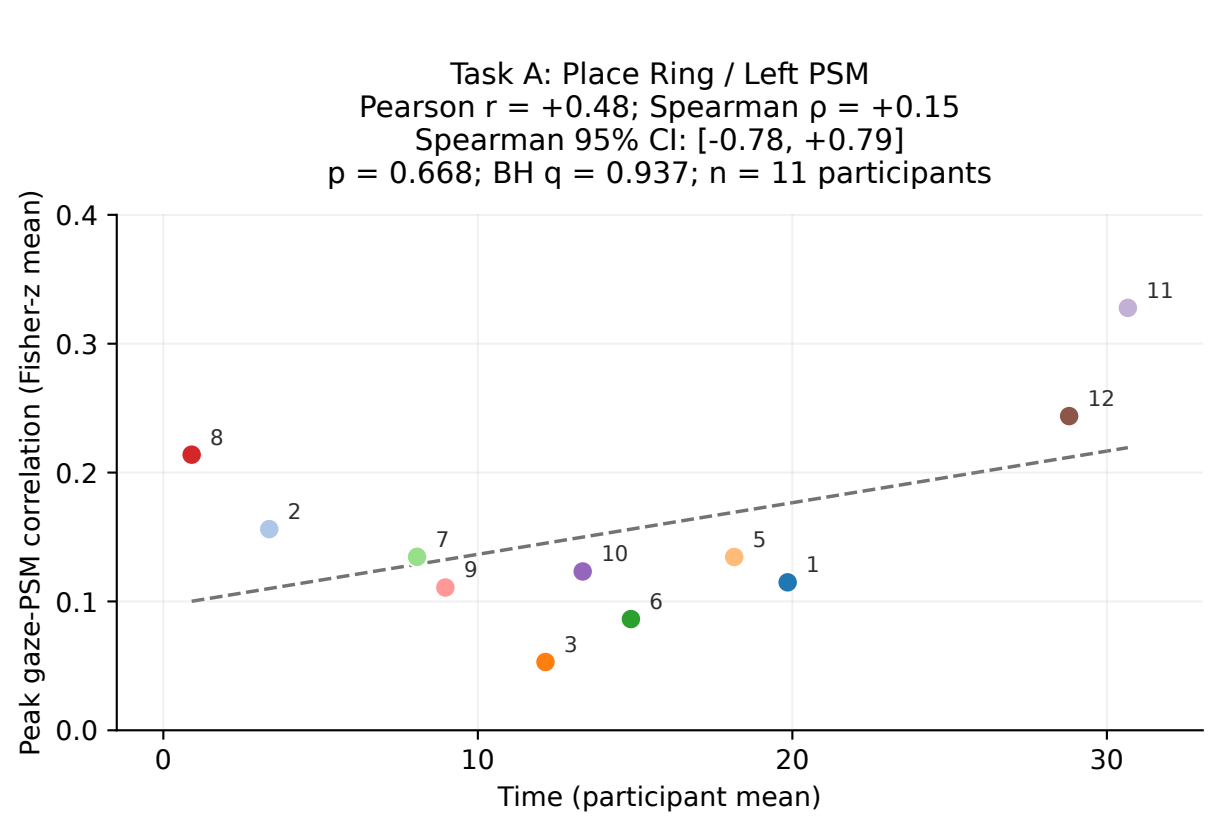


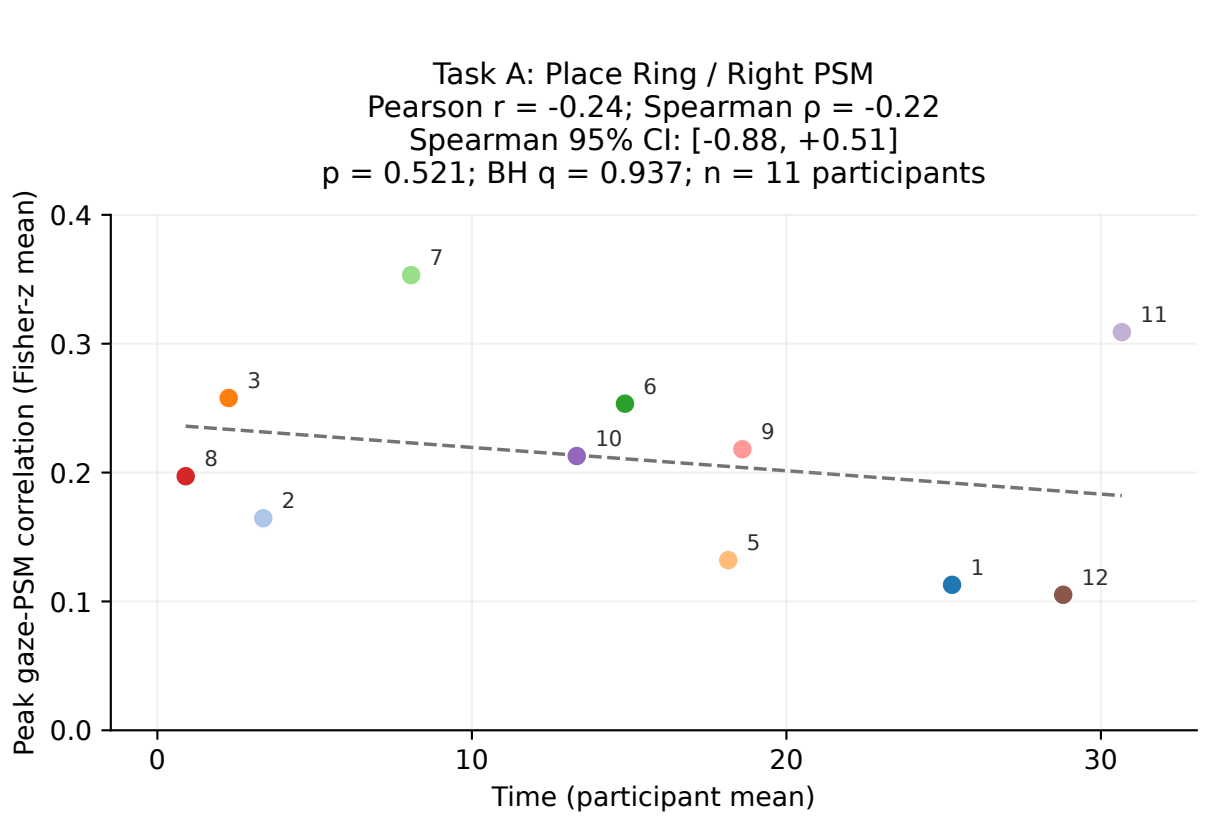



One point per participant; labels show participant IDs. Each point uses the same eligible attempts for Time and peak correlation.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
Time uses the supplied column values directly; attempts with missing Time values are excluded.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.


Task C: valid-phase peak correlation versus Time Position (primary analysis)

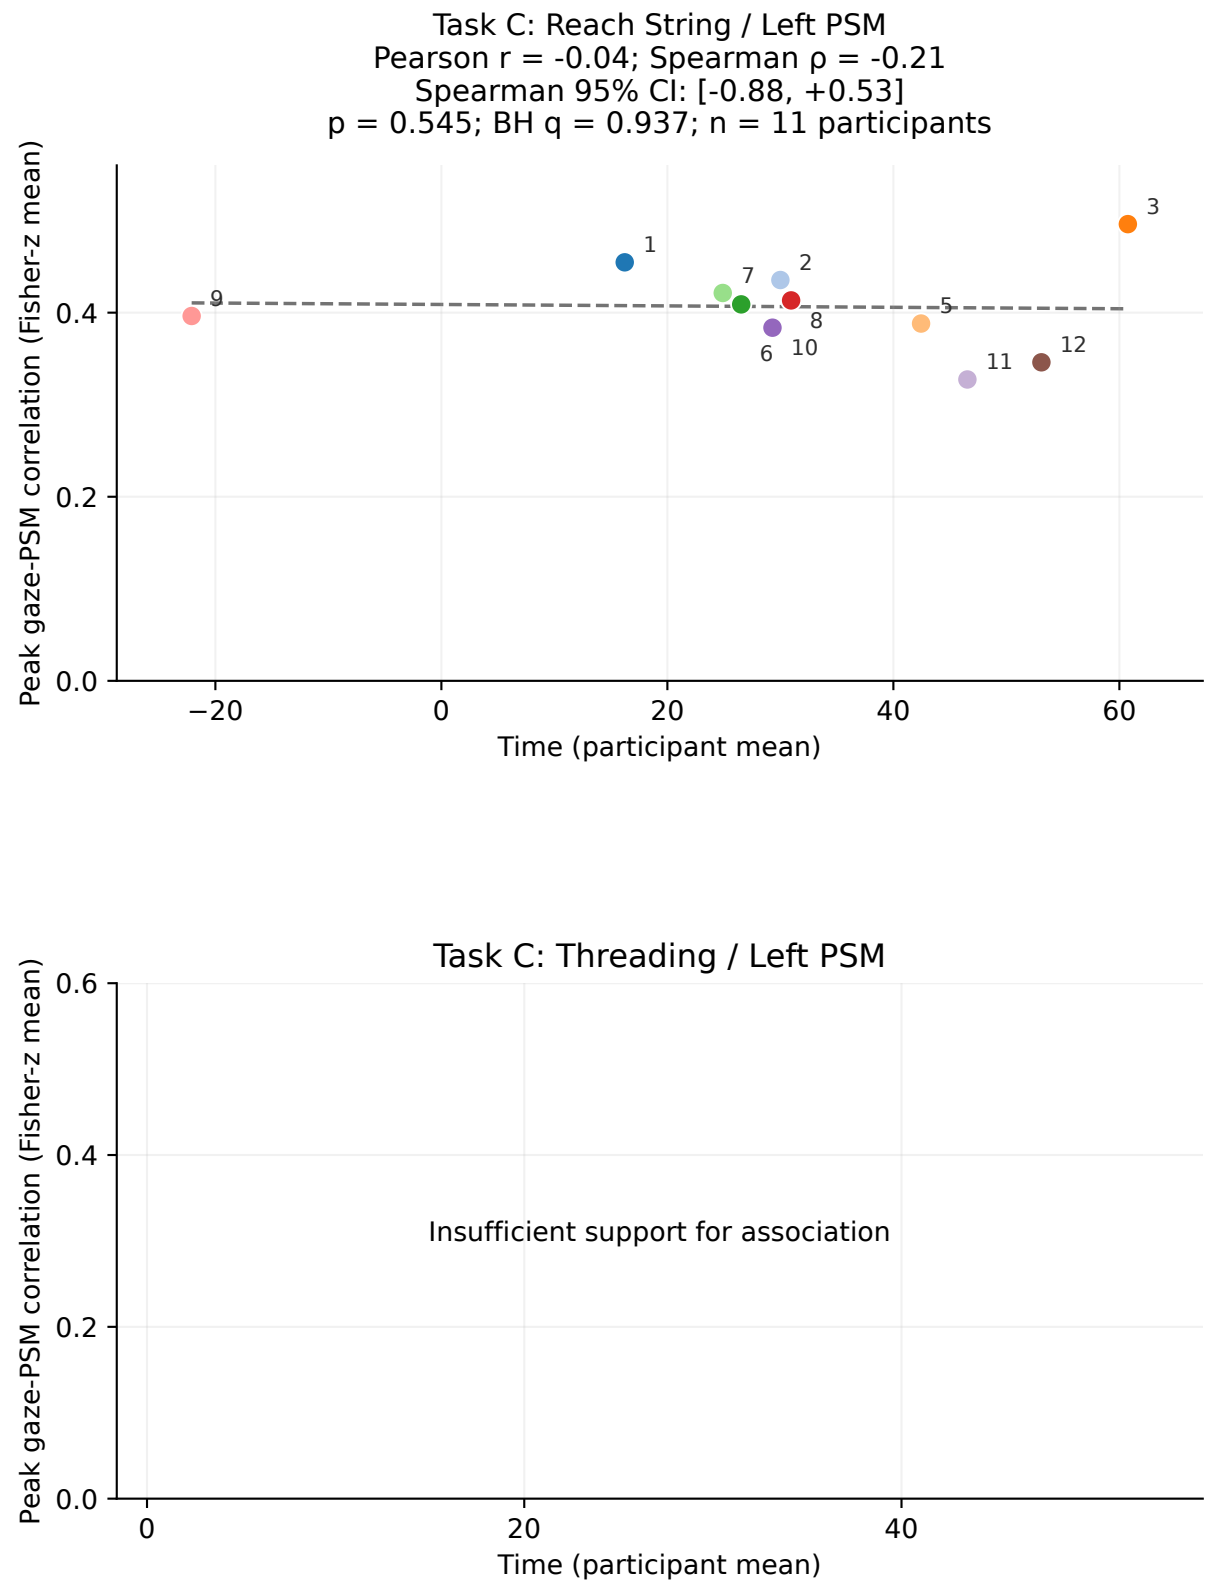


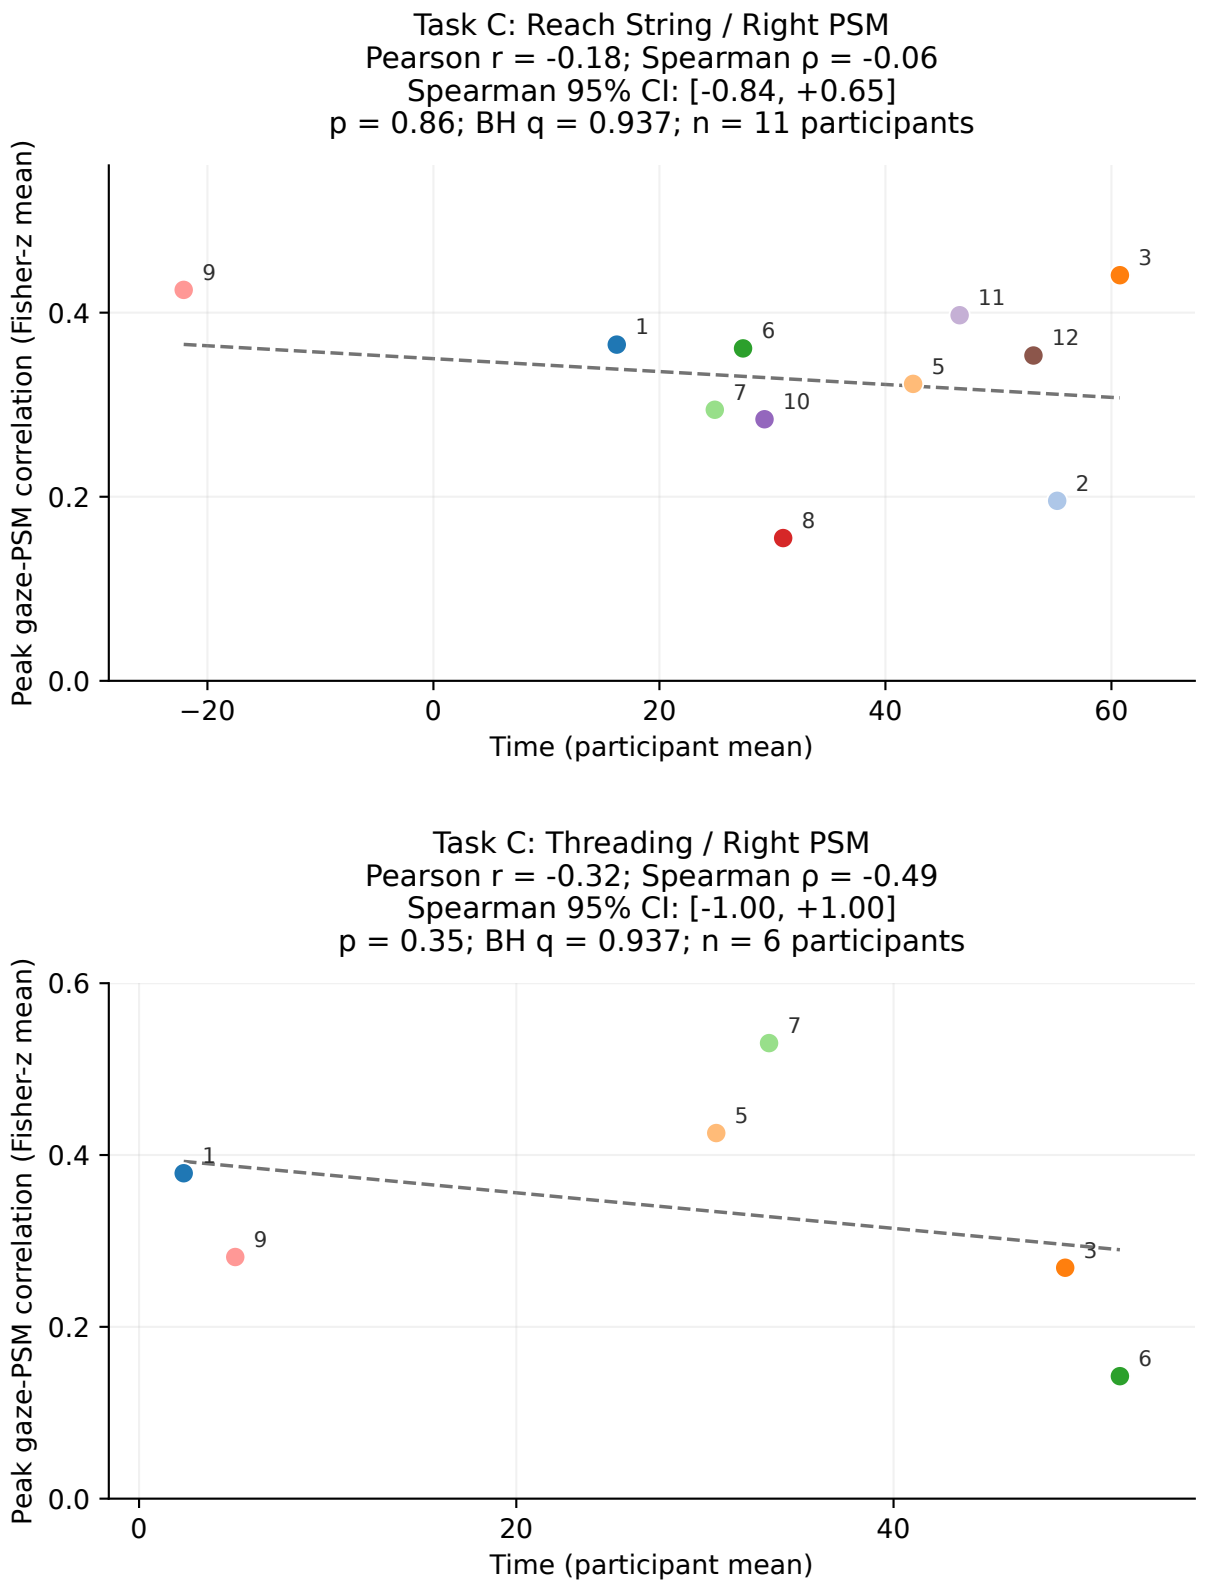

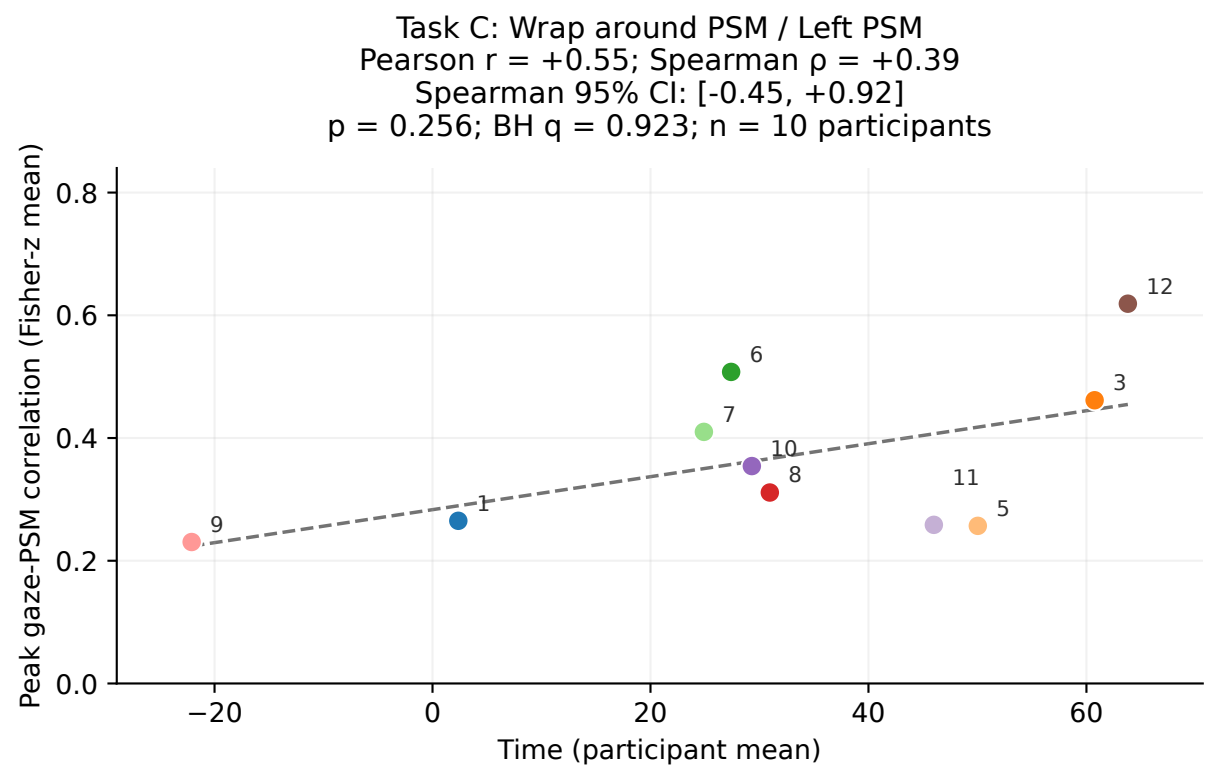

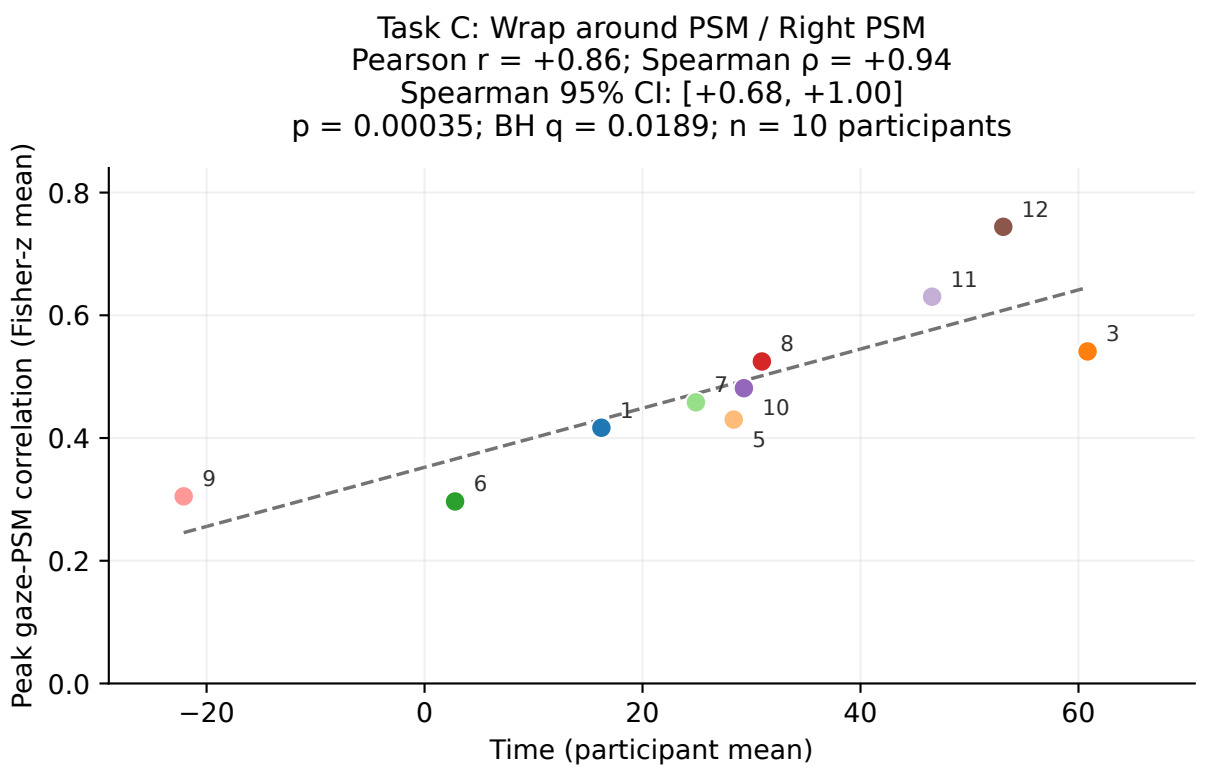

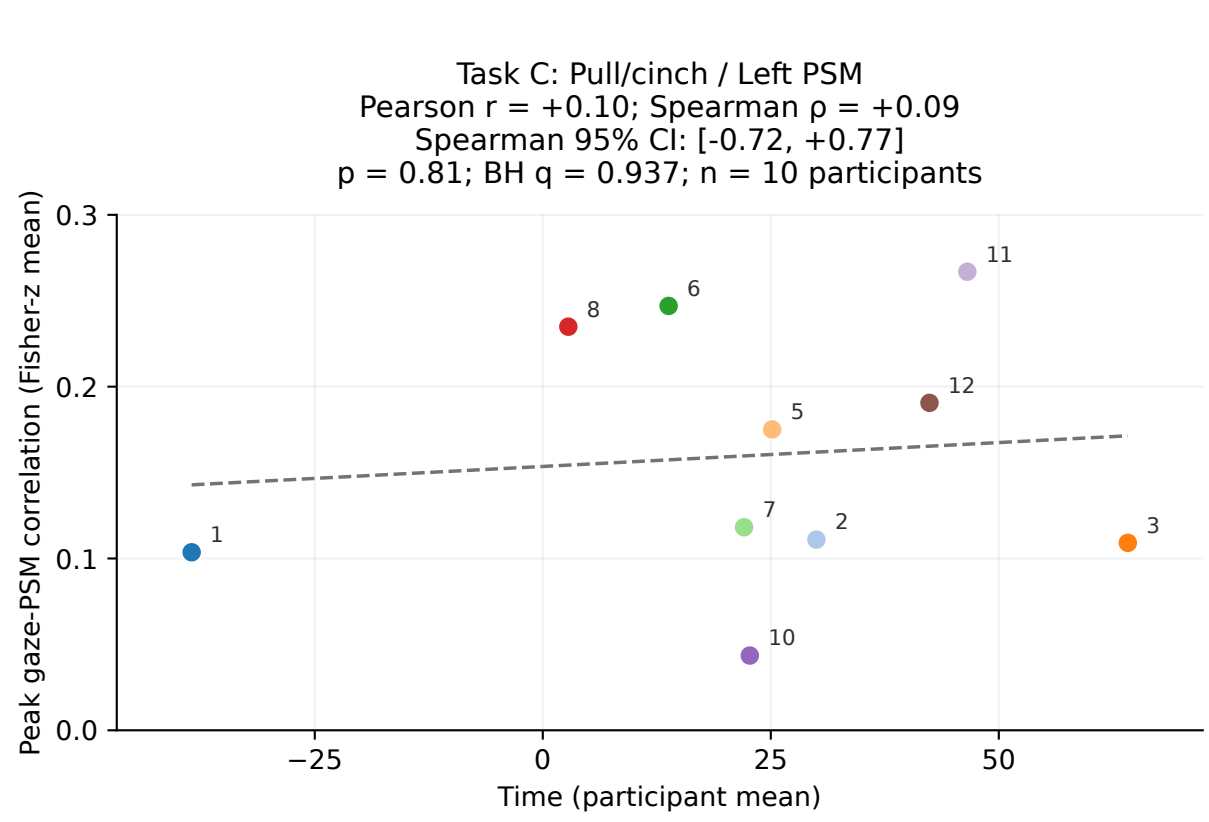

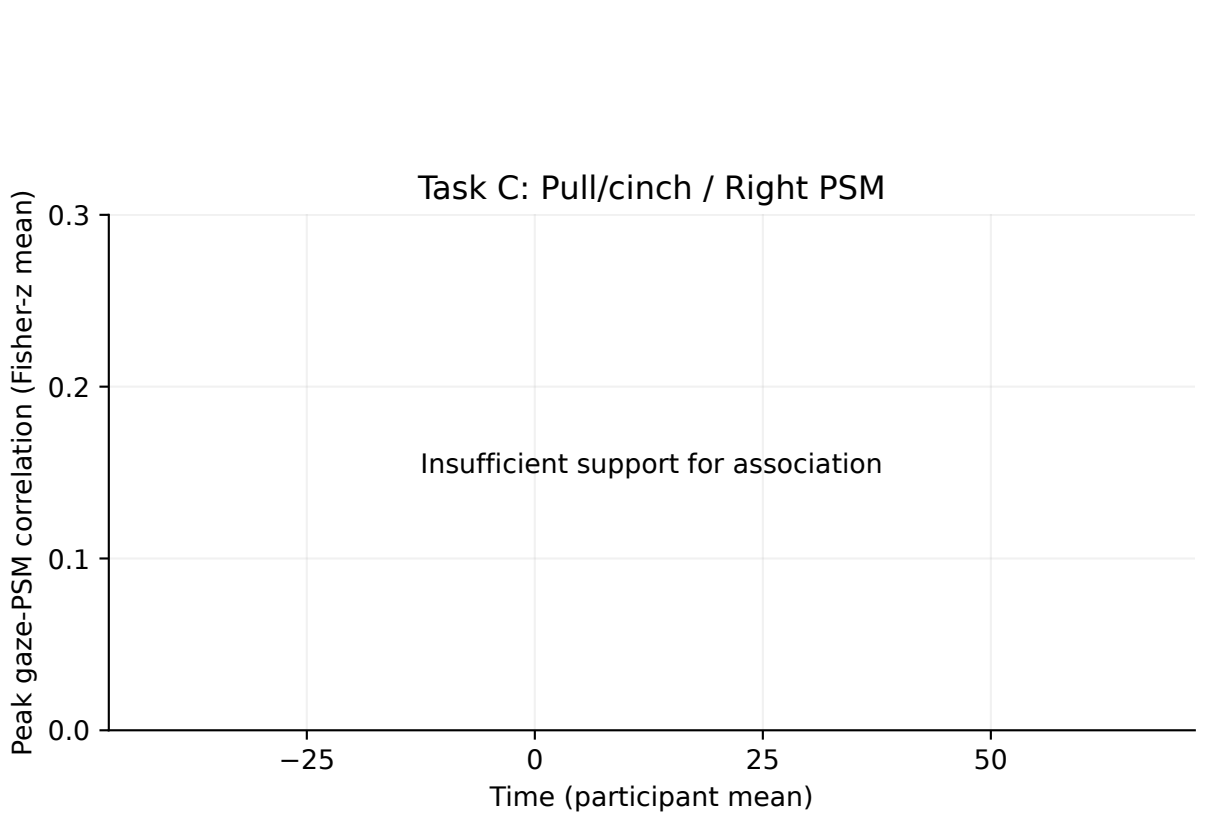

One point per participant; labels show participant IDs. Each point uses the same eligible attempts for Time and peak correlation.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
Time uses the supplied column values directly; attempts with missing Time values are excluded.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.