

Whole-task absolute peak lag versus PenaltyRawSum
Velocity (secondary analysis)

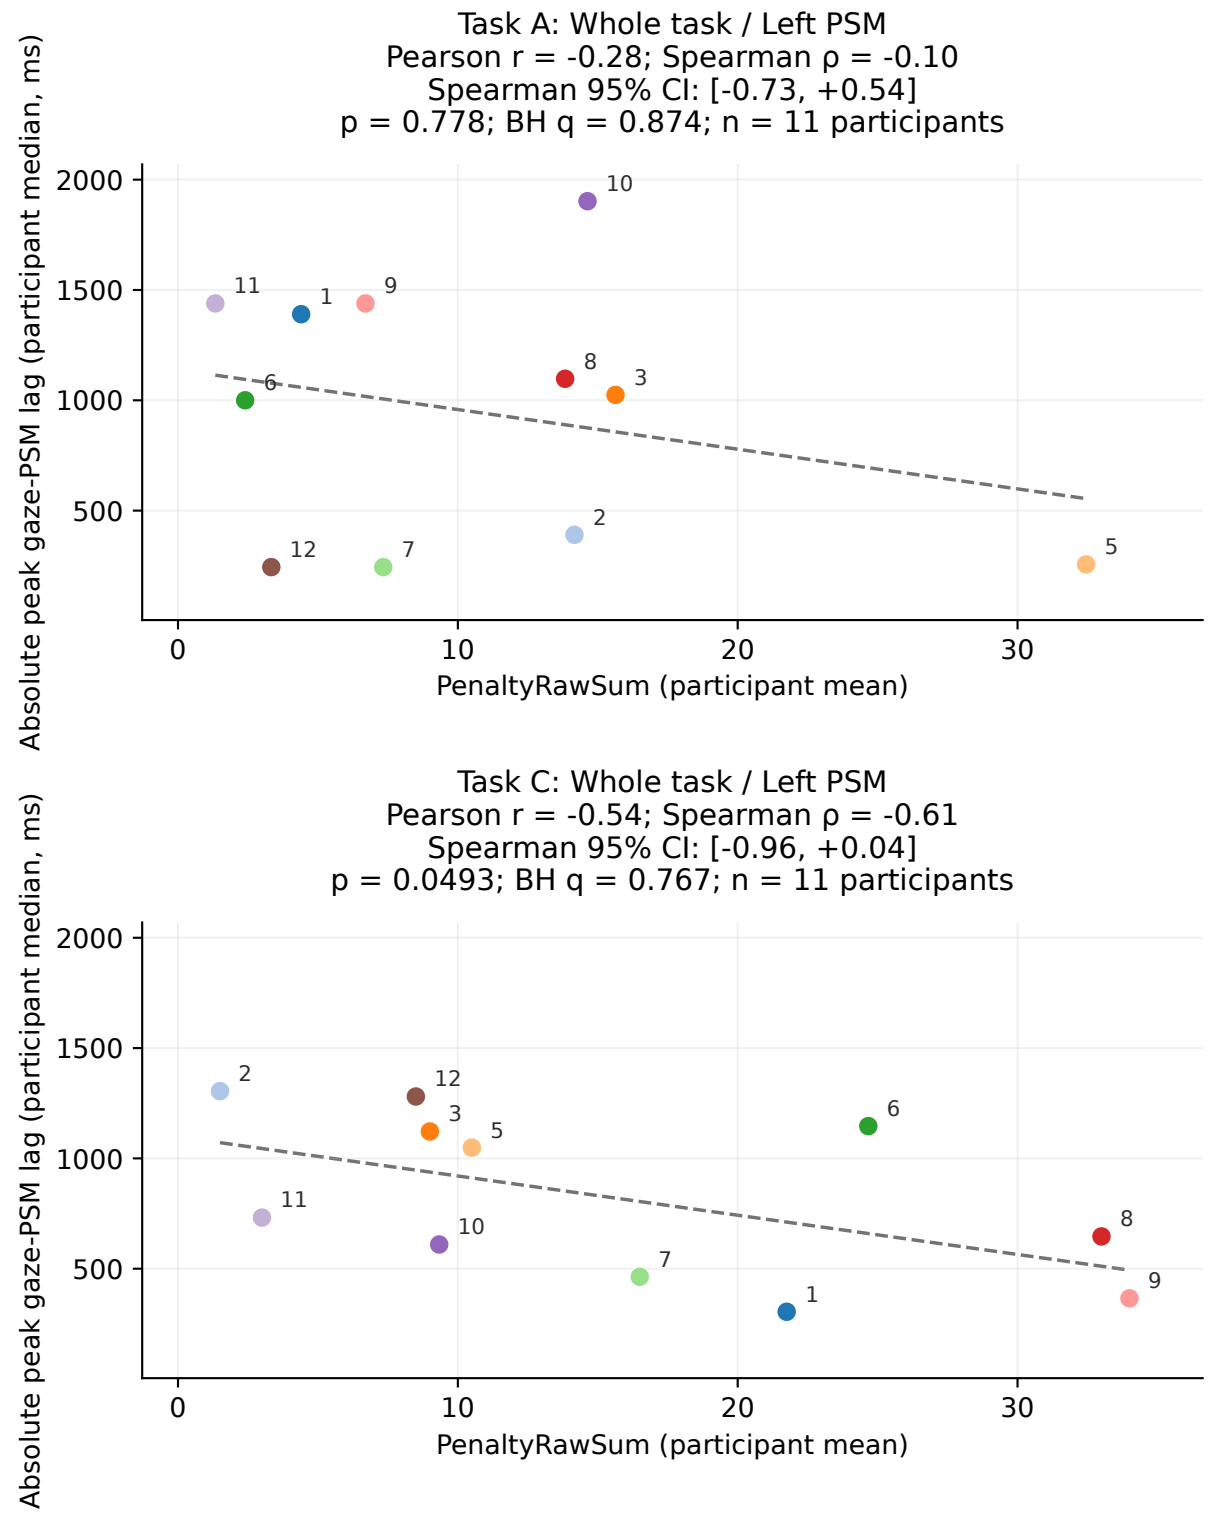


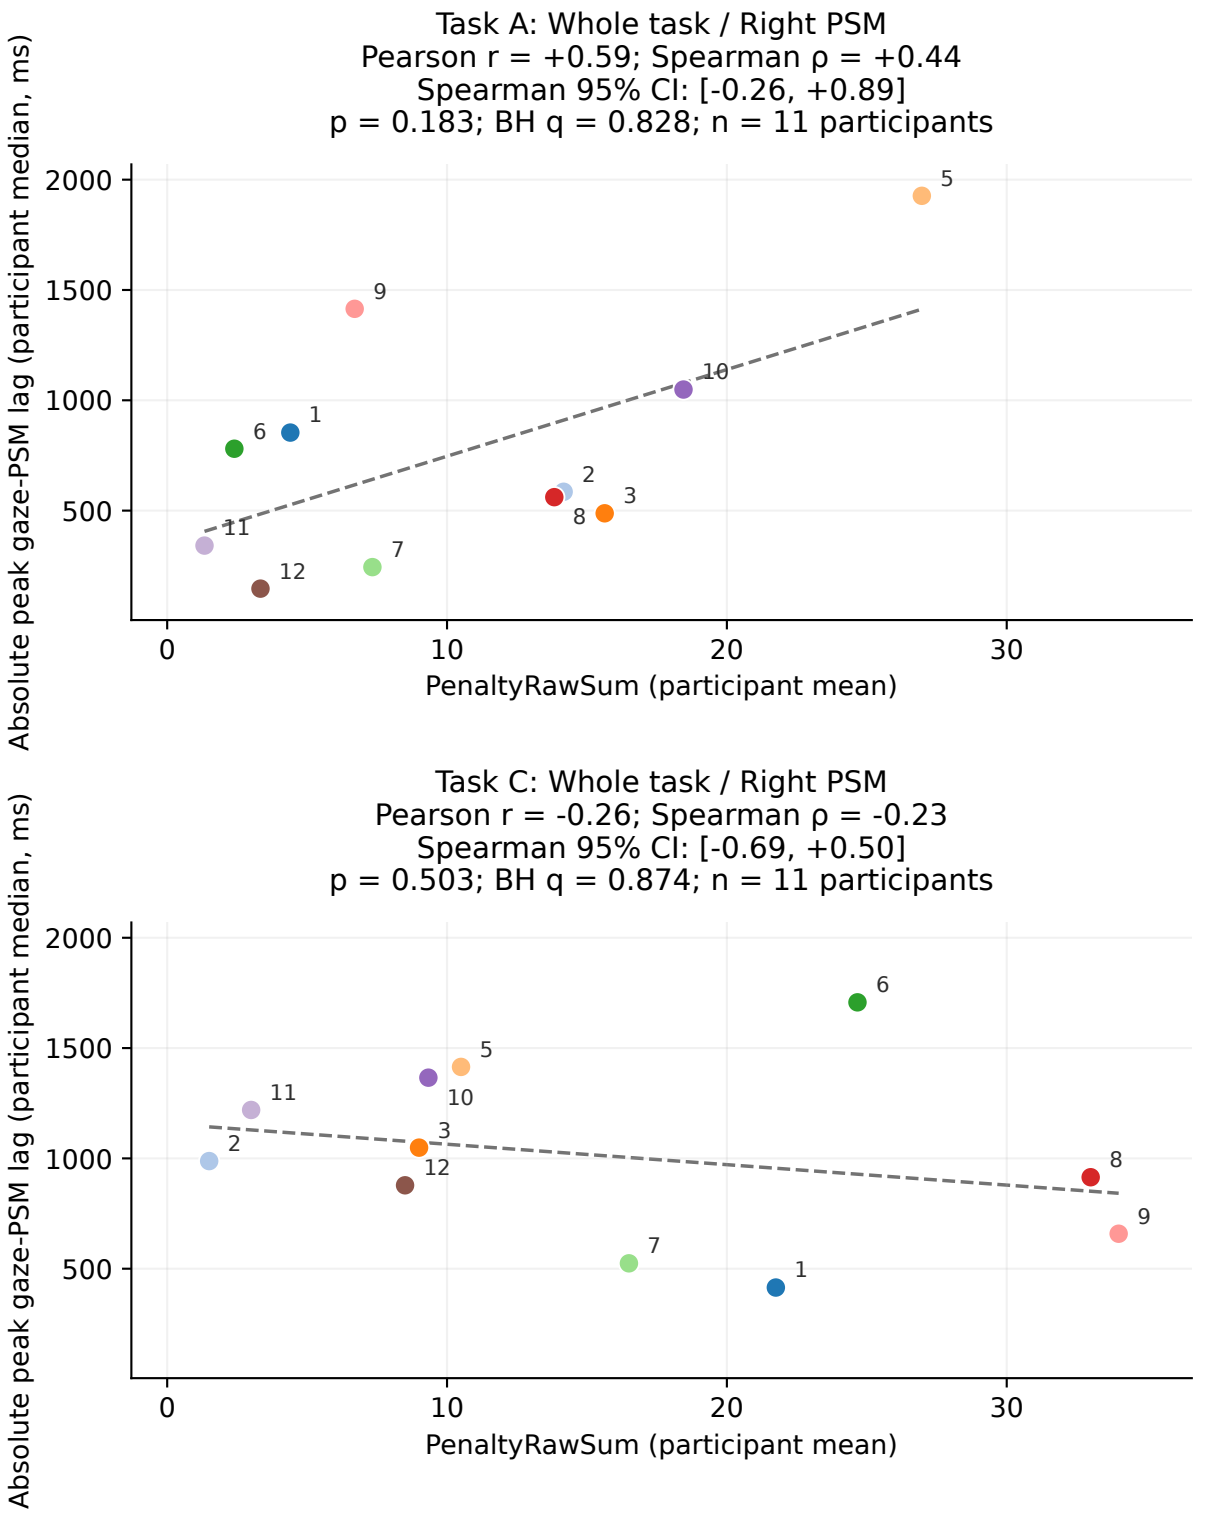


One point per participant; labels show participant IDs. Each point uses the same eligible attempts for PenaltyRawSum and absolute peak lag.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
PenaltyRawSum uses the supplied column values directly; attempts with missing PenaltyRawSum values are excluded.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.

Task A: valid-phase absolute peak lag versus PenaltyRawSum Velocity (secondary analysis)


Task A: Reach Ring / Left PSM
Pearson r = +0.14; Spearman ρ = -0.13
Spearman 95% CI: [-0.81, +0.56]
p = 0.718; BH q = 0.874; n = 11 participants

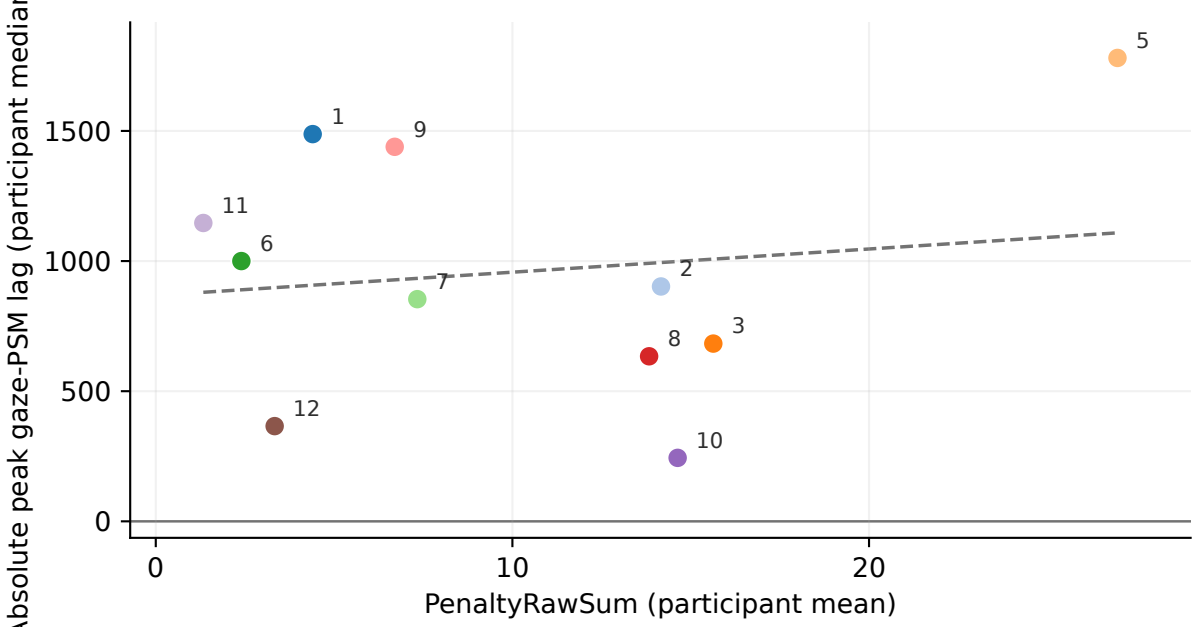


Task A: Reach Ring / Right PSM
Pearson r = +0.22; Spearman ρ = +0.31
Spearman 95% CI: [-0.36, +0.77]
p = 0.345; BH q = 0.836; n = 11 participants

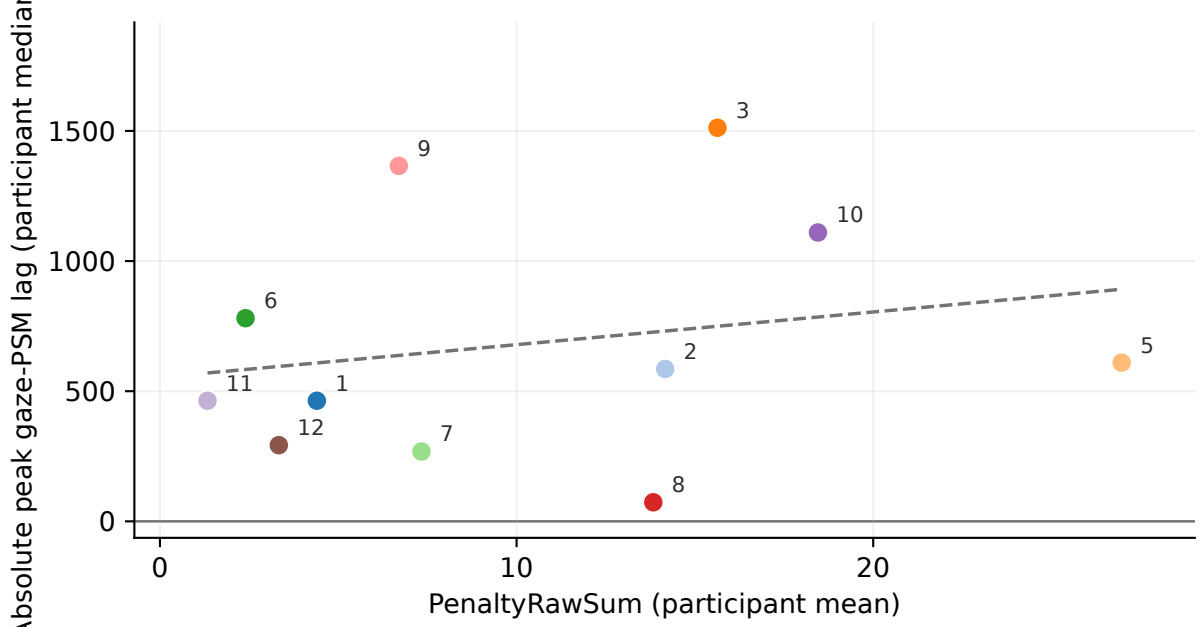


Task A: Grab Ring / Left PSM
Pearson r = +0.37; Spearman ρ = +0.39
Spearman 95% CI: [-0.24, +0.74]
p = 0.232; BH q = 0.836; n = 11 participants

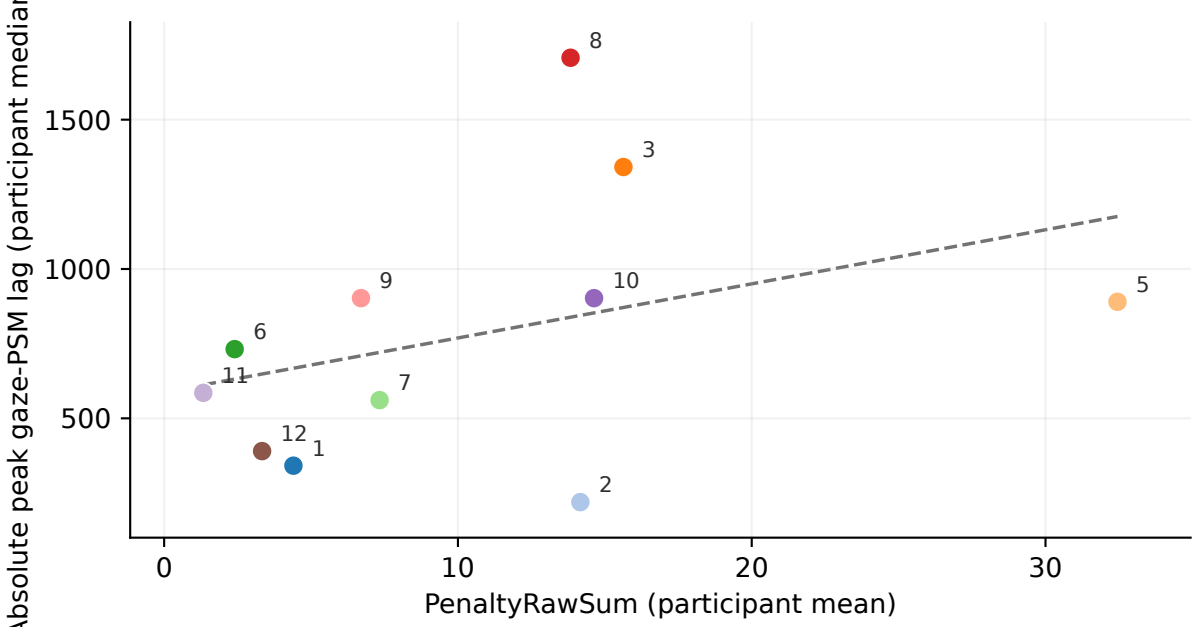


Task A: Grab Ring / Right PSM
Pearson r = +0.38; Spearman ρ = +0.48
Spearman 95% CI: [-0.32, +0.86]
p = 0.141; BH q = 0.767; n = 11 participants

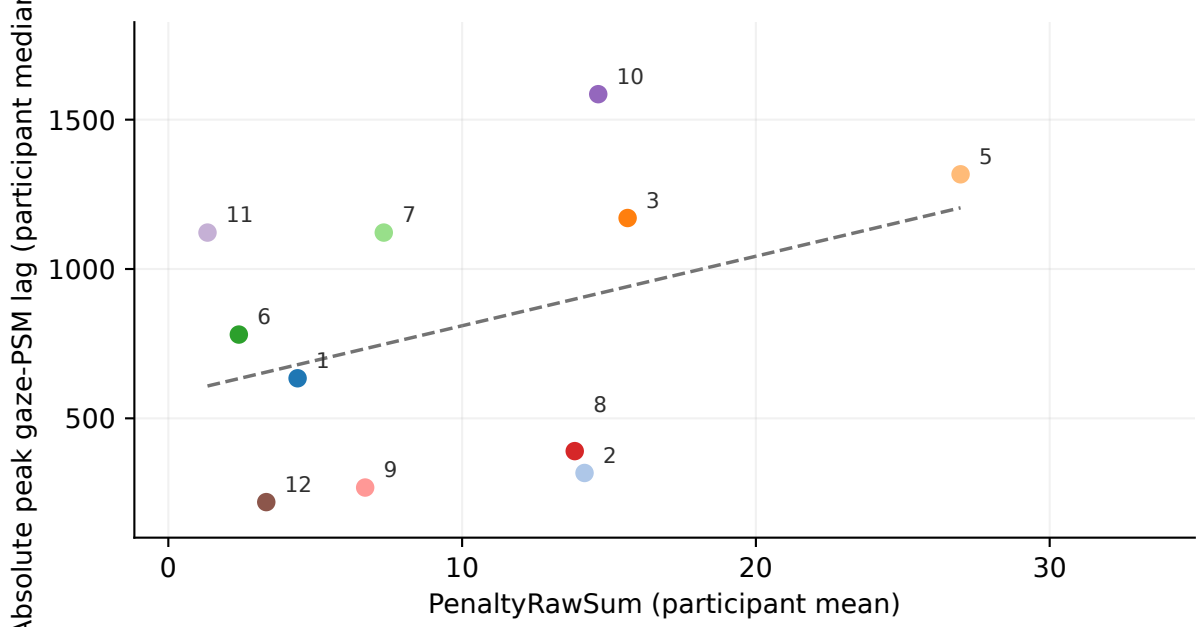


Task A: Transfer Ring / Left PSM
Pearson r = -0.02; Spearman ρ = +0.11
Spearman 95% CI: [-0.57, +0.64]
p = 0.758; BH q = 0.874; n = 11 participants

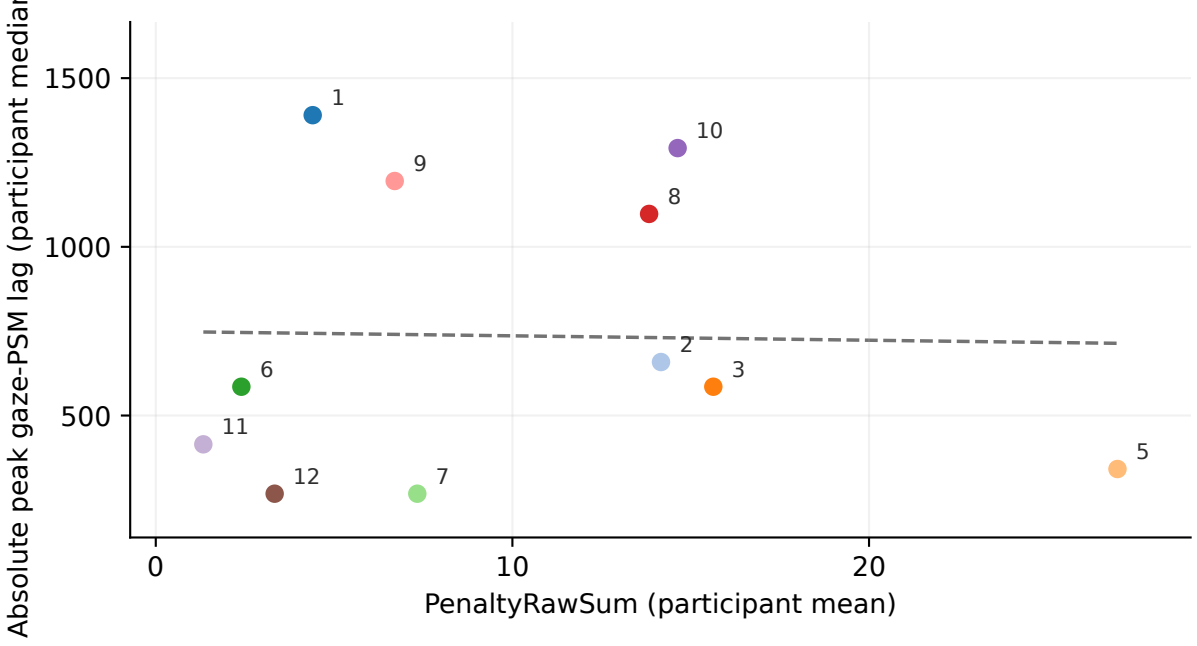


Task A: Transfer Ring / Right PSM
Pearson r = +0.03; Spearman ρ = +0.10
Spearman 95% CI: [-0.49, +0.66]
p = 0.777; BH q = 0.874; n = 11 participants

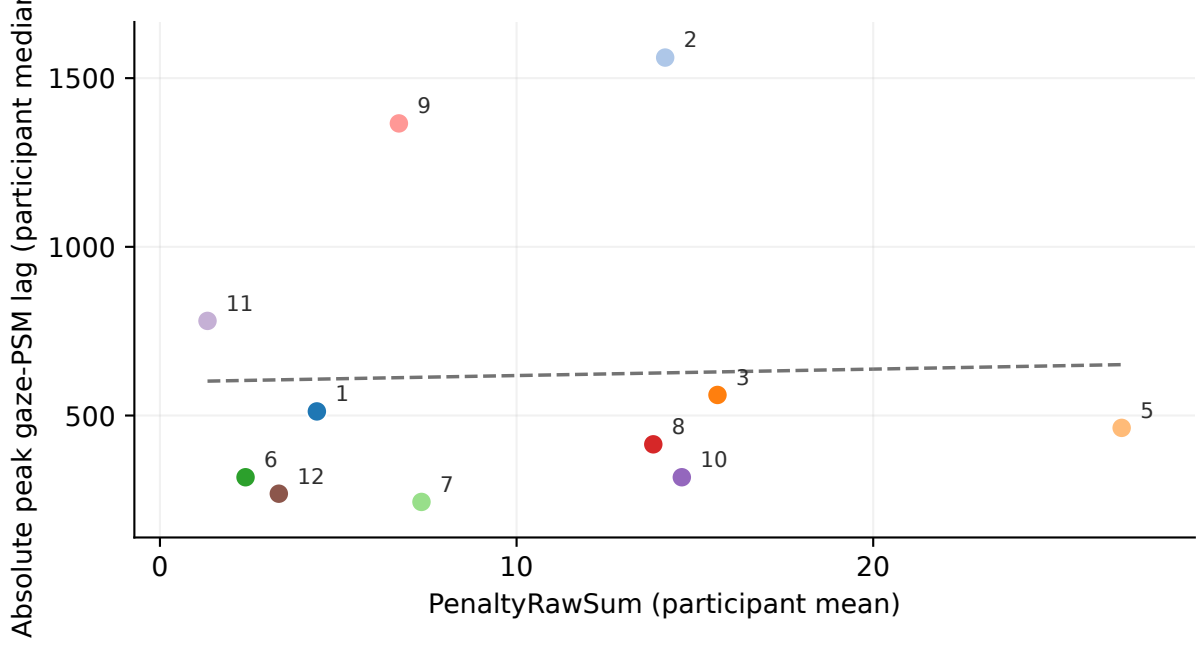

Task A: Place Ring / Left PSM
Pearson r = -0.09; Spearman ρ = -0.09
Spearman 95% CI: [-0.73, +0.55]
p = 0.801; BH q = 0.874; n = 11 participants

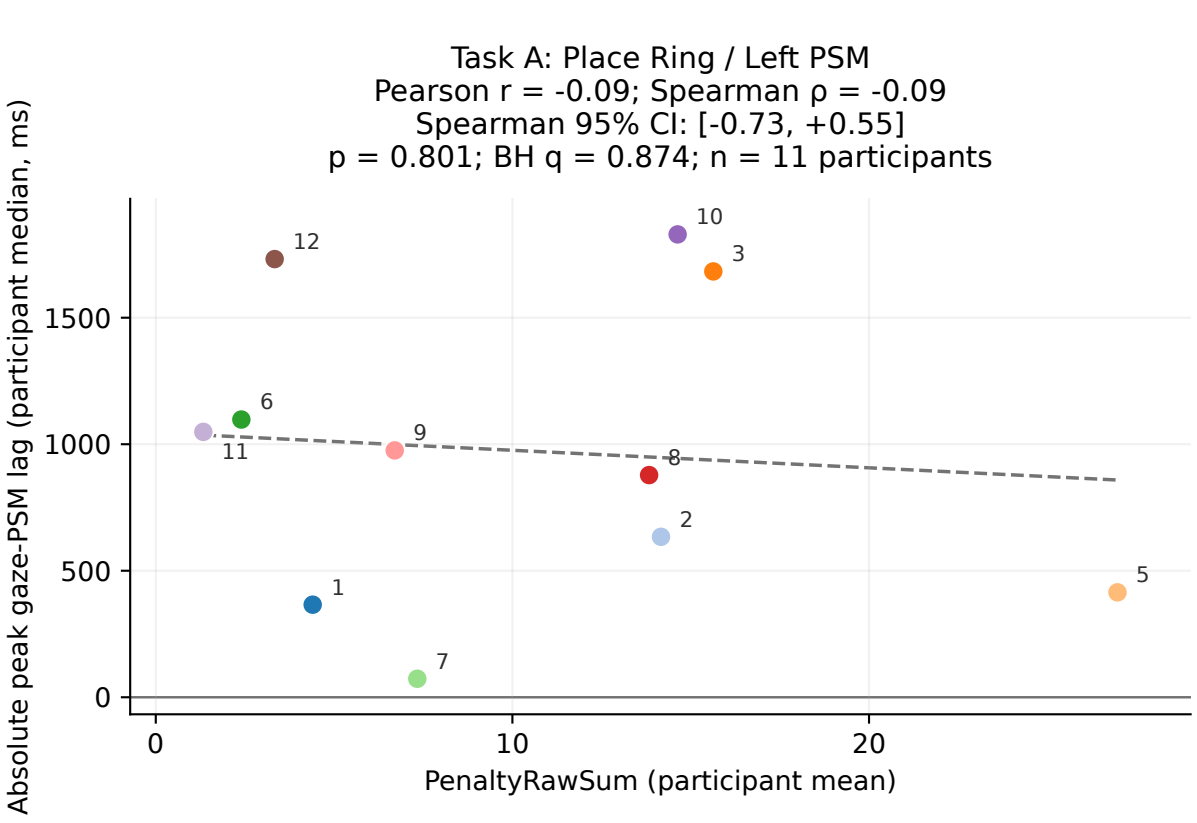



Task A: Place Ring / Right PSM
Pearson r = +0.48; Spearman ρ = +0.31
Spearman 95% CI: [-0.52, +0.89]
p = 0.358; BH q = 0.836; n = 11 participants

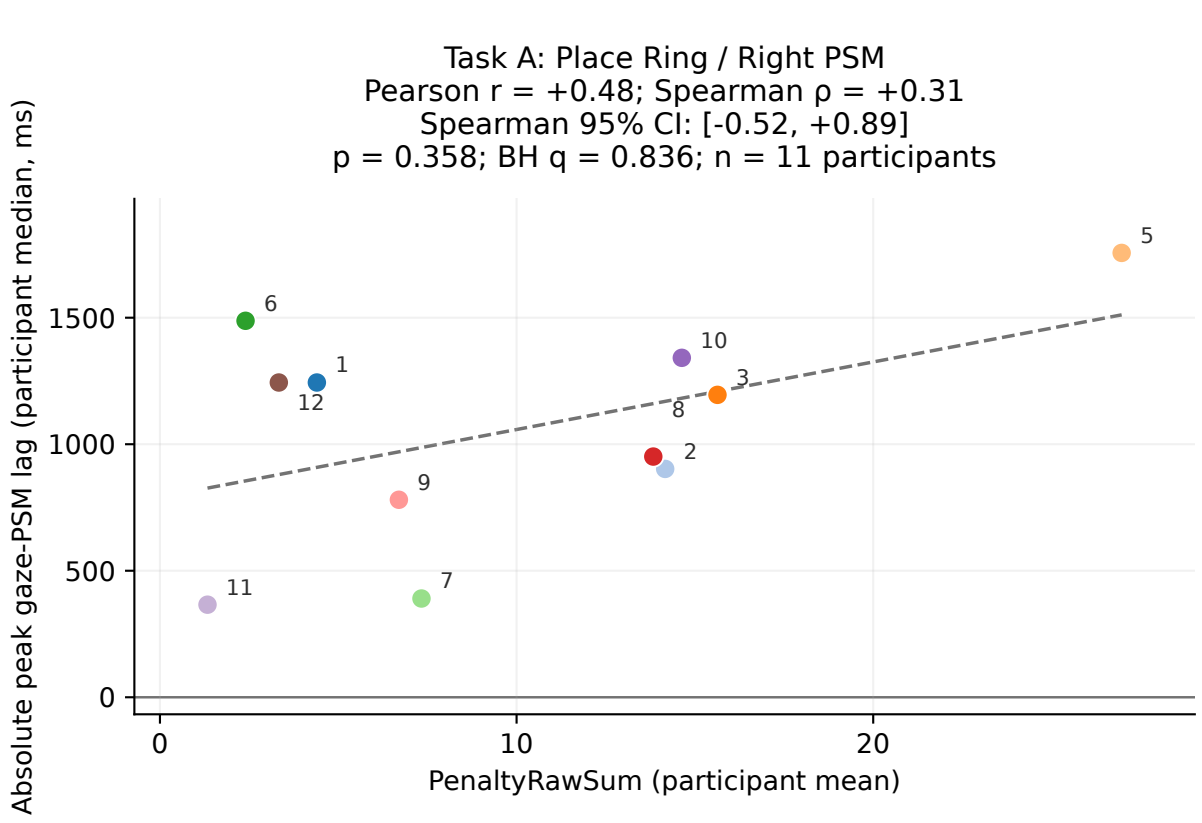



One point per participant; labels show participant IDs. Each point uses the same eligible attempts for PenaltyRawSum and absolute peak lag.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
PenaltyRawSum uses the supplied column values directly; attempts with missing PenaltyRawSum values are excluded.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.


Task C: valid-phase absolute peak lag versus PenaltyRawSum Velocity (secondary analysis)

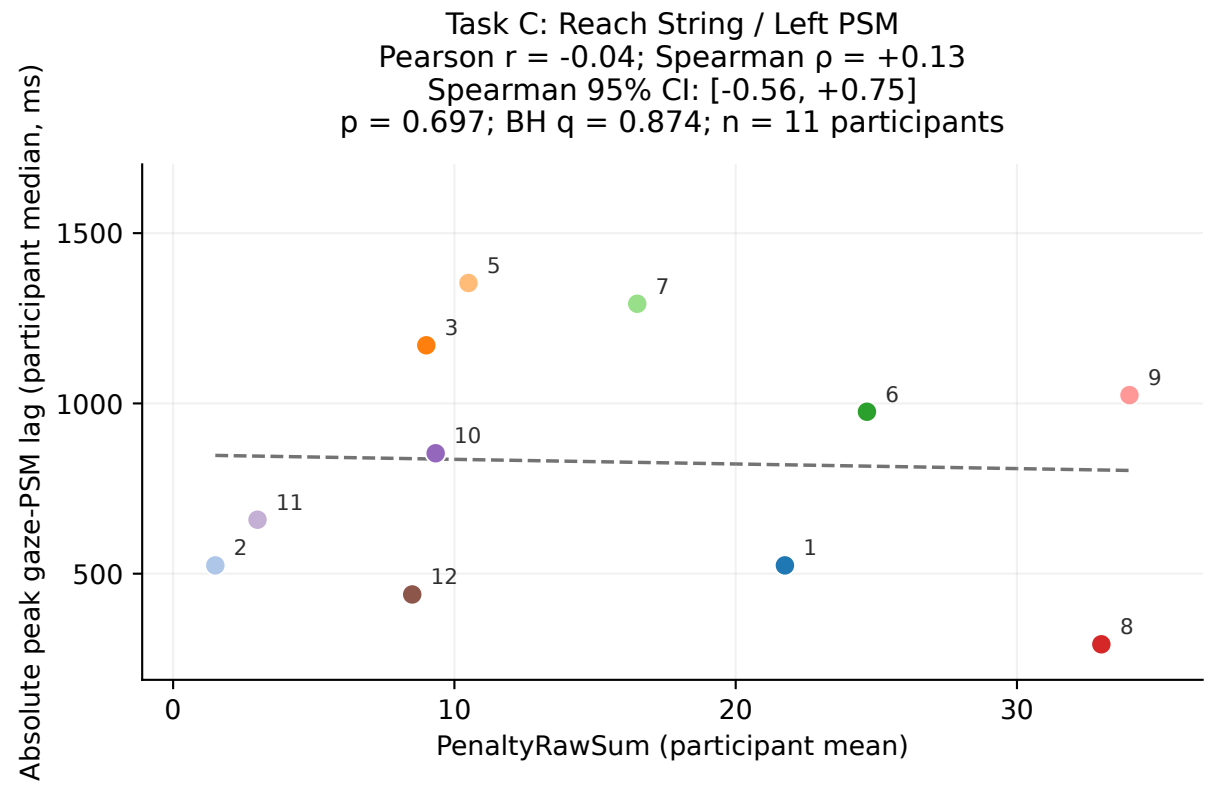


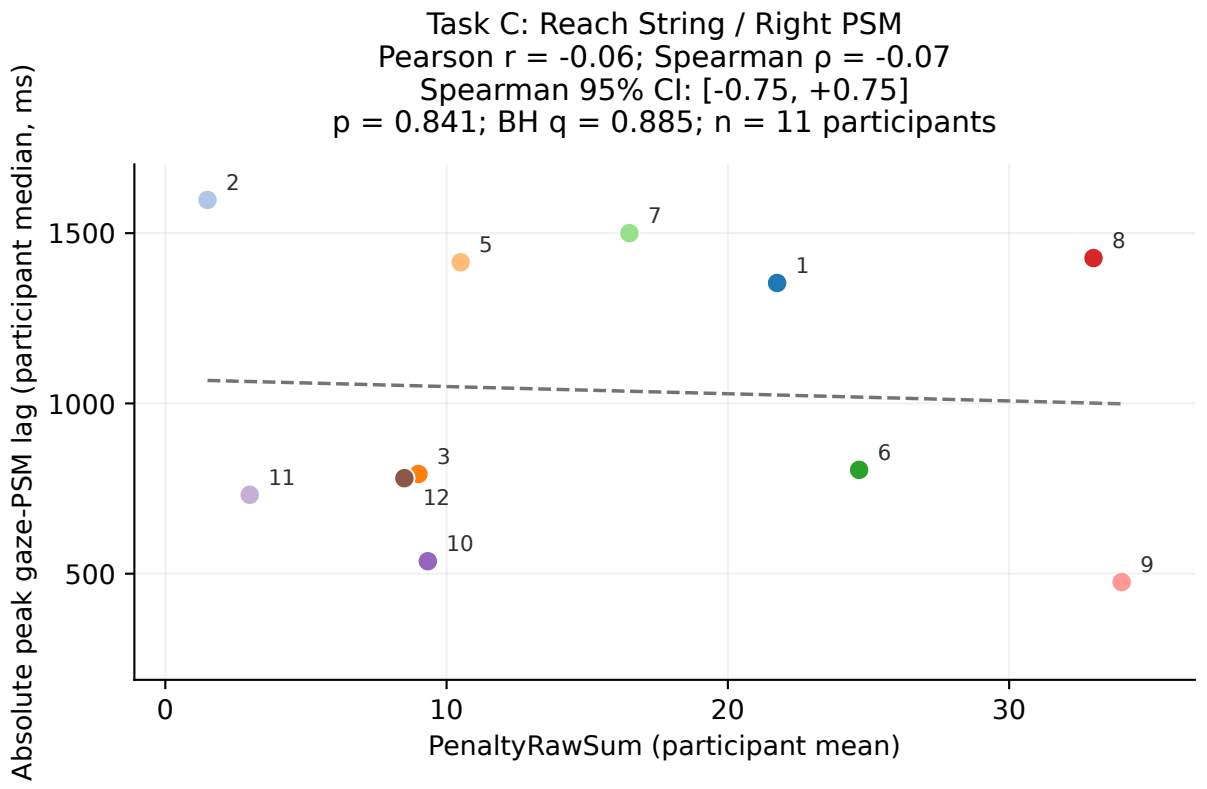


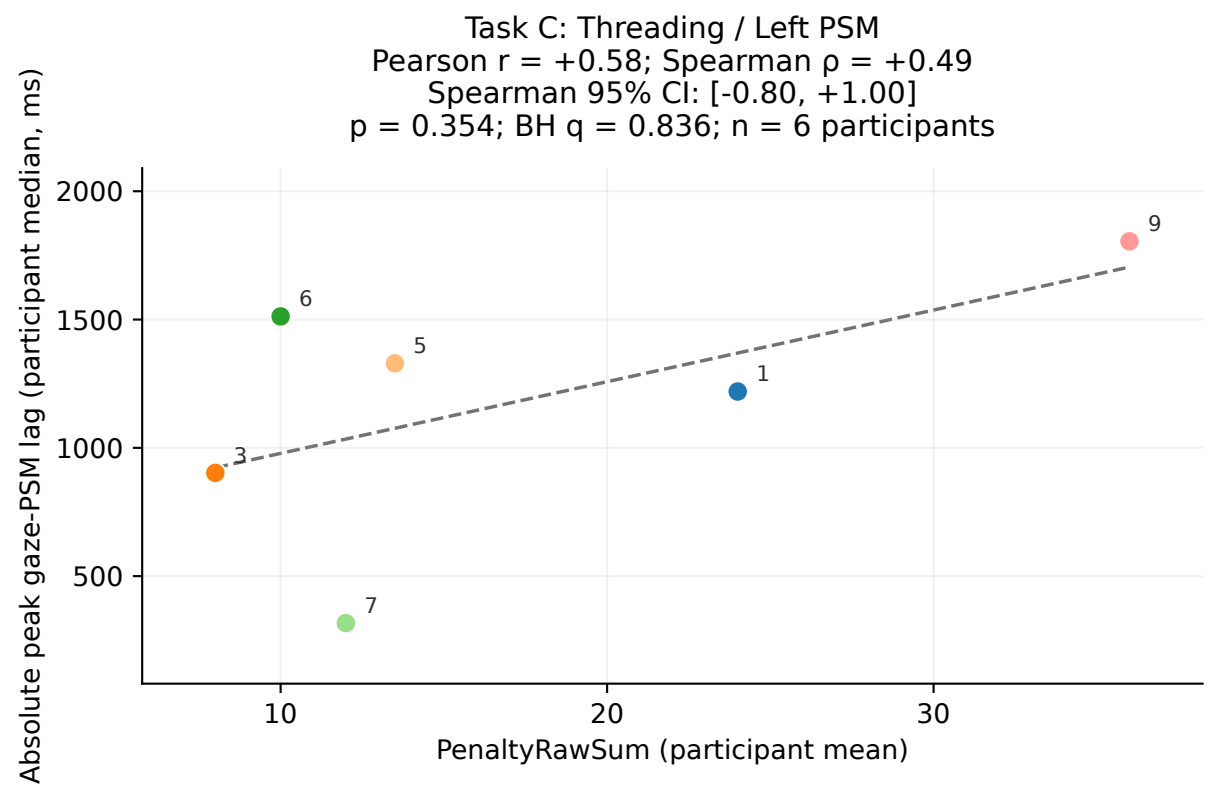


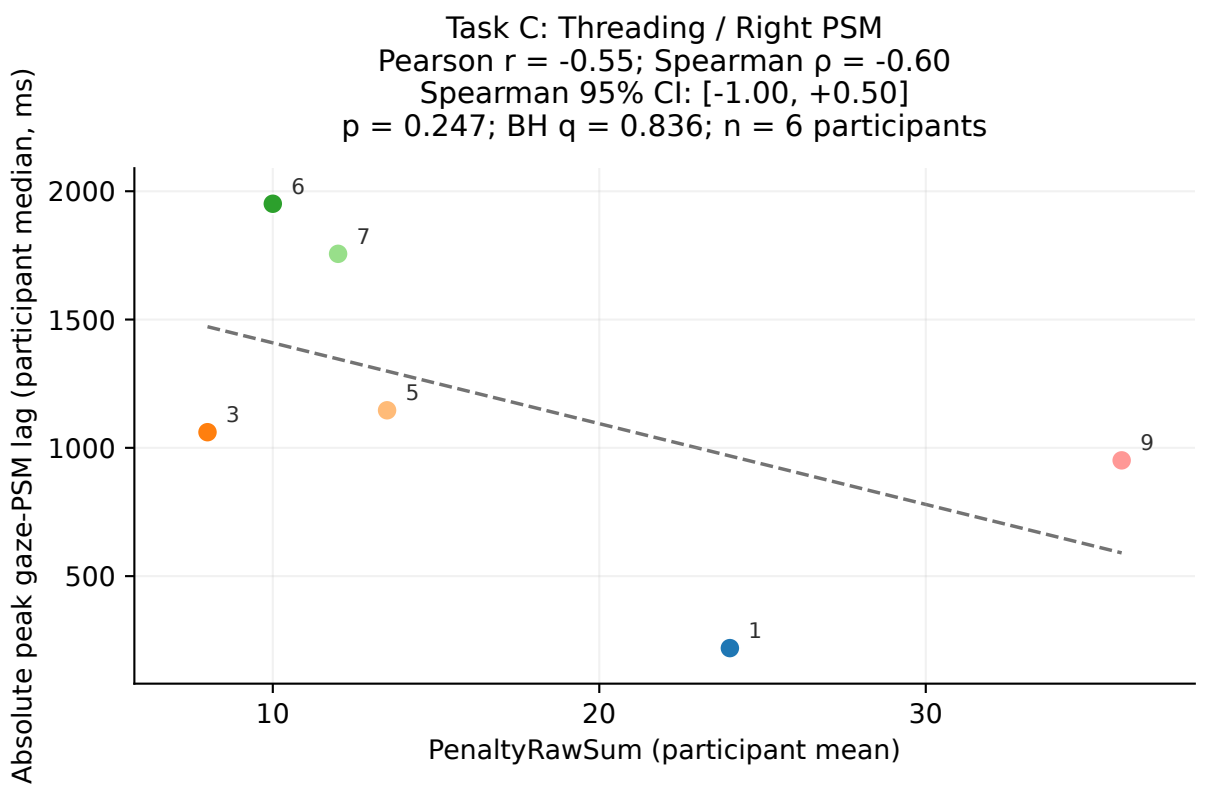

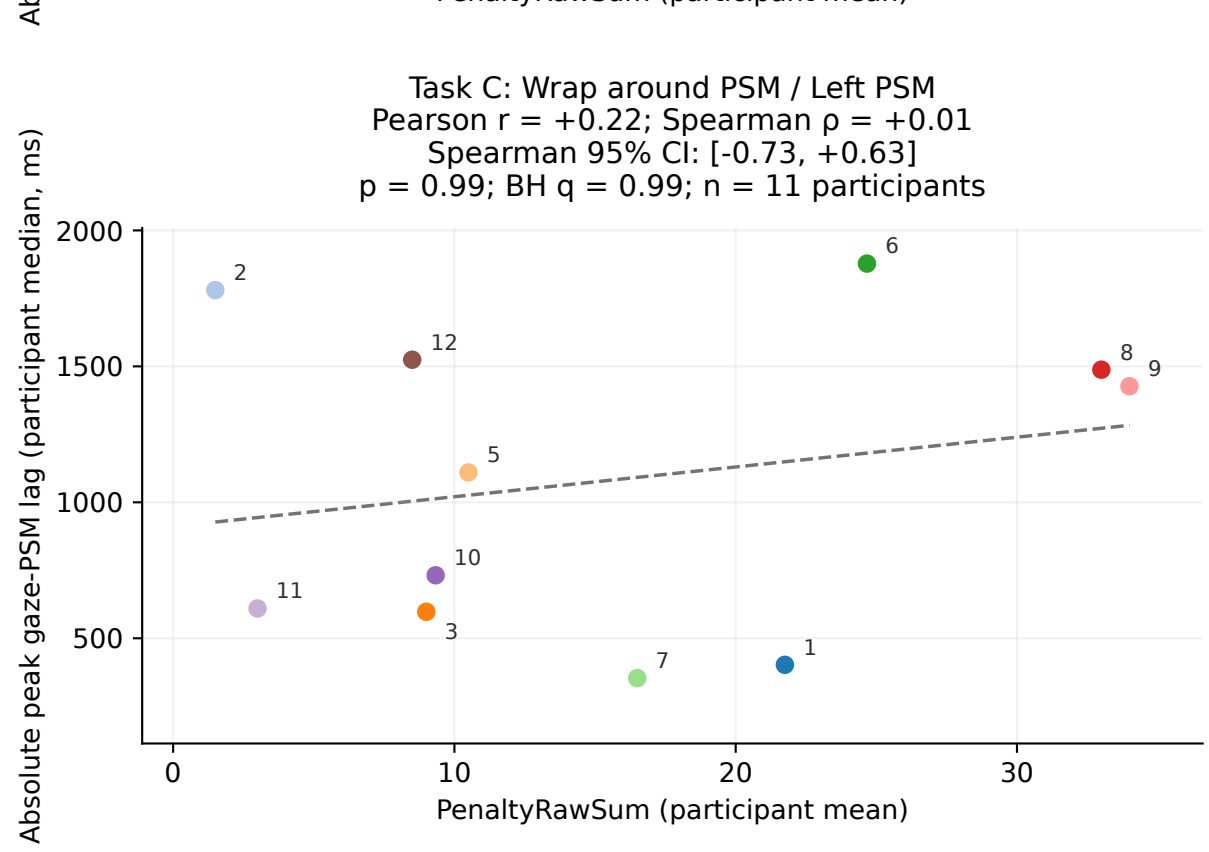

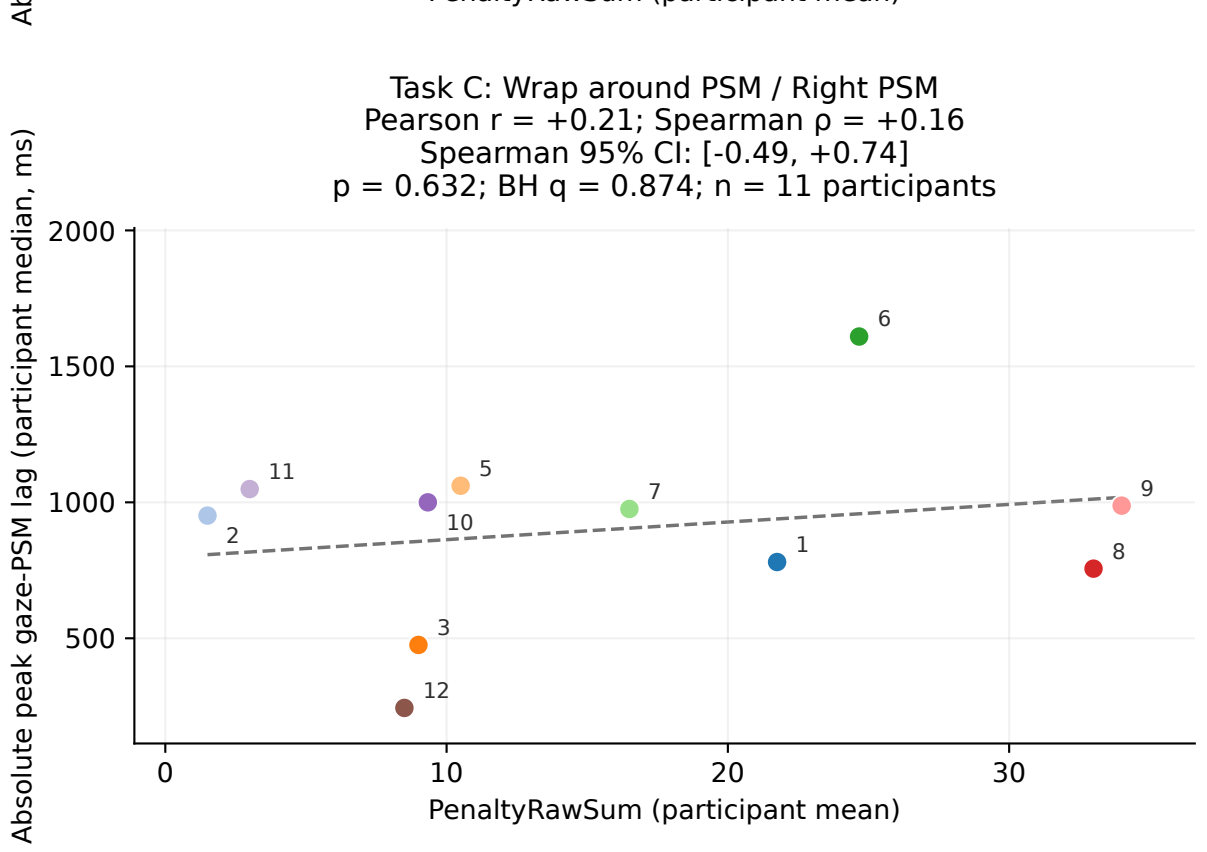

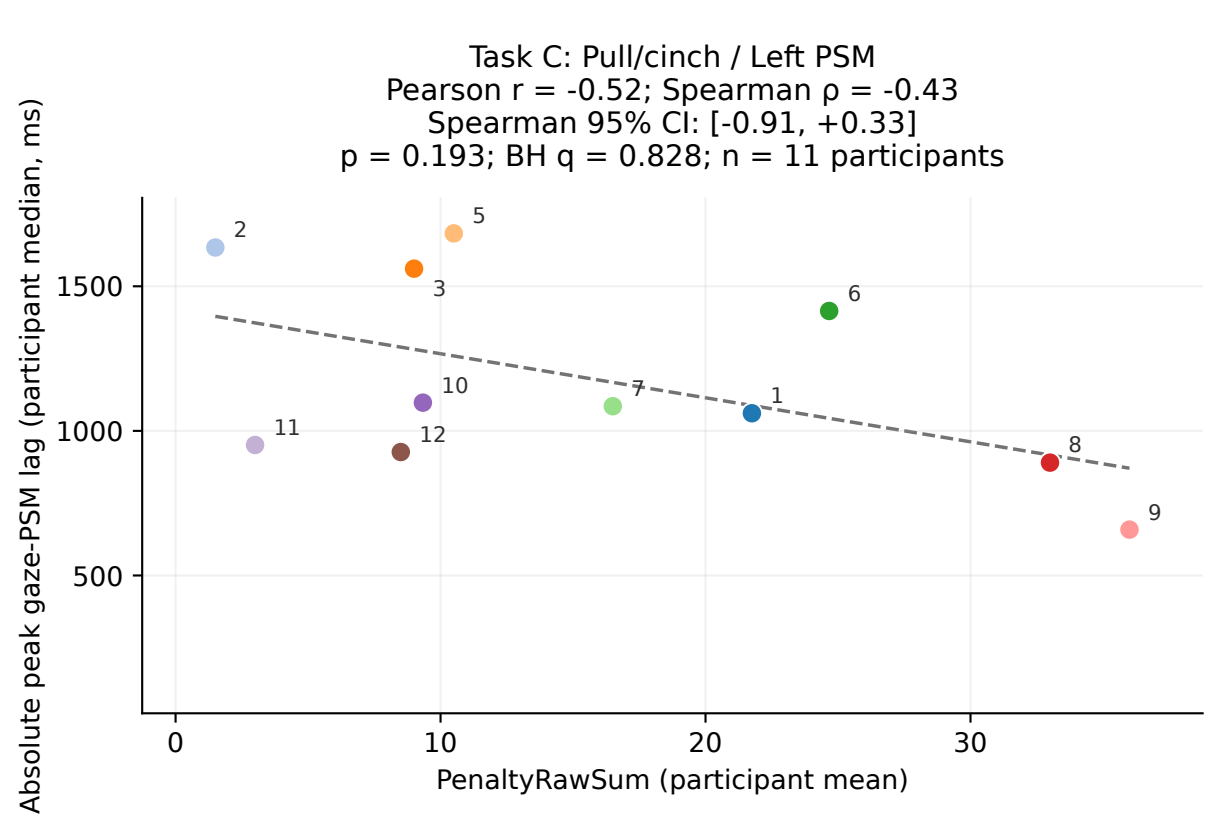

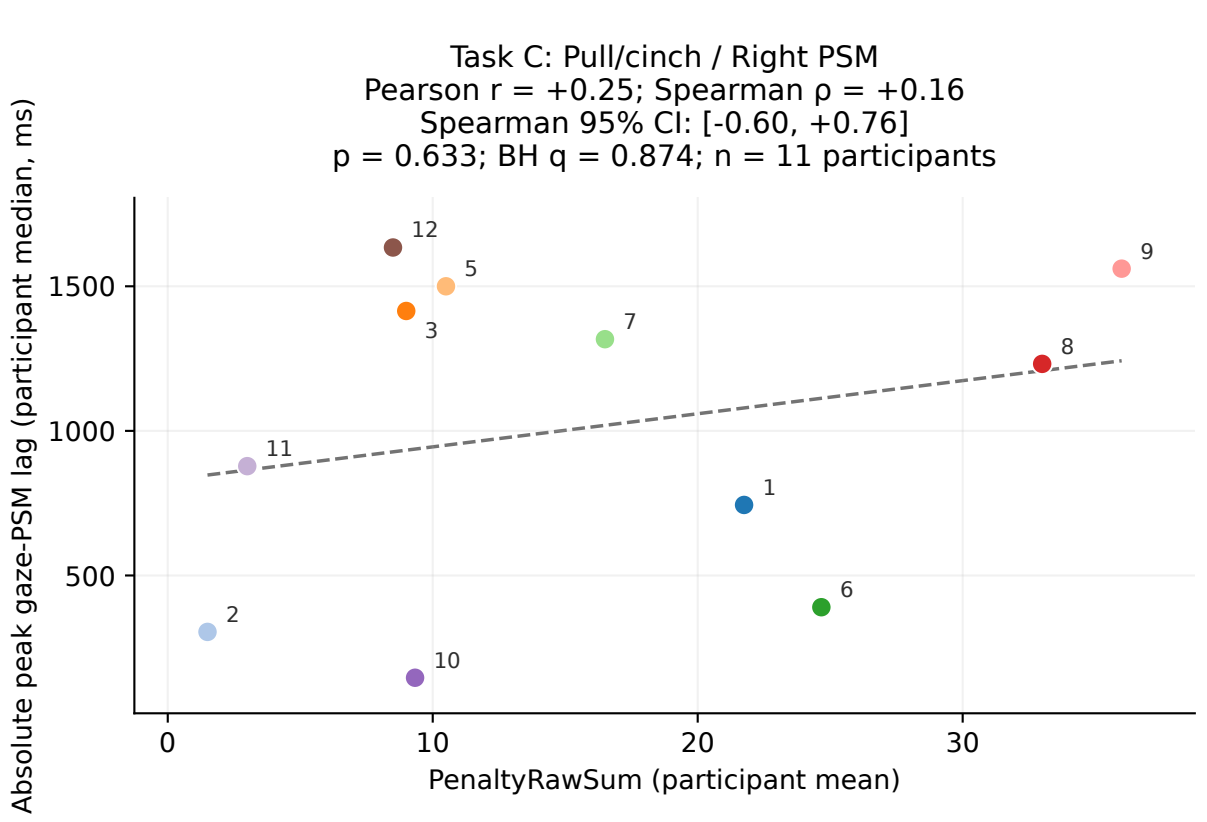

One point per participant; labels show participant IDs. Each point uses the same eligible attempts for PenaltyRawSum and absolute peak lag.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
PenaltyRawSum uses the supplied column values directly; attempts with missing PenaltyRawSum values are excluded.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.