



Whole-task peak lag versus PenaltyRawSum
Velocity (secondary analysis)

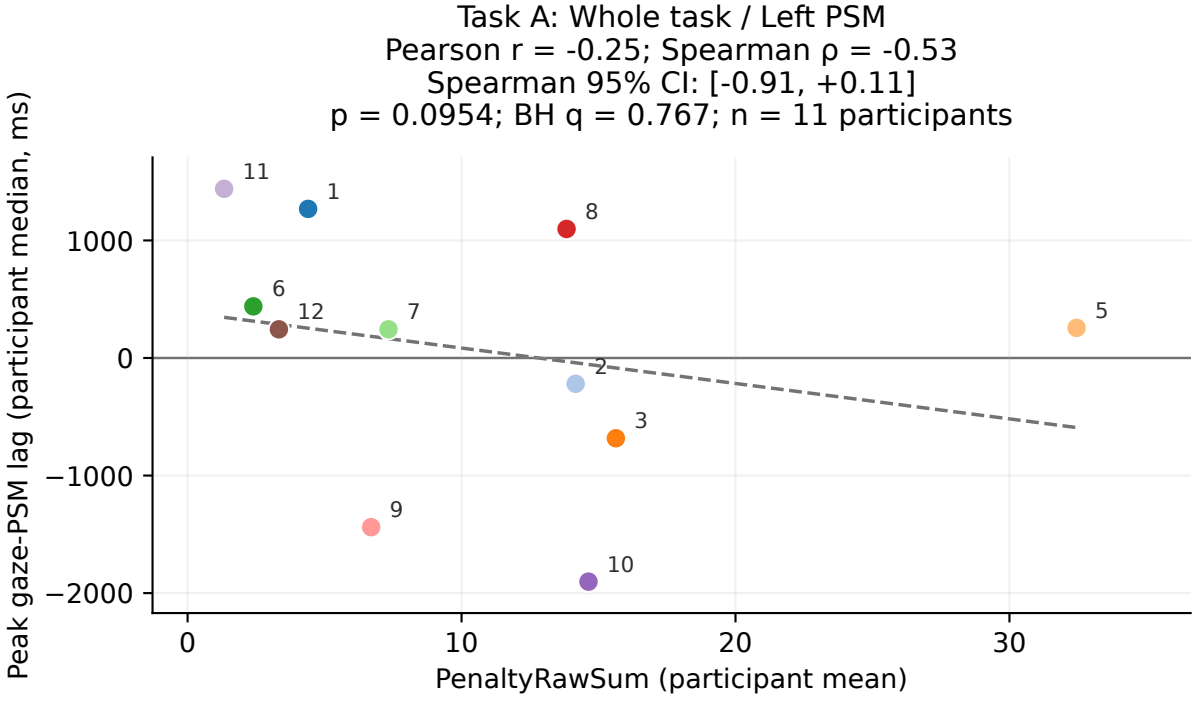

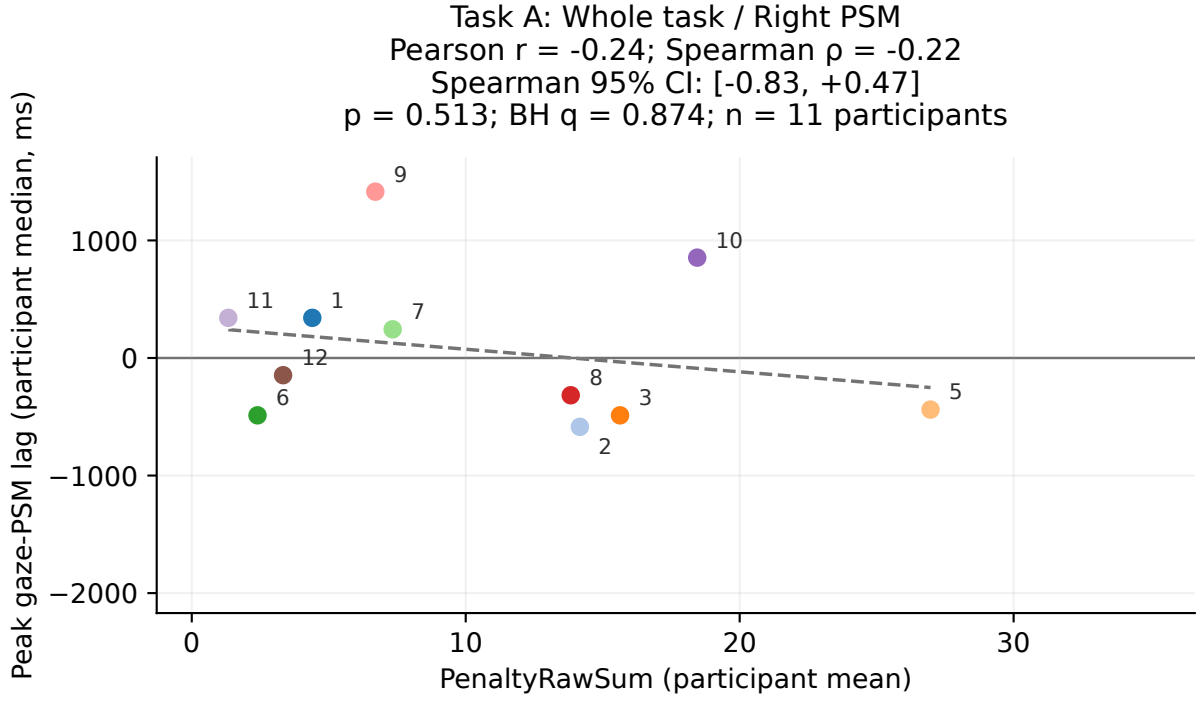


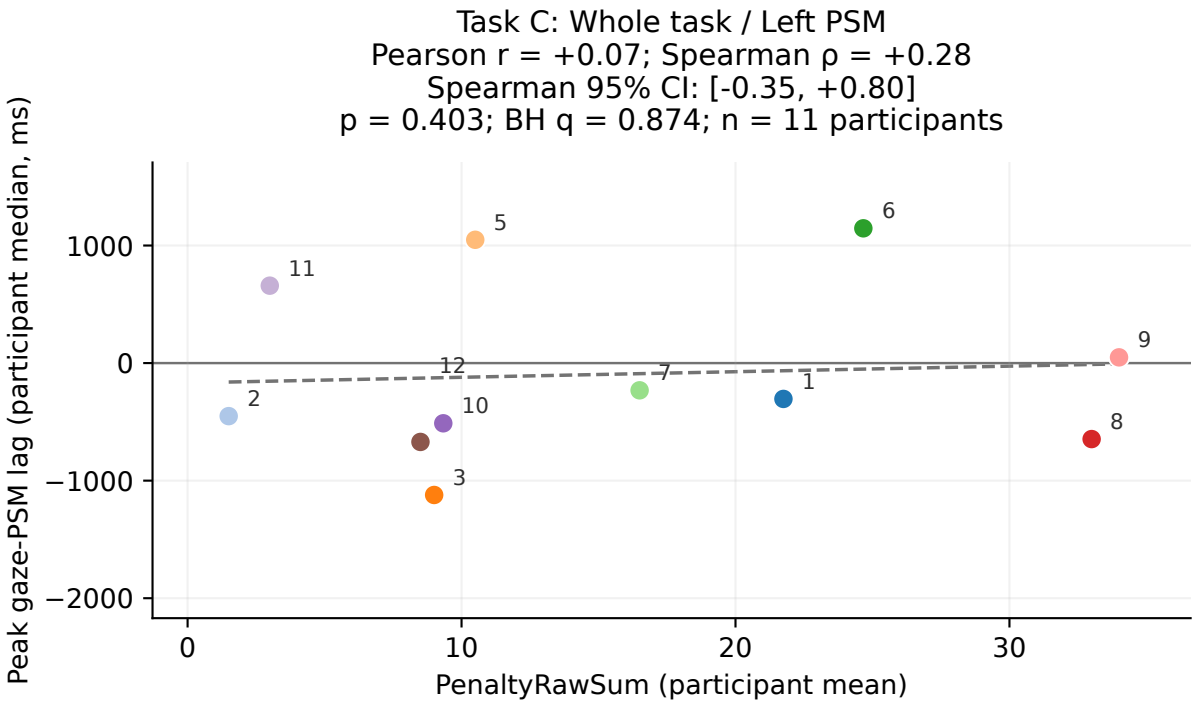


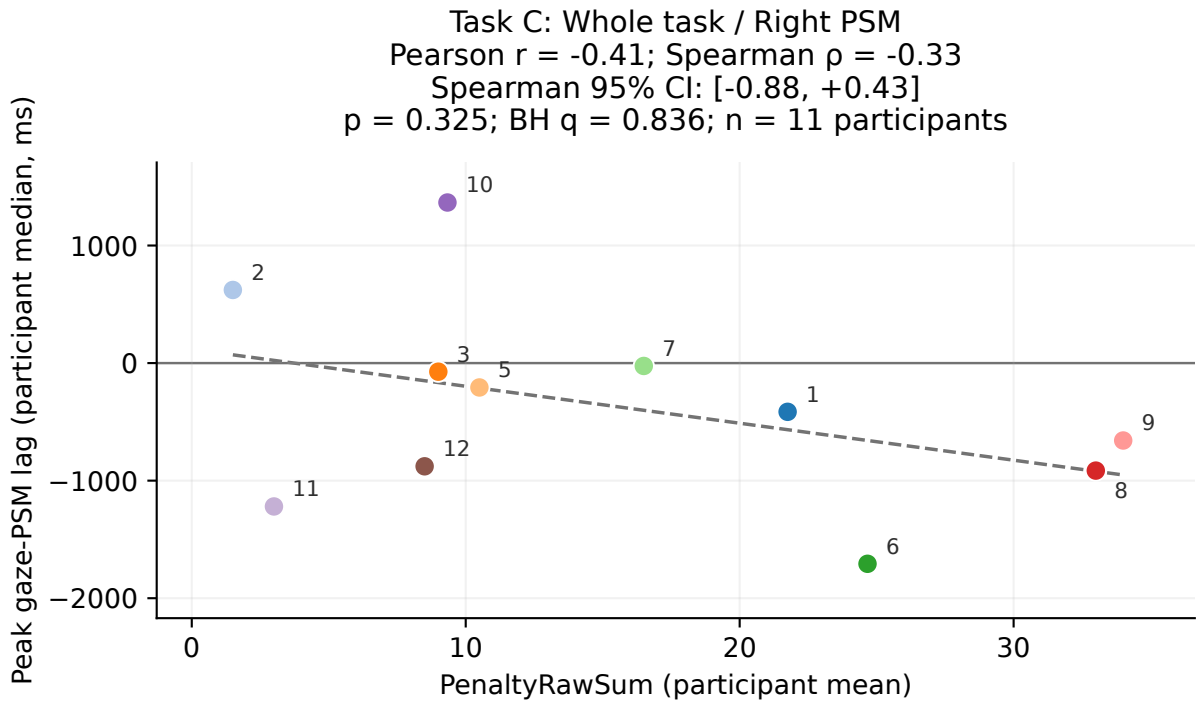



One point per participant; labels show participant IDs. Each point uses the same eligible attempts for PenaltyRawSum and peak lag.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
Positive lag = gaze leads PSM; negative lag = PSM leads gaze. PenaltyRawSum values are used directly; missing values are excluded.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.


Task A: valid-phase peak lag versus PenaltyRawSum
Velocity (secondary analysis)

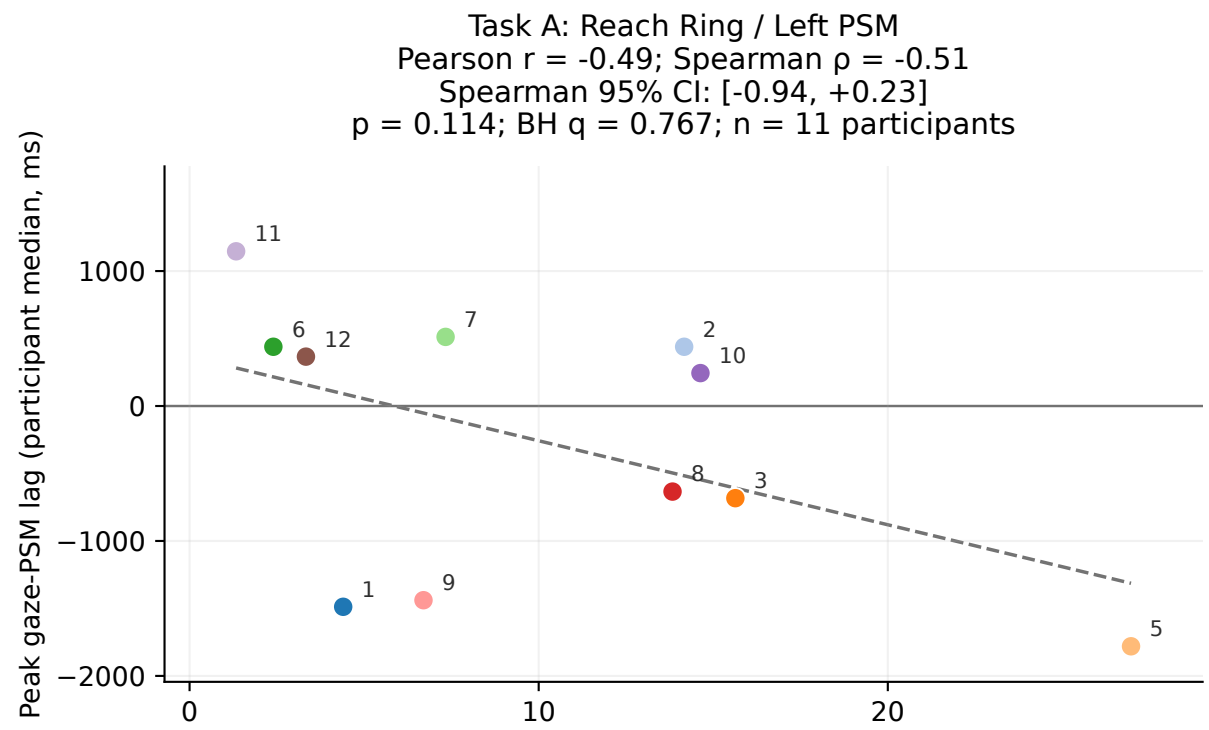


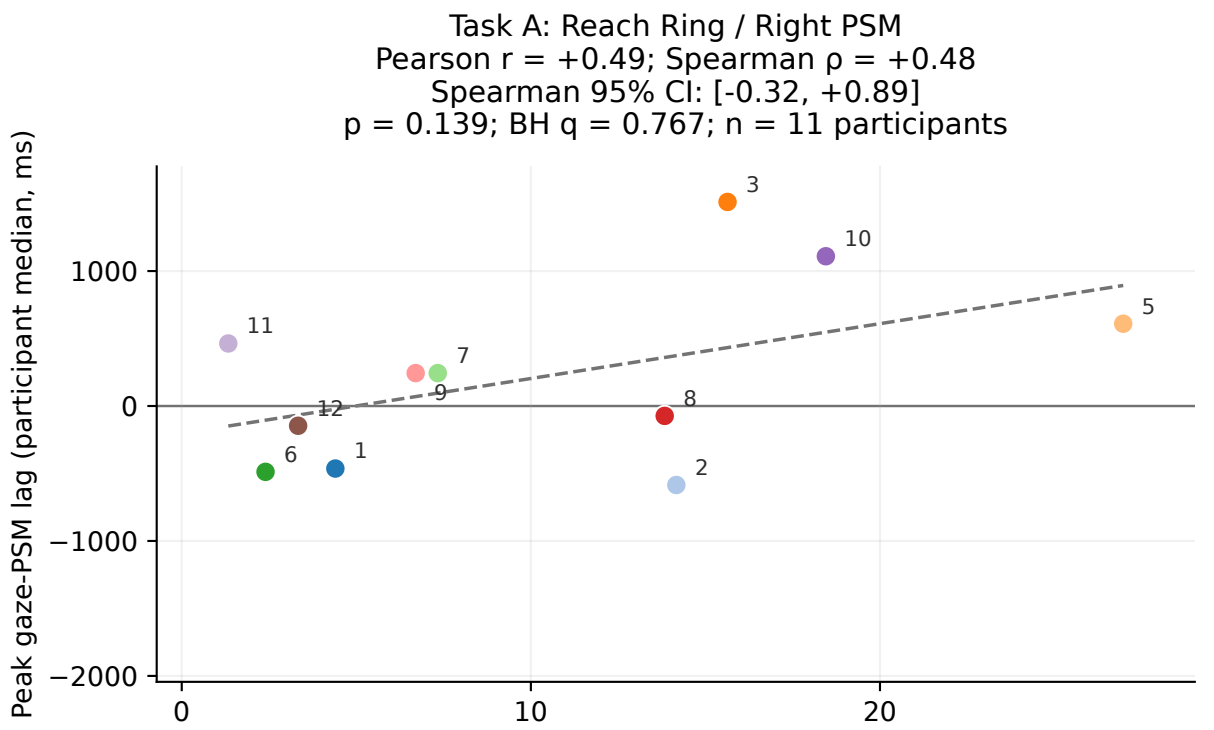


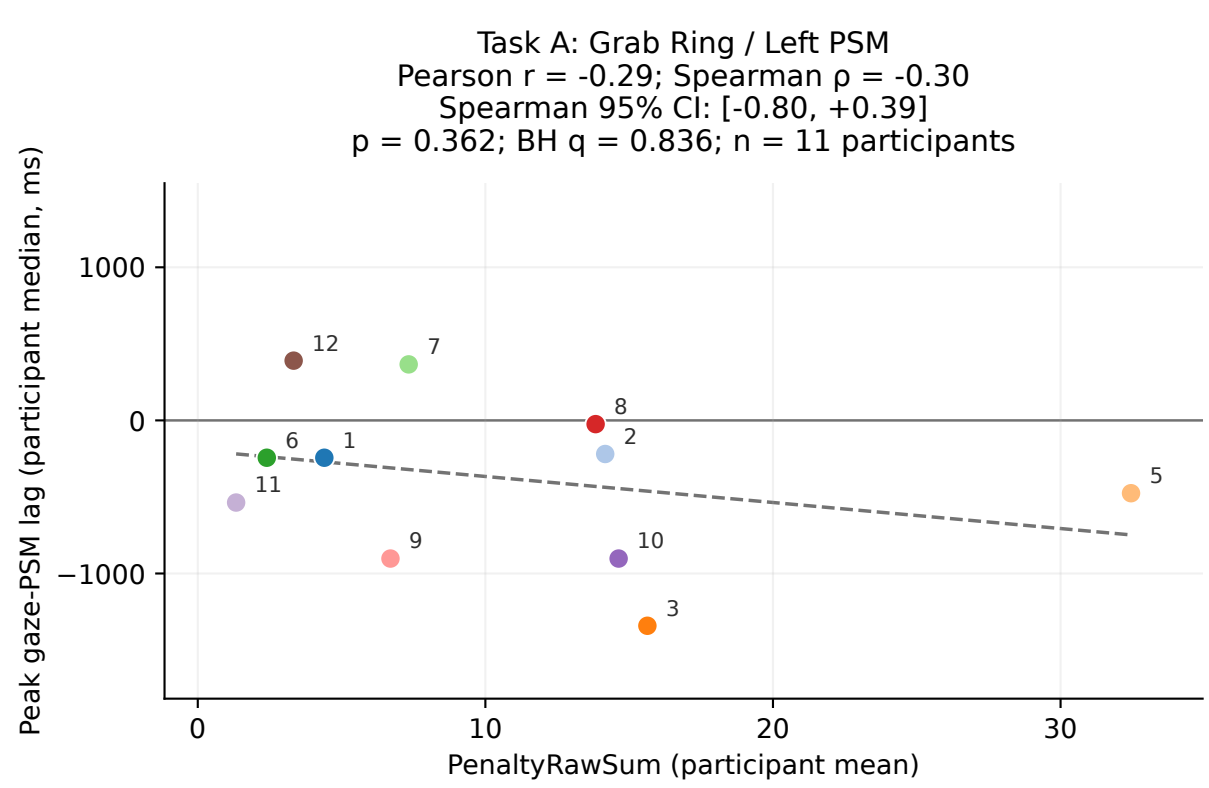


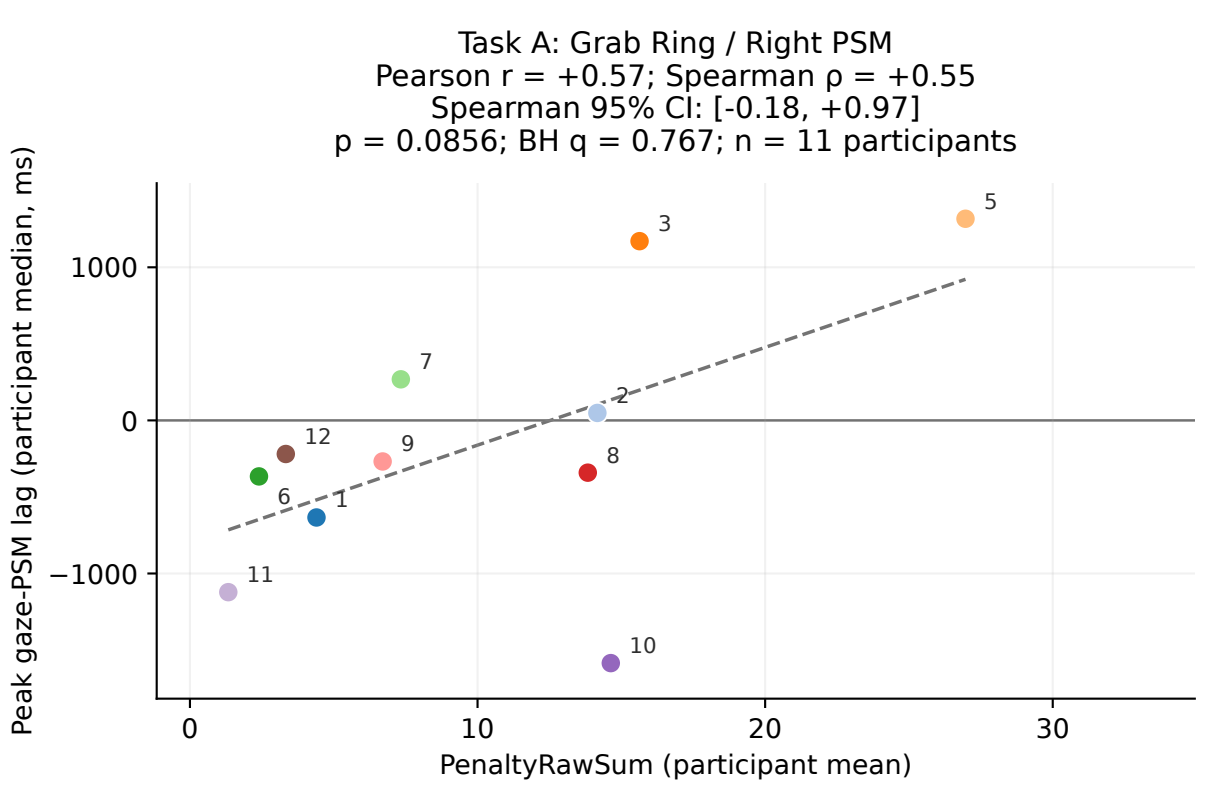

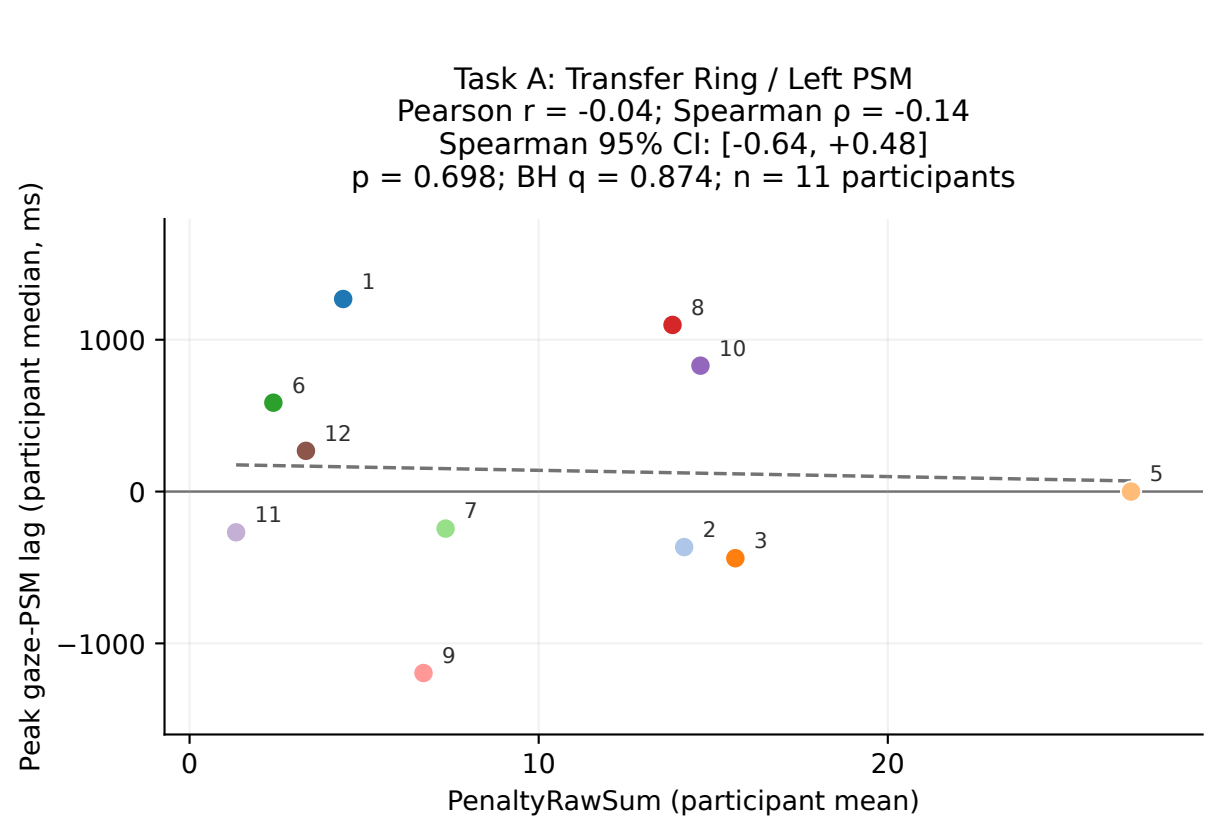

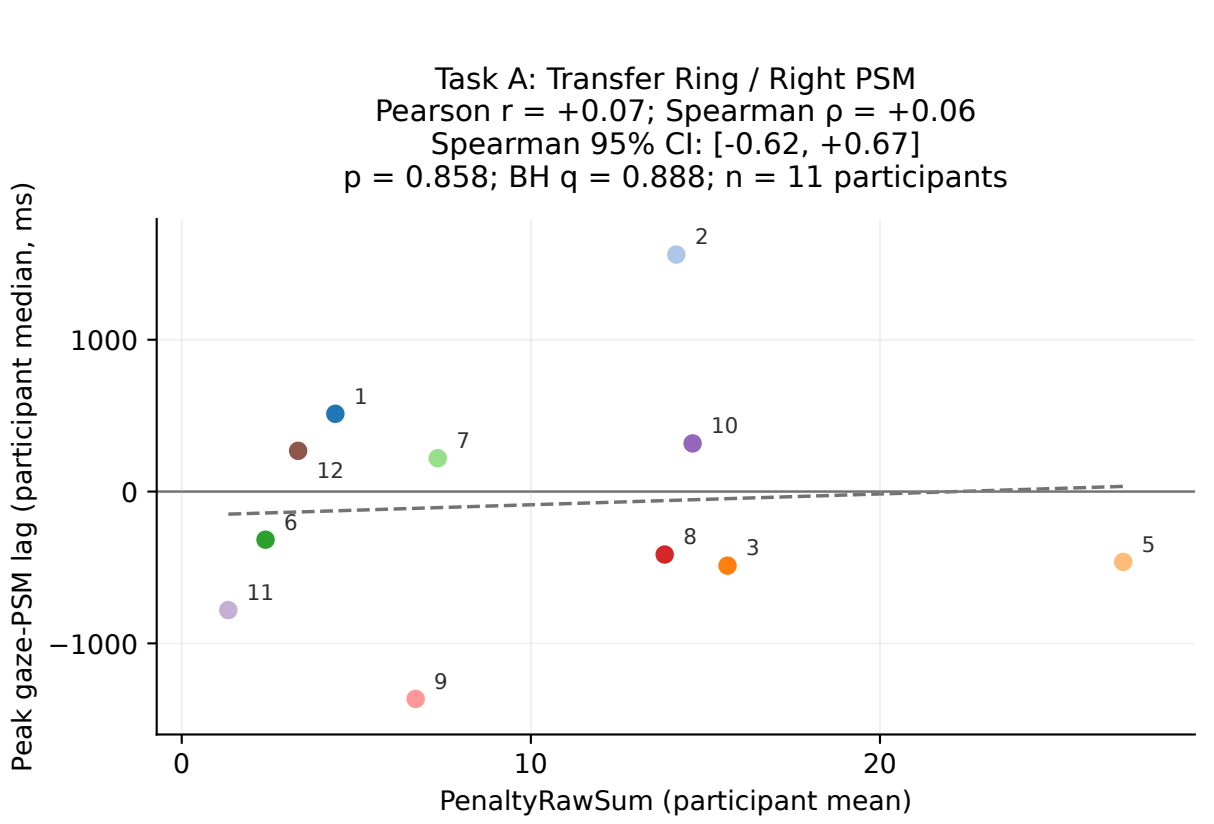


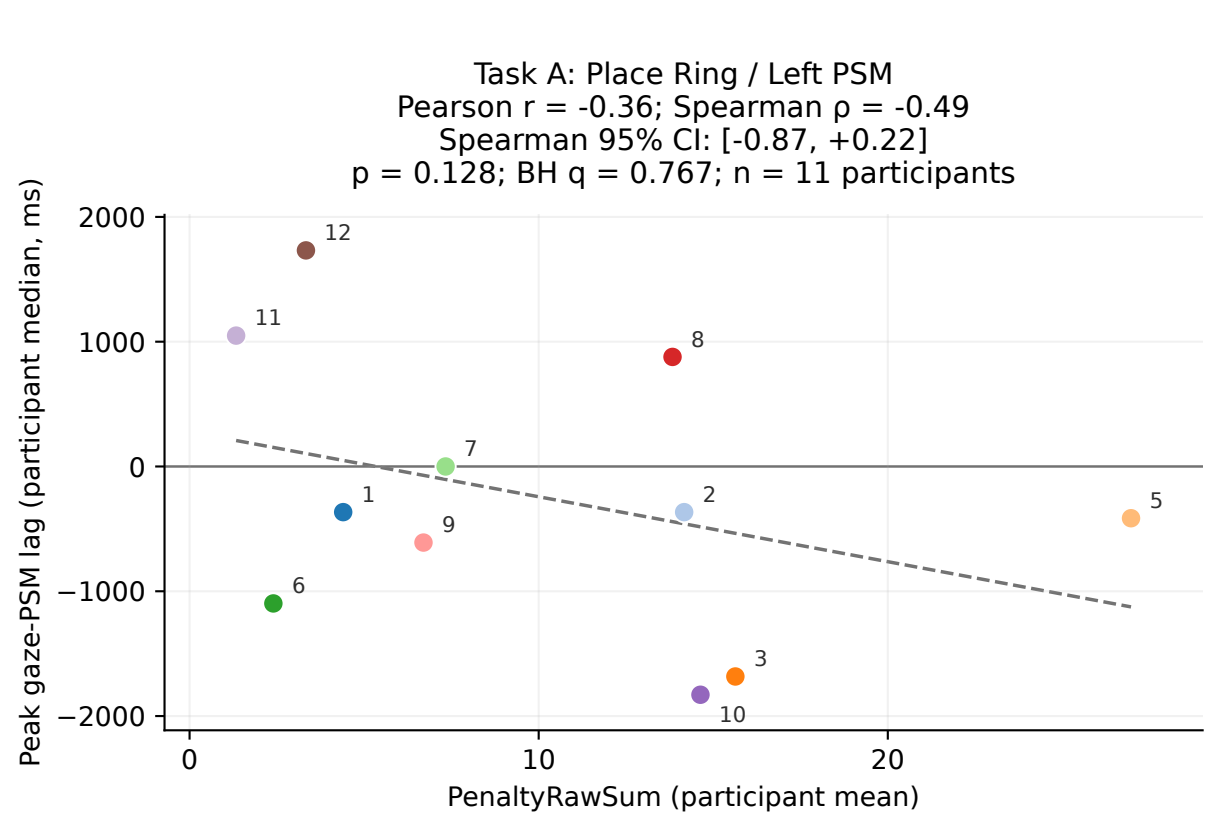


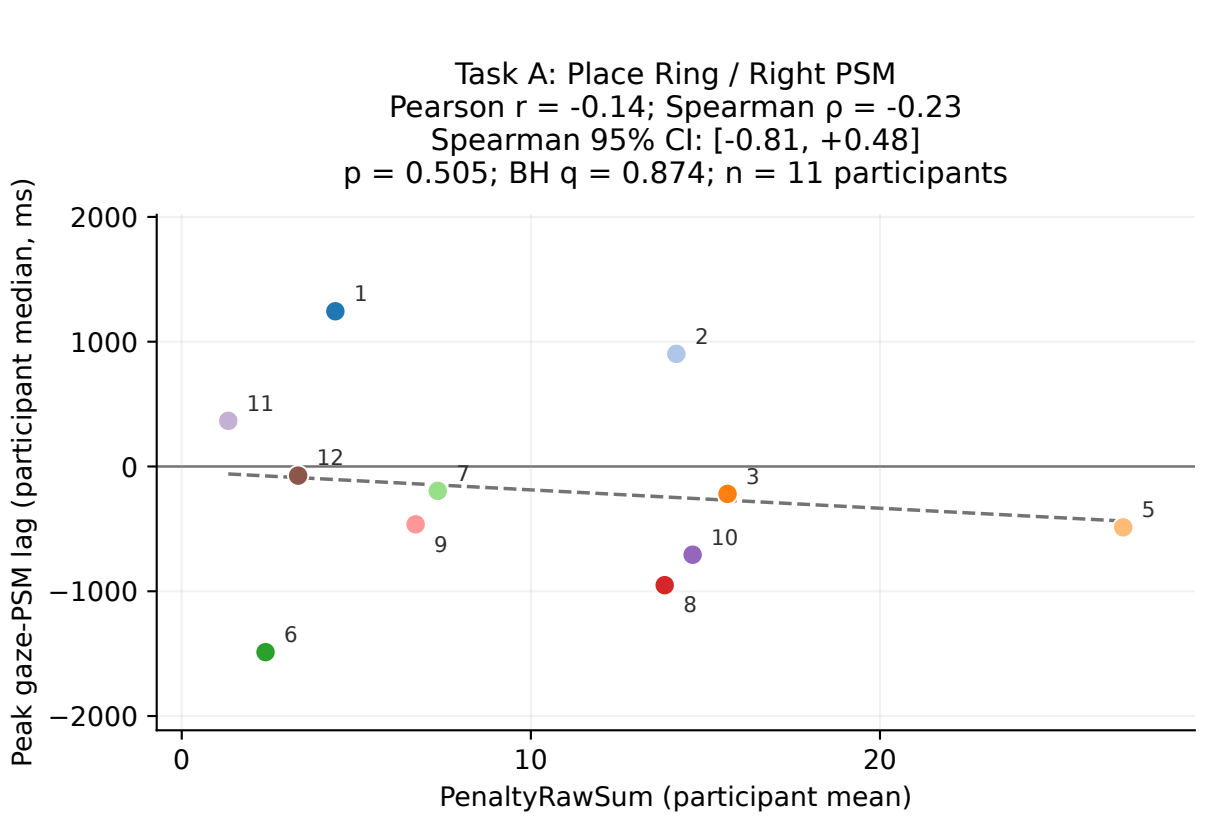



One point per participant; labels show participant IDs. Each point uses the same eligible attempts for PenaltyRawSum and peak lag.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
Positive lag = gaze leads PSM; negative lag = PSM leads gaze. PenaltyRawSum values are used directly; missing values are excluded.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.


Task C: valid-phase peak lag versus PenaltyRawSum Velocity (secondary analysis)

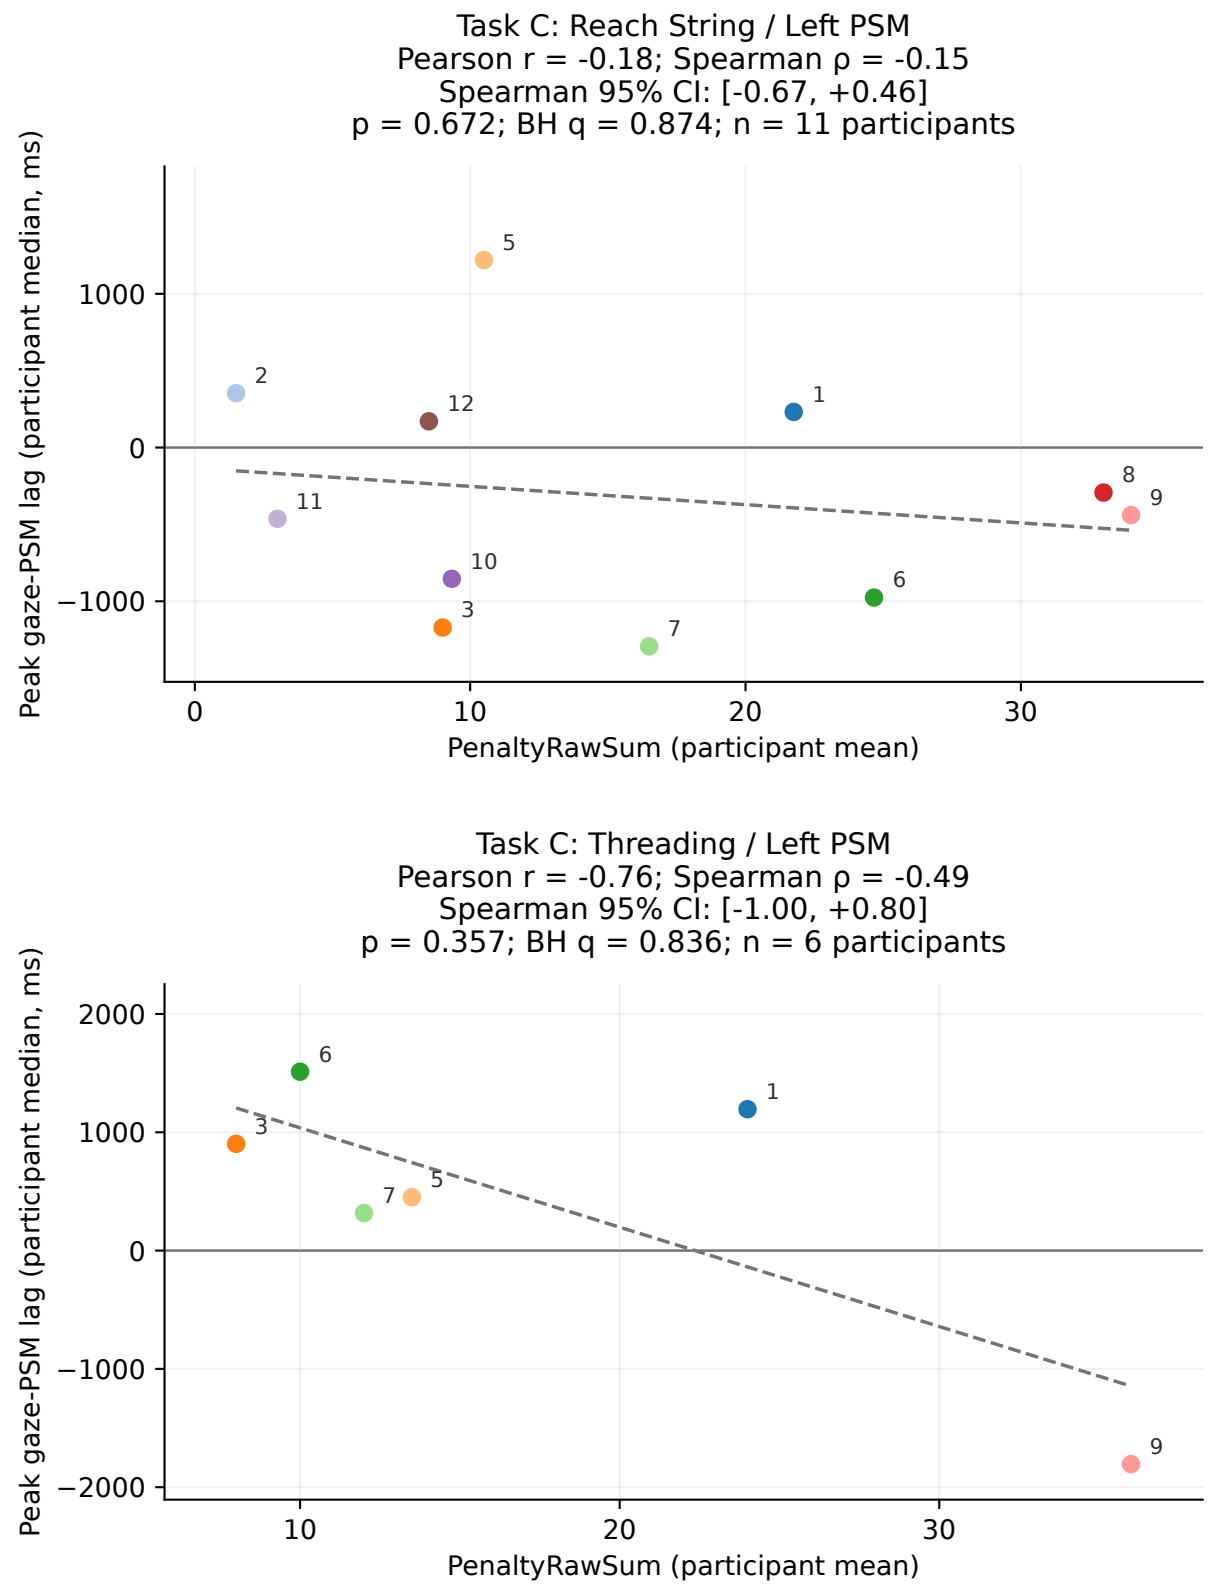


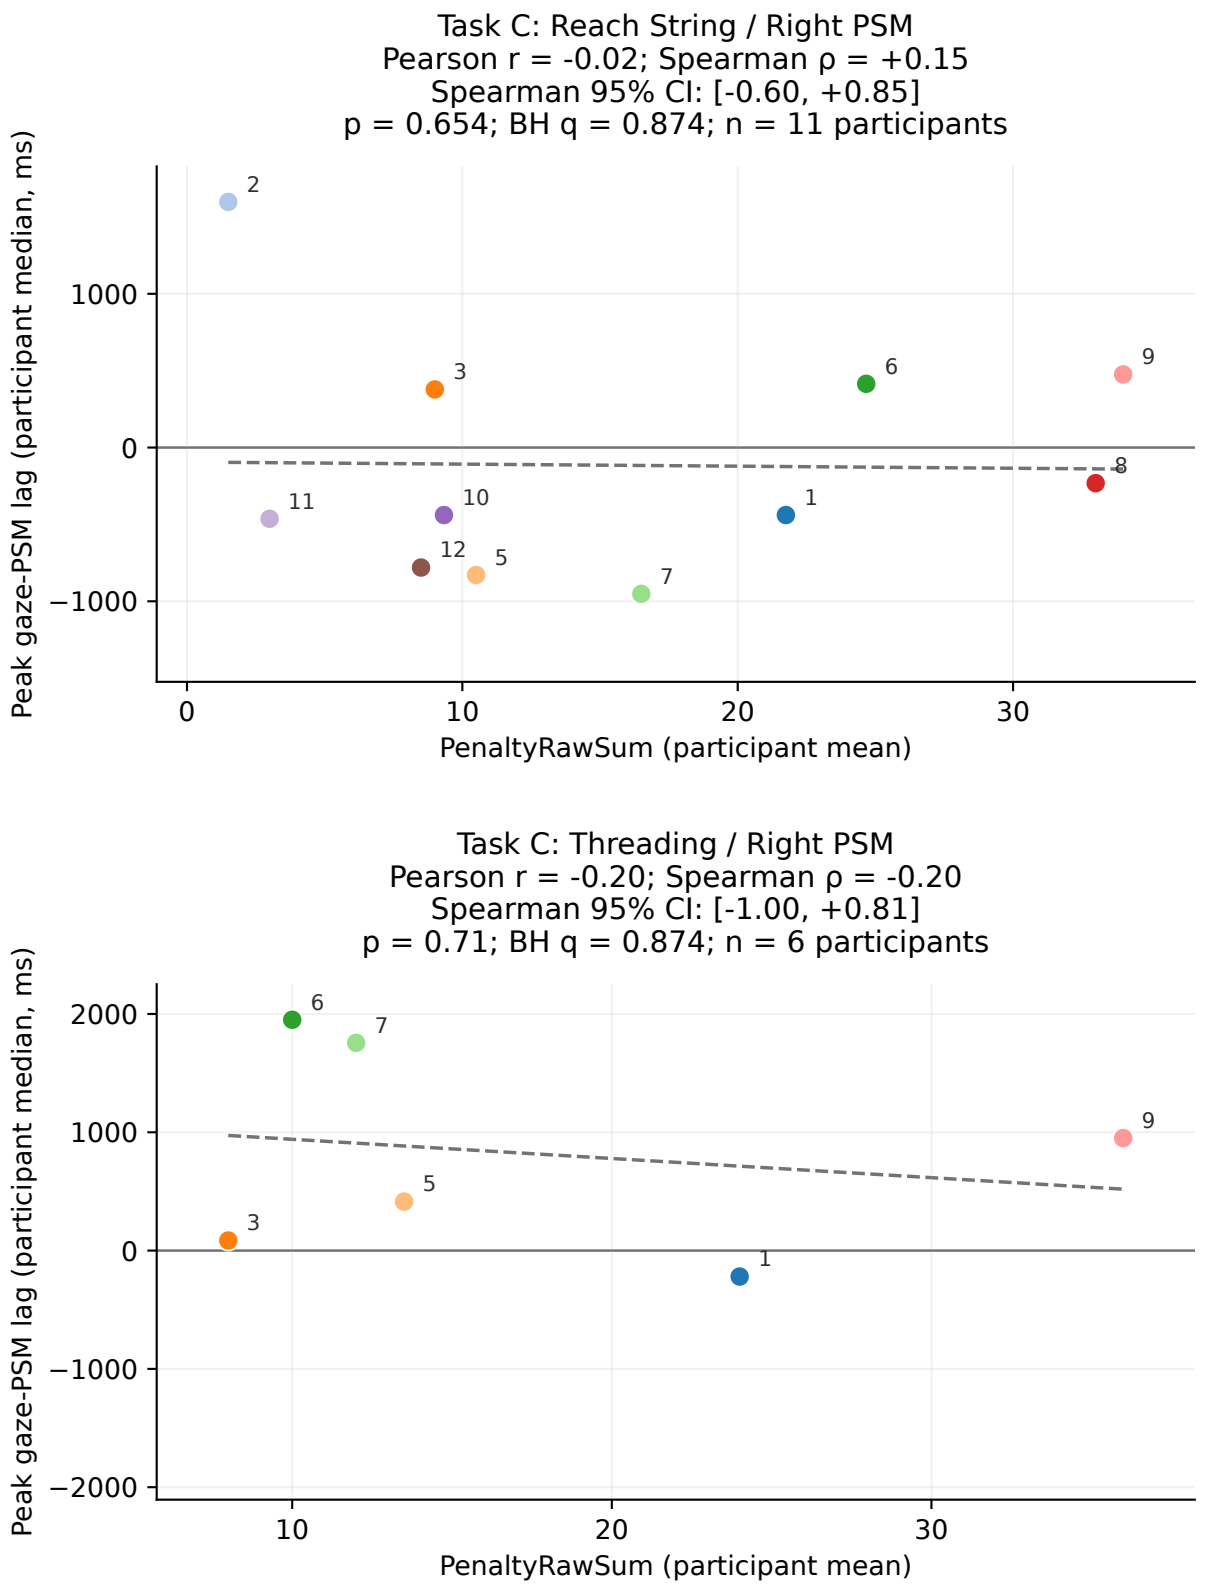

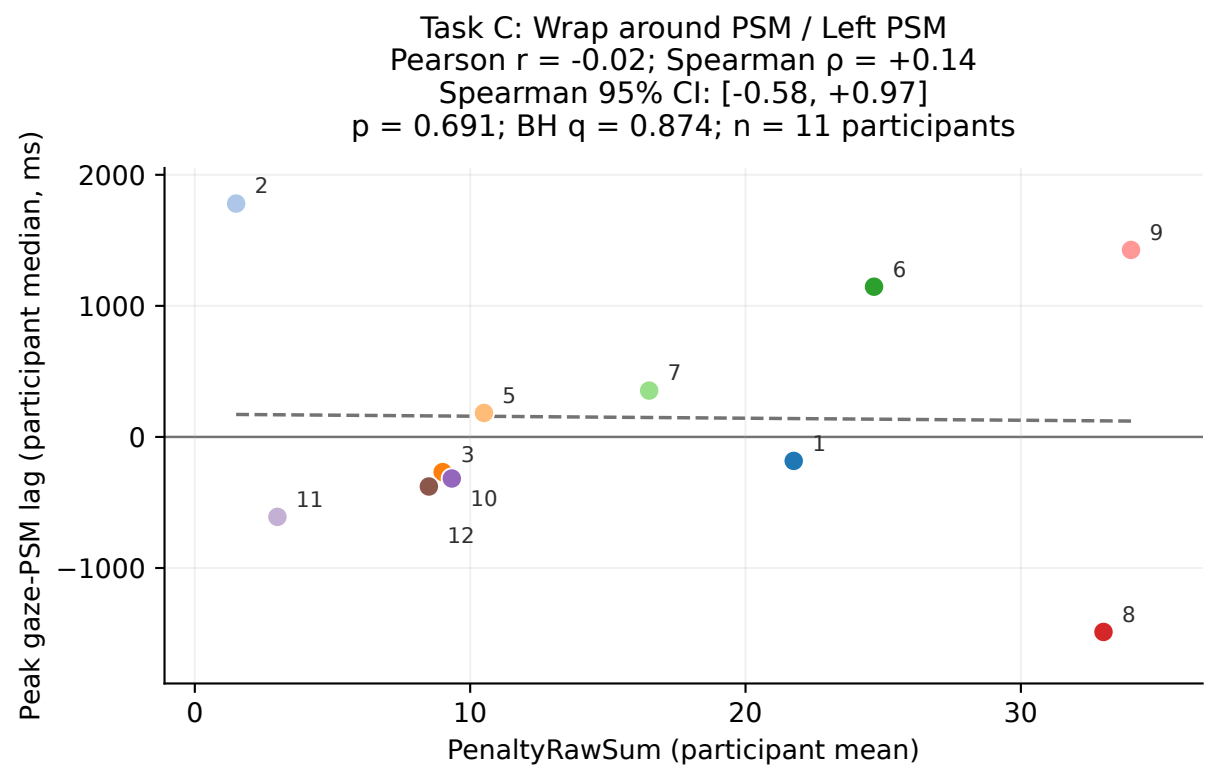

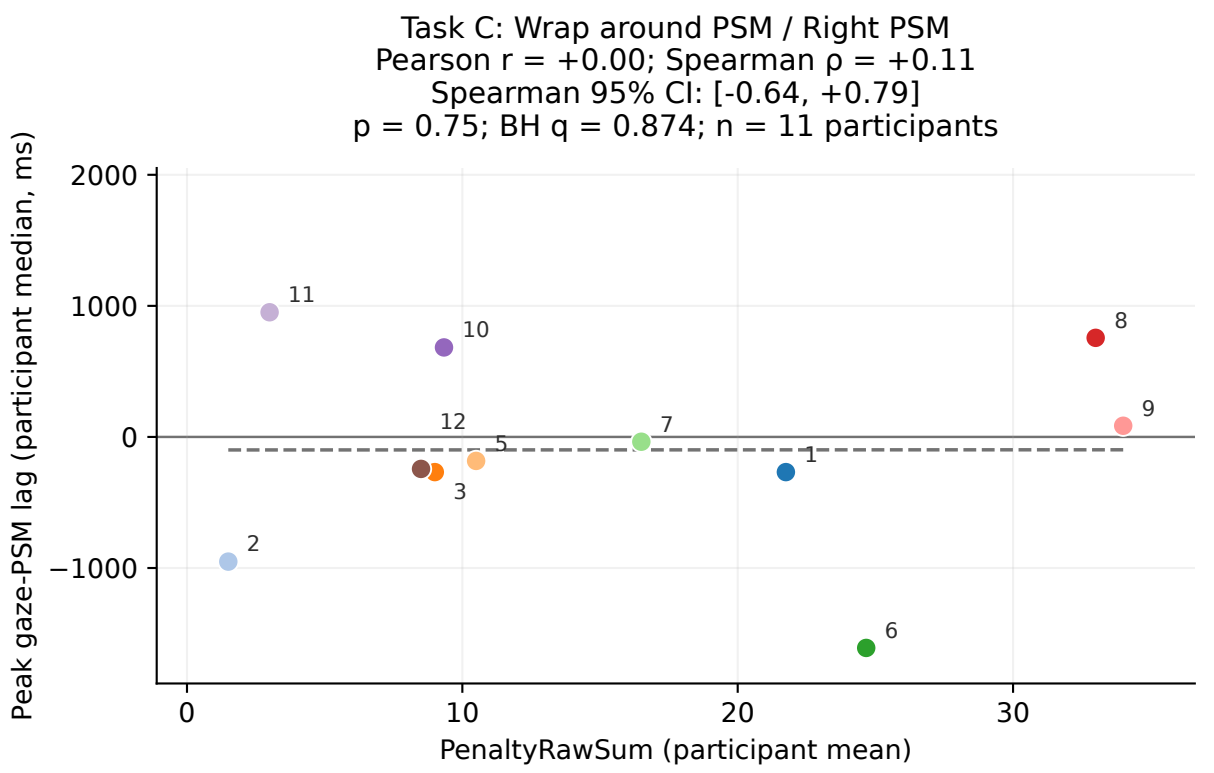

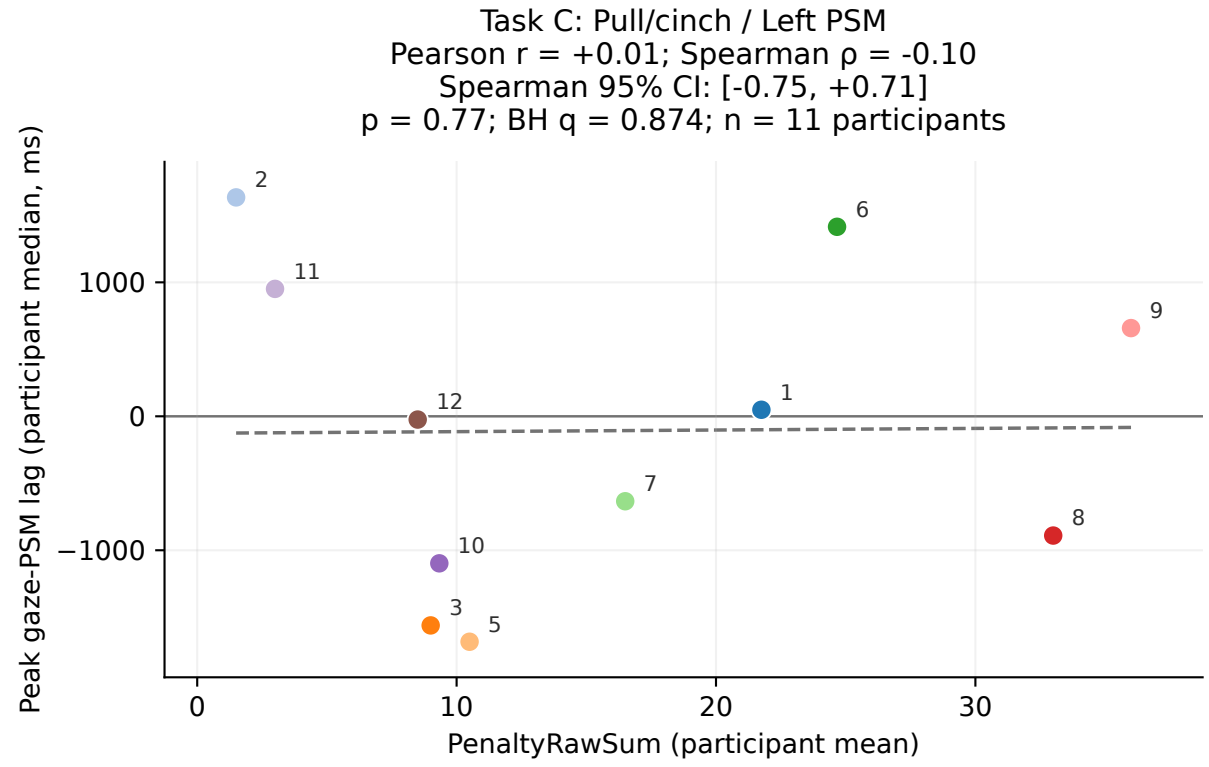

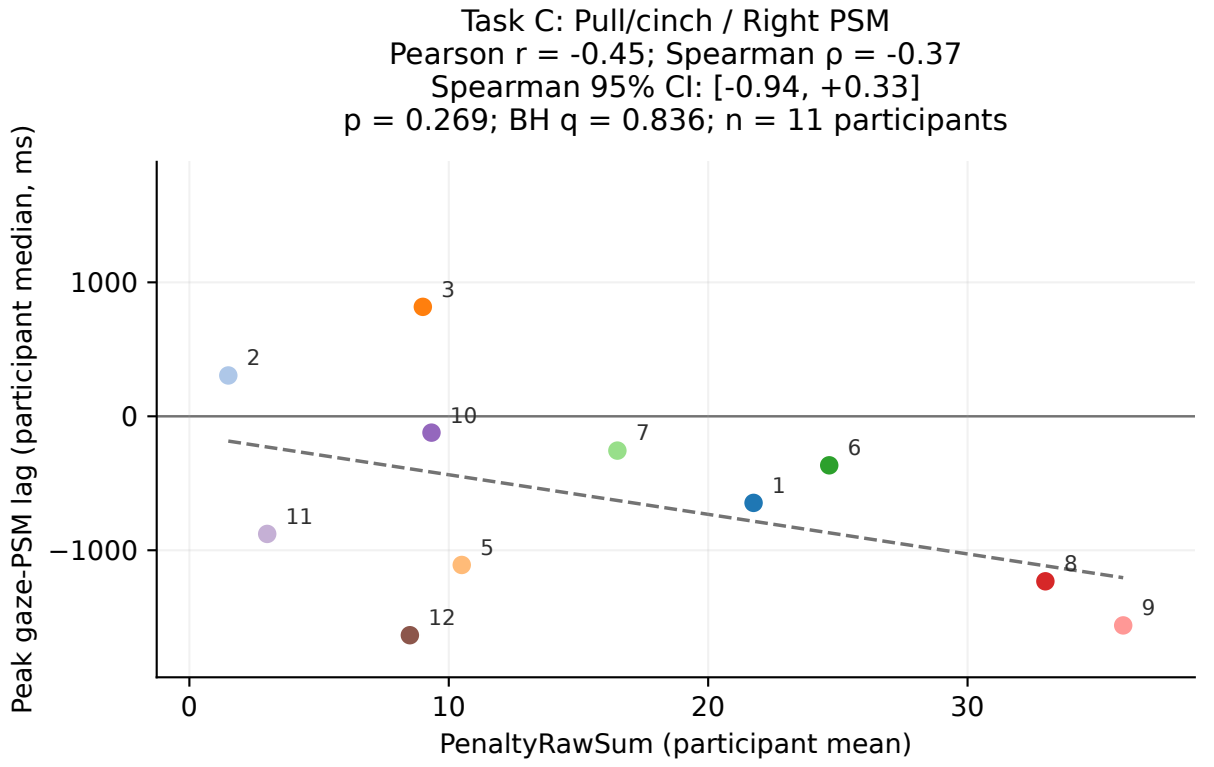

One point per participant; labels show participant IDs. Each point uses the same eligible attempts for PenaltyRawSum and peak lag.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
Positive lag = gaze leads PSM; negative lag = PSM leads gaze. PenaltyRawSum values are used directly; missing values are excluded.
Axes shared within each L/R phase row; ranges can vary between rows. Whole-task panels share axes.