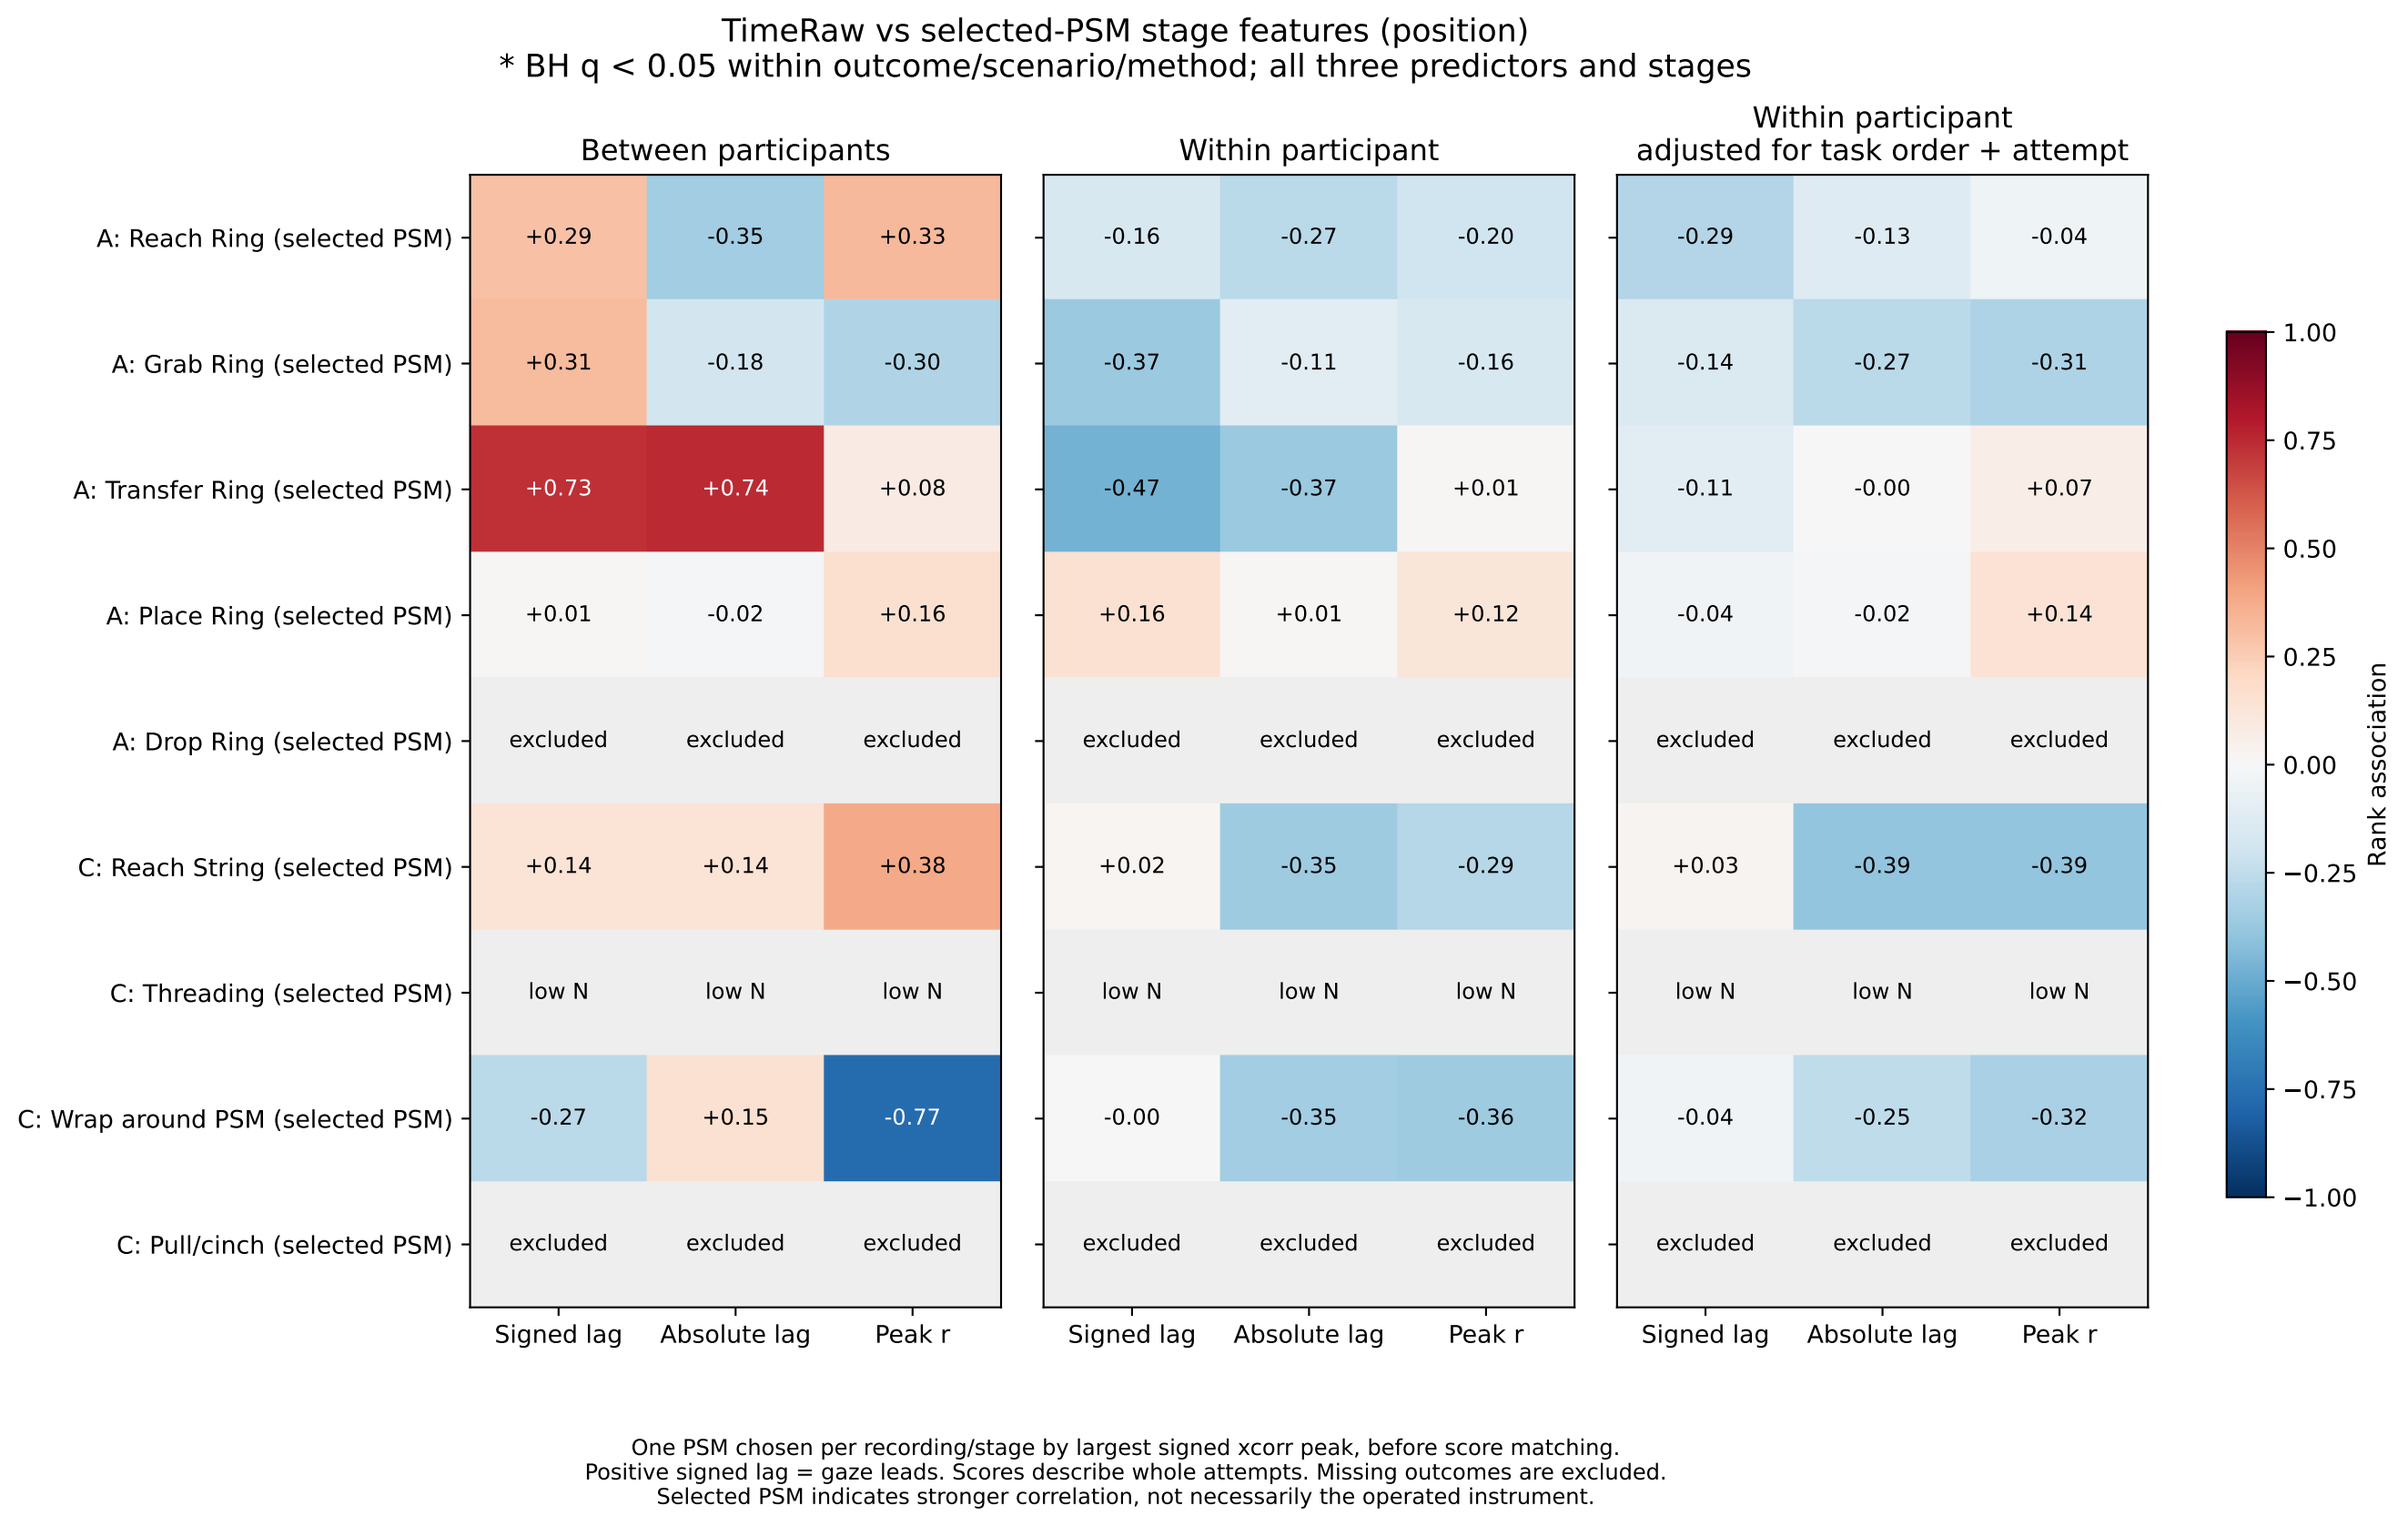
TimeRaw vs selected-PSM stage features (position)
* BH q < 0.05 within outcome/scenario/method; all three predictors and stages
Between participants
Within participant
Within participant
adjusted for task order + attempt
A: Reach Ring (selected PSM)
A: Grab Ring (selected PSM)
A: Transfer Ring (selected PSM)
A: Place Ring (selected PSM)
A: Drop Ring (selected PSM)
C: Reach String (selected PSM)
C: Threading (selected PSM)
C: Wrap around PSM (selected PSM)
C: Pull/cinch (selected PSM)
+0.29 -0.35 +0.33
-0.16 -0.27 -0.20
-0.29 -0.13 -0.04
+0.31 -0.18 -0.30
-0.37 -0.11 -0.16
-0.14 -0.27 -0.31
+0.73 +0.74 +0.08
-0.47 -0.37 +0.01
-0.11 -0.00 +0.07
+0.01 -0.02 +0.16
+0.16 +0.01 +0.12
-0.04 -0.02 +0.14
excluded excluded excluded
excluded excluded excluded
excluded excluded excluded
+0.14 +0.14 +0.38
+0.02 -0.35 -0.29
+0.03 -0.39 -0.39
low N low N low N
low N low N low N
low N low N low N
-0.27 +0.15 -0.77
-0.00 -0.35 -0.36
-0.04 -0.25 -0.32
excluded excluded excluded
excluded excluded excluded
excluded excluded excluded
Signed lag
Absolute lag
Peak r
Rank association
1.00
0.75
0.50
0.25
0.00
−0.25
−0.50
−0.75
−1.00
One PSM chosen per recording/stage by largest signed xcorr peak, before score matching.
Positive signed lag = gaze leads. Scores describe whole attempts. Missing outcomes are excluded.
Selected PSM indicates stronger correlation, not necessarily the operated instrument.