Task A: valid-phase peak lag versus PenaltyRawSum Velocity (secondary analysis)

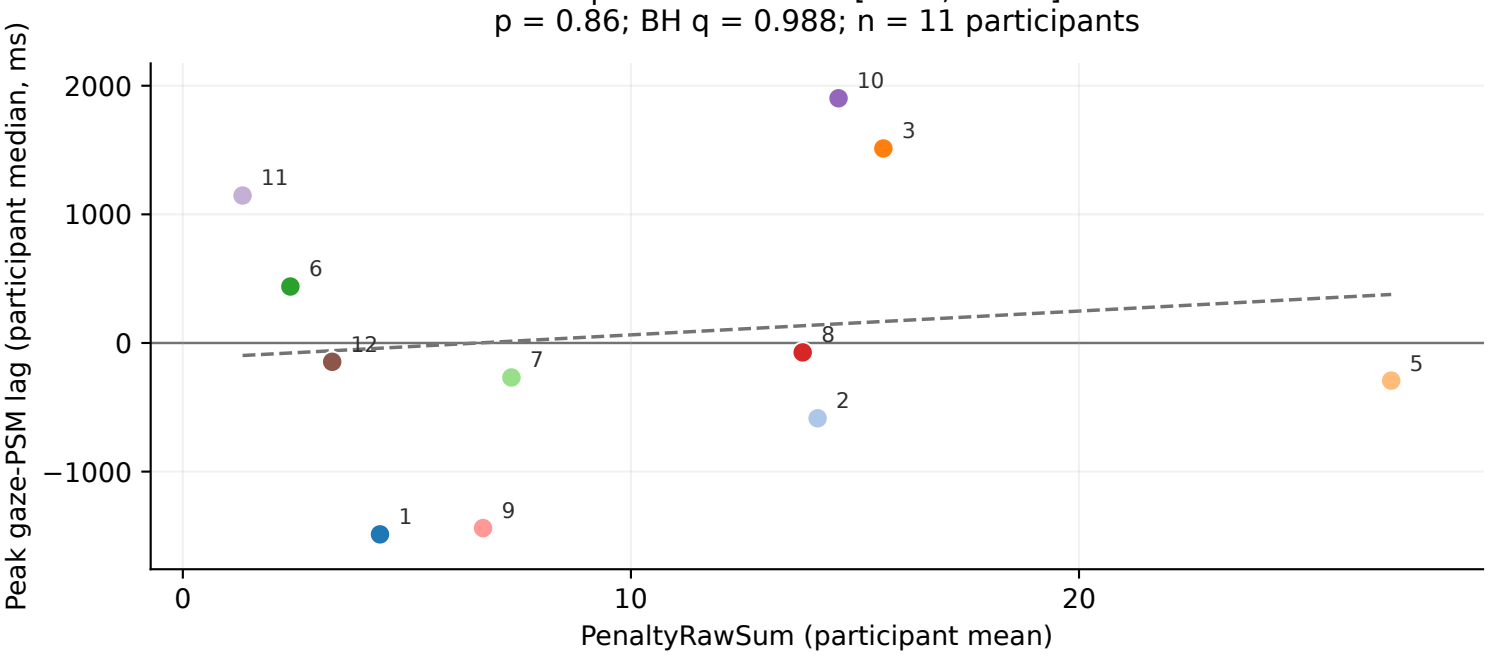

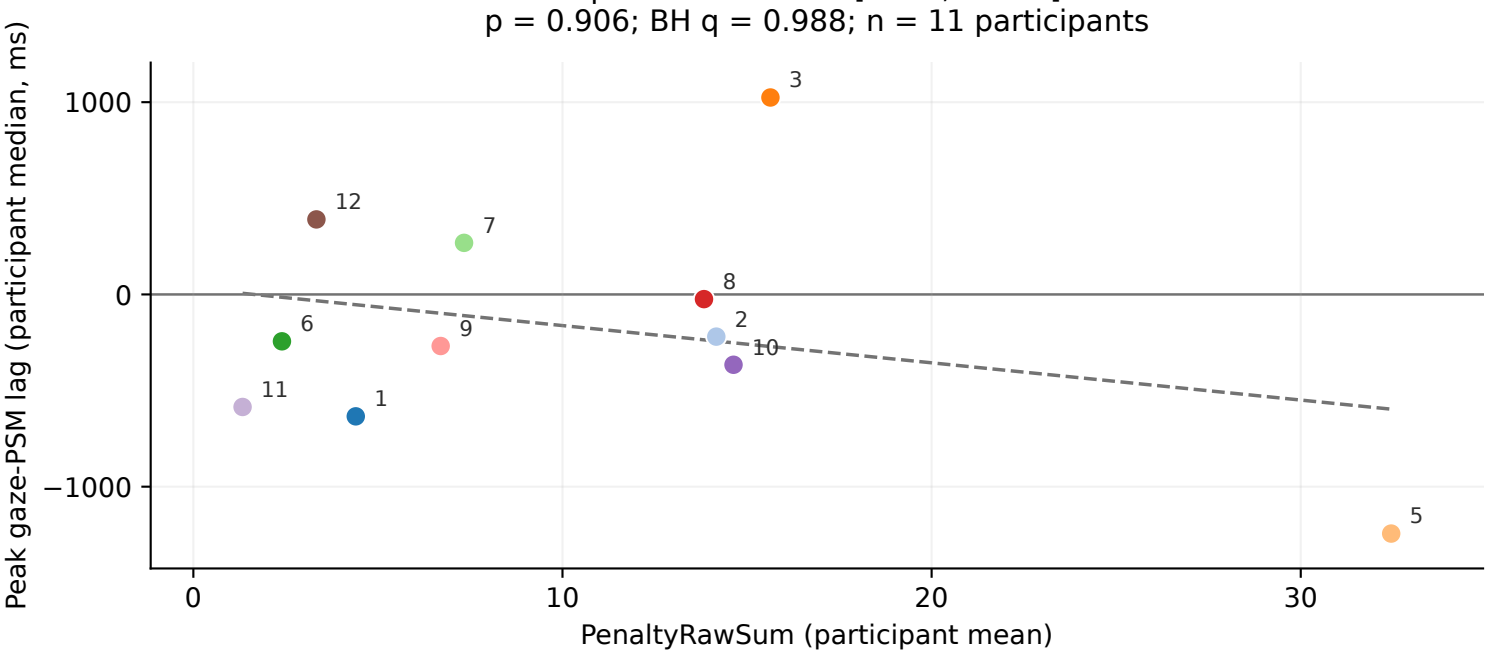

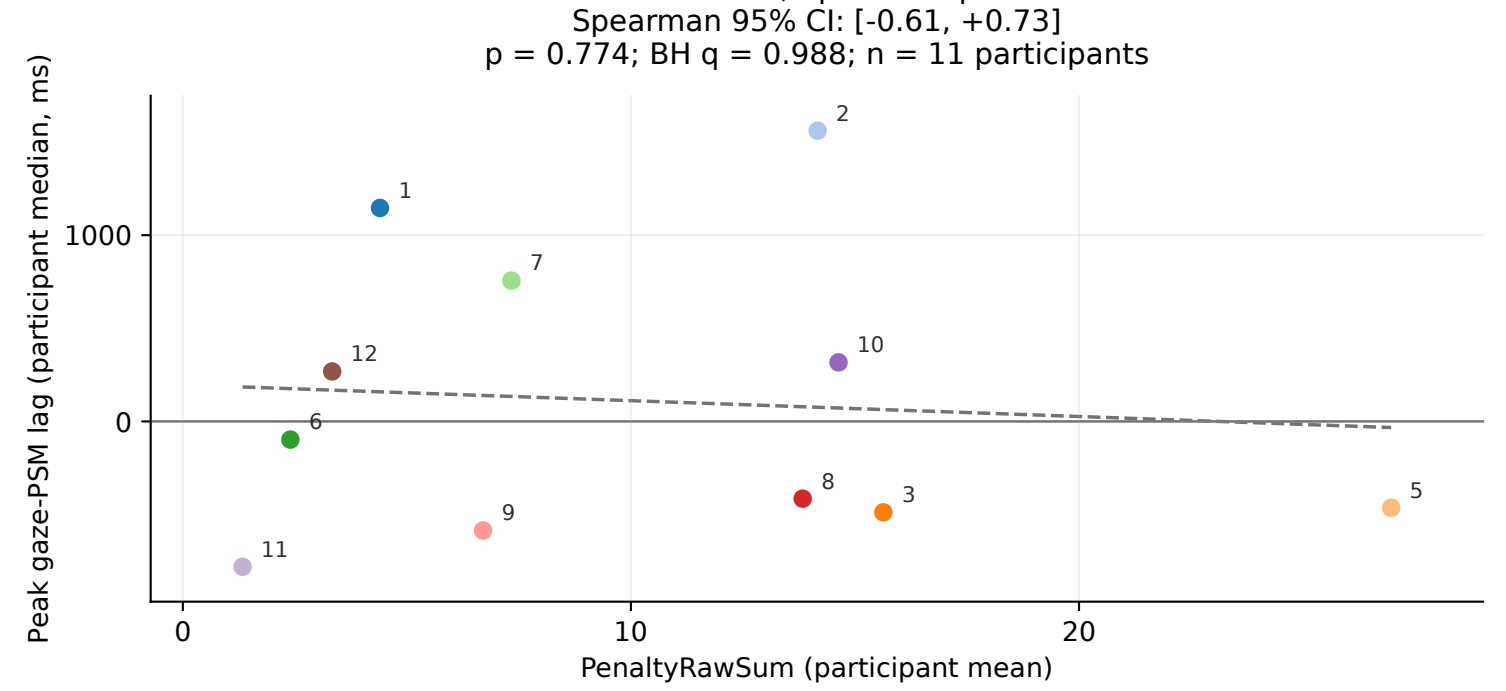

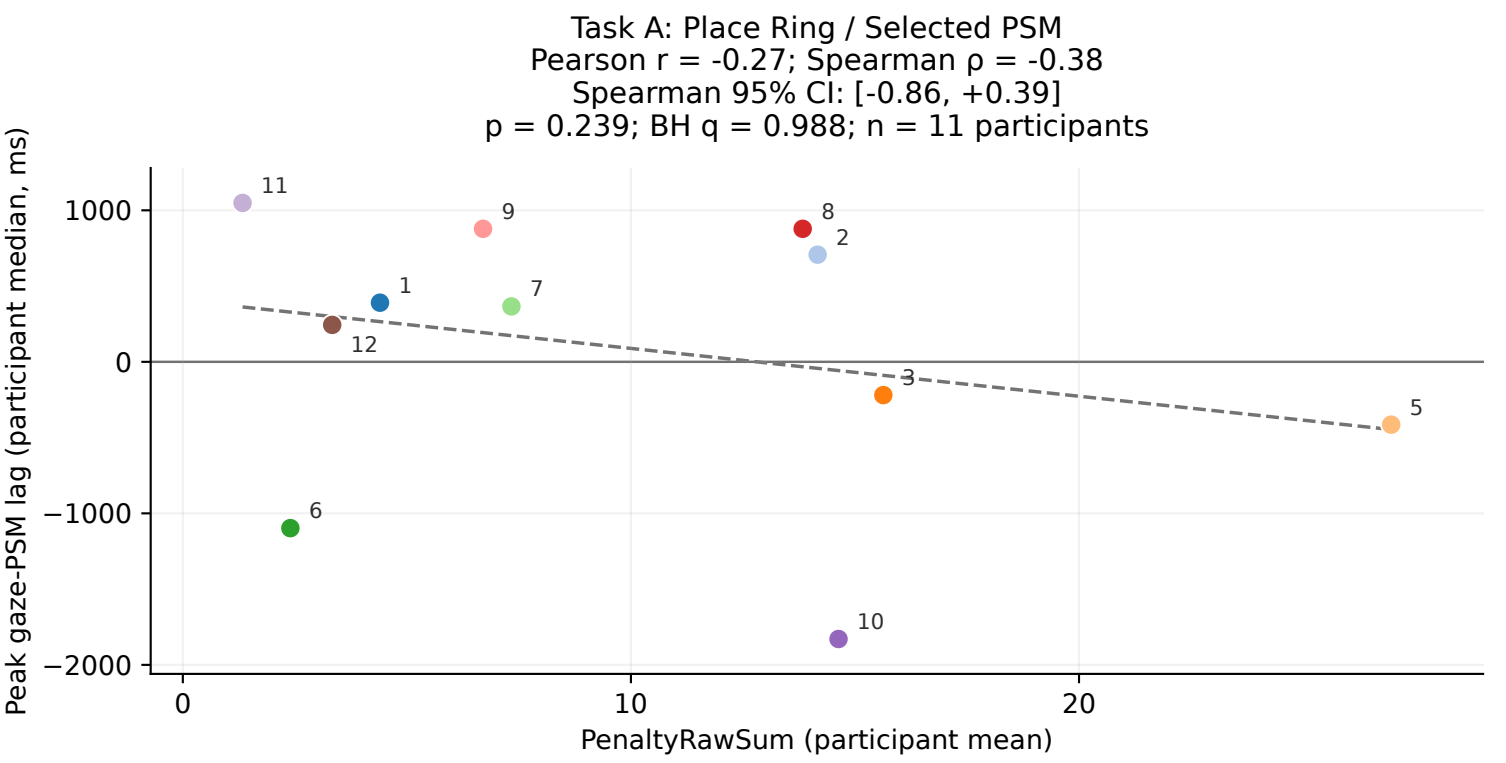

One point per participant; labels show participant IDs. Each point uses the same eligible attempts for PenaltyRawSum and peak lag.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
Positive lag = gaze leads PSM; negative lag = PSM leads gaze. PenaltyRawSum values are used directly; missing values are excluded.
One PSM selected per recording/stage by signed xcorr peak, before score matching.
Selection identifies stronger correlation, not the operated instrument. Axes vary by stage.

Task C: valid-phase peak lag versus PenaltyRawSum Velocity (secondary analysis)

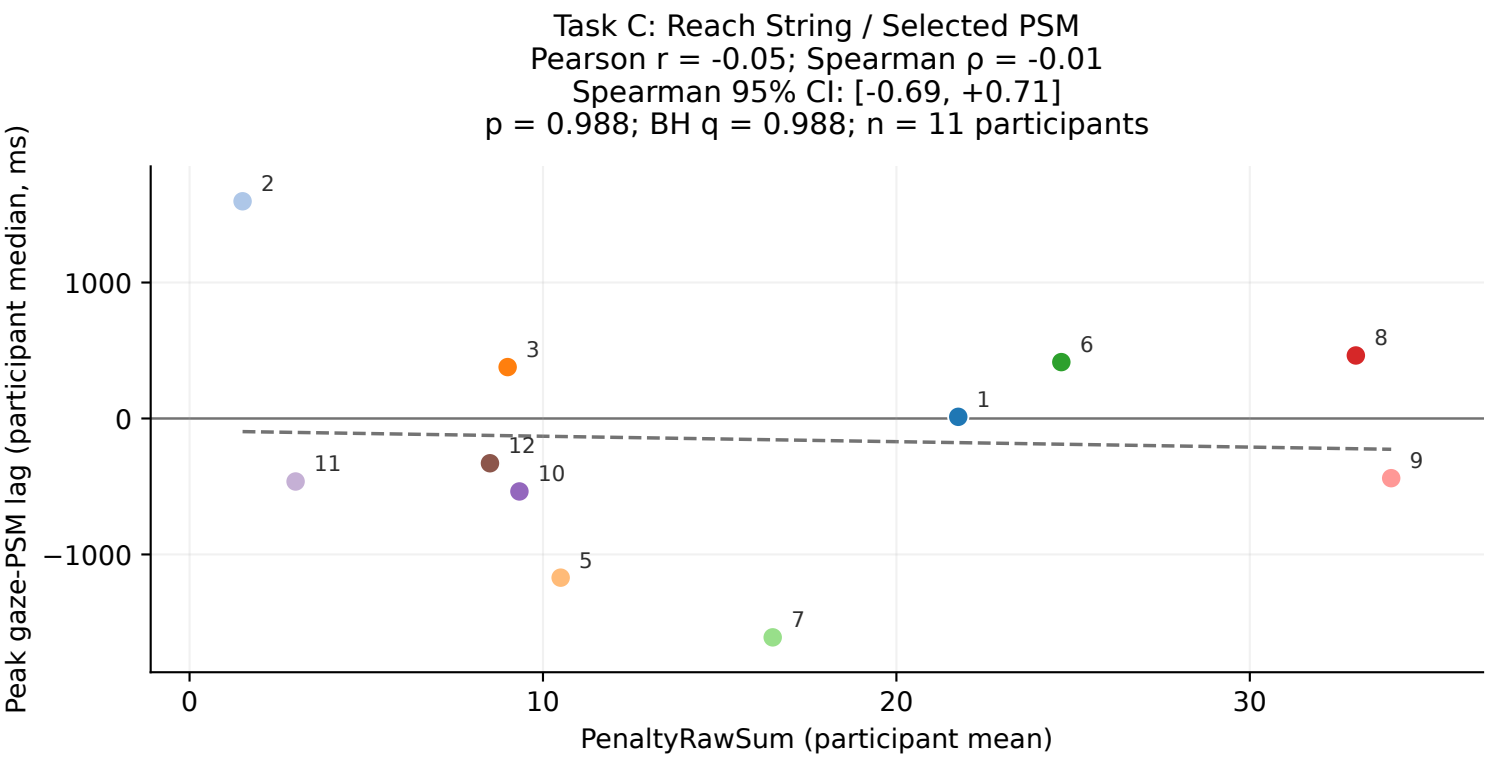

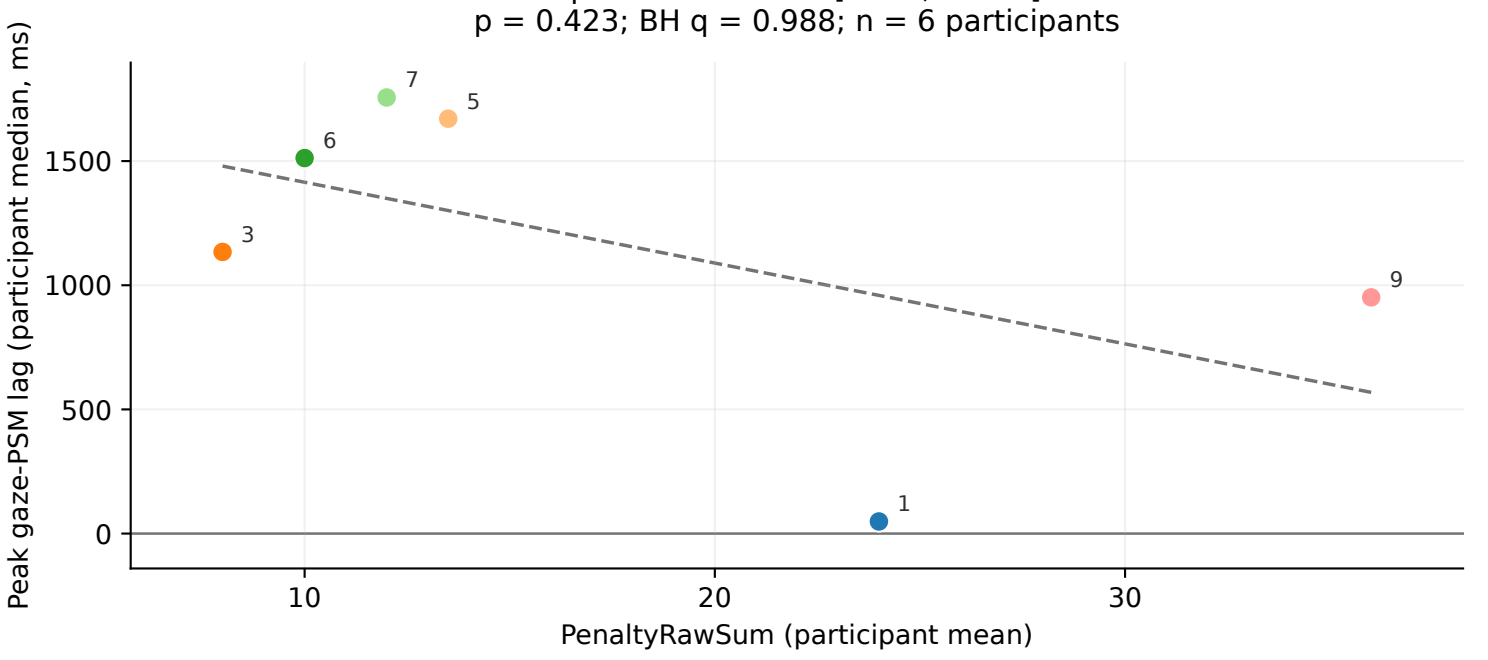

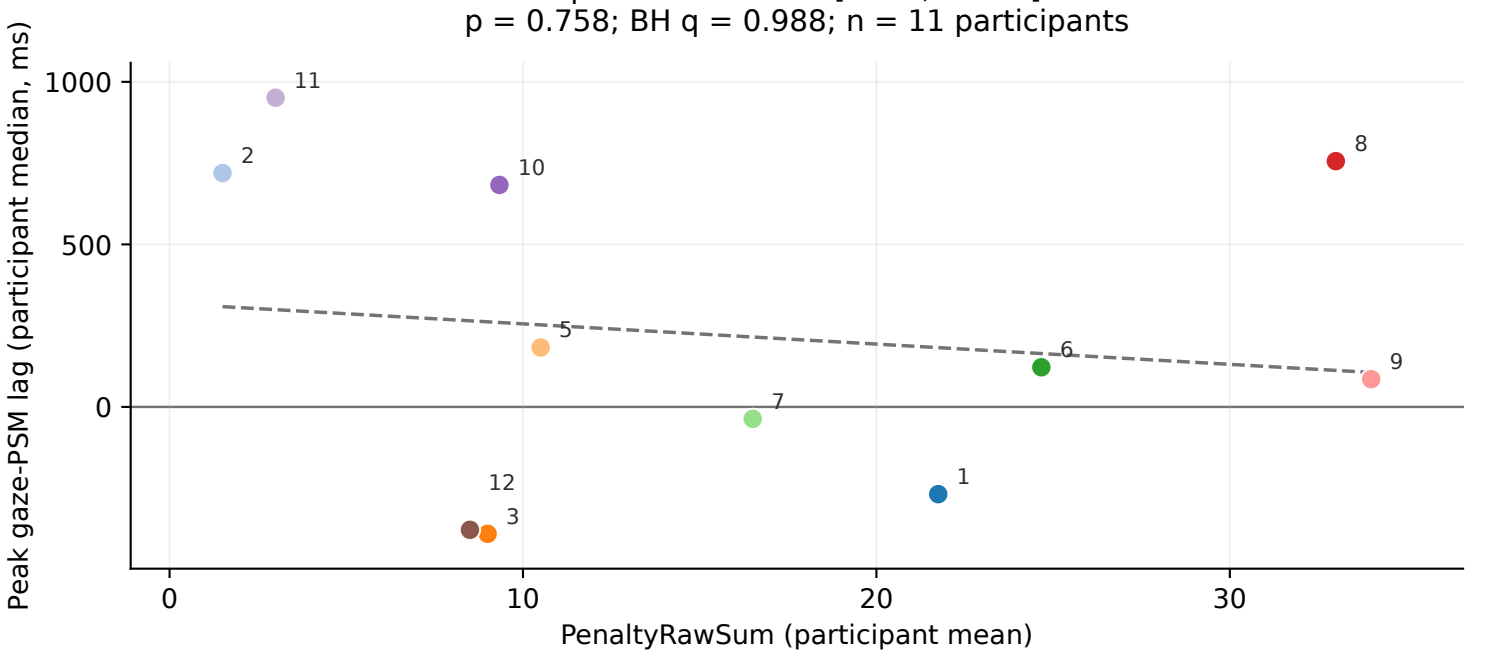

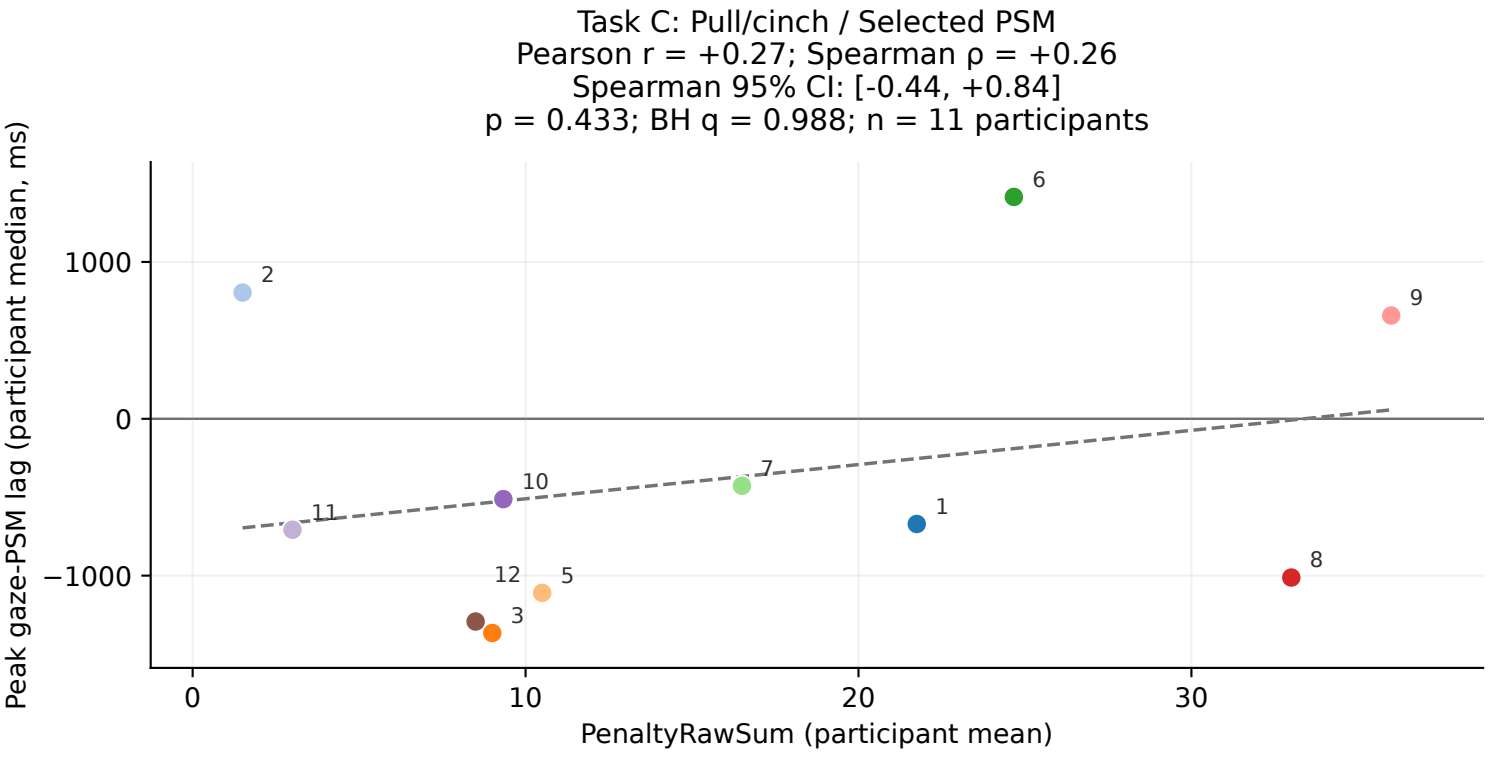

One point per participant; labels show participant IDs. Each point uses the same eligible attempts for PenaltyRawSum and peak lag.
Spearman 95% CIs: exploratory participant percentile bootstrap, unadjusted. p: permutation; q: BH; Pearson r/fit: descriptive.
CI unreliable: <97.5% defined bootstrap draws. BH family spans phases and features; phase scores are whole-attempt.
Positive lag = gaze leads PSM; negative lag = PSM leads gaze. PenaltyRawSum values are used directly; missing values are excluded.
One PSM selected per recording/stage by signed xcorr peak, before score matching.
Selection identifies stronger correlation, not the operated instrument. Axes vary by stage.