



GT84 / scoring coverage and score distributions

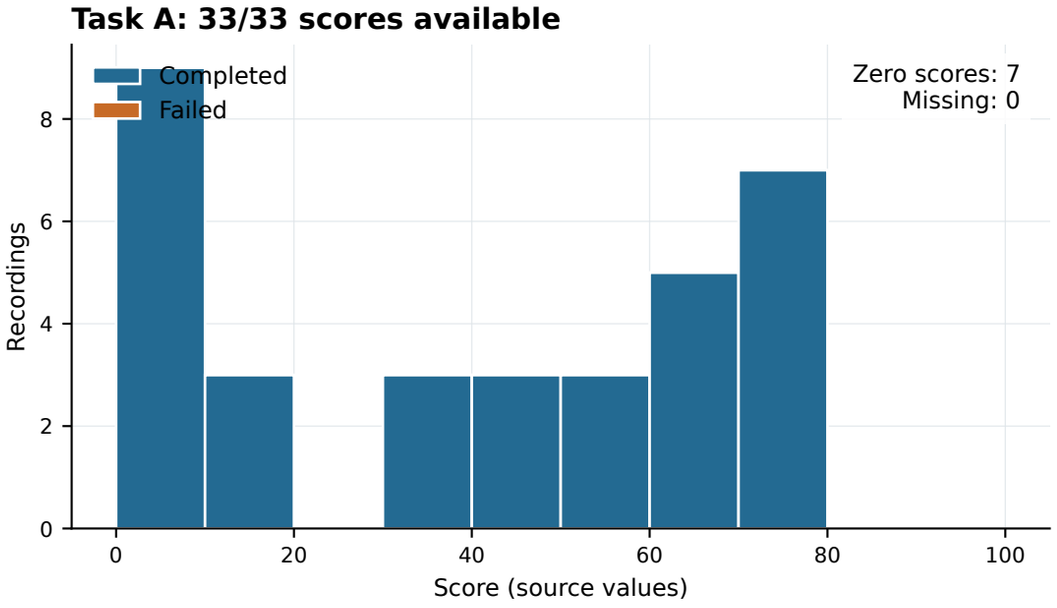

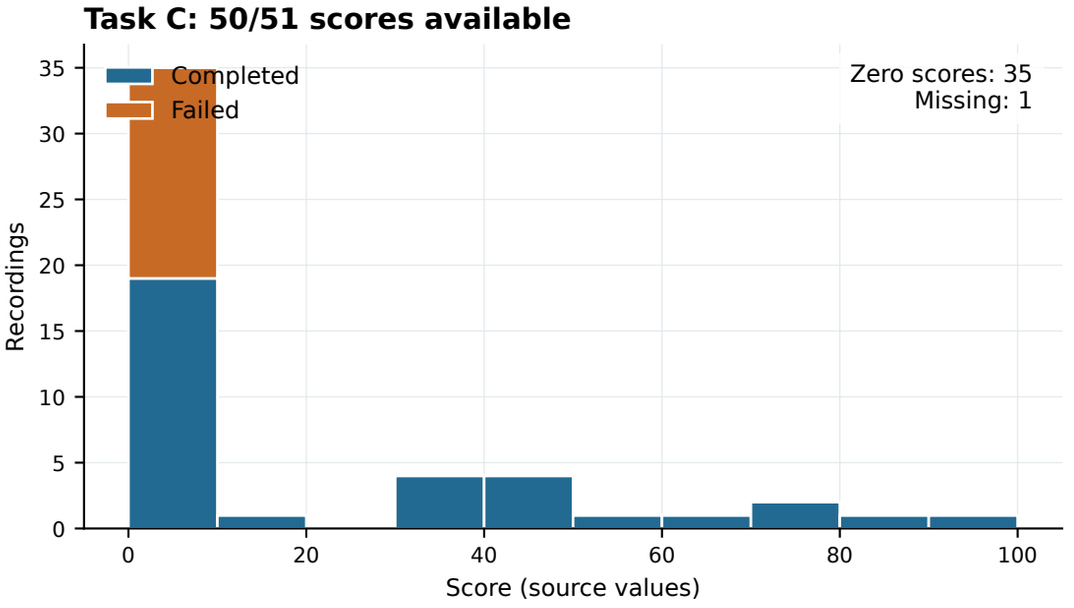


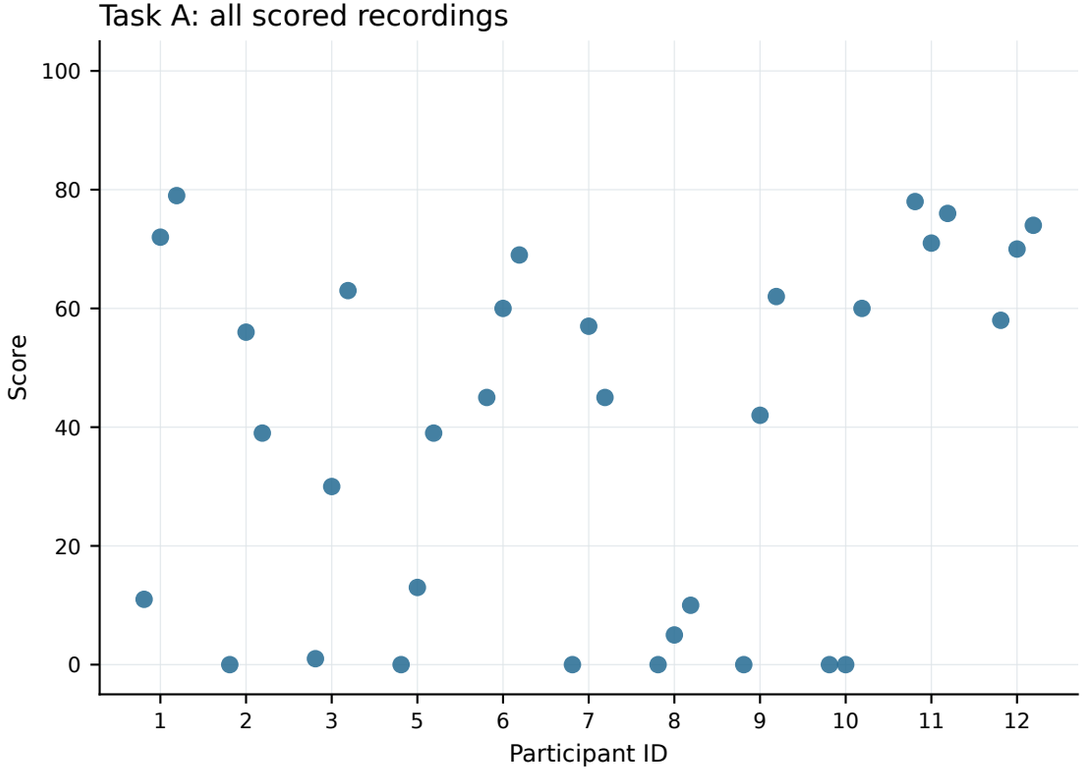

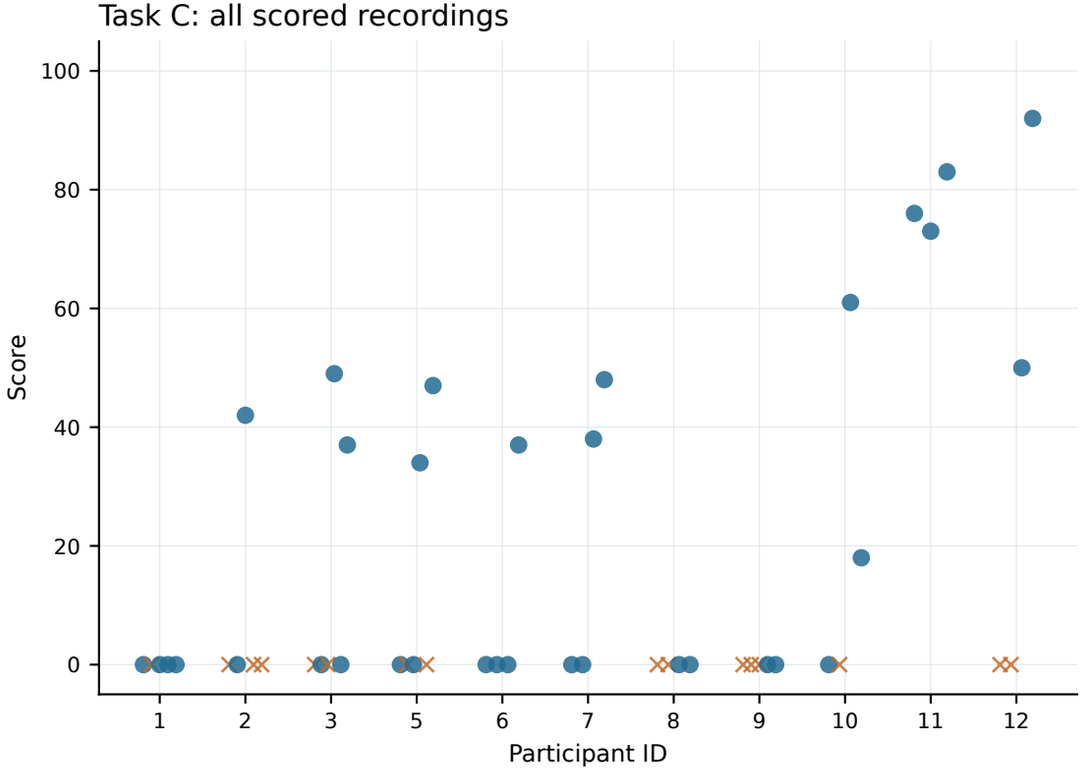


One point = one recording. Genuine zero scores are retained; missing scores are not set to zero. Before stage-specific support filtering.


Primary position / peak-r analysis coverage

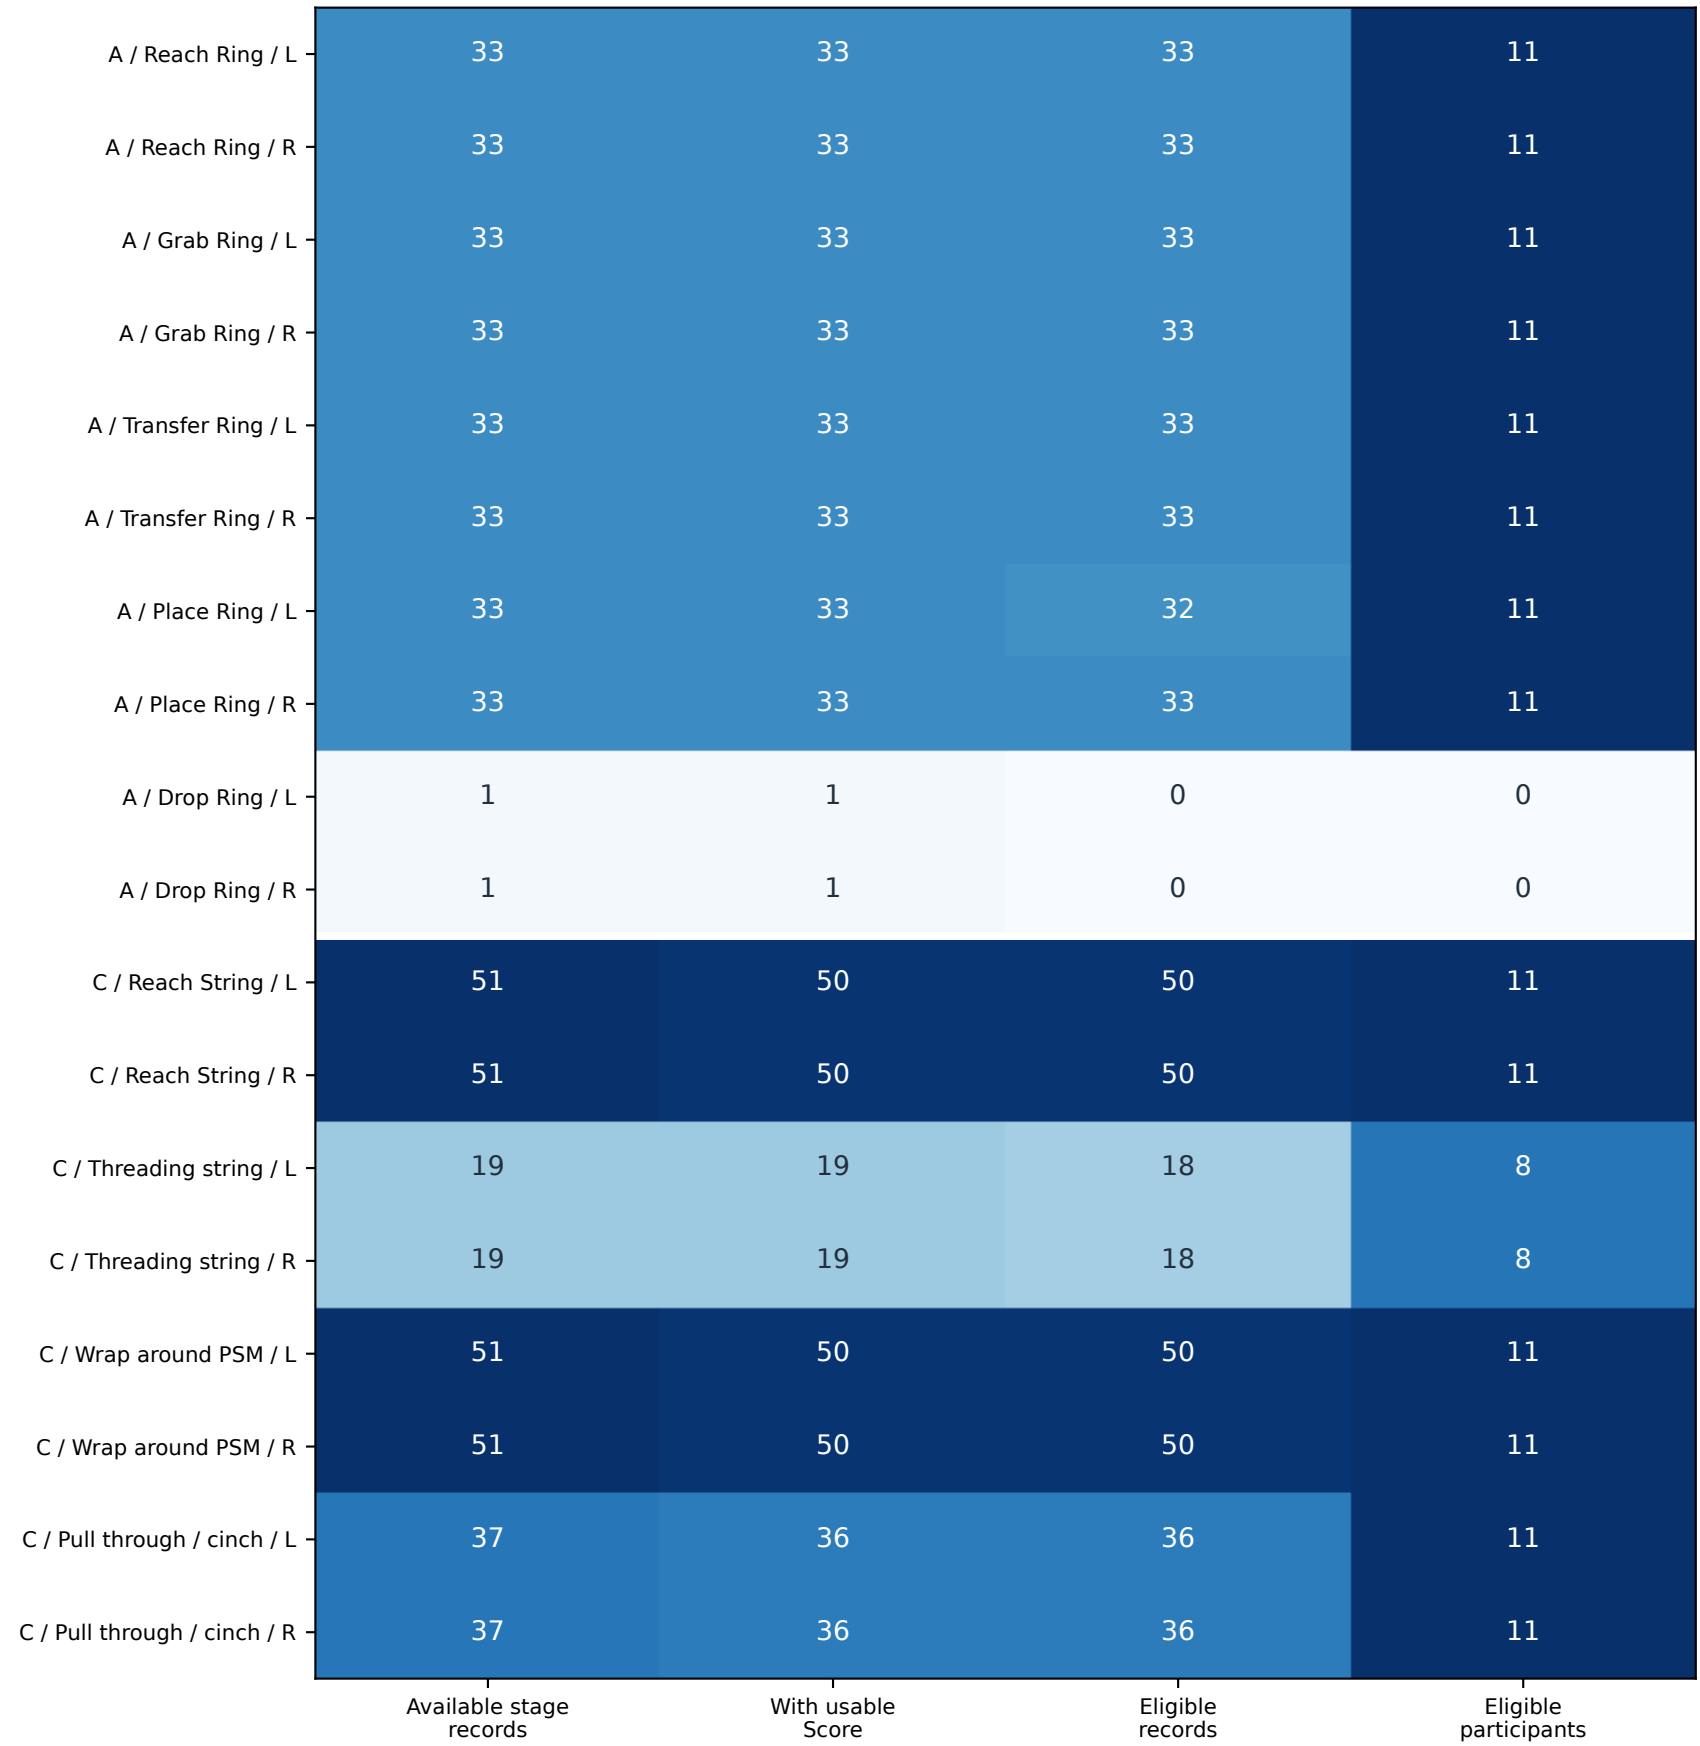



Counts shown explicitly. Color uses separate record (0–51) and participant (0–11) scales.
Fixed left/right sides; complete lag support and usable Score are required. Zero coverage remains visible.


Task A / Peak gaze-PSM correlation vs Score

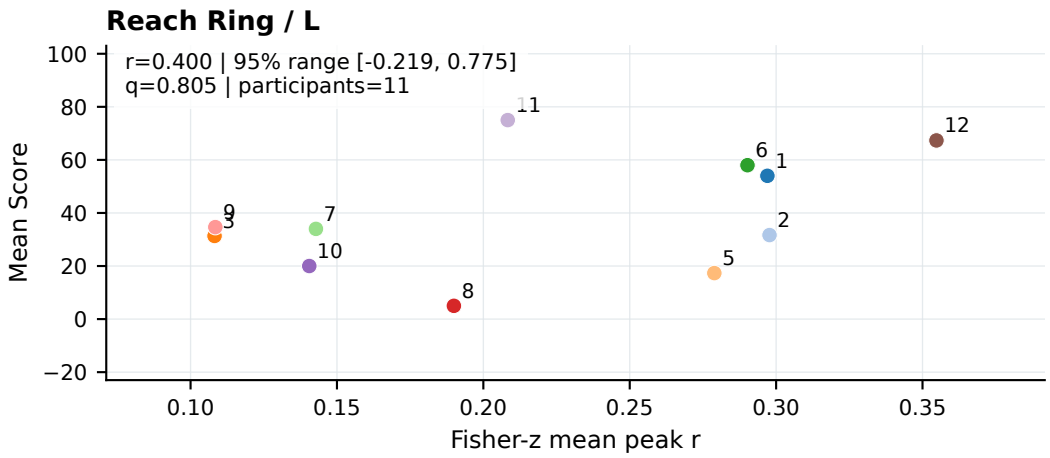


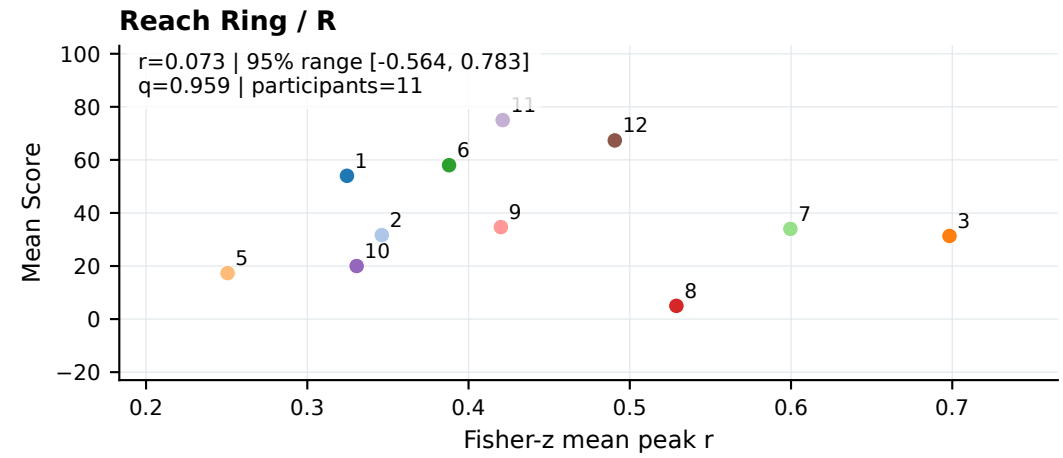


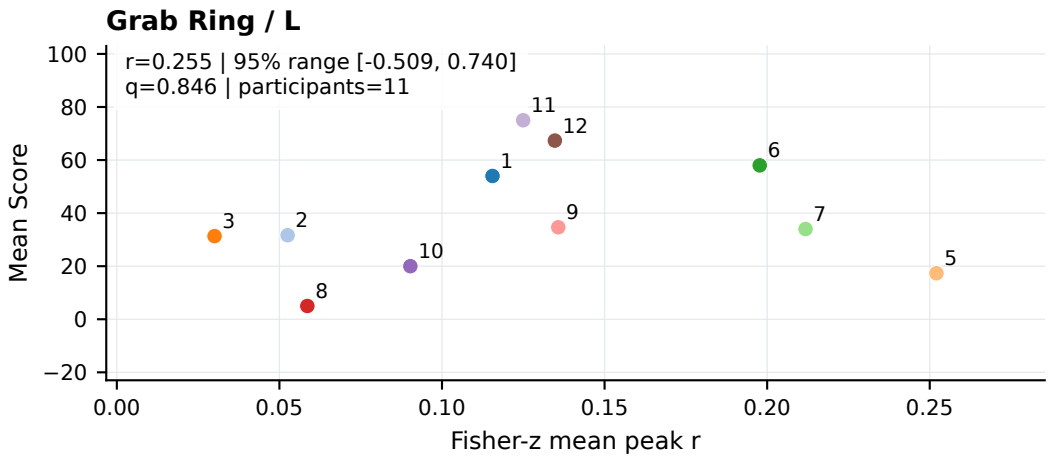


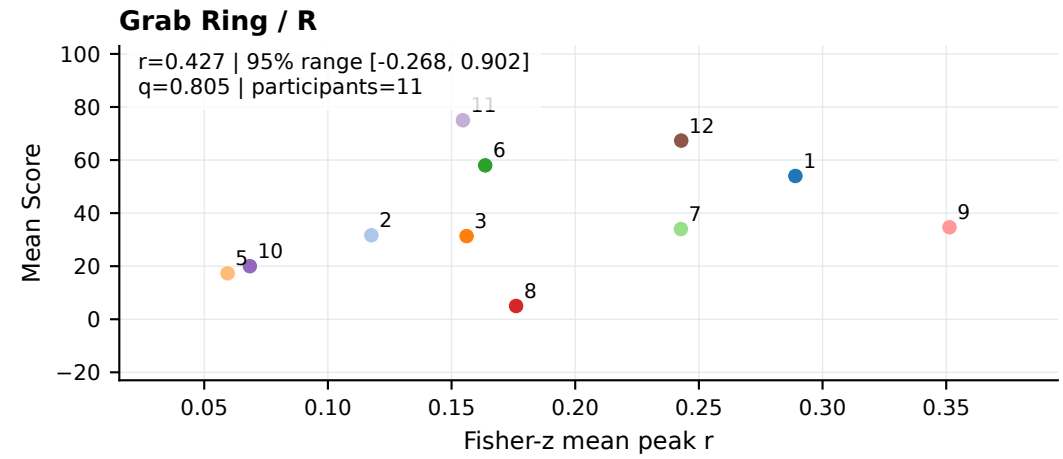


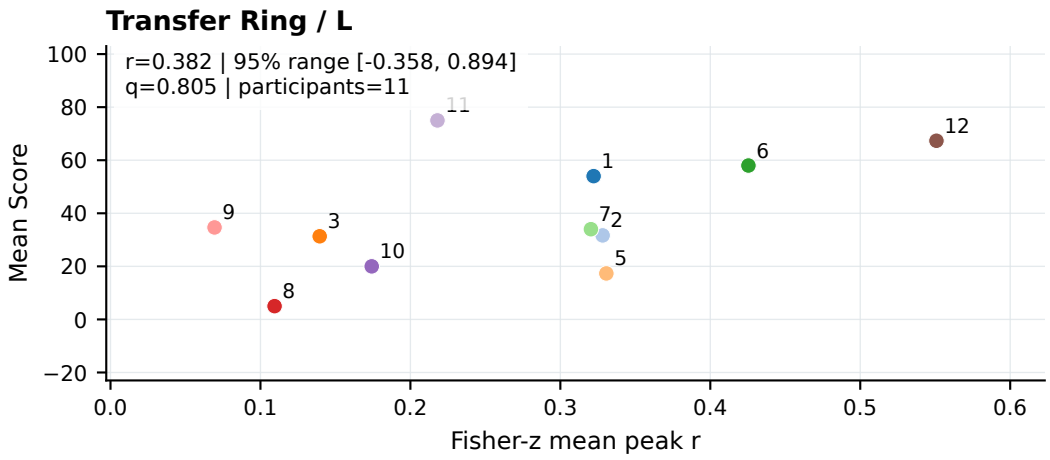


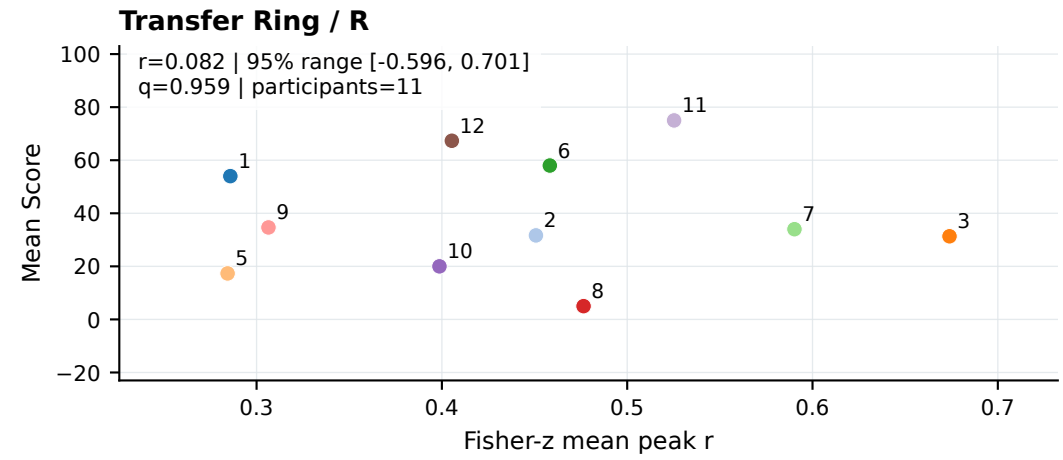

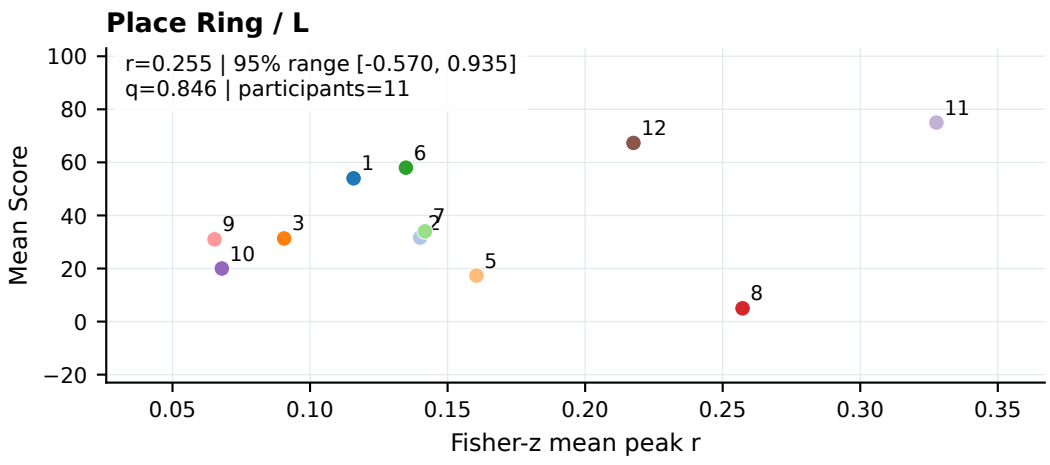

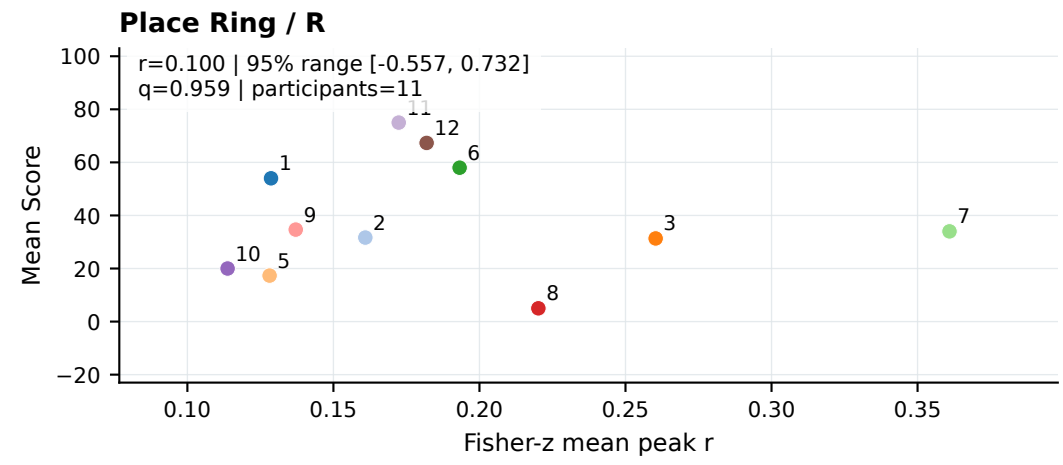


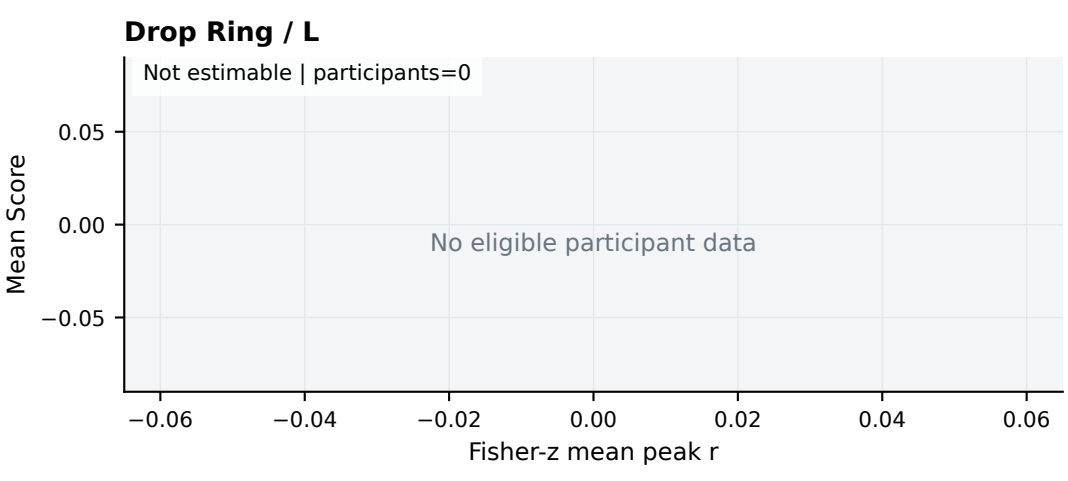


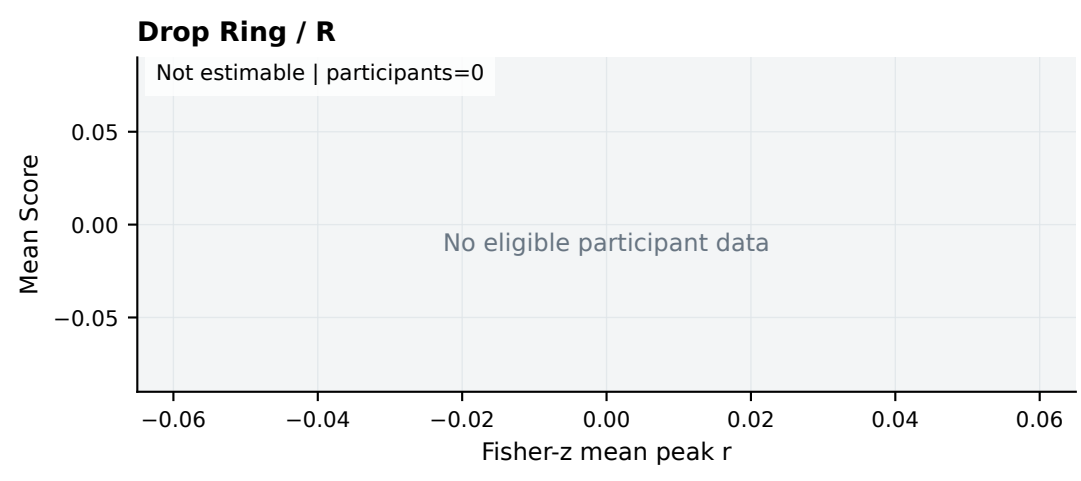



One point = one participant; labels are participant IDs. Correlation and Score use the same eligible recordings.
Saved Spearman inference; q is family-specific. * Fewer than 97.5% valid bootstrap draws: interval unreliable.


Task A / Zero-lag gaze-PSM correlation vs Score

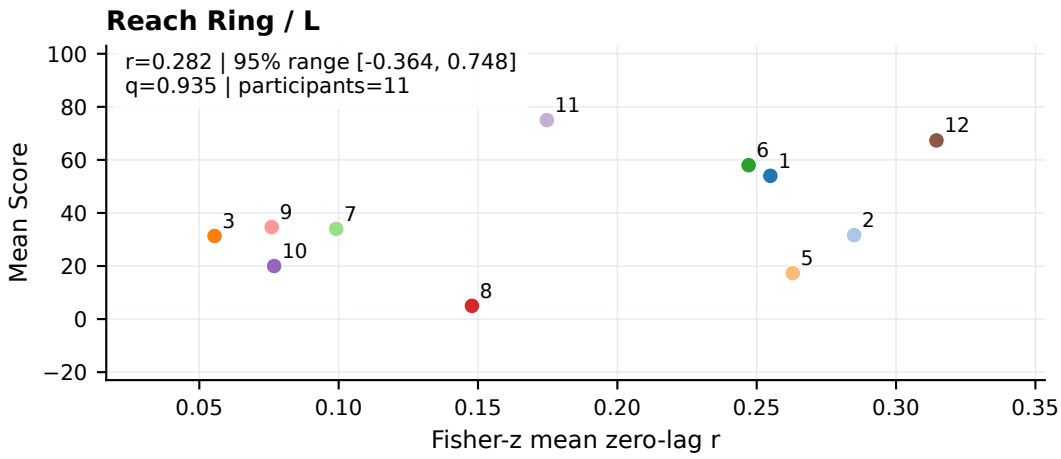


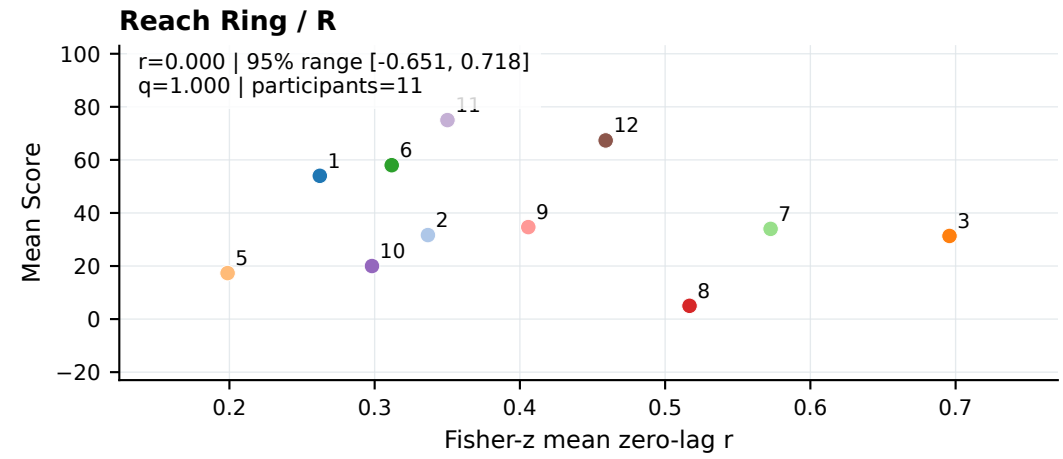


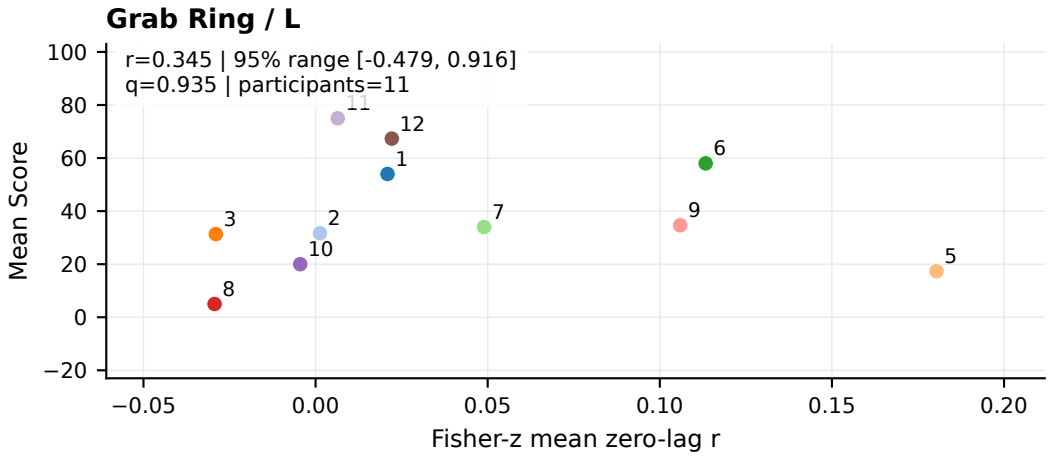


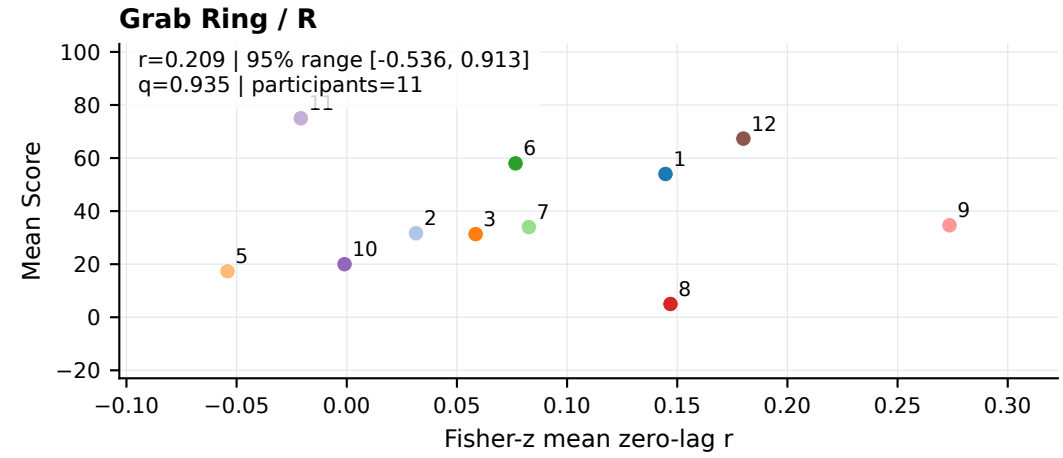


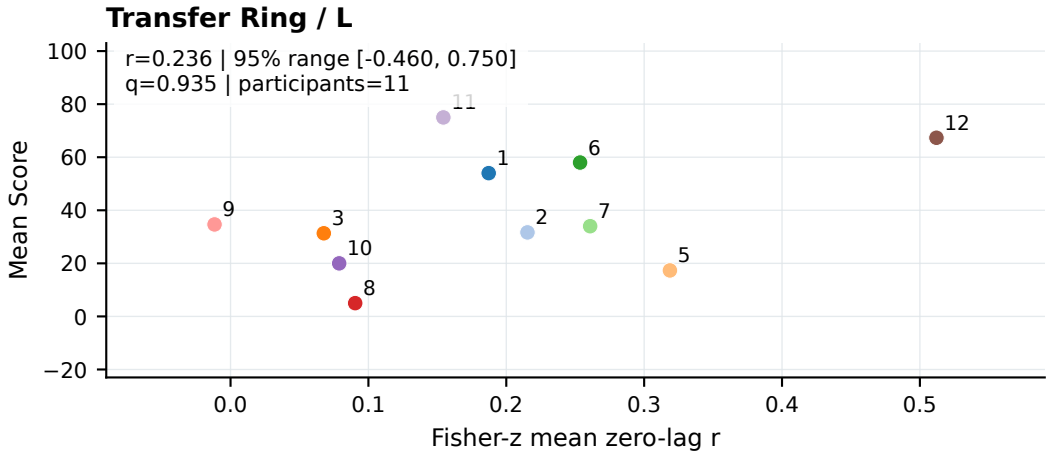


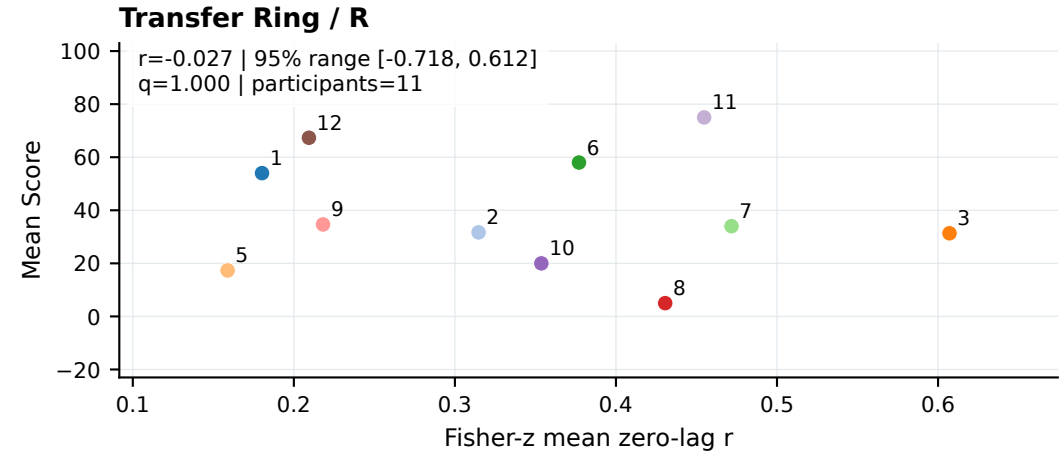

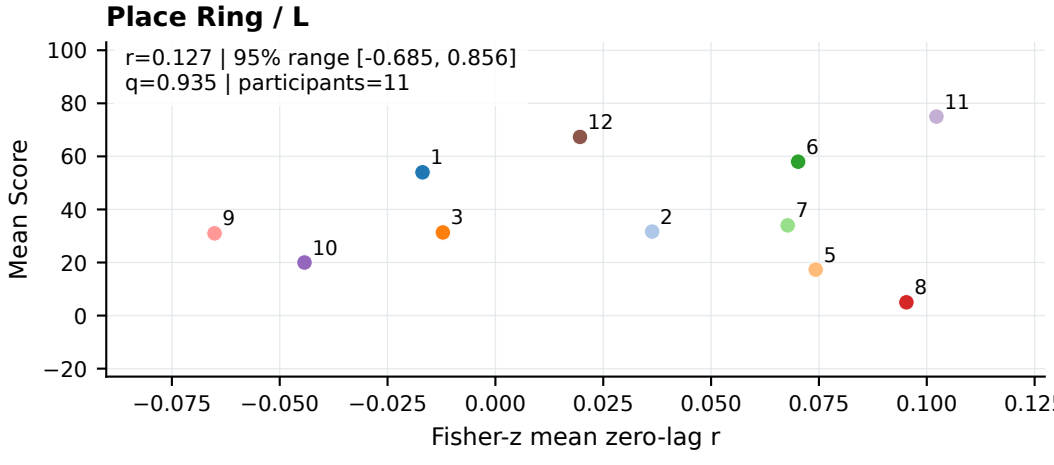

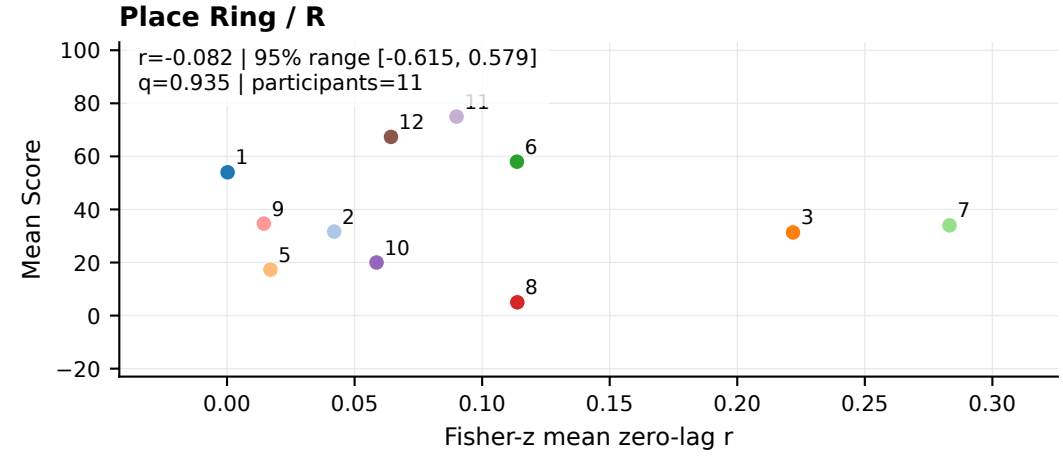

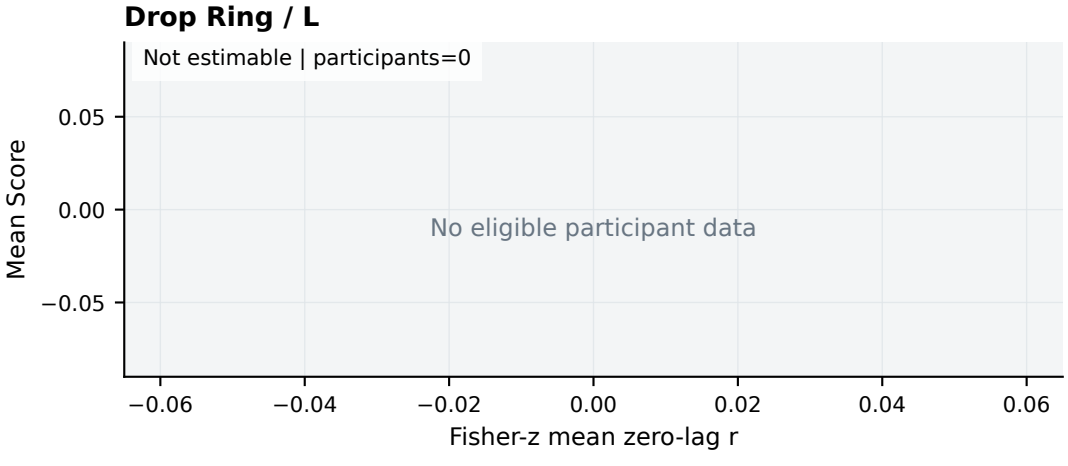


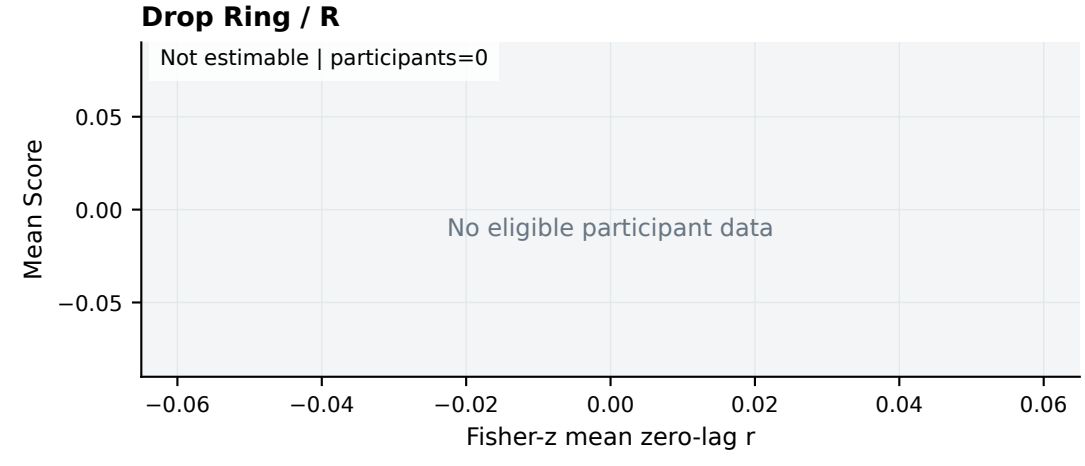


One point = one participant; labels are participant IDs. Correlation and Score use the same eligible recordings.
Saved Spearman inference; q is family-specific. * Fewer than 97.5% valid bootstrap draws: interval unreliable.

Task C / Peak gaze-PSM correlation vs Score


Reach String / L

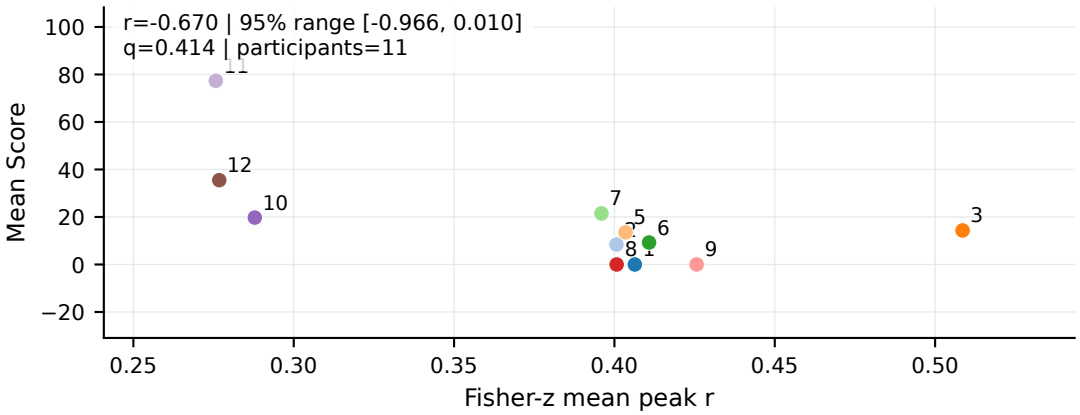


Reach String / R

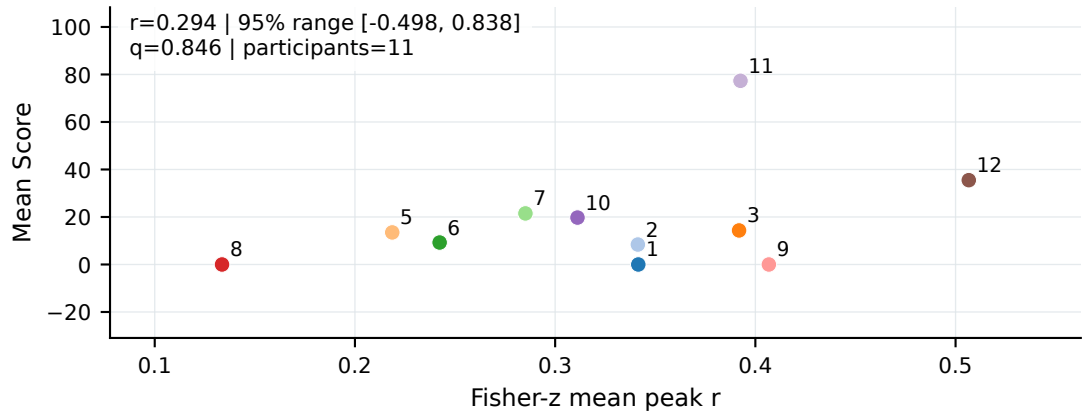


Threading string / L

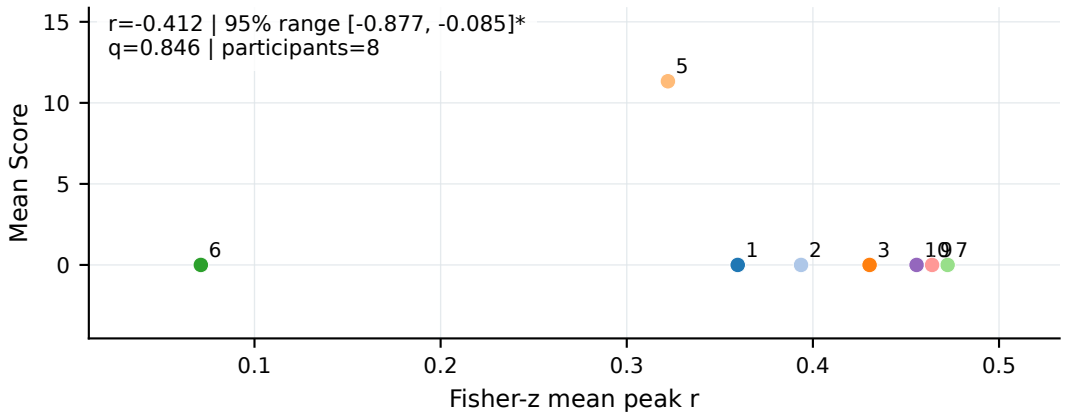


Threading string / R

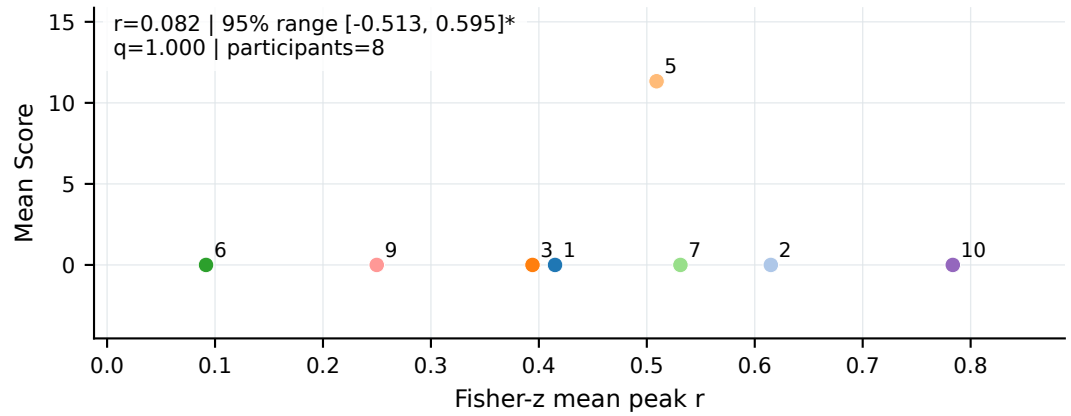


Wrap around PSM / L

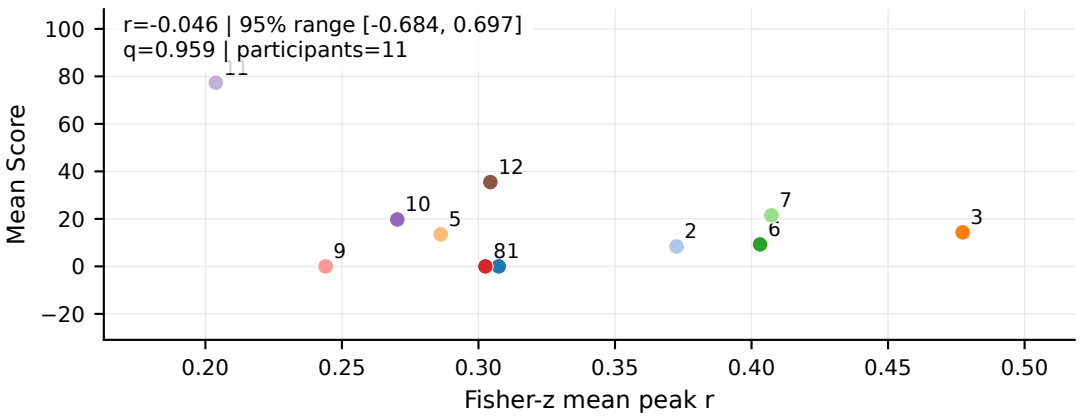


Wrap around PSM / R

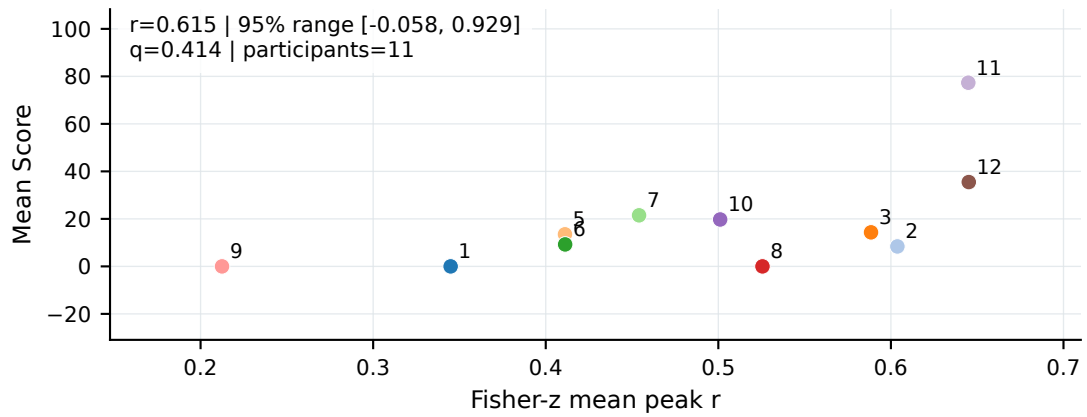

Pull through / cinch / L

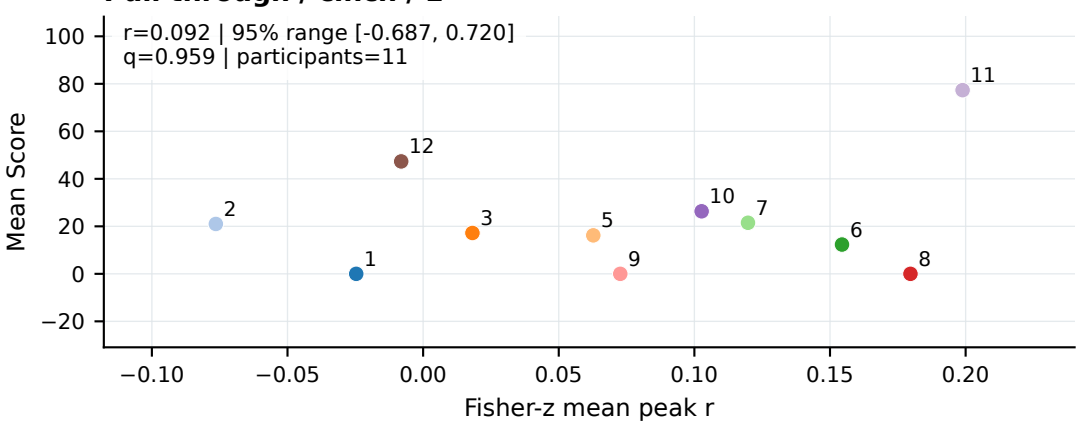


Pull through / cinch / R

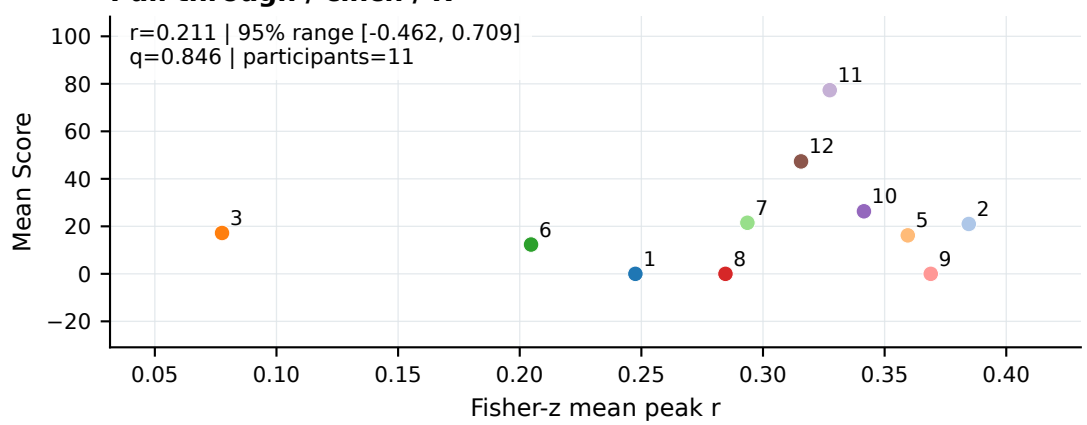


One point = one participant; labels are participant IDs. Correlation and Score use the same eligible recordings.
Saved Spearman inference; q is family-specific. * Fewer than 97.5% valid bootstrap draws: interval unreliable.

Task C / Zero-lag gaze-PSM correlation vs Score


Reach String / L

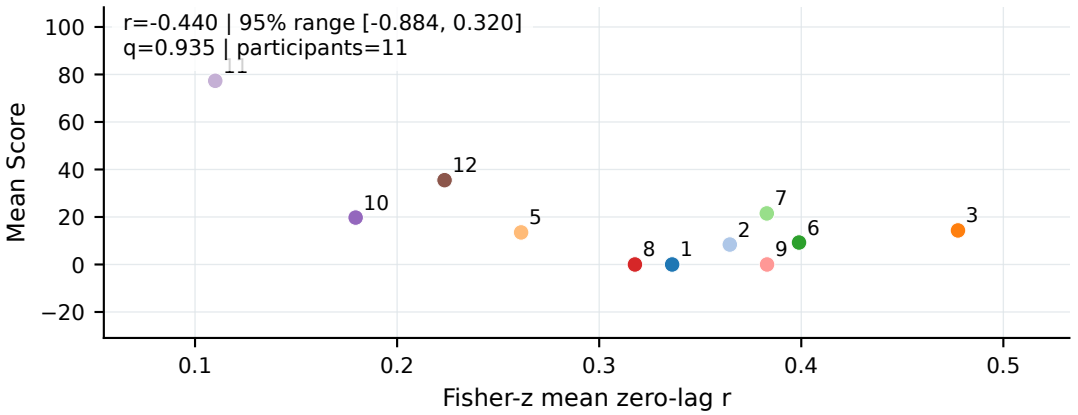


Reach String / R

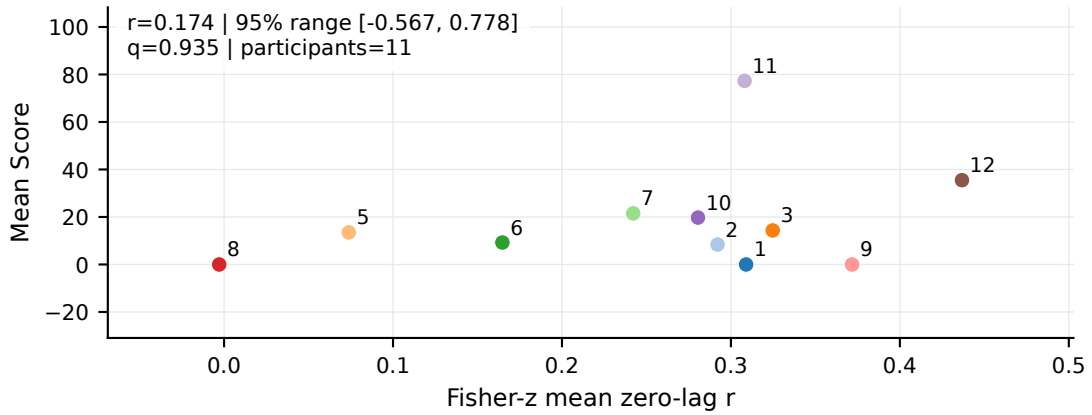


Threading string / L

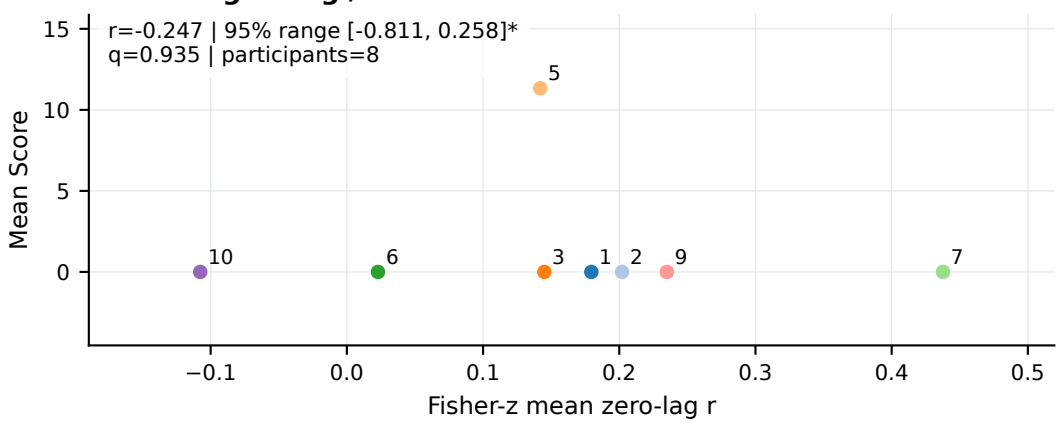


Threading string / R

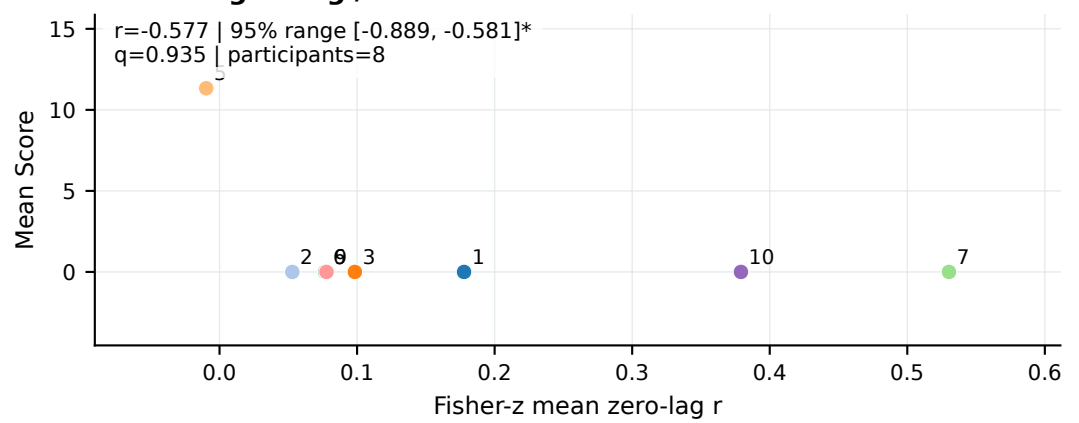


Wrap around PSM / L

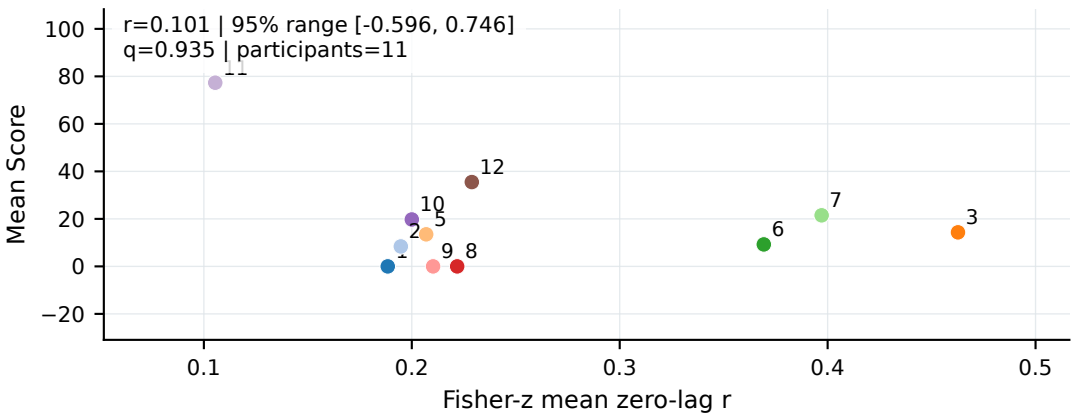


Wrap around PSM / R

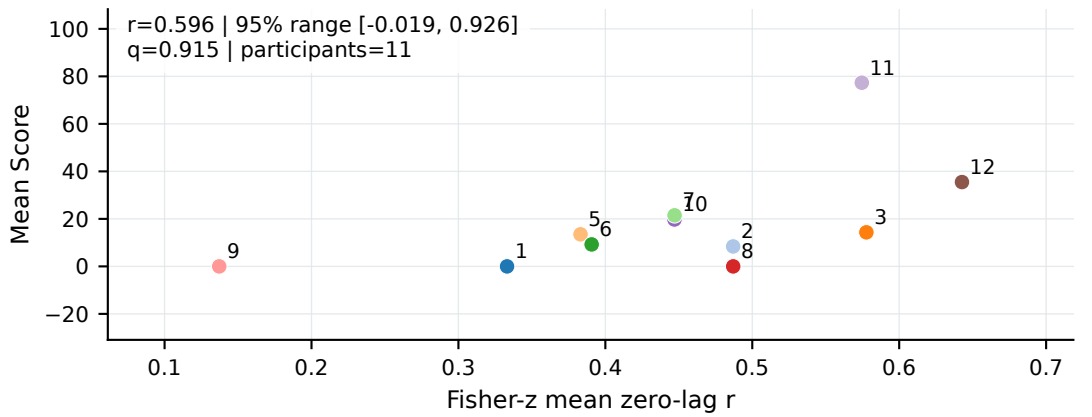

Pull through / cinch / L

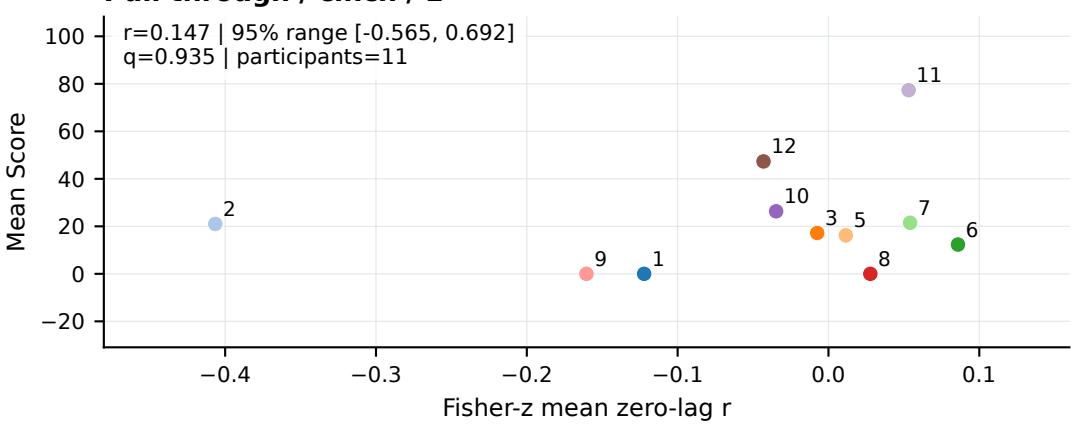



Pull through / cinch / R

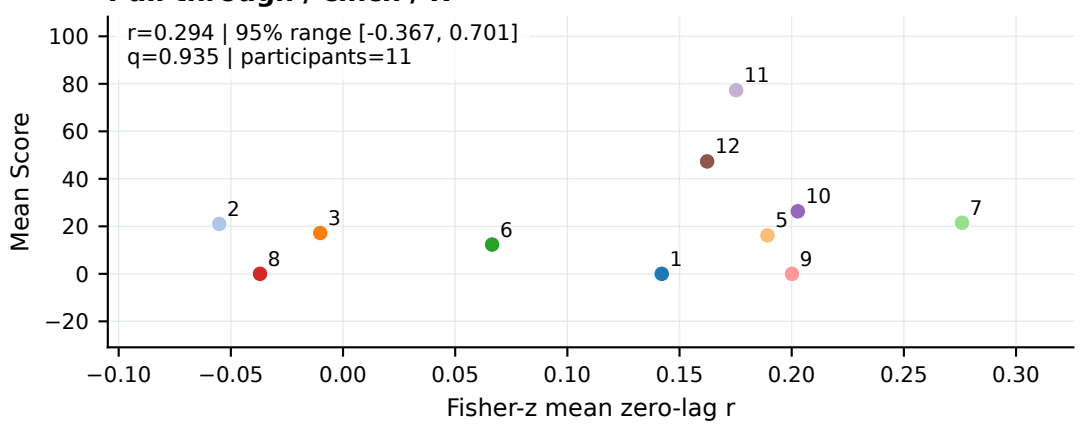



One point = one participant; labels are participant IDs. Correlation and Score use the same eligible recordings.
Saved Spearman inference; q is family-specific. * Fewer than 97.5% valid bootstrap draws: interval unreliable.


Task A / peak_r / Within participant

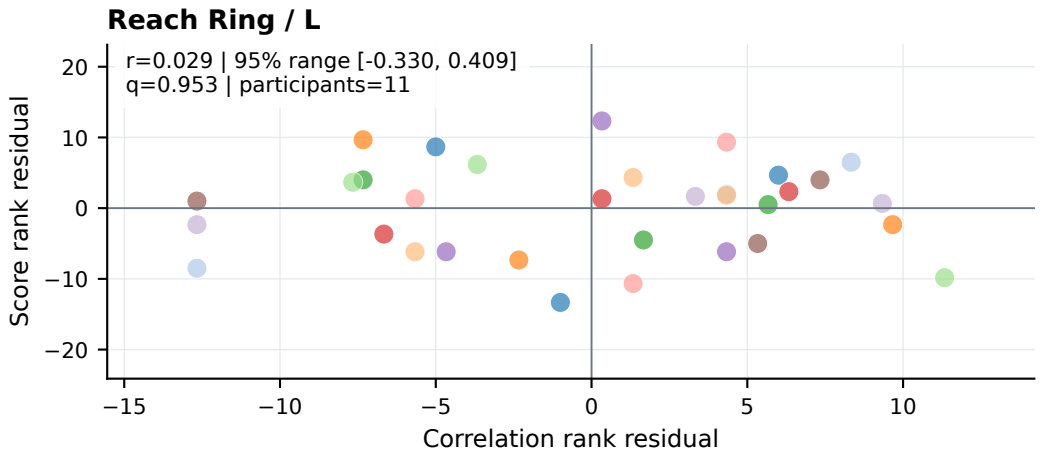


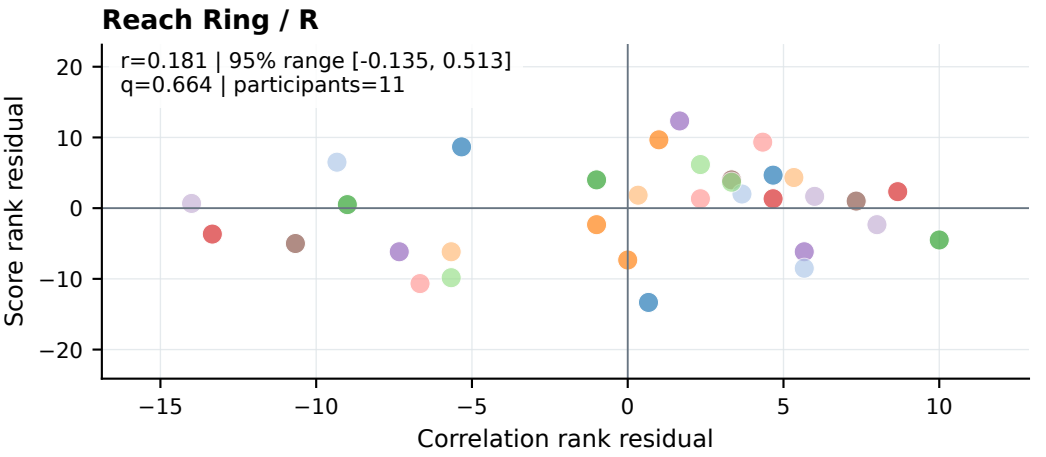


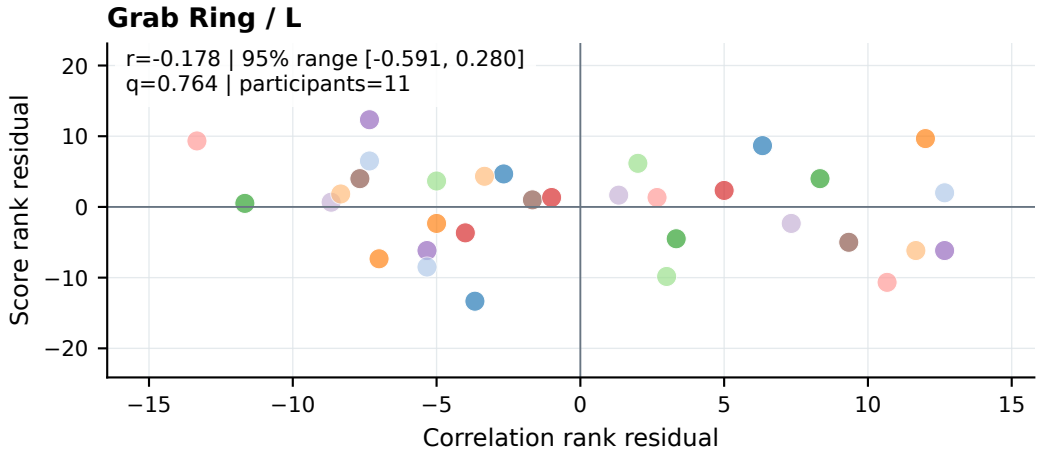


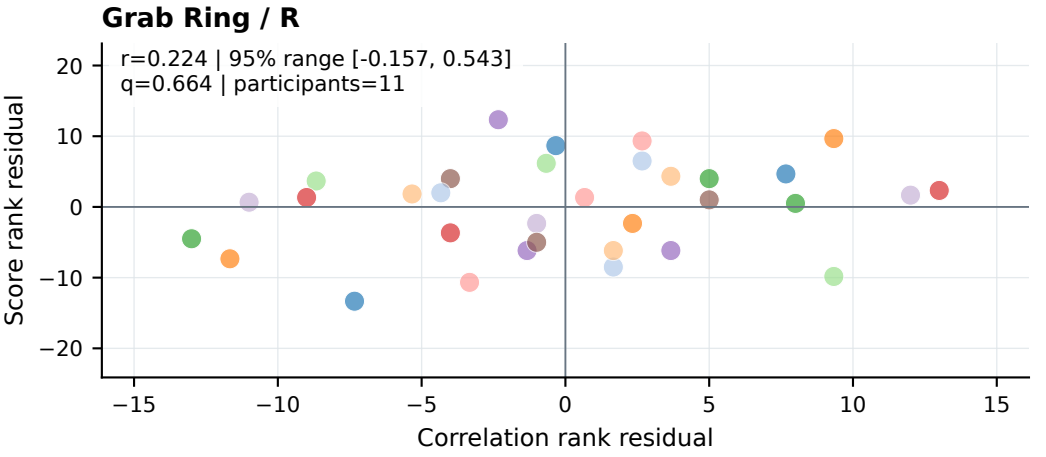


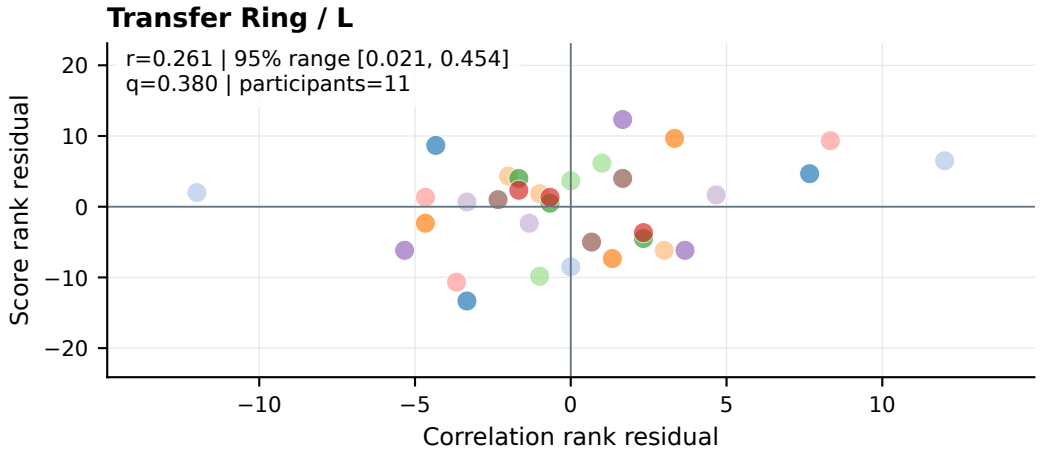


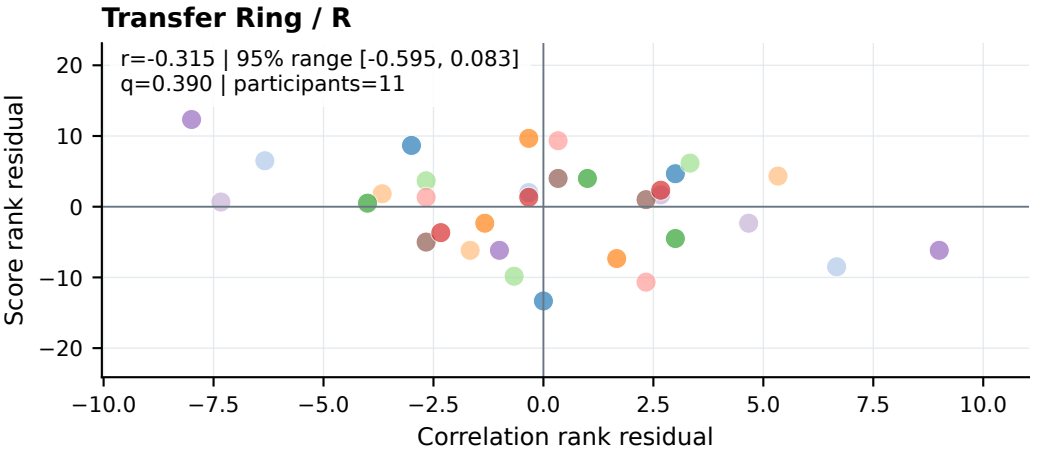

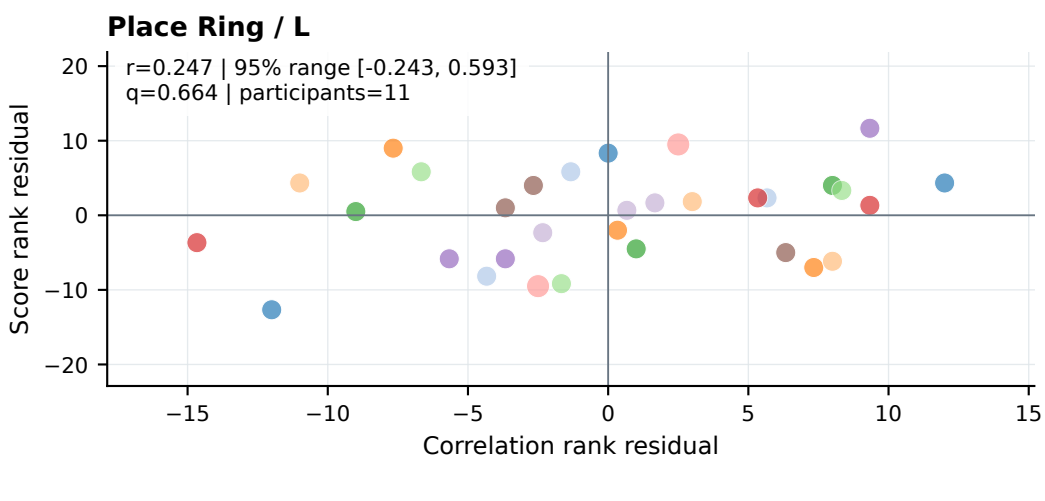

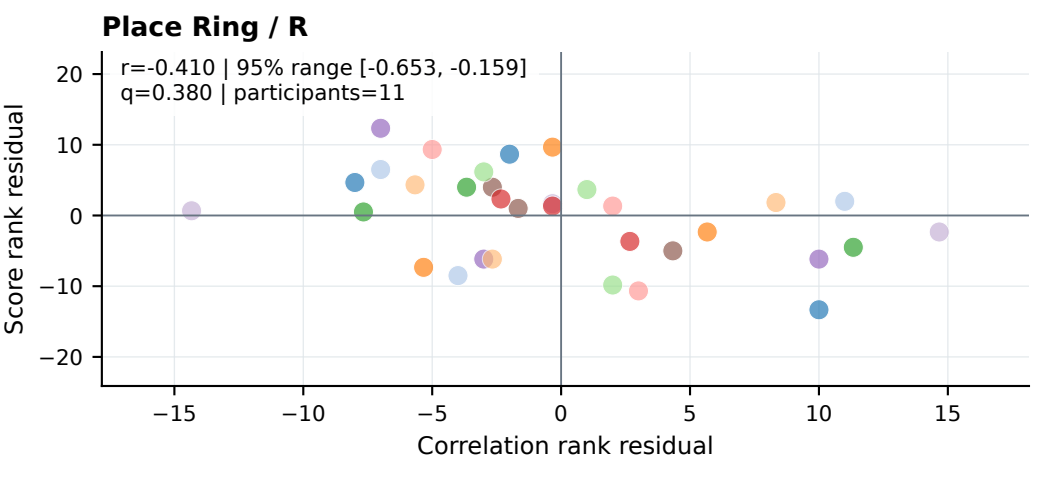

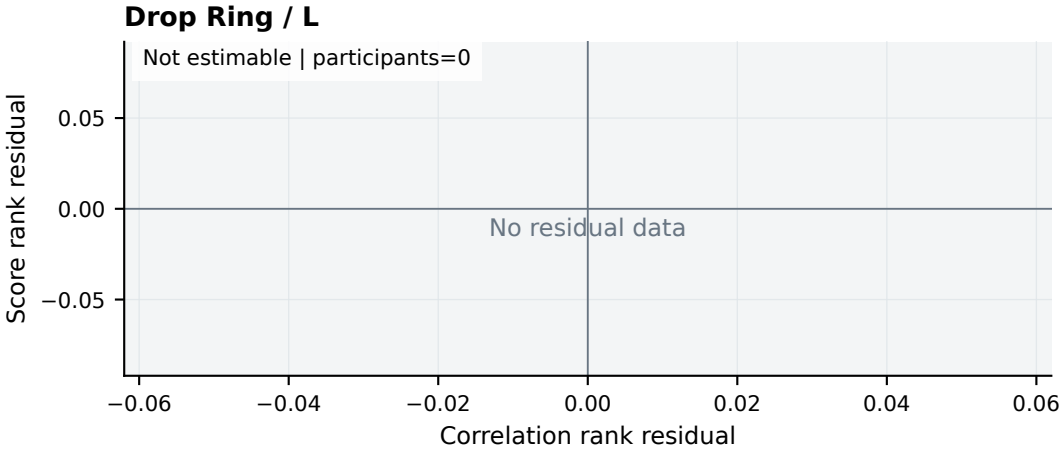


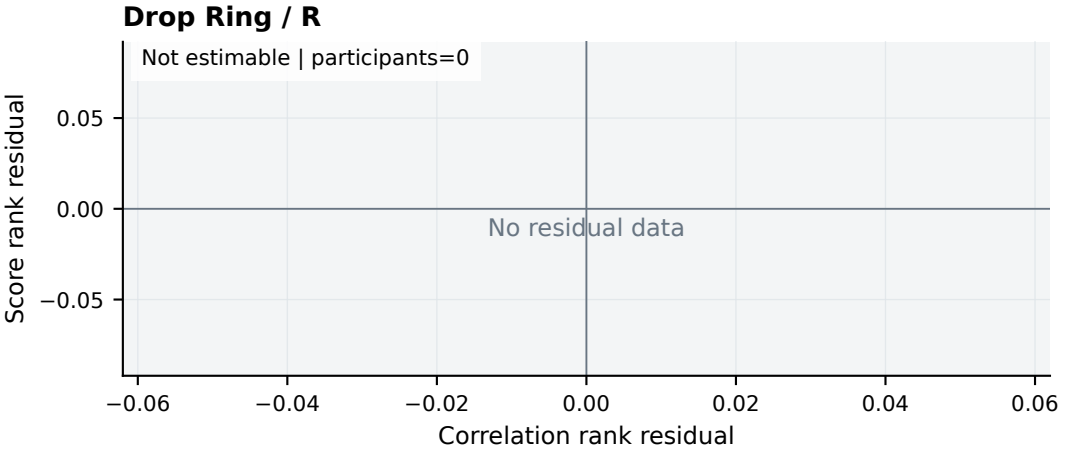


One point = one recording; color = participant. Analysis gives each participant equal total weight.
Ranks are residualized for participant effects. q is family-specific; small-cluster inference is exploratory.

Task A / peak_r / Within, order adjusted


Reach Ring / L

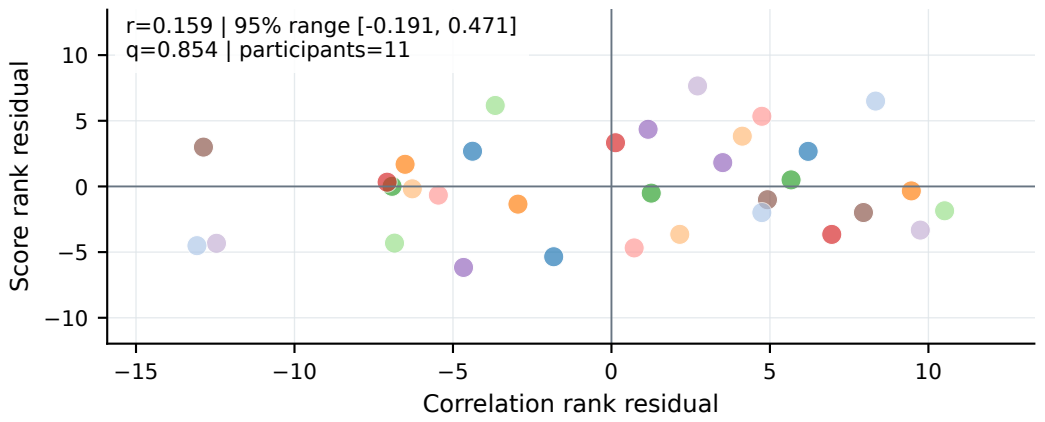


Reach Ring / R

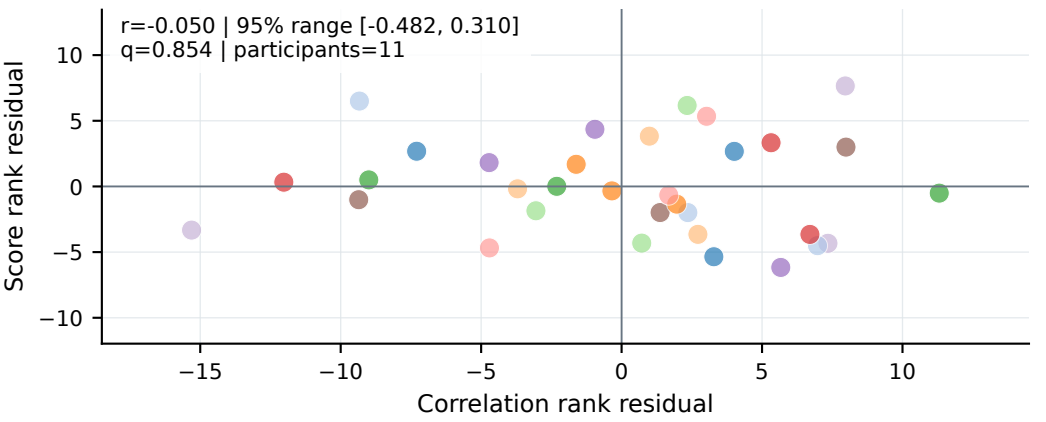


Grab Ring / L

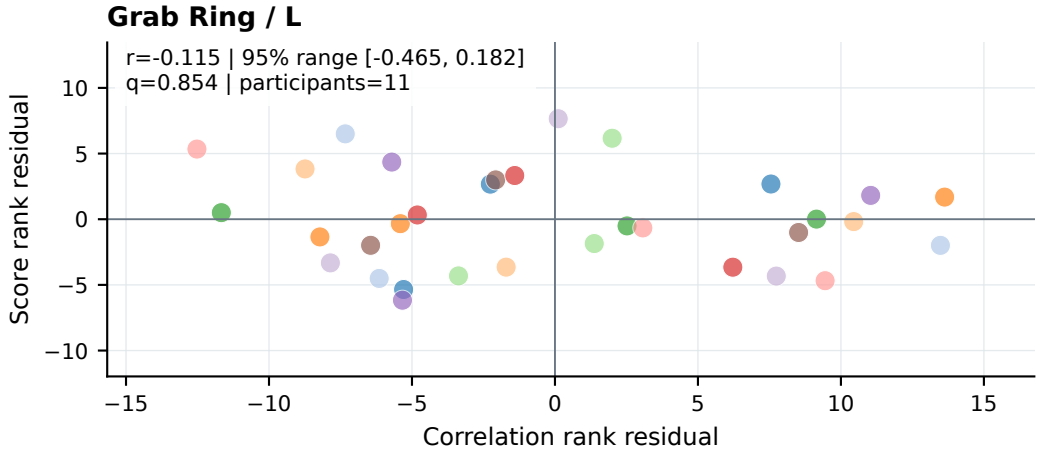


Grab Ring / R

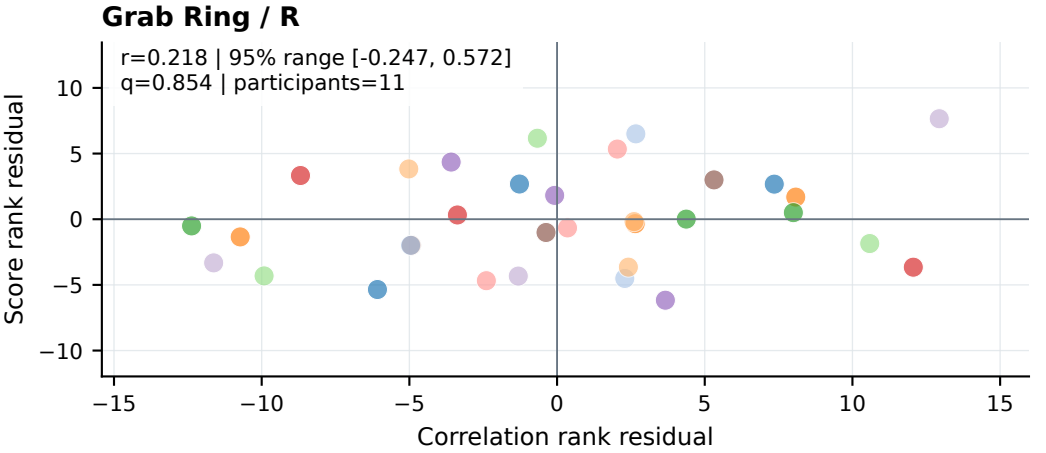


Transfer Ring / L

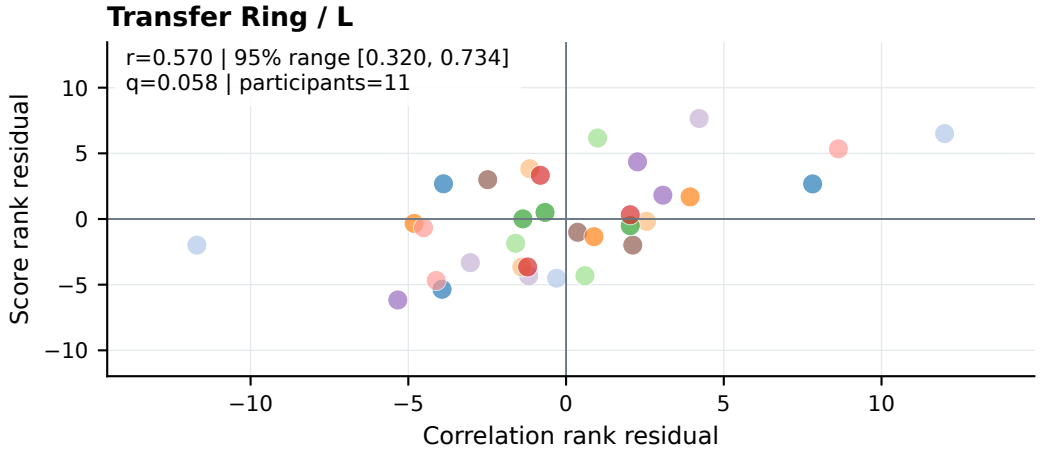


Transfer Ring / R

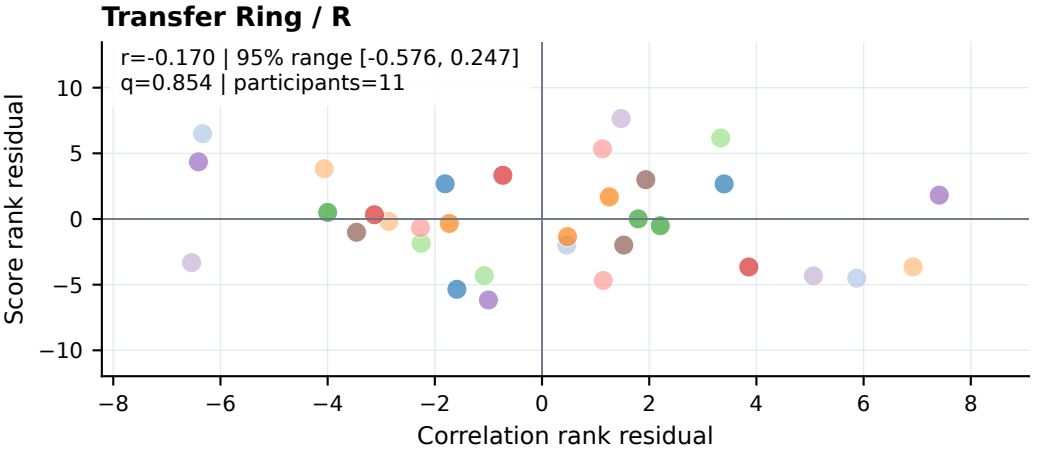


Place Ring / L

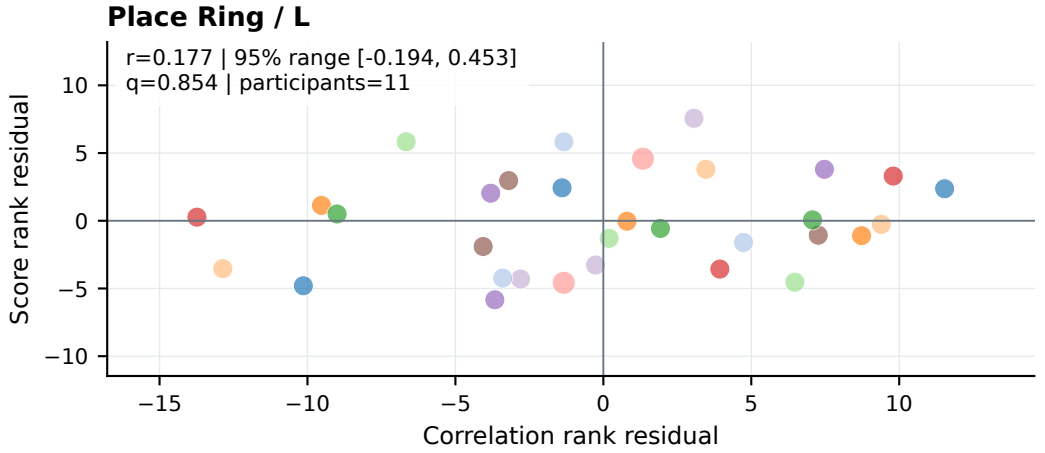


Place Ring / R

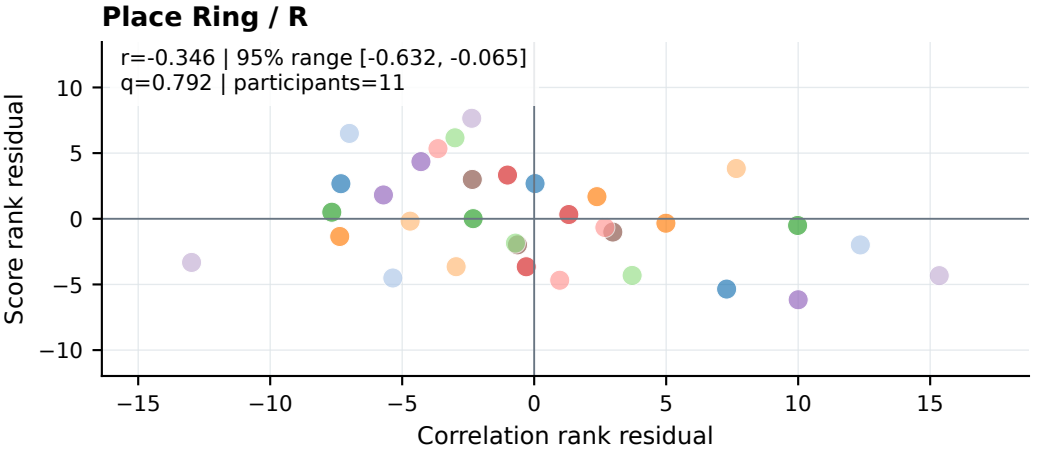

Drop Ring / L

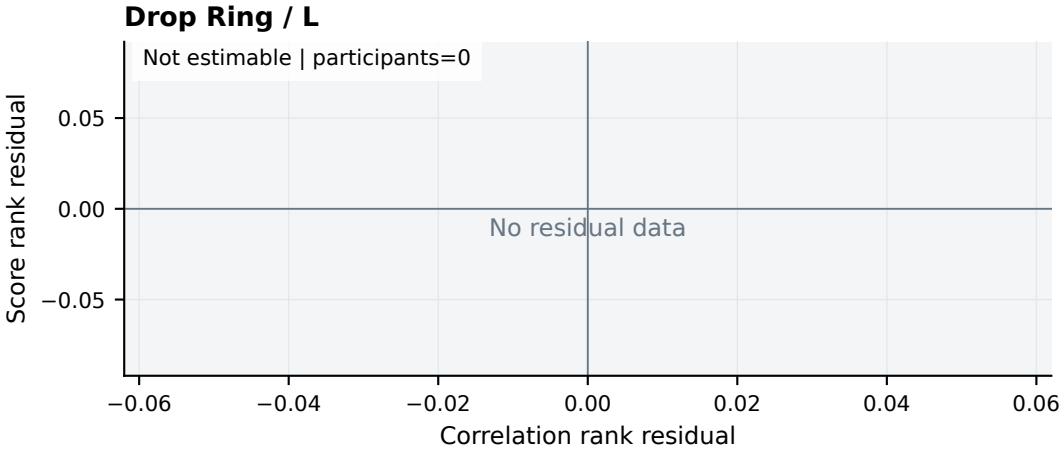



Drop Ring / R

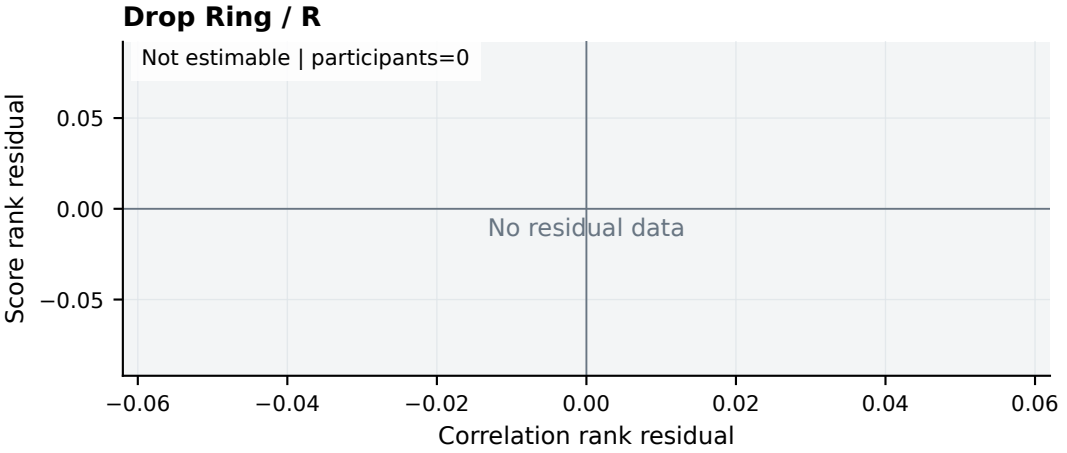



One point = one recording; color = participant. Analysis gives each participant equal total weight.
Ranks are residualized for participant effects and task order / attempt. q is family-specific; small-cluster inference is exploratory.


Task A / r_zero / Within participant

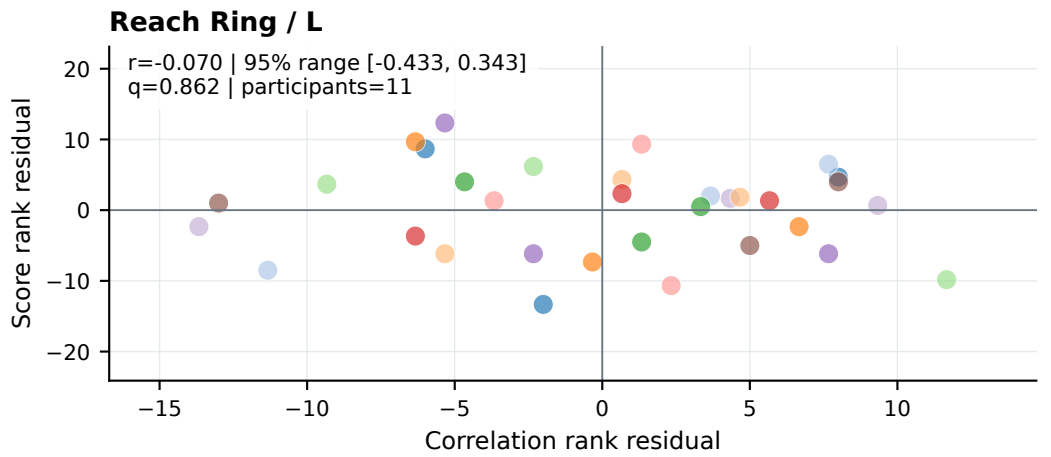


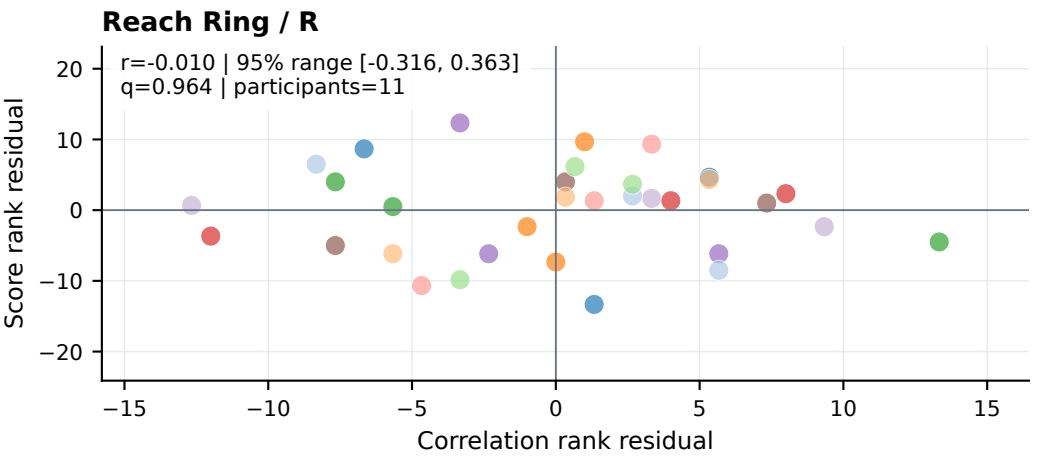


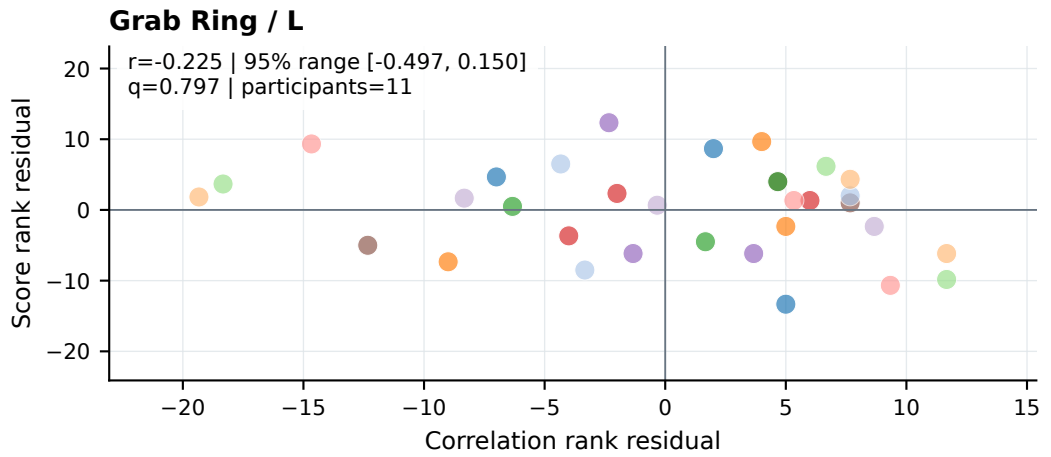


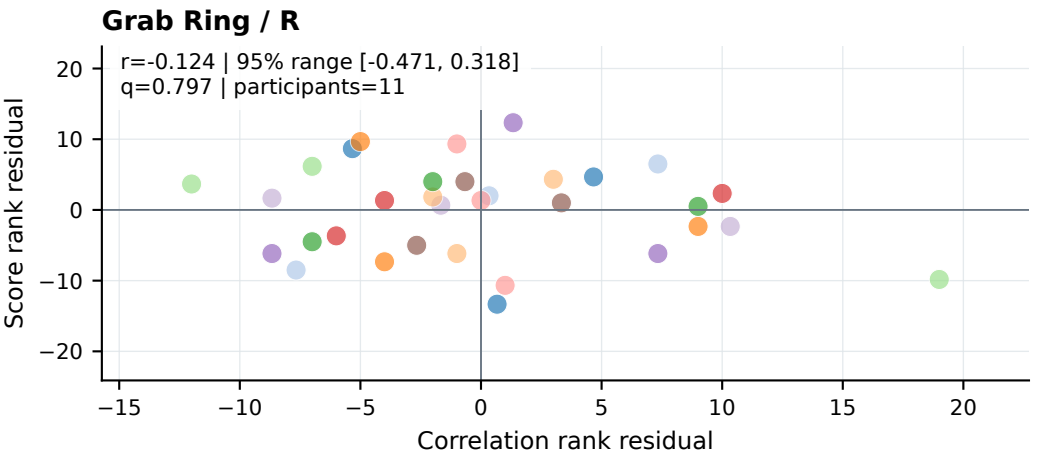


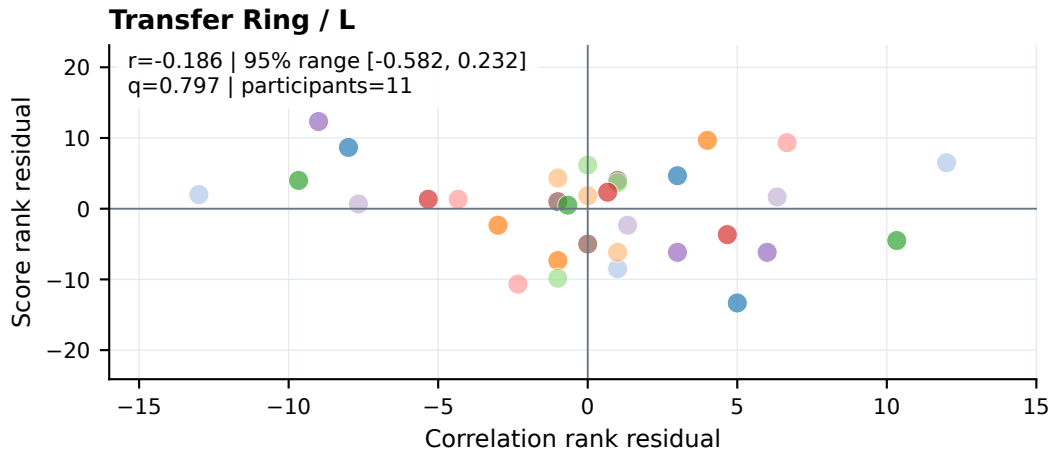


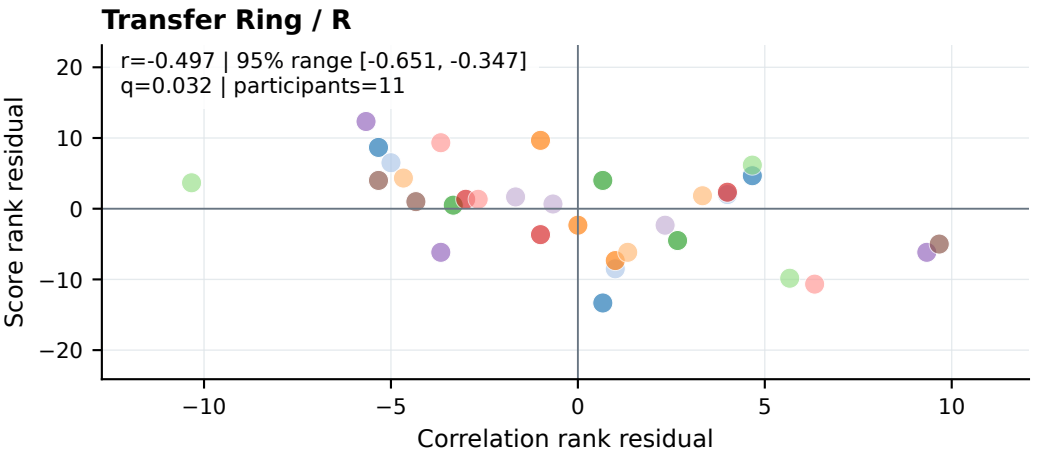

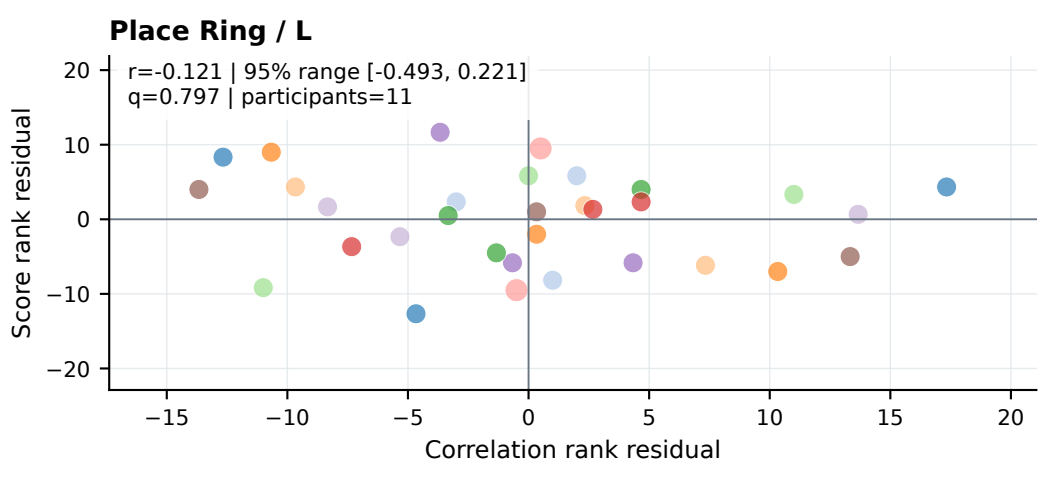

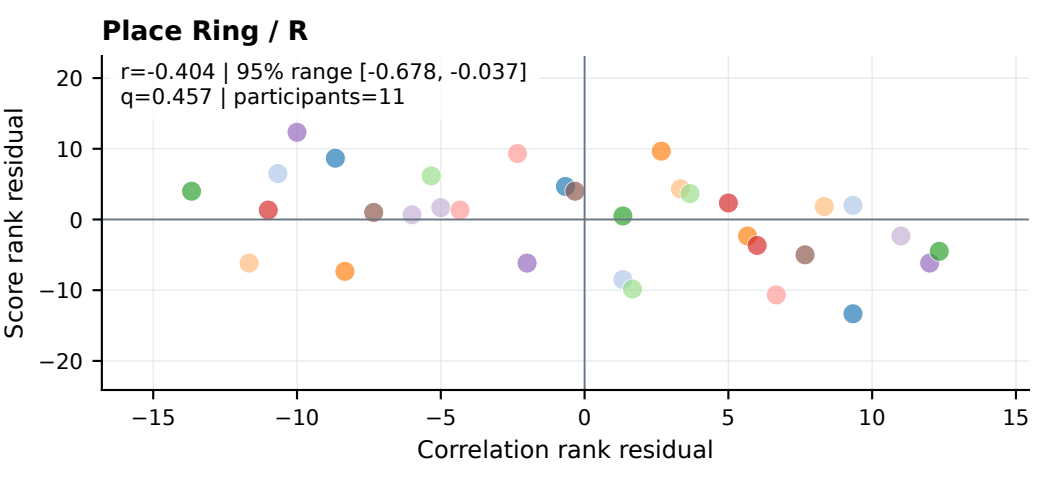

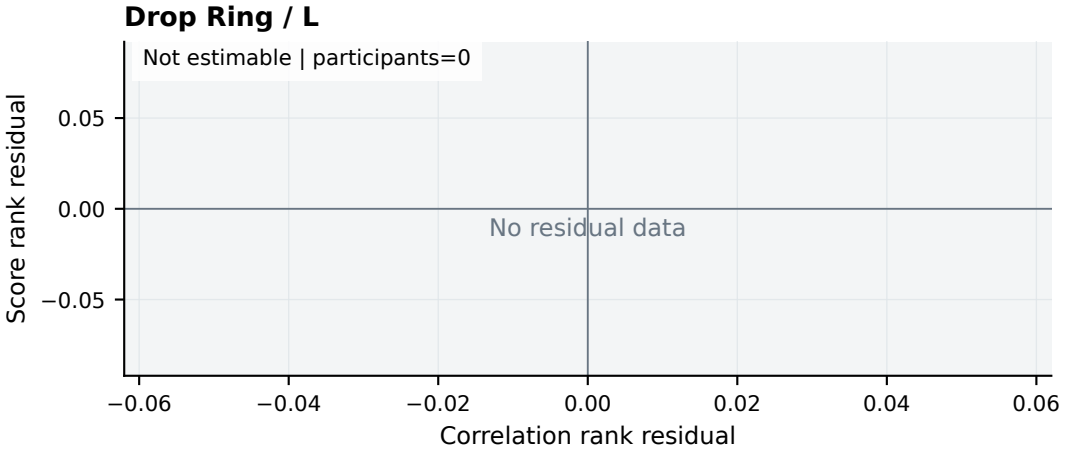


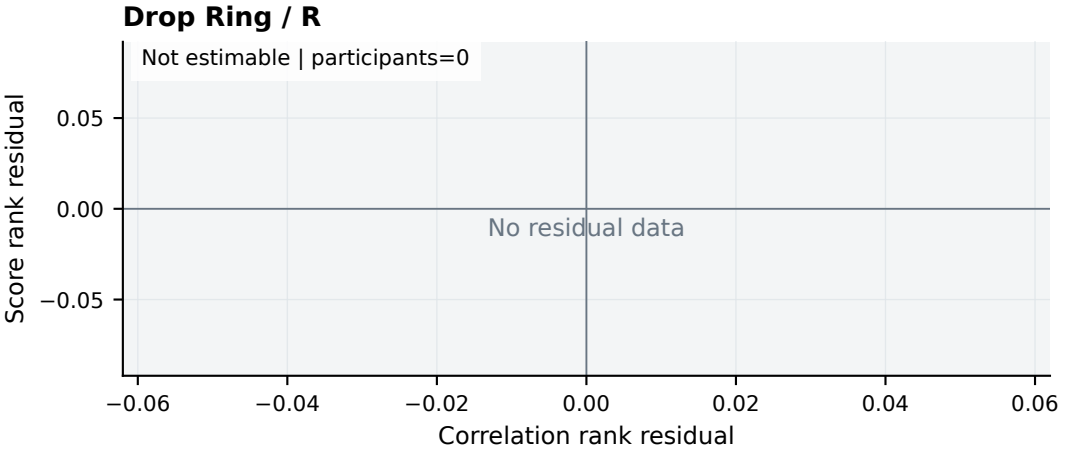


One point = one recording; color = participant. Analysis gives each participant equal total weight.
Ranks are residualized for participant effects. q is family-specific; small-cluster inference is exploratory.

Task A / r_zero / Within, order adjusted


Reach Ring / L

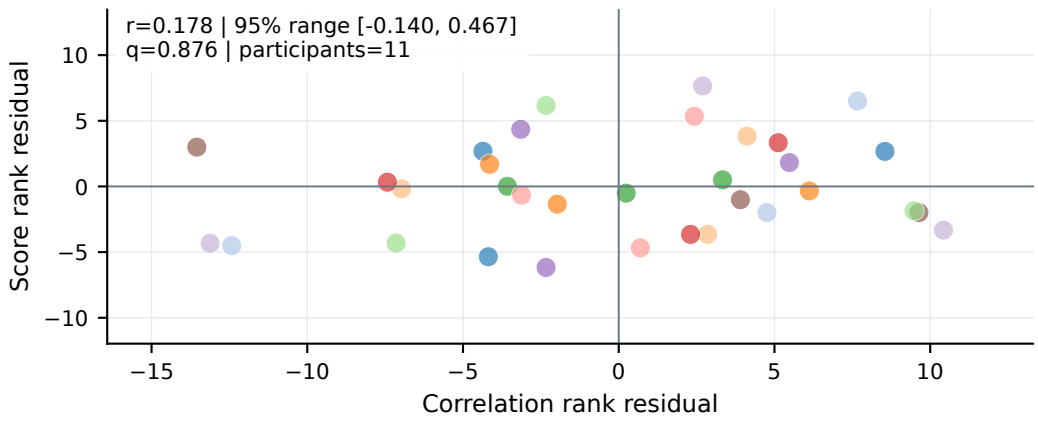


Reach Ring / R

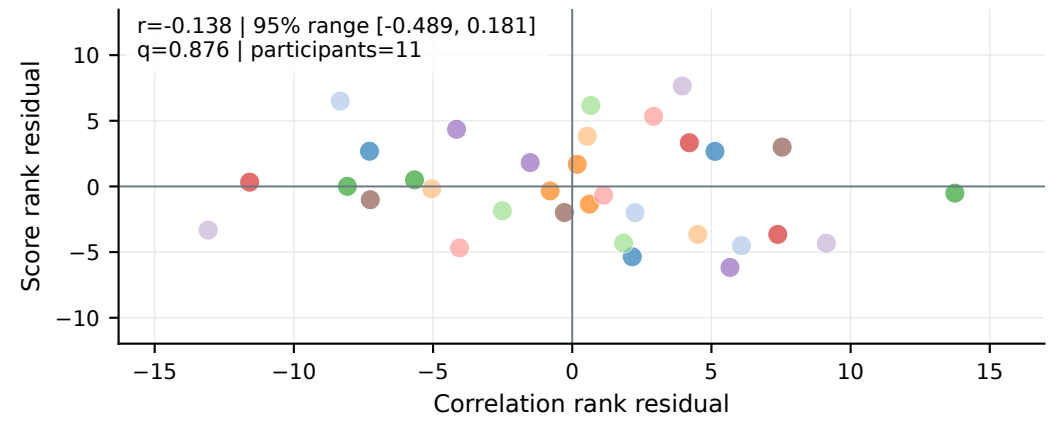


Grab Ring / L

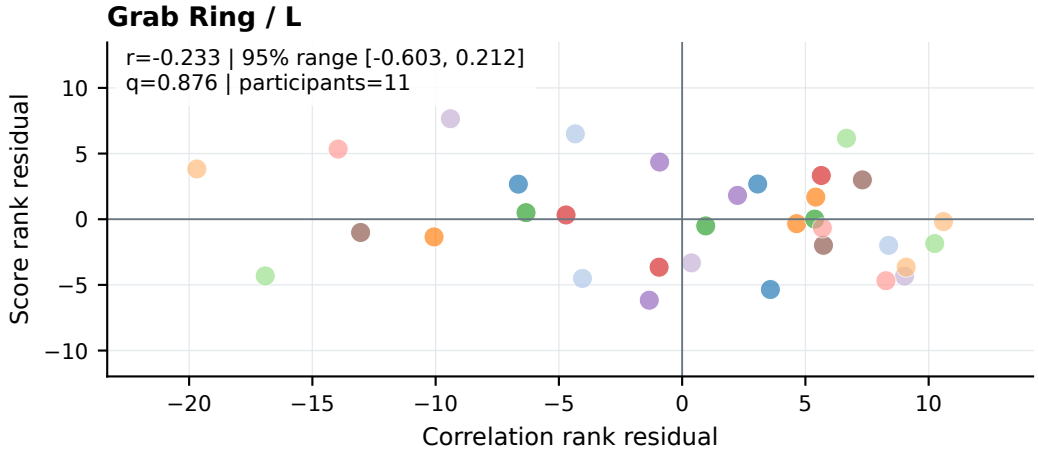


Grab Ring / R

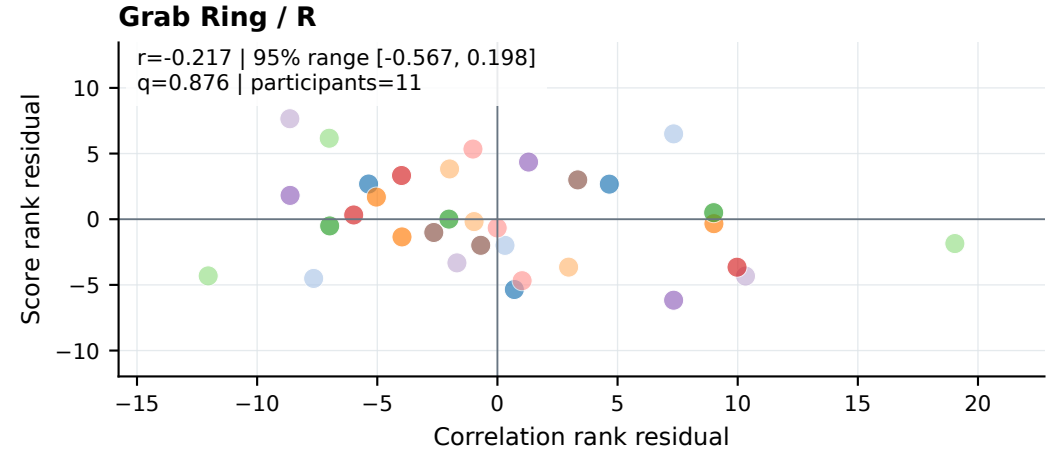


Transfer Ring / L

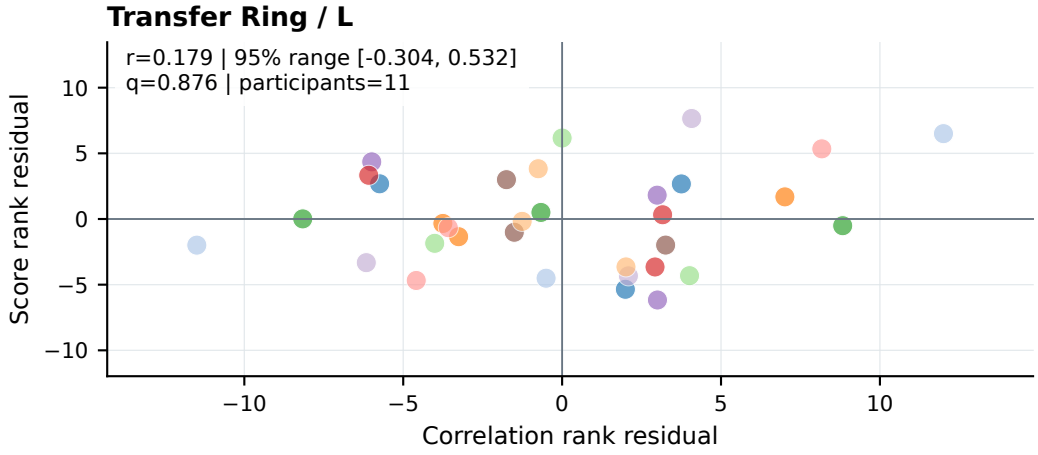


Transfer Ring / R

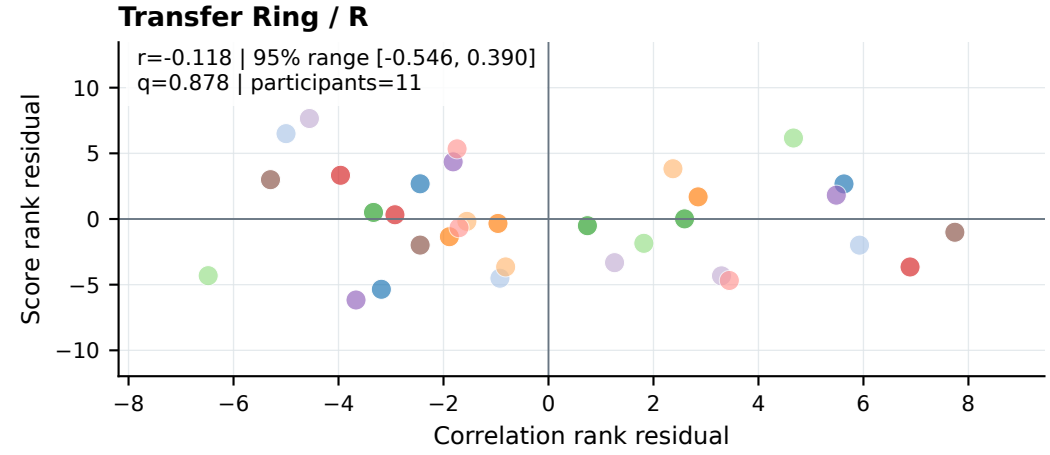


Place Ring / L

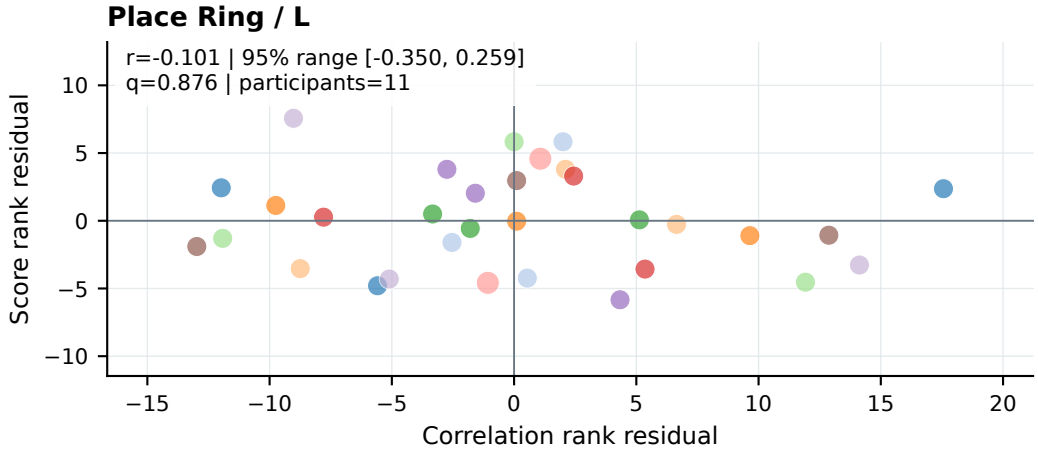


Place Ring / R

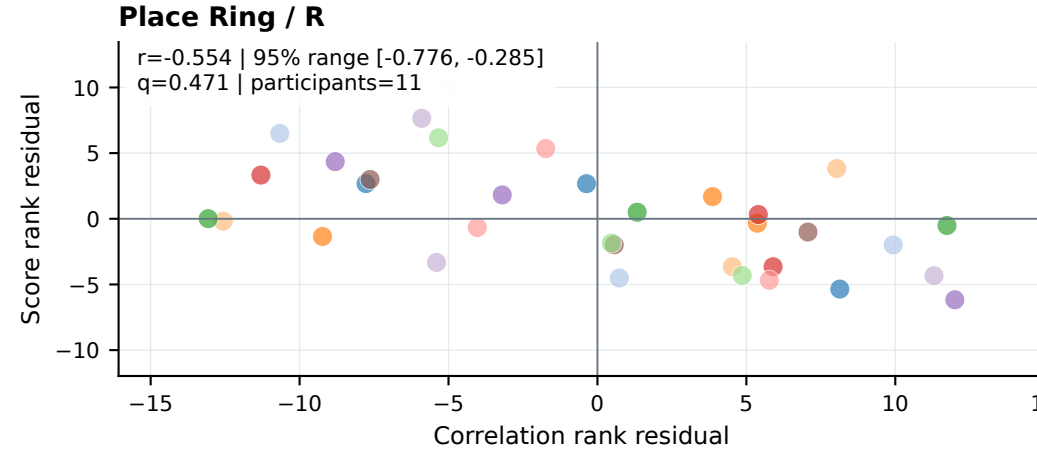

Drop Ring / L

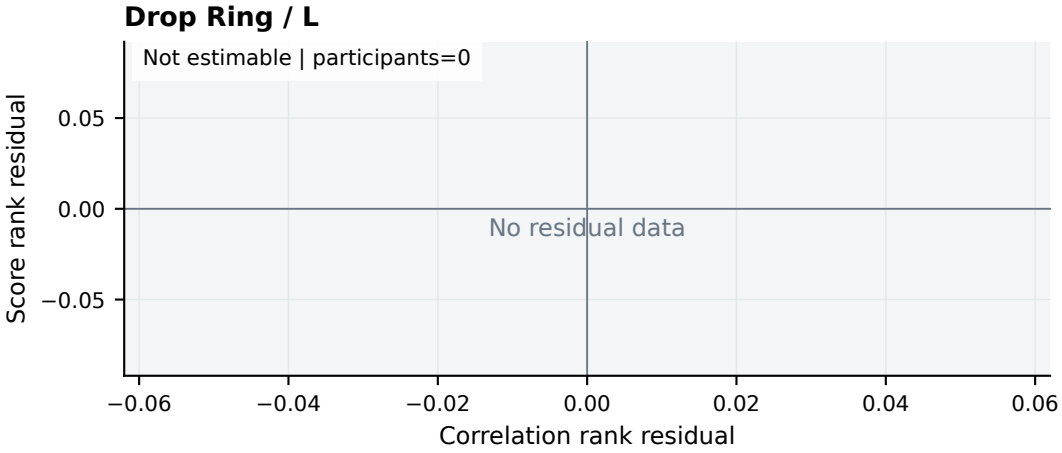



Drop Ring / R

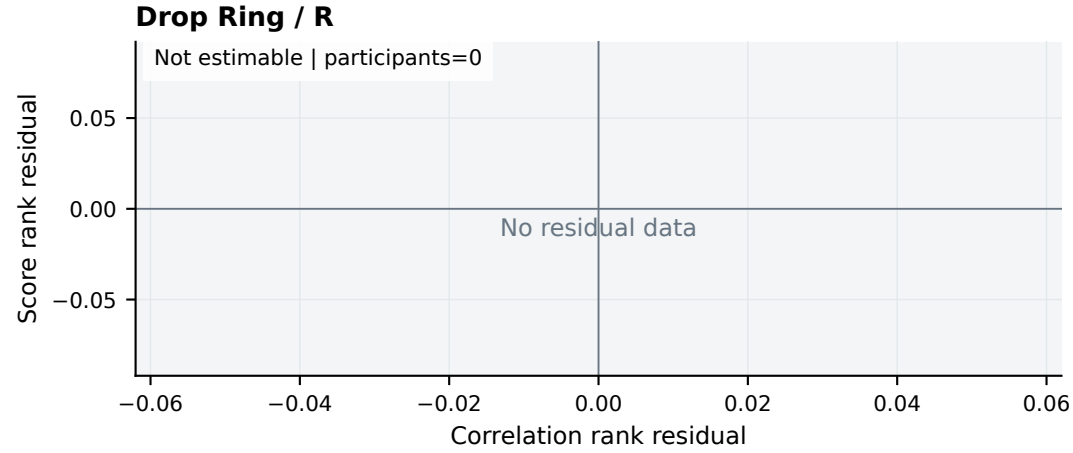



One point = one recording; color = participant. Analysis gives each participant equal total weight.
Ranks are residualized for participant effects and task order / attempt. q is family-specific; small-cluster inference is exploratory.


Task C / peak_r / Within participant

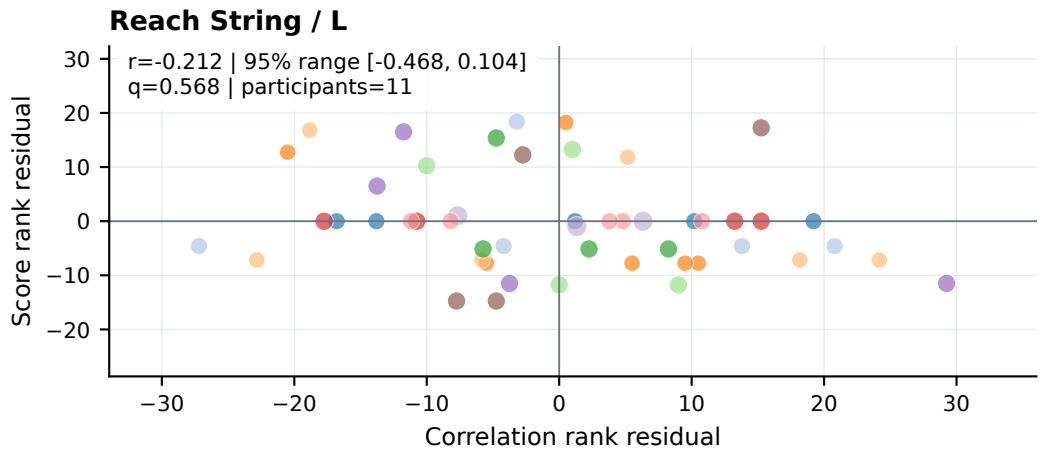


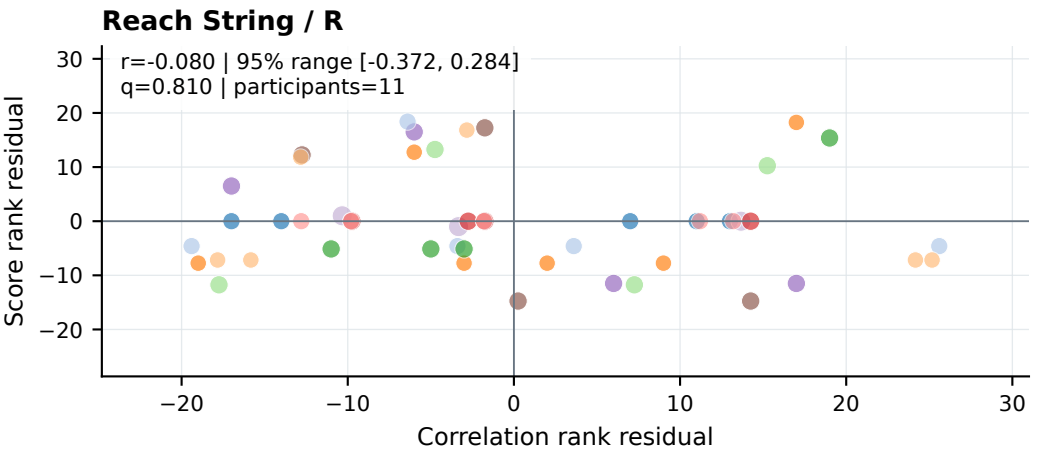


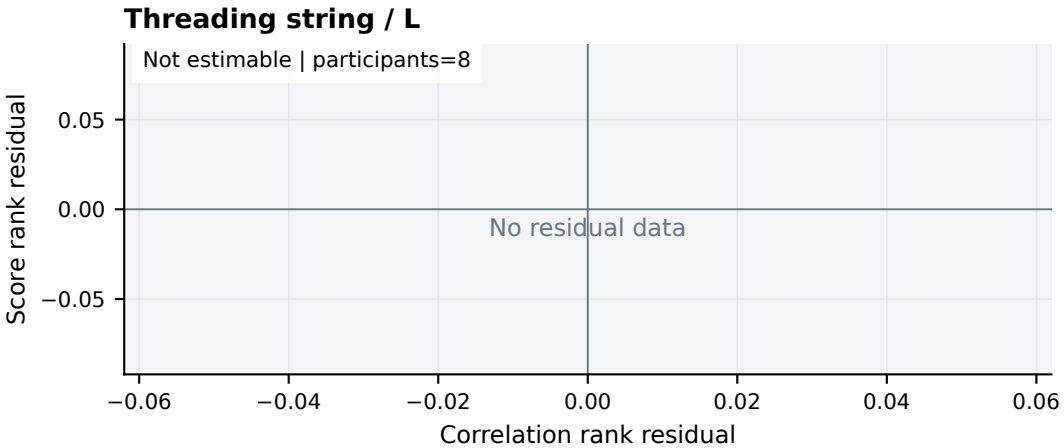


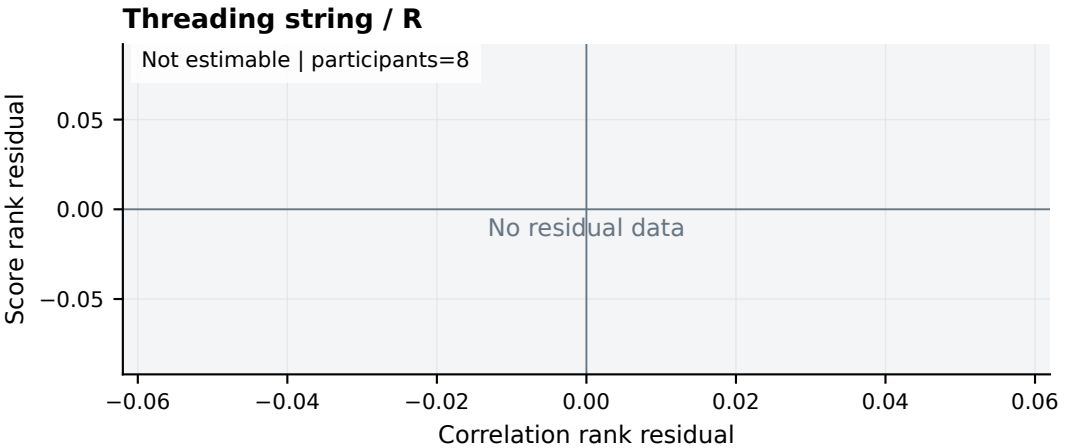

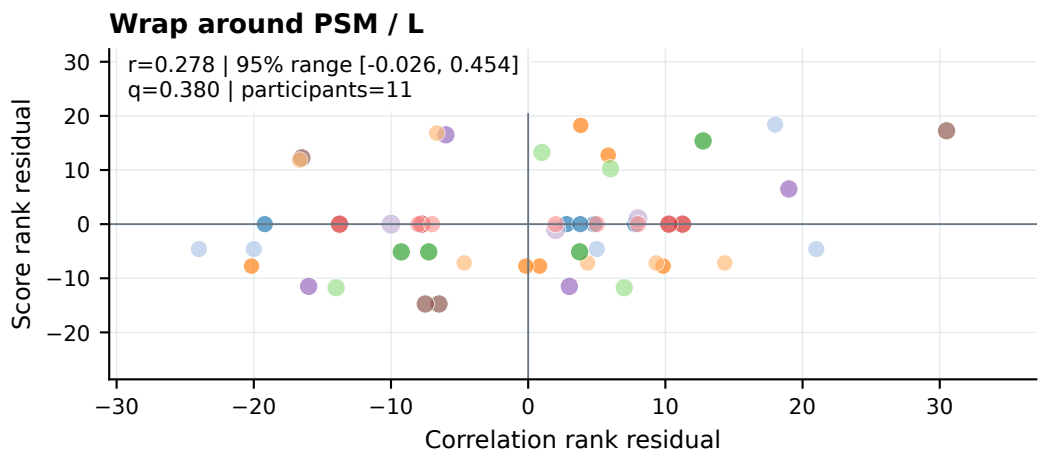

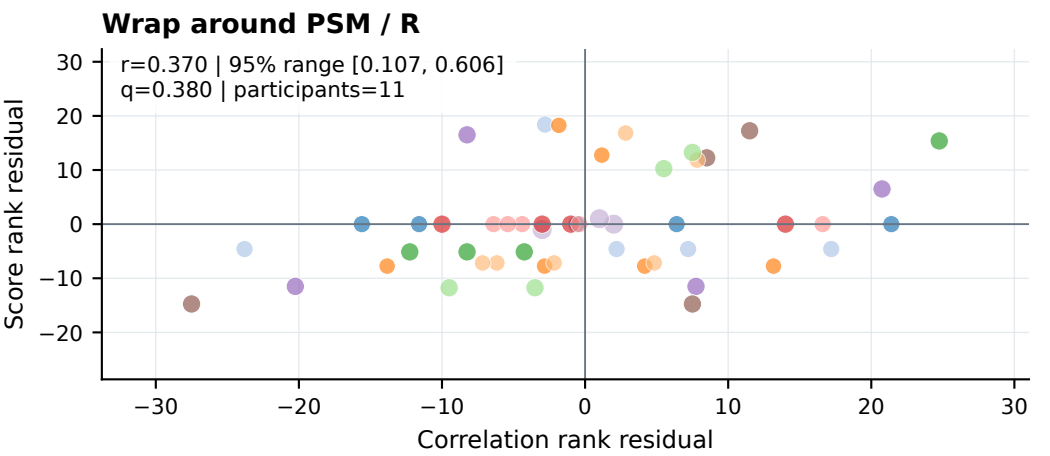


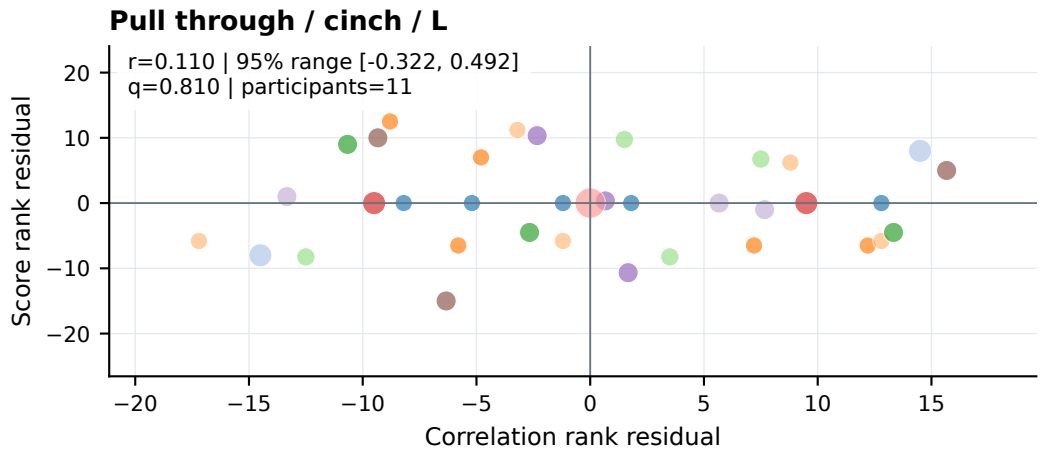


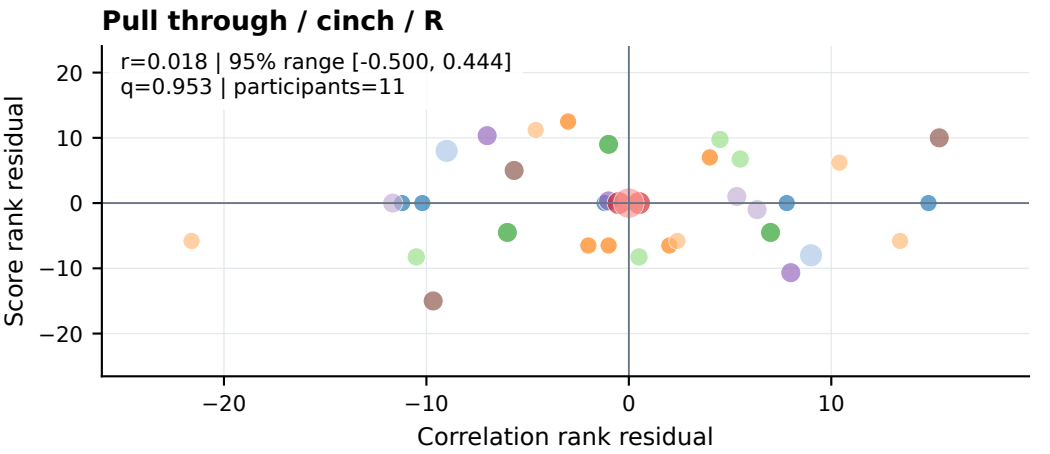



One point = one recording; color = participant. Analysis gives each participant equal total weight.
Ranks are residualized for participant effects. q is family-specific; small-cluster inference is exploratory.


Task C / peak_r / Within, order adjusted

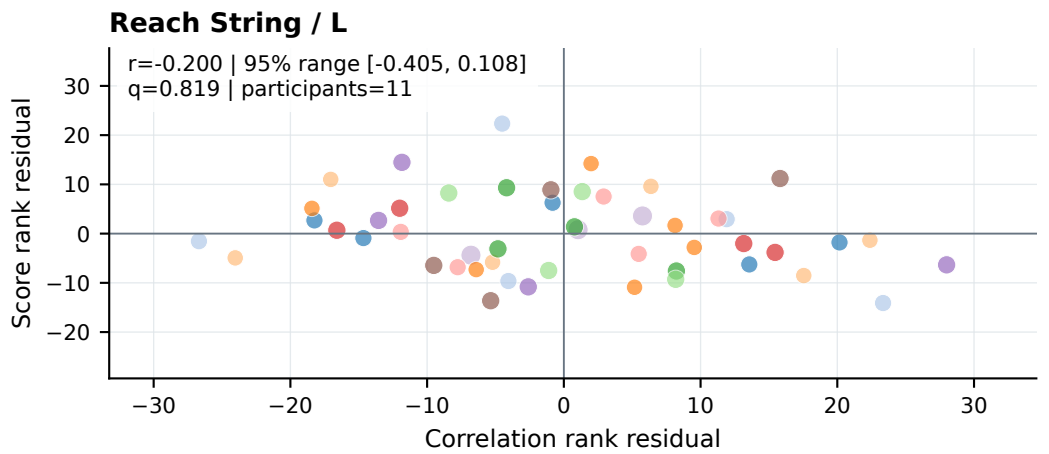


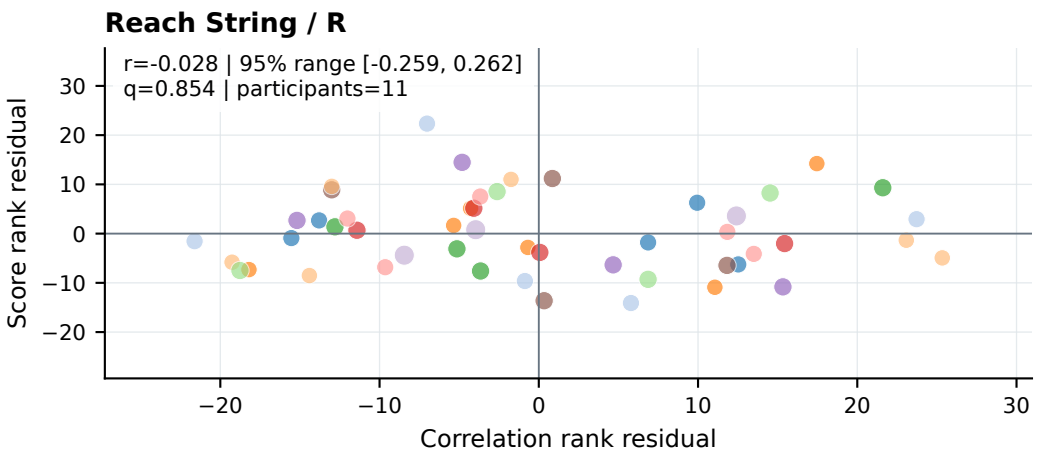


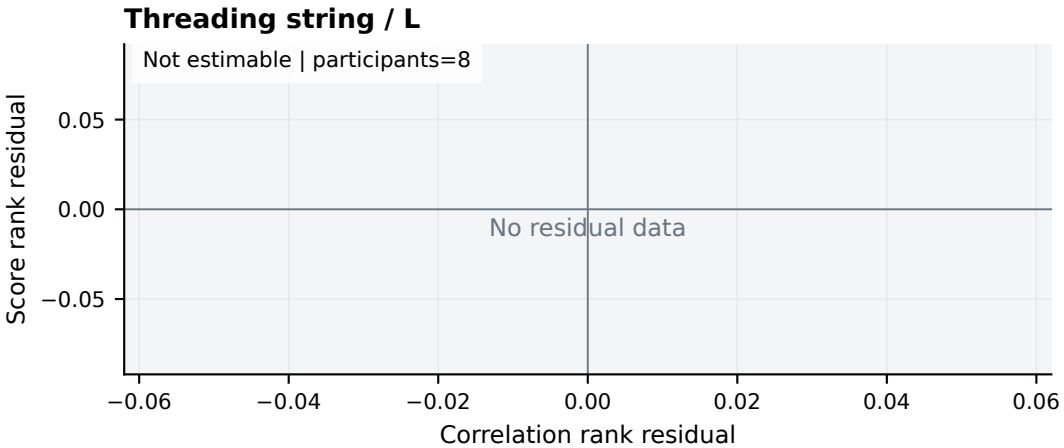


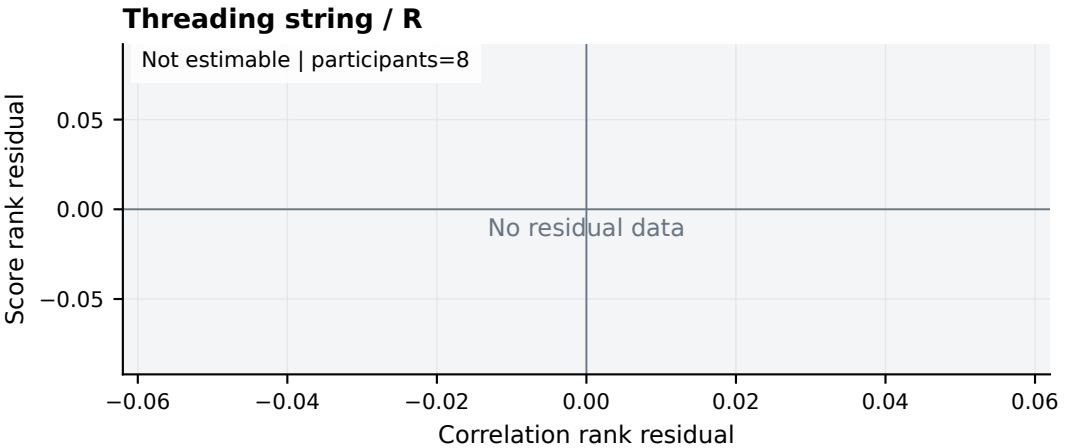

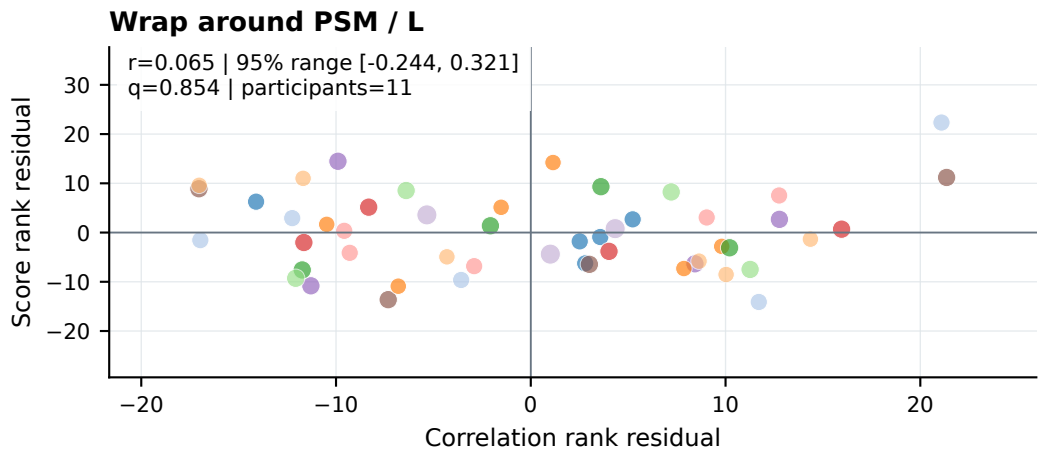

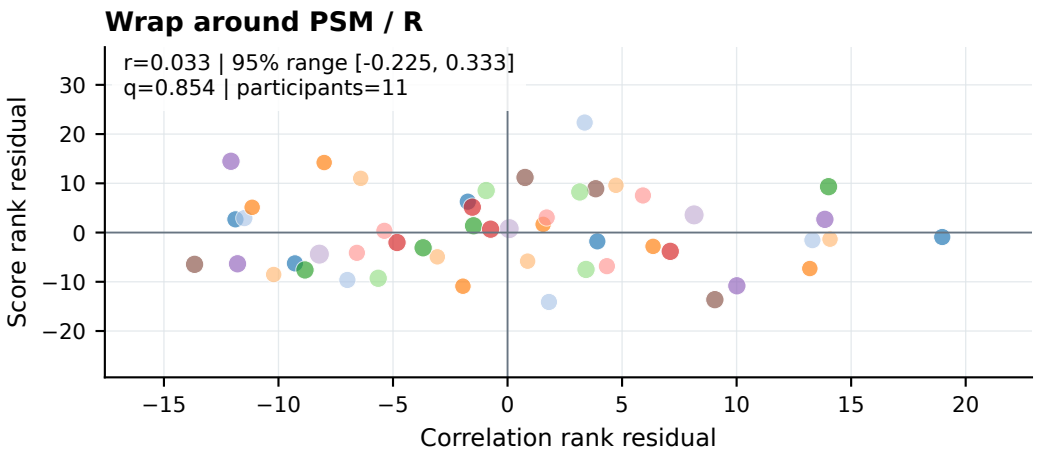

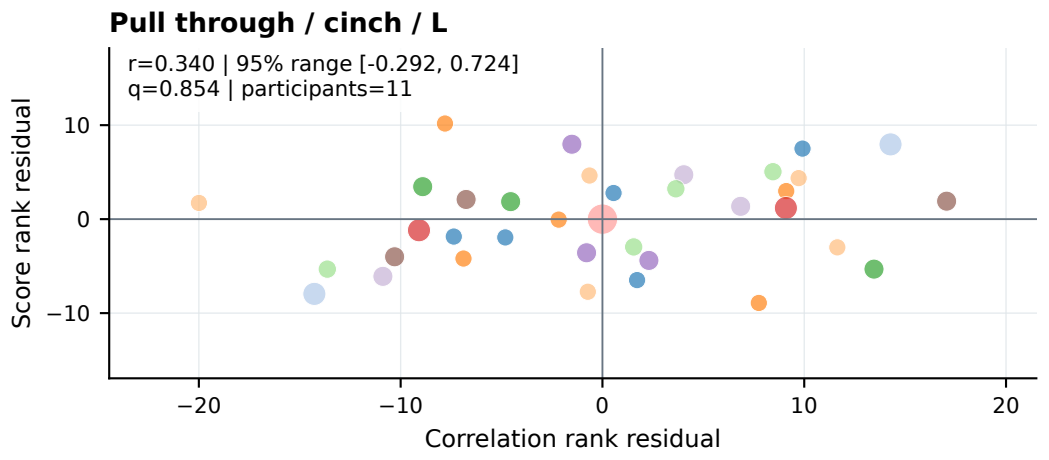


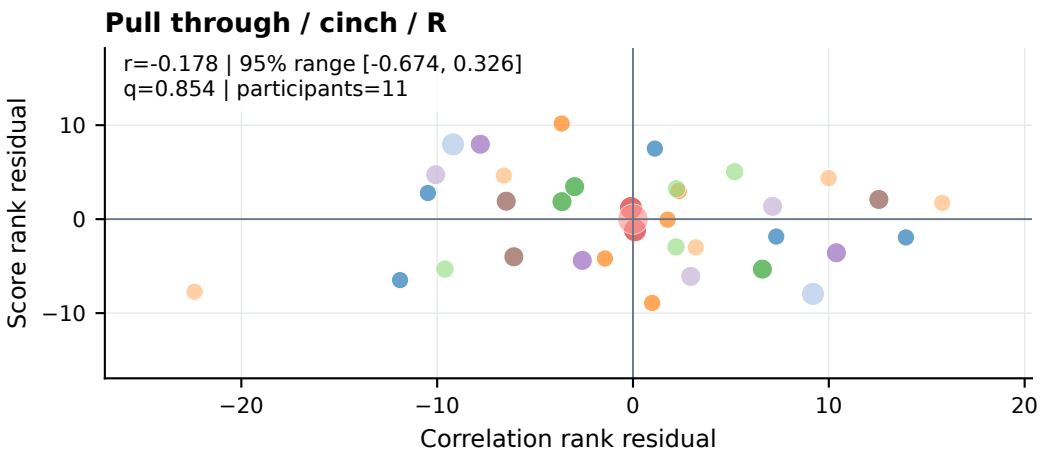


One point = one recording; color = participant. Analysis gives each participant equal total weight.
Ranks are residualized for participant effects and task order / attempt. q is family-specific; small-cluster inference is exploratory.

Task C / r_zero / Within participant


Reach String / L

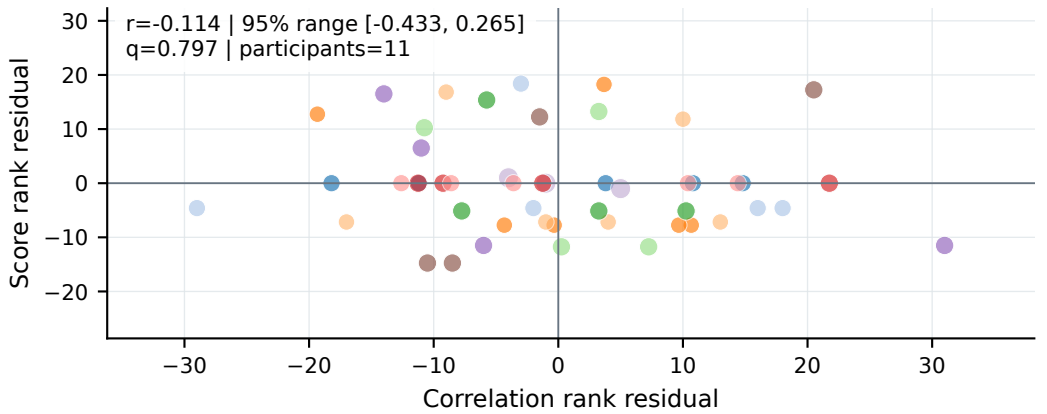


Reach String / R

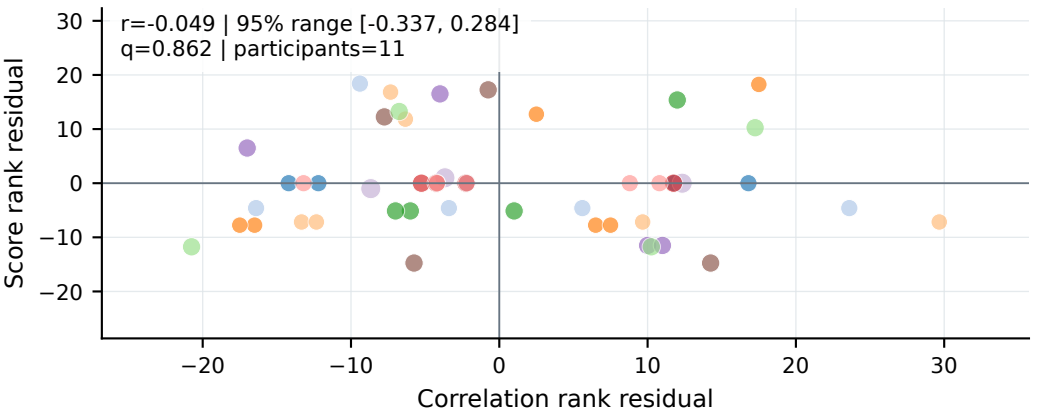


Threading string / L

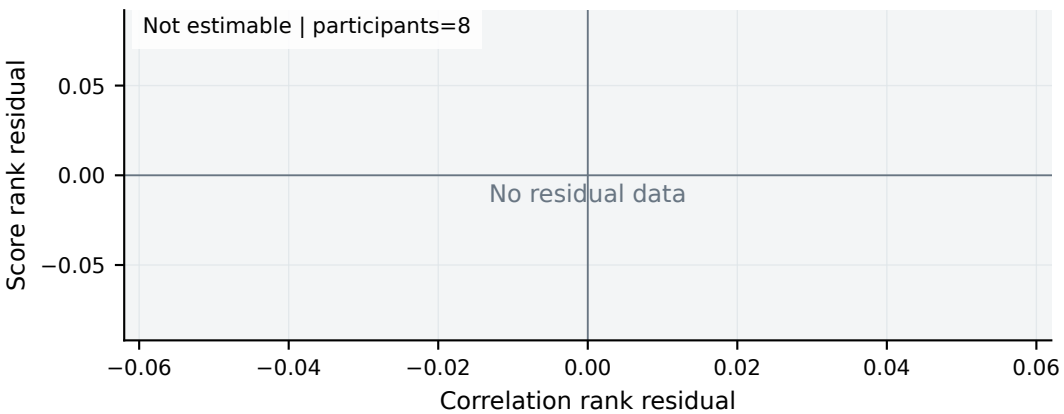


Threading string / R

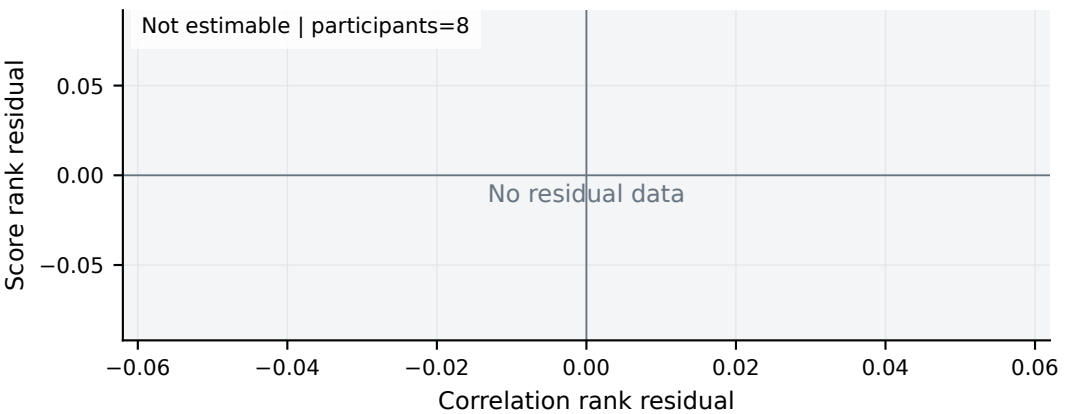


Wrap around PSM / L

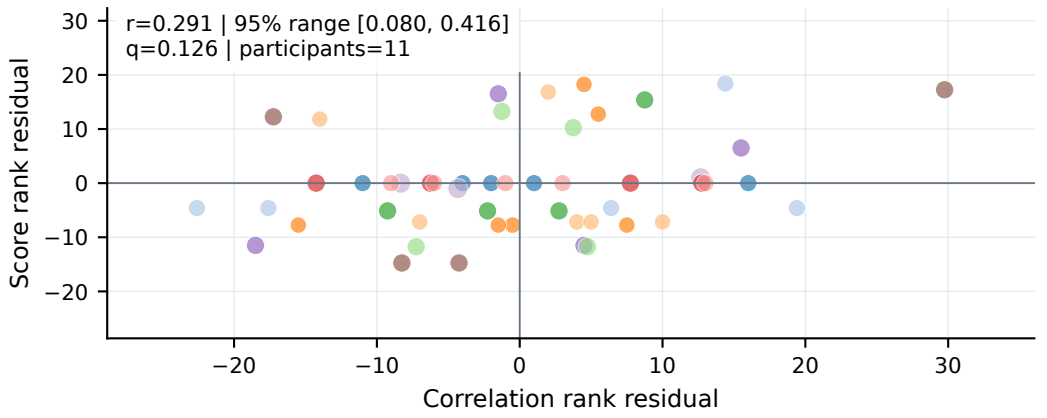


Wrap around PSM / R

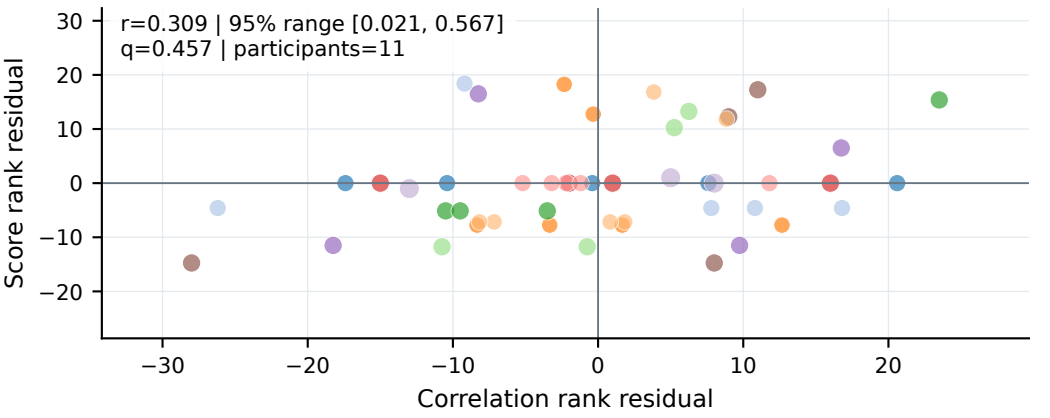

Pull through / cinch / L

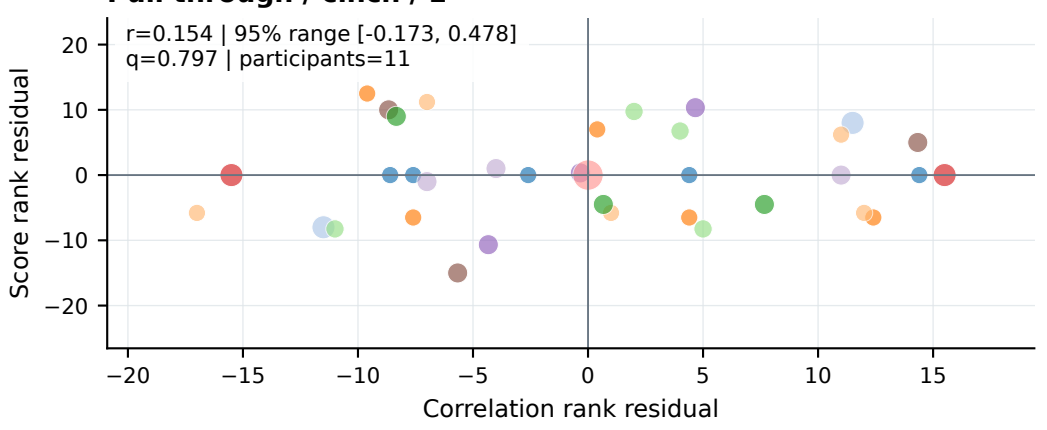



Pull through / cinch / R

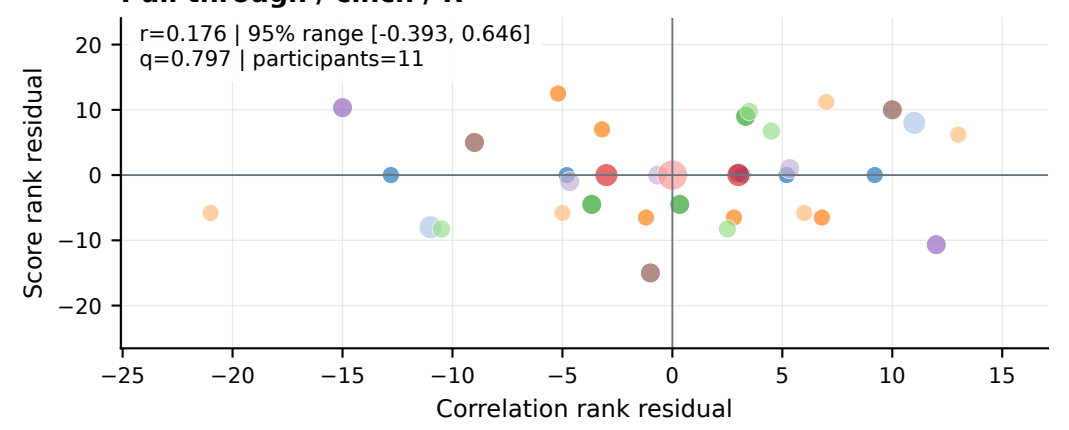



One point = one recording; color = participant. Analysis gives each participant equal total weight.
Ranks are residualized for participant effects. q is family-specific; small-cluster inference is exploratory.


Task C / r_zero / Within, order adjusted

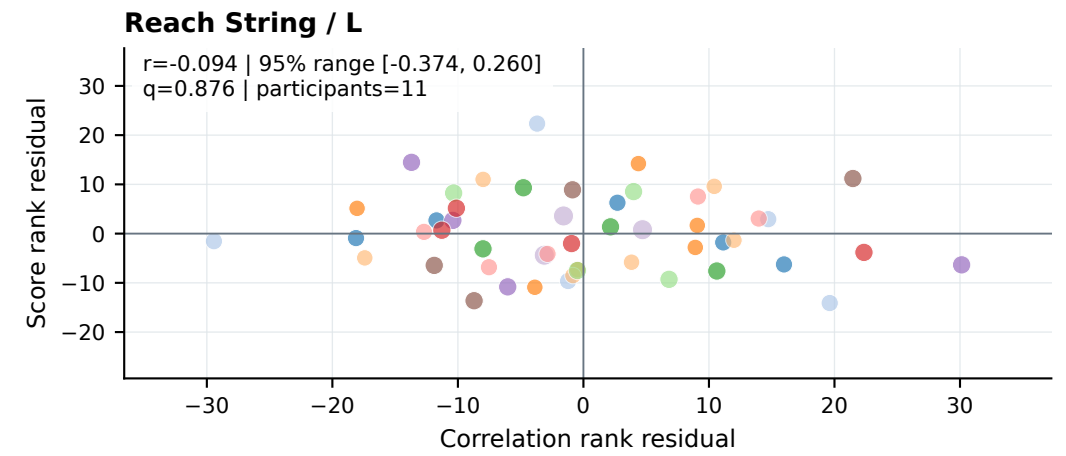


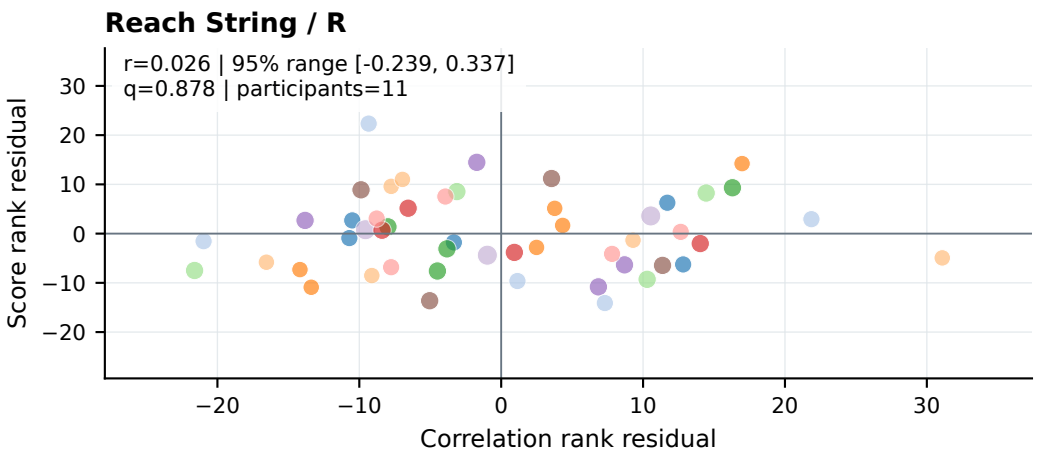


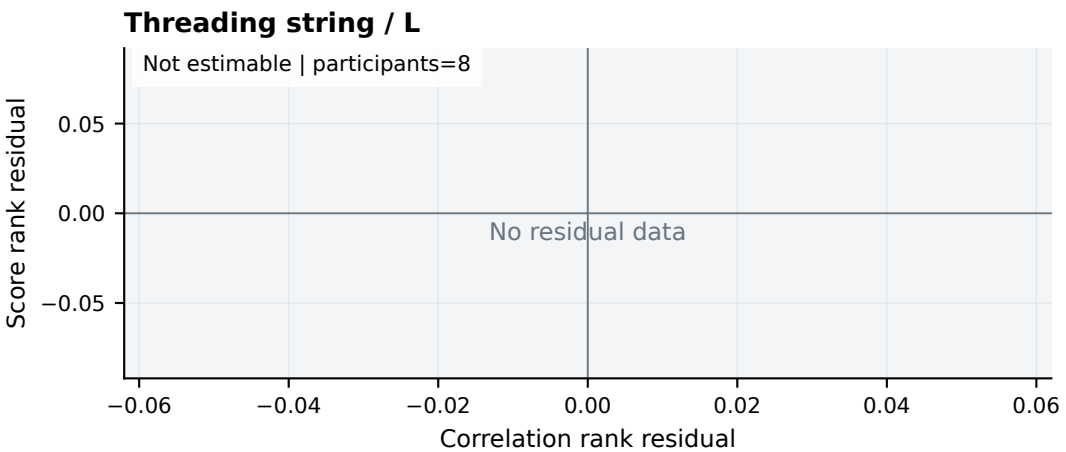


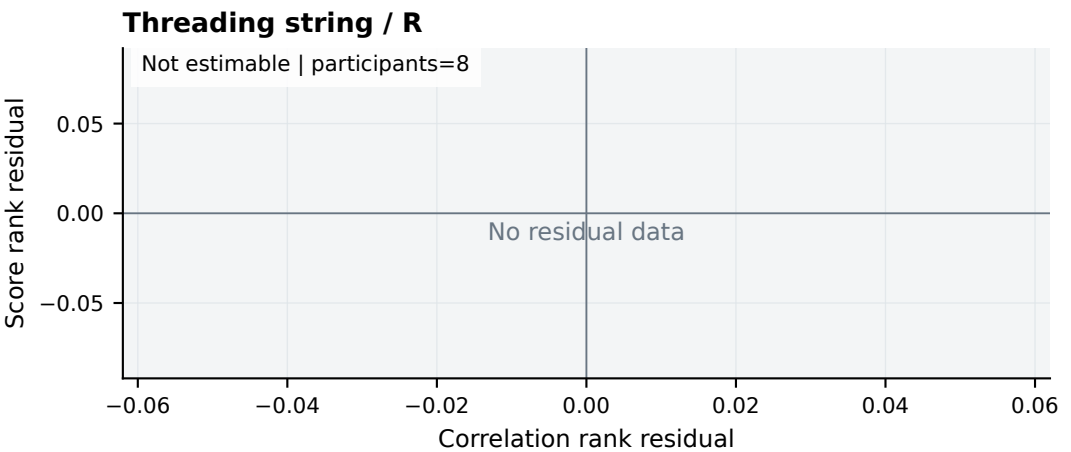

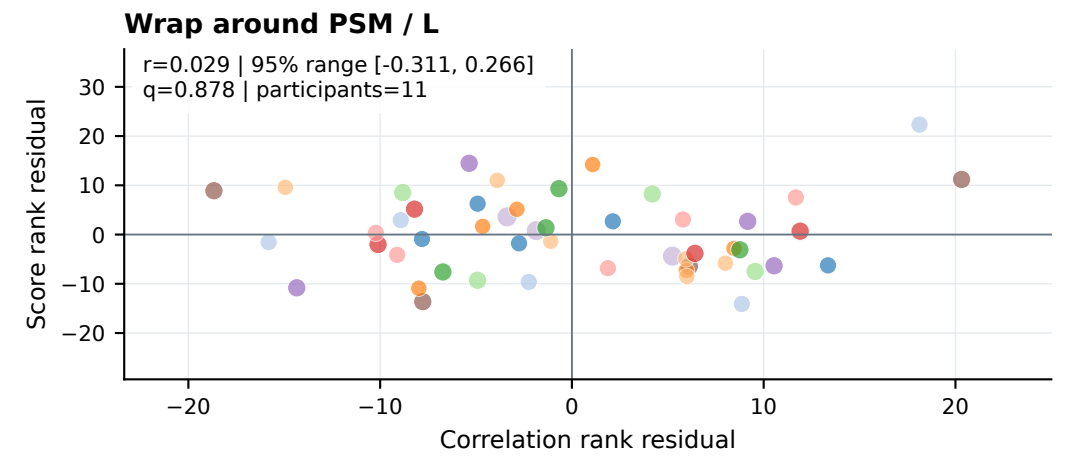

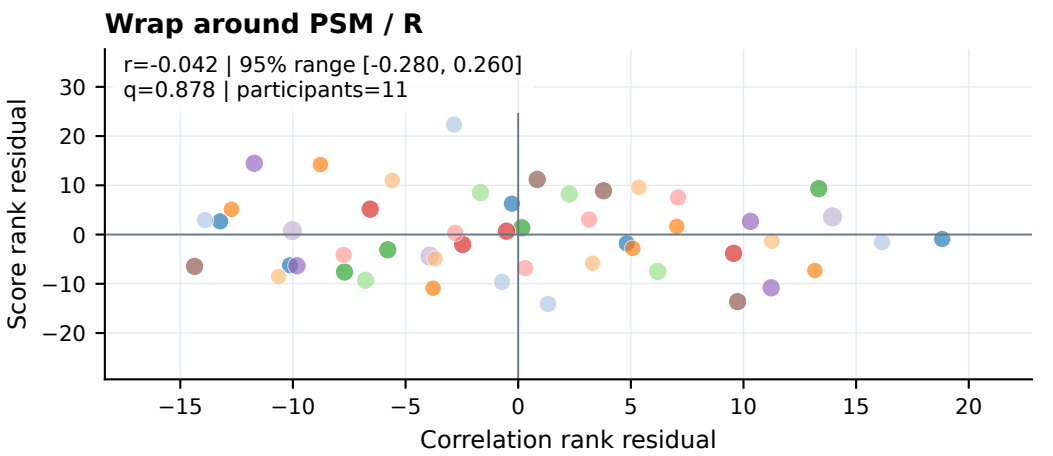


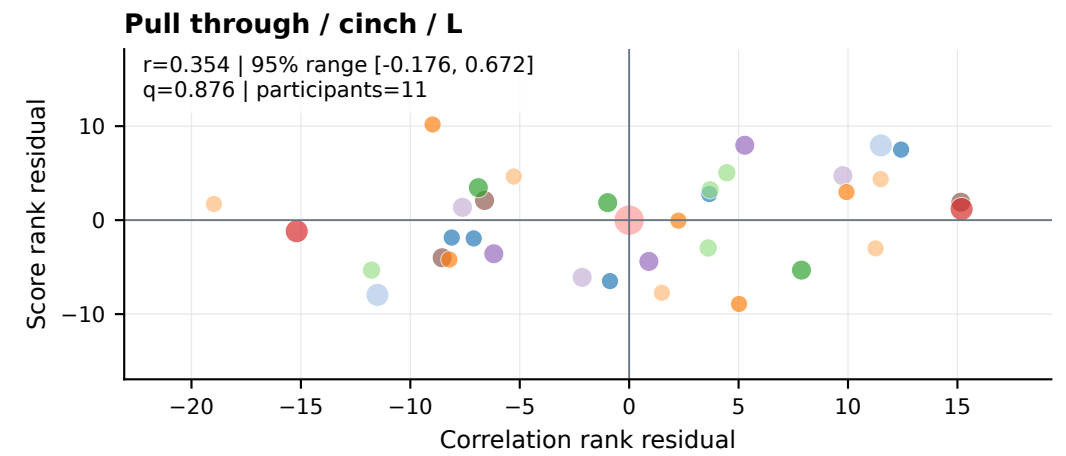

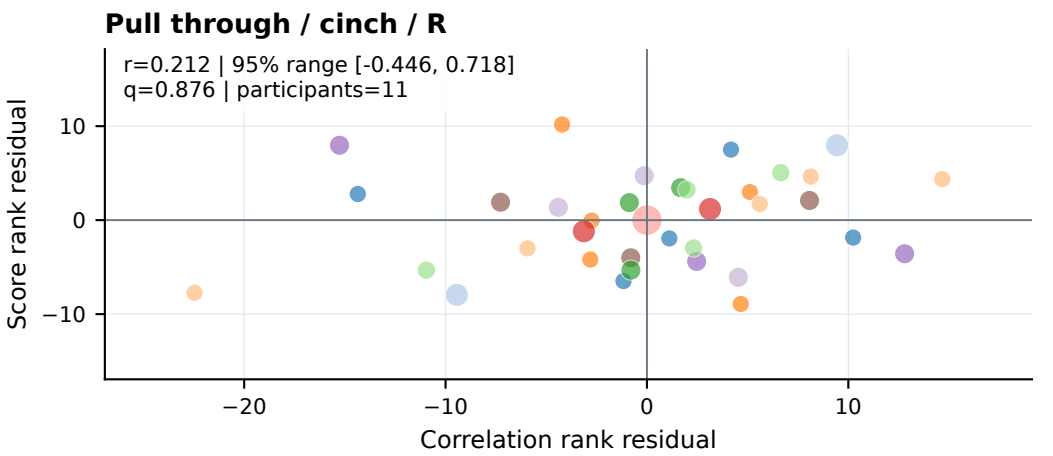


One point = one recording; color = participant. Analysis gives each participant equal total weight.
Ranks are residualized for participant effects and task order / attempt. q is family-specific; small-cluster inference is exploratory.

Primary position / Peak gaze-PSM correlation and Score

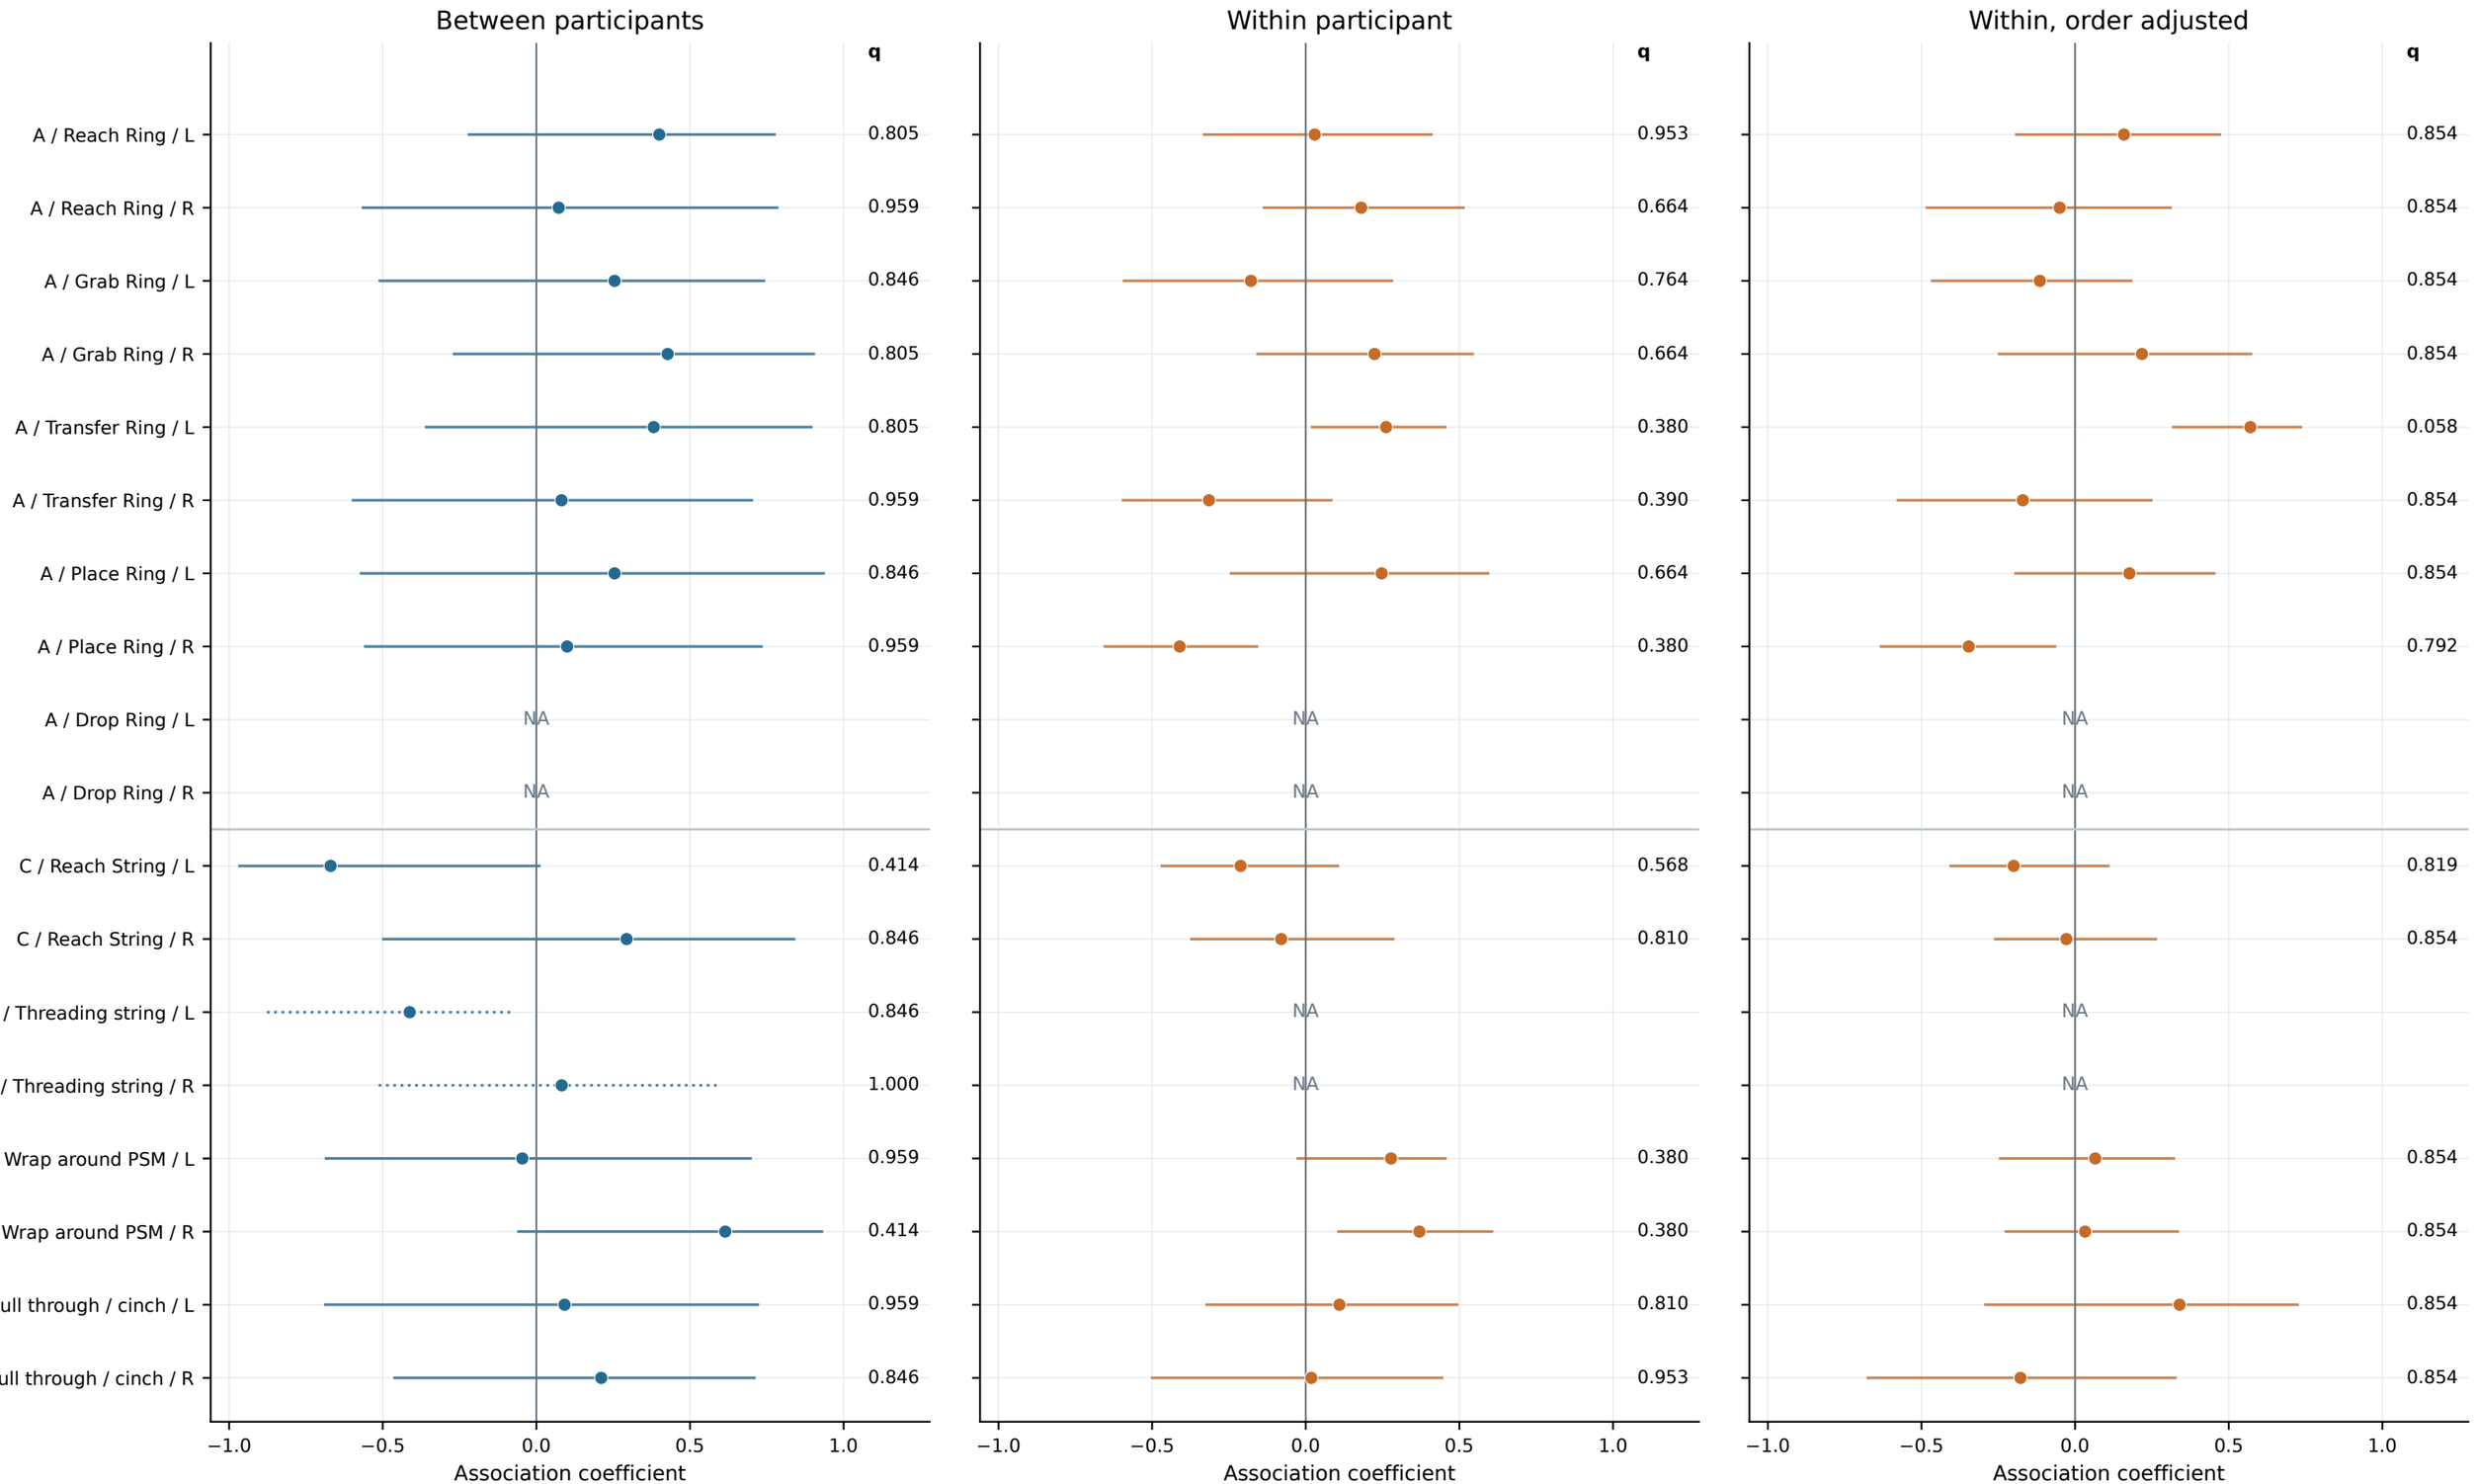


Bars: 95% participant-bootstrap percentile intervals; dotted bars are unreliable (<97.5% valid draws). Diamonds: family q < 0.05.
NA means not estimable, not zero association. Each method/predictor has a separate correction family across tasks, stages and sides.

Primary position / Zero-lag gaze-PSM correlation and Score

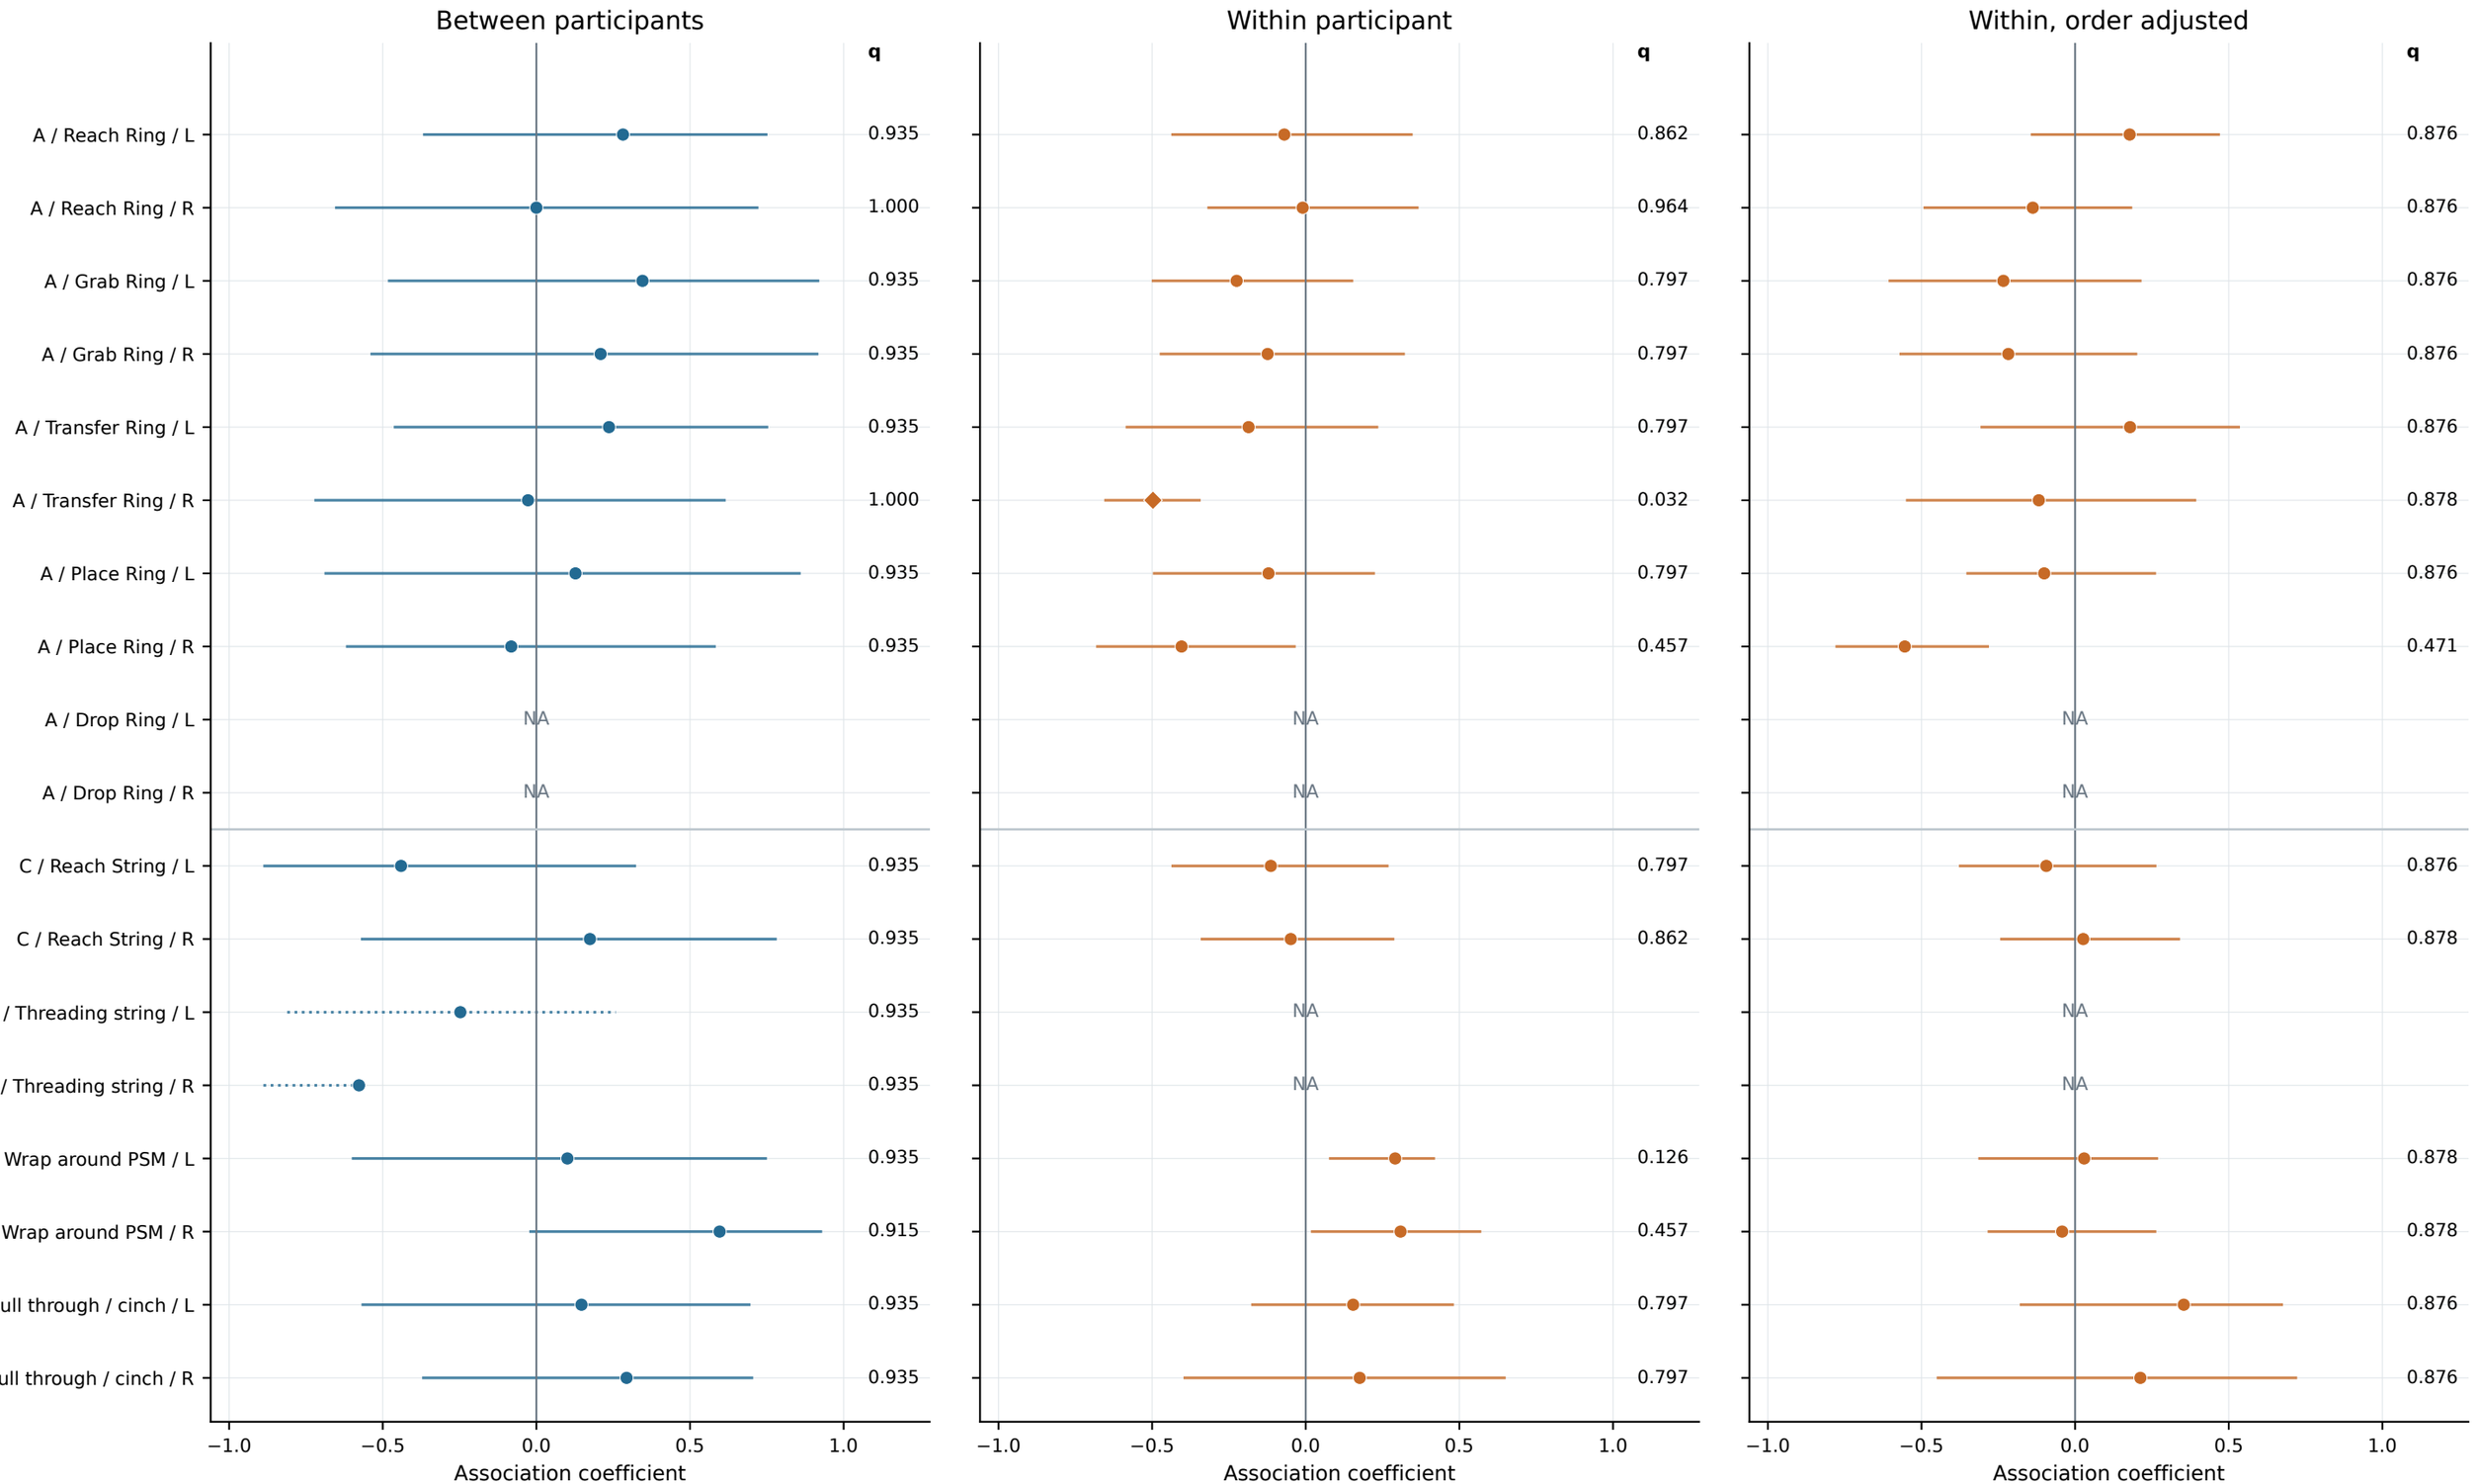


Bars: 95% participant-bootstrap percentile intervals; dotted bars are unreliable (<97.5% valid draws). Diamonds: family q < 0.05.
NA means not estimable, not zero association. Each method/predictor has a separate correction family across tasks, stages and sides.

Task A / peak_r / Between participants
Primary and sensitivity analyses

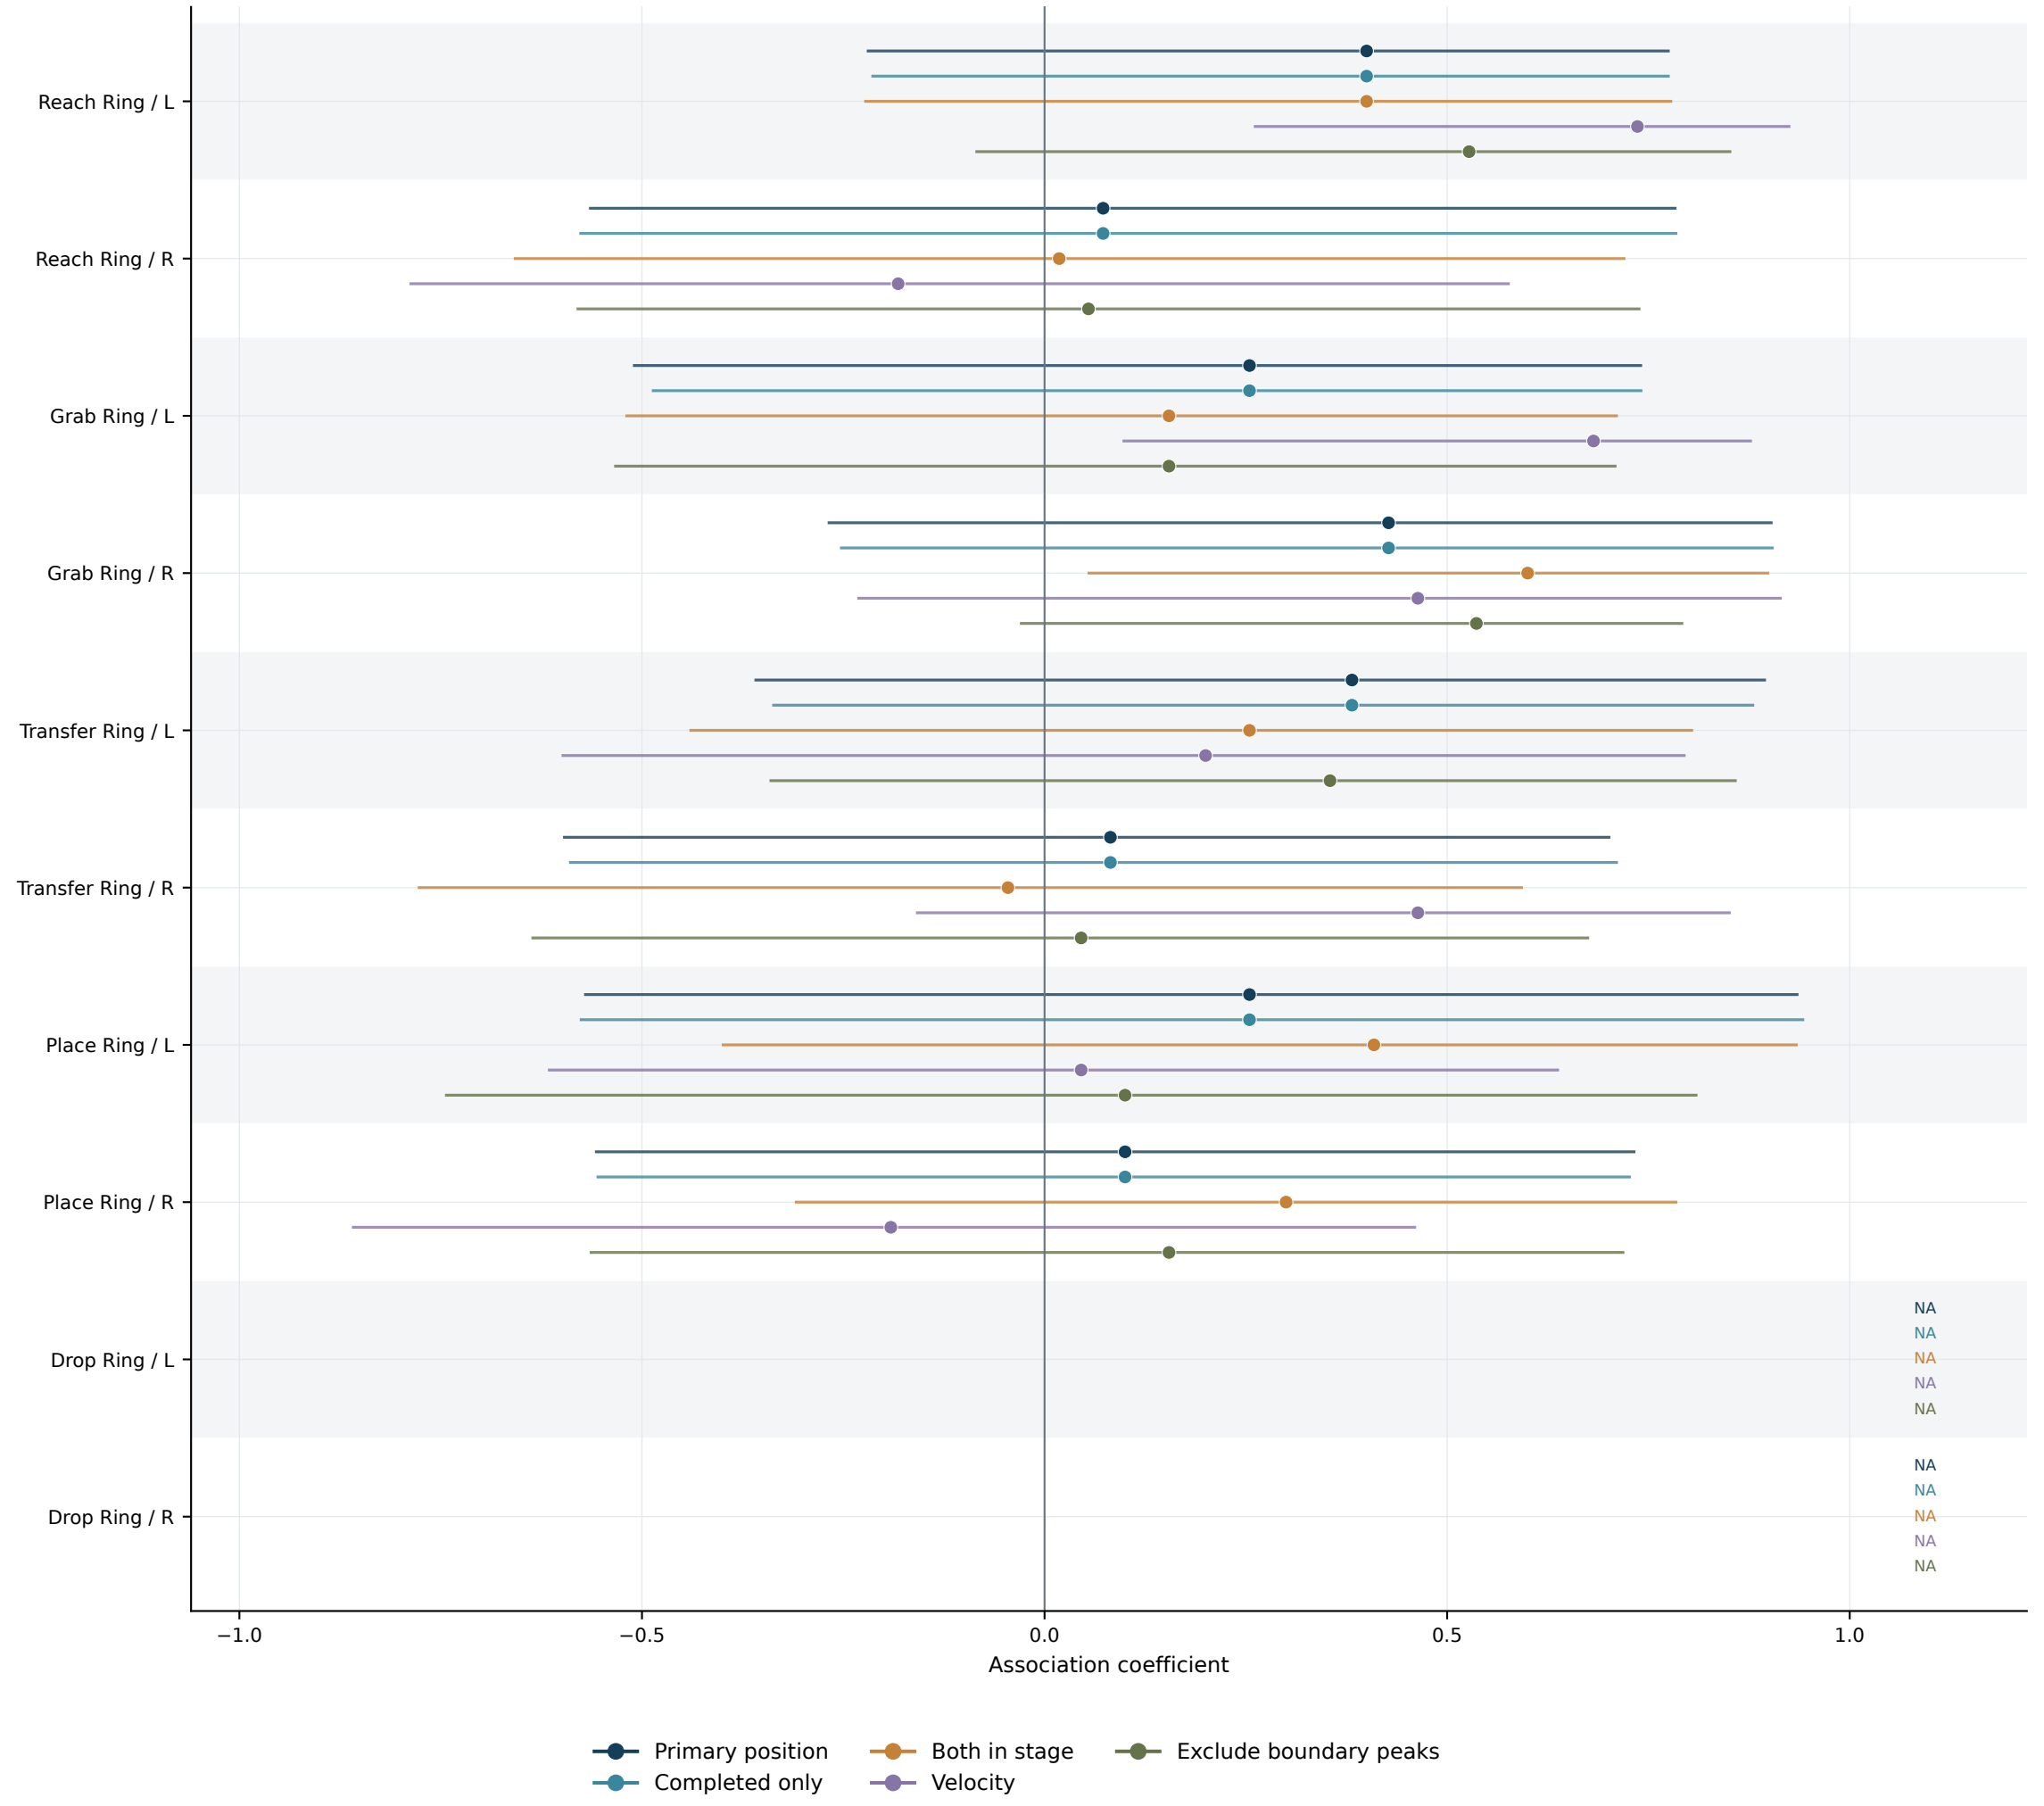


Participant-bootstrap intervals. Dotted intervals: unreliable. Diamonds: q < 0.05 in that scenario's family.
Scenario samples may differ; this display is a robustness comparison, not a formal test of scenario differences.

Task A / peak_r / Within, order adjusted
Primary and sensitivity analyses

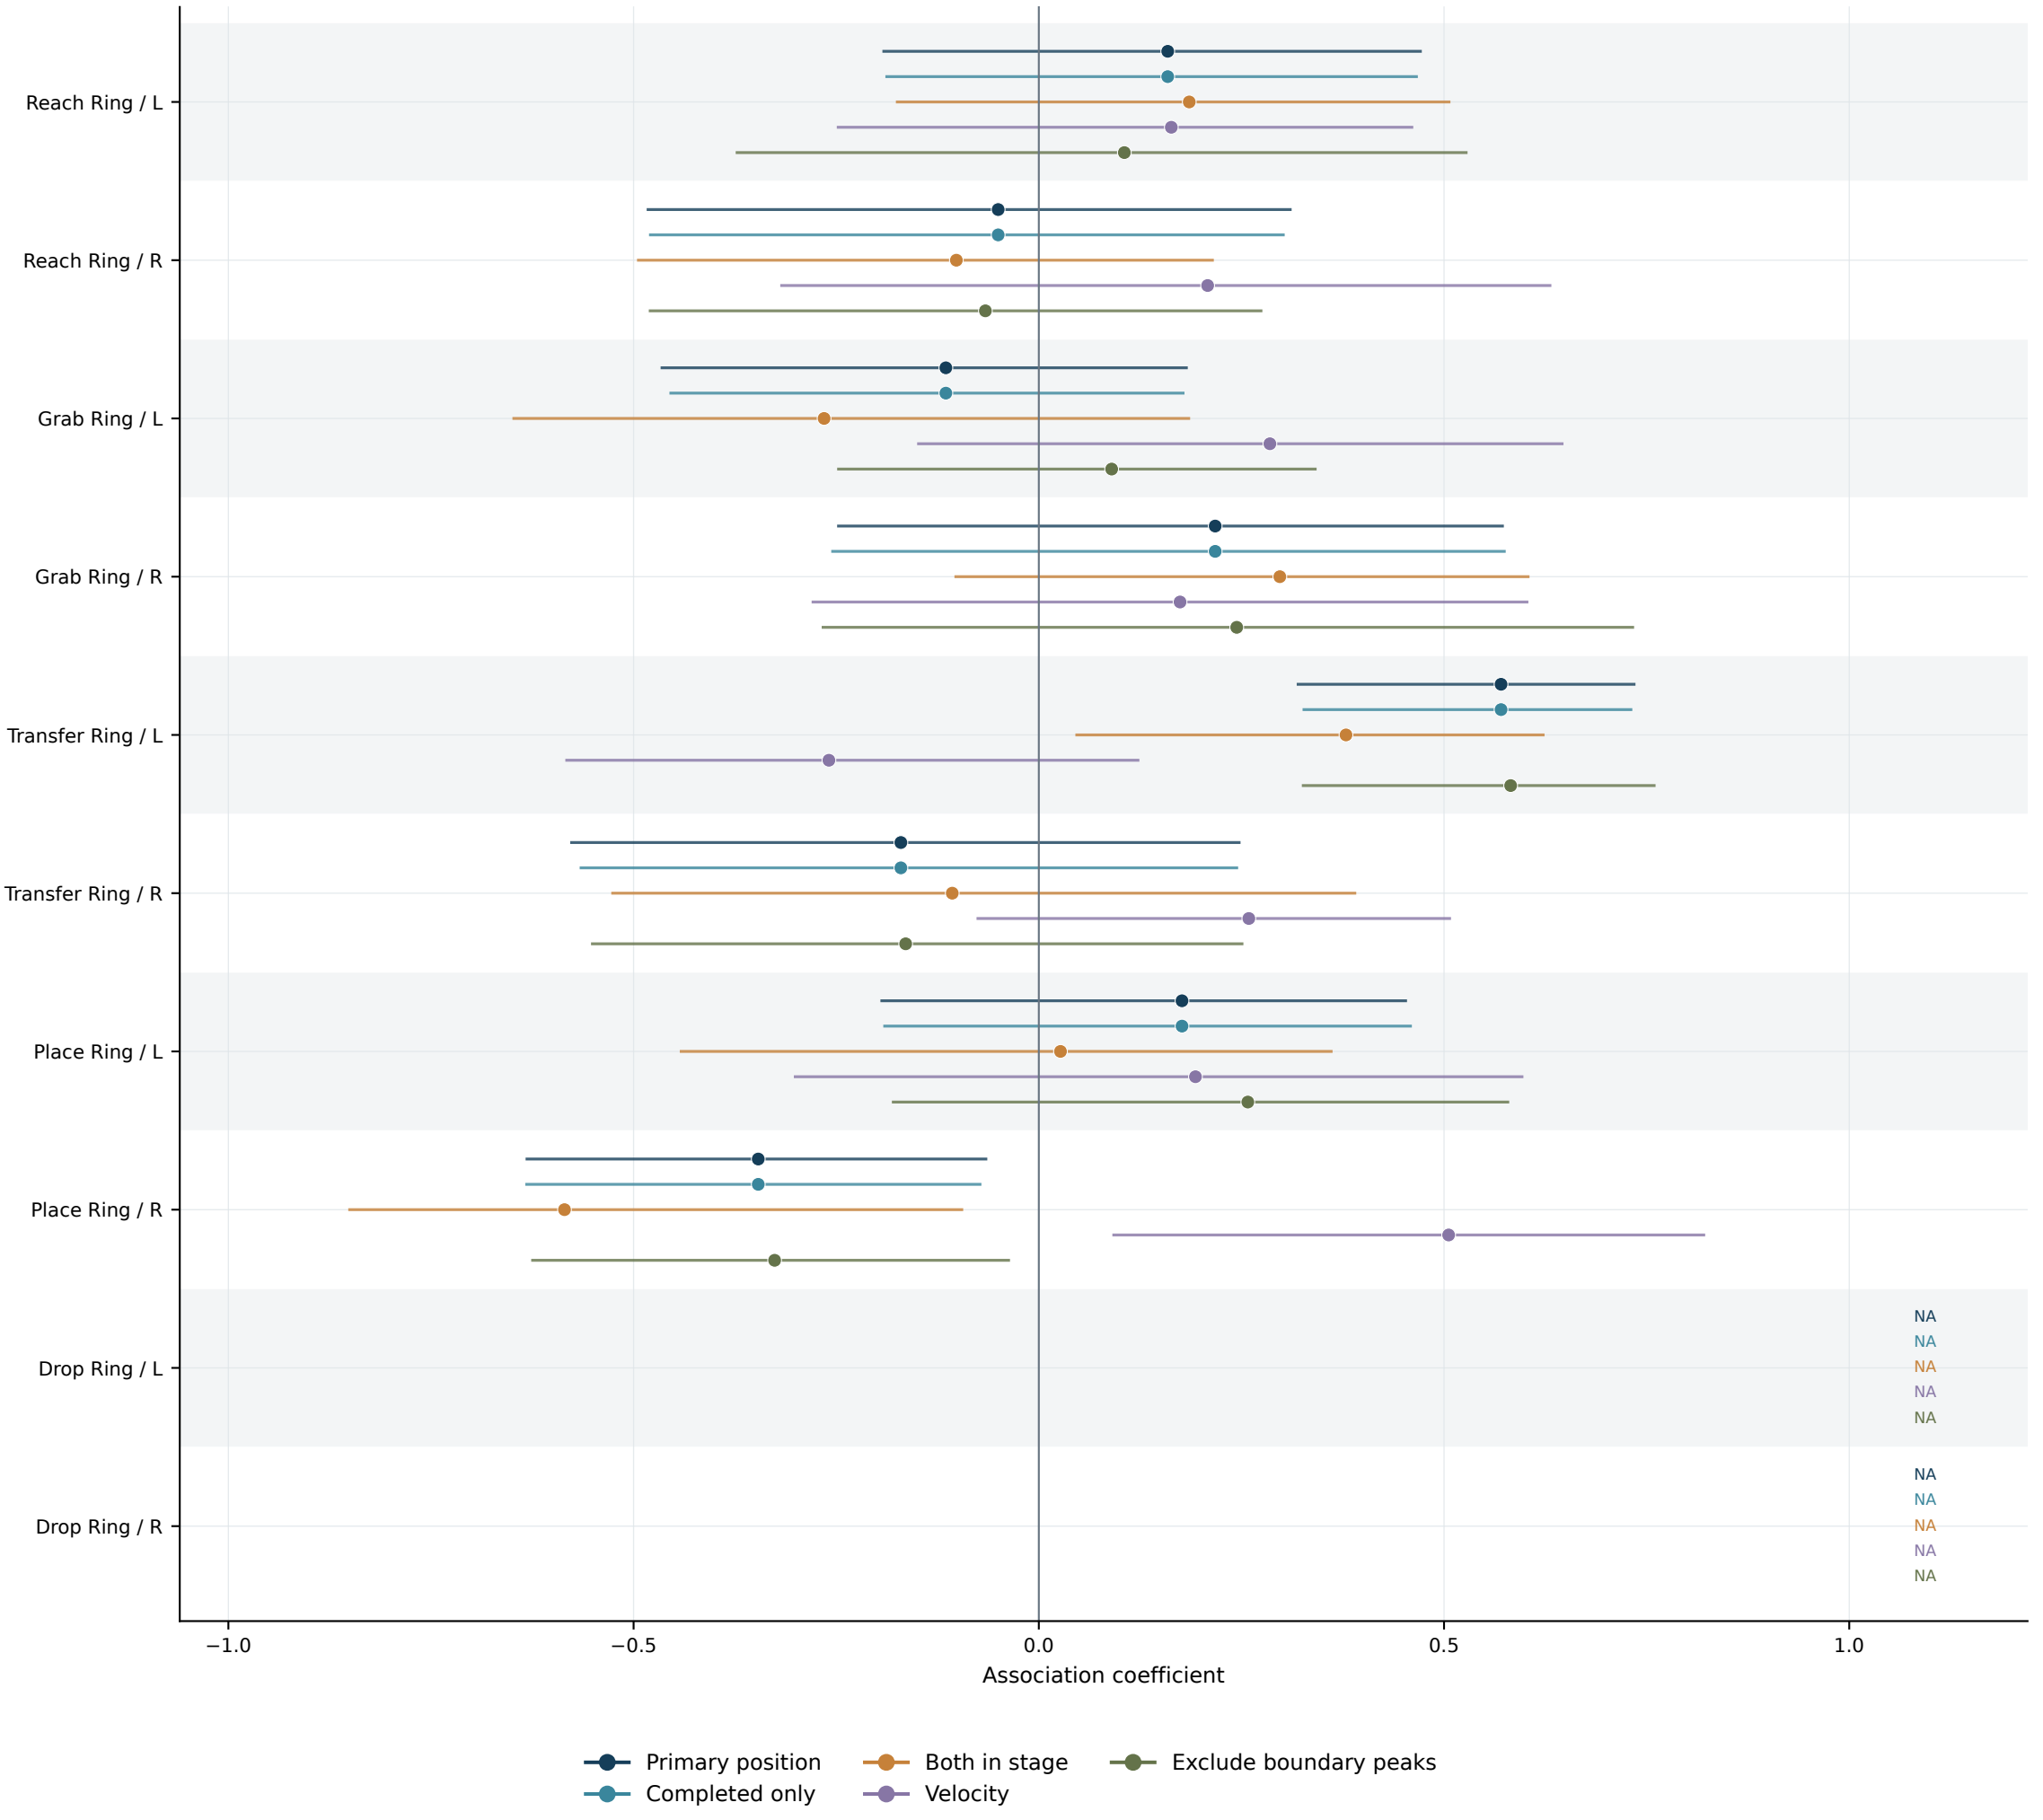


Participant-bootstrap intervals. Dotted intervals: unreliable. Diamonds: q < 0.05 in that scenario's family.
Scenario samples may differ; this display is a robustness comparison, not a formal test of scenario differences.

Task A / r_zero / Between participants
Primary and sensitivity analyses

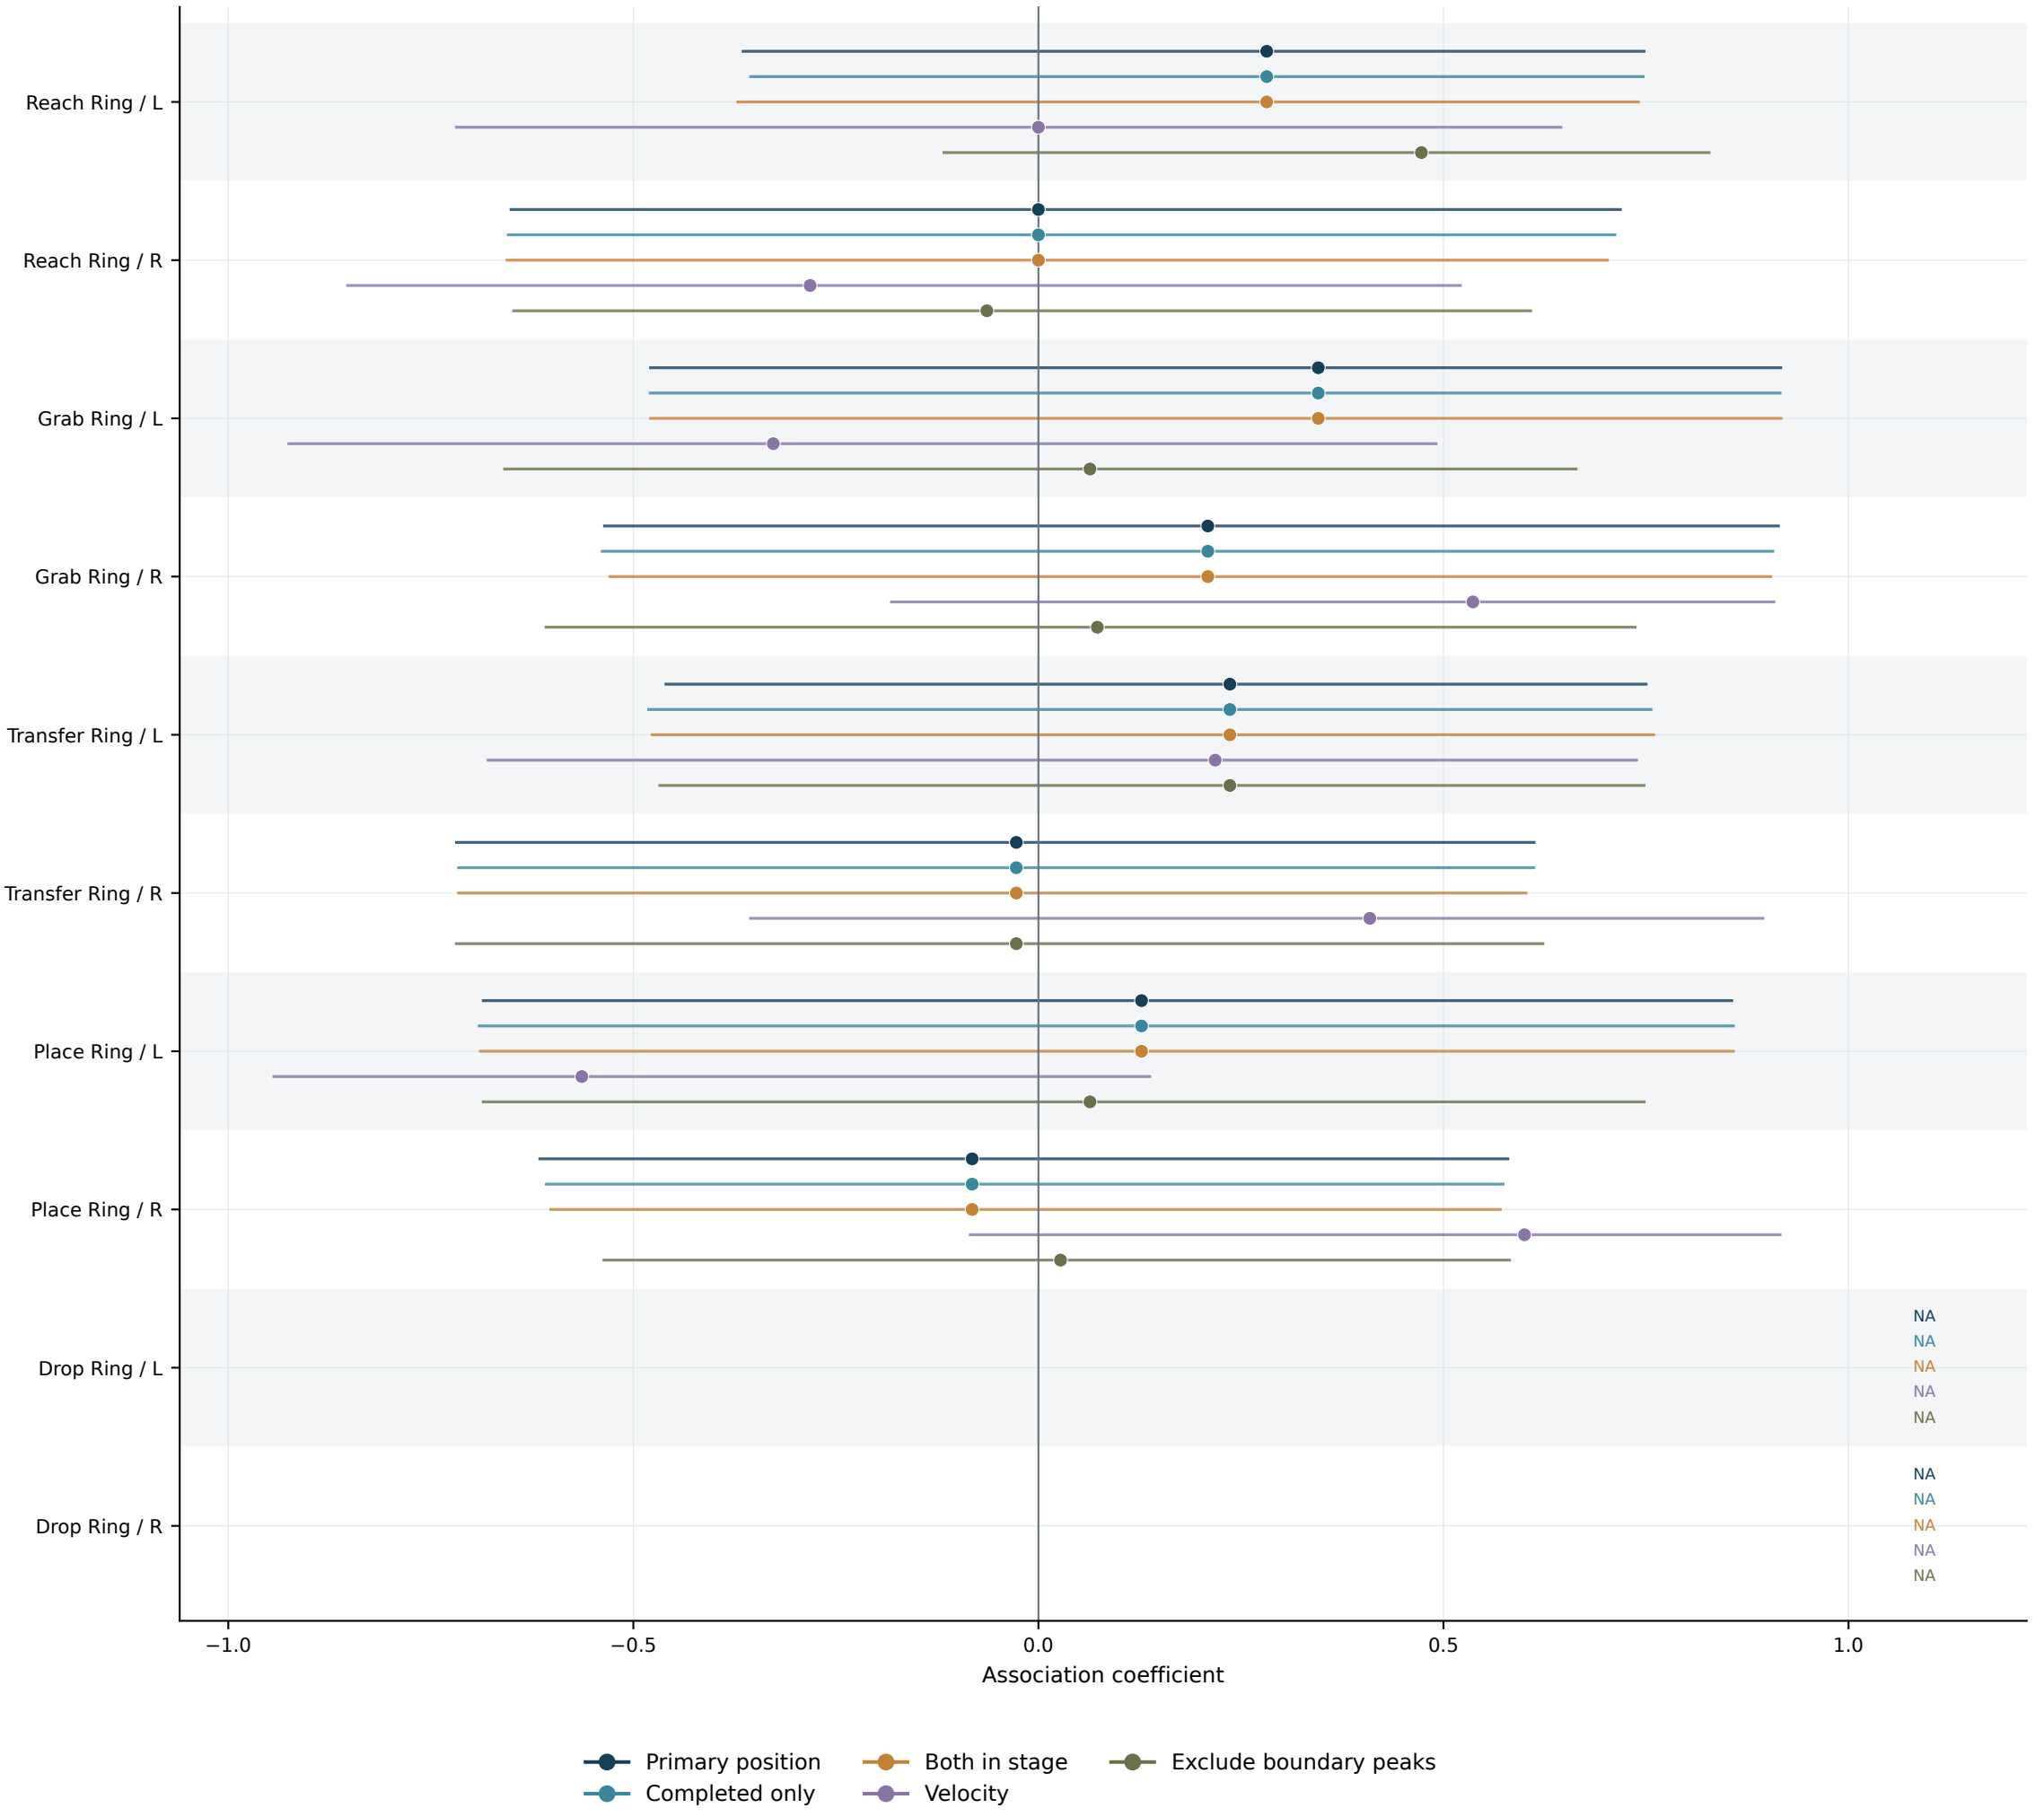


Participant-bootstrap intervals. Dotted intervals: unreliable. Diamonds: q < 0.05 in that scenario's family.
Scenario samples may differ; this display is a robustness comparison, not a formal test of scenario differences.


Task A / r_zero / Within, order adjusted
Primary and sensitivity analyses

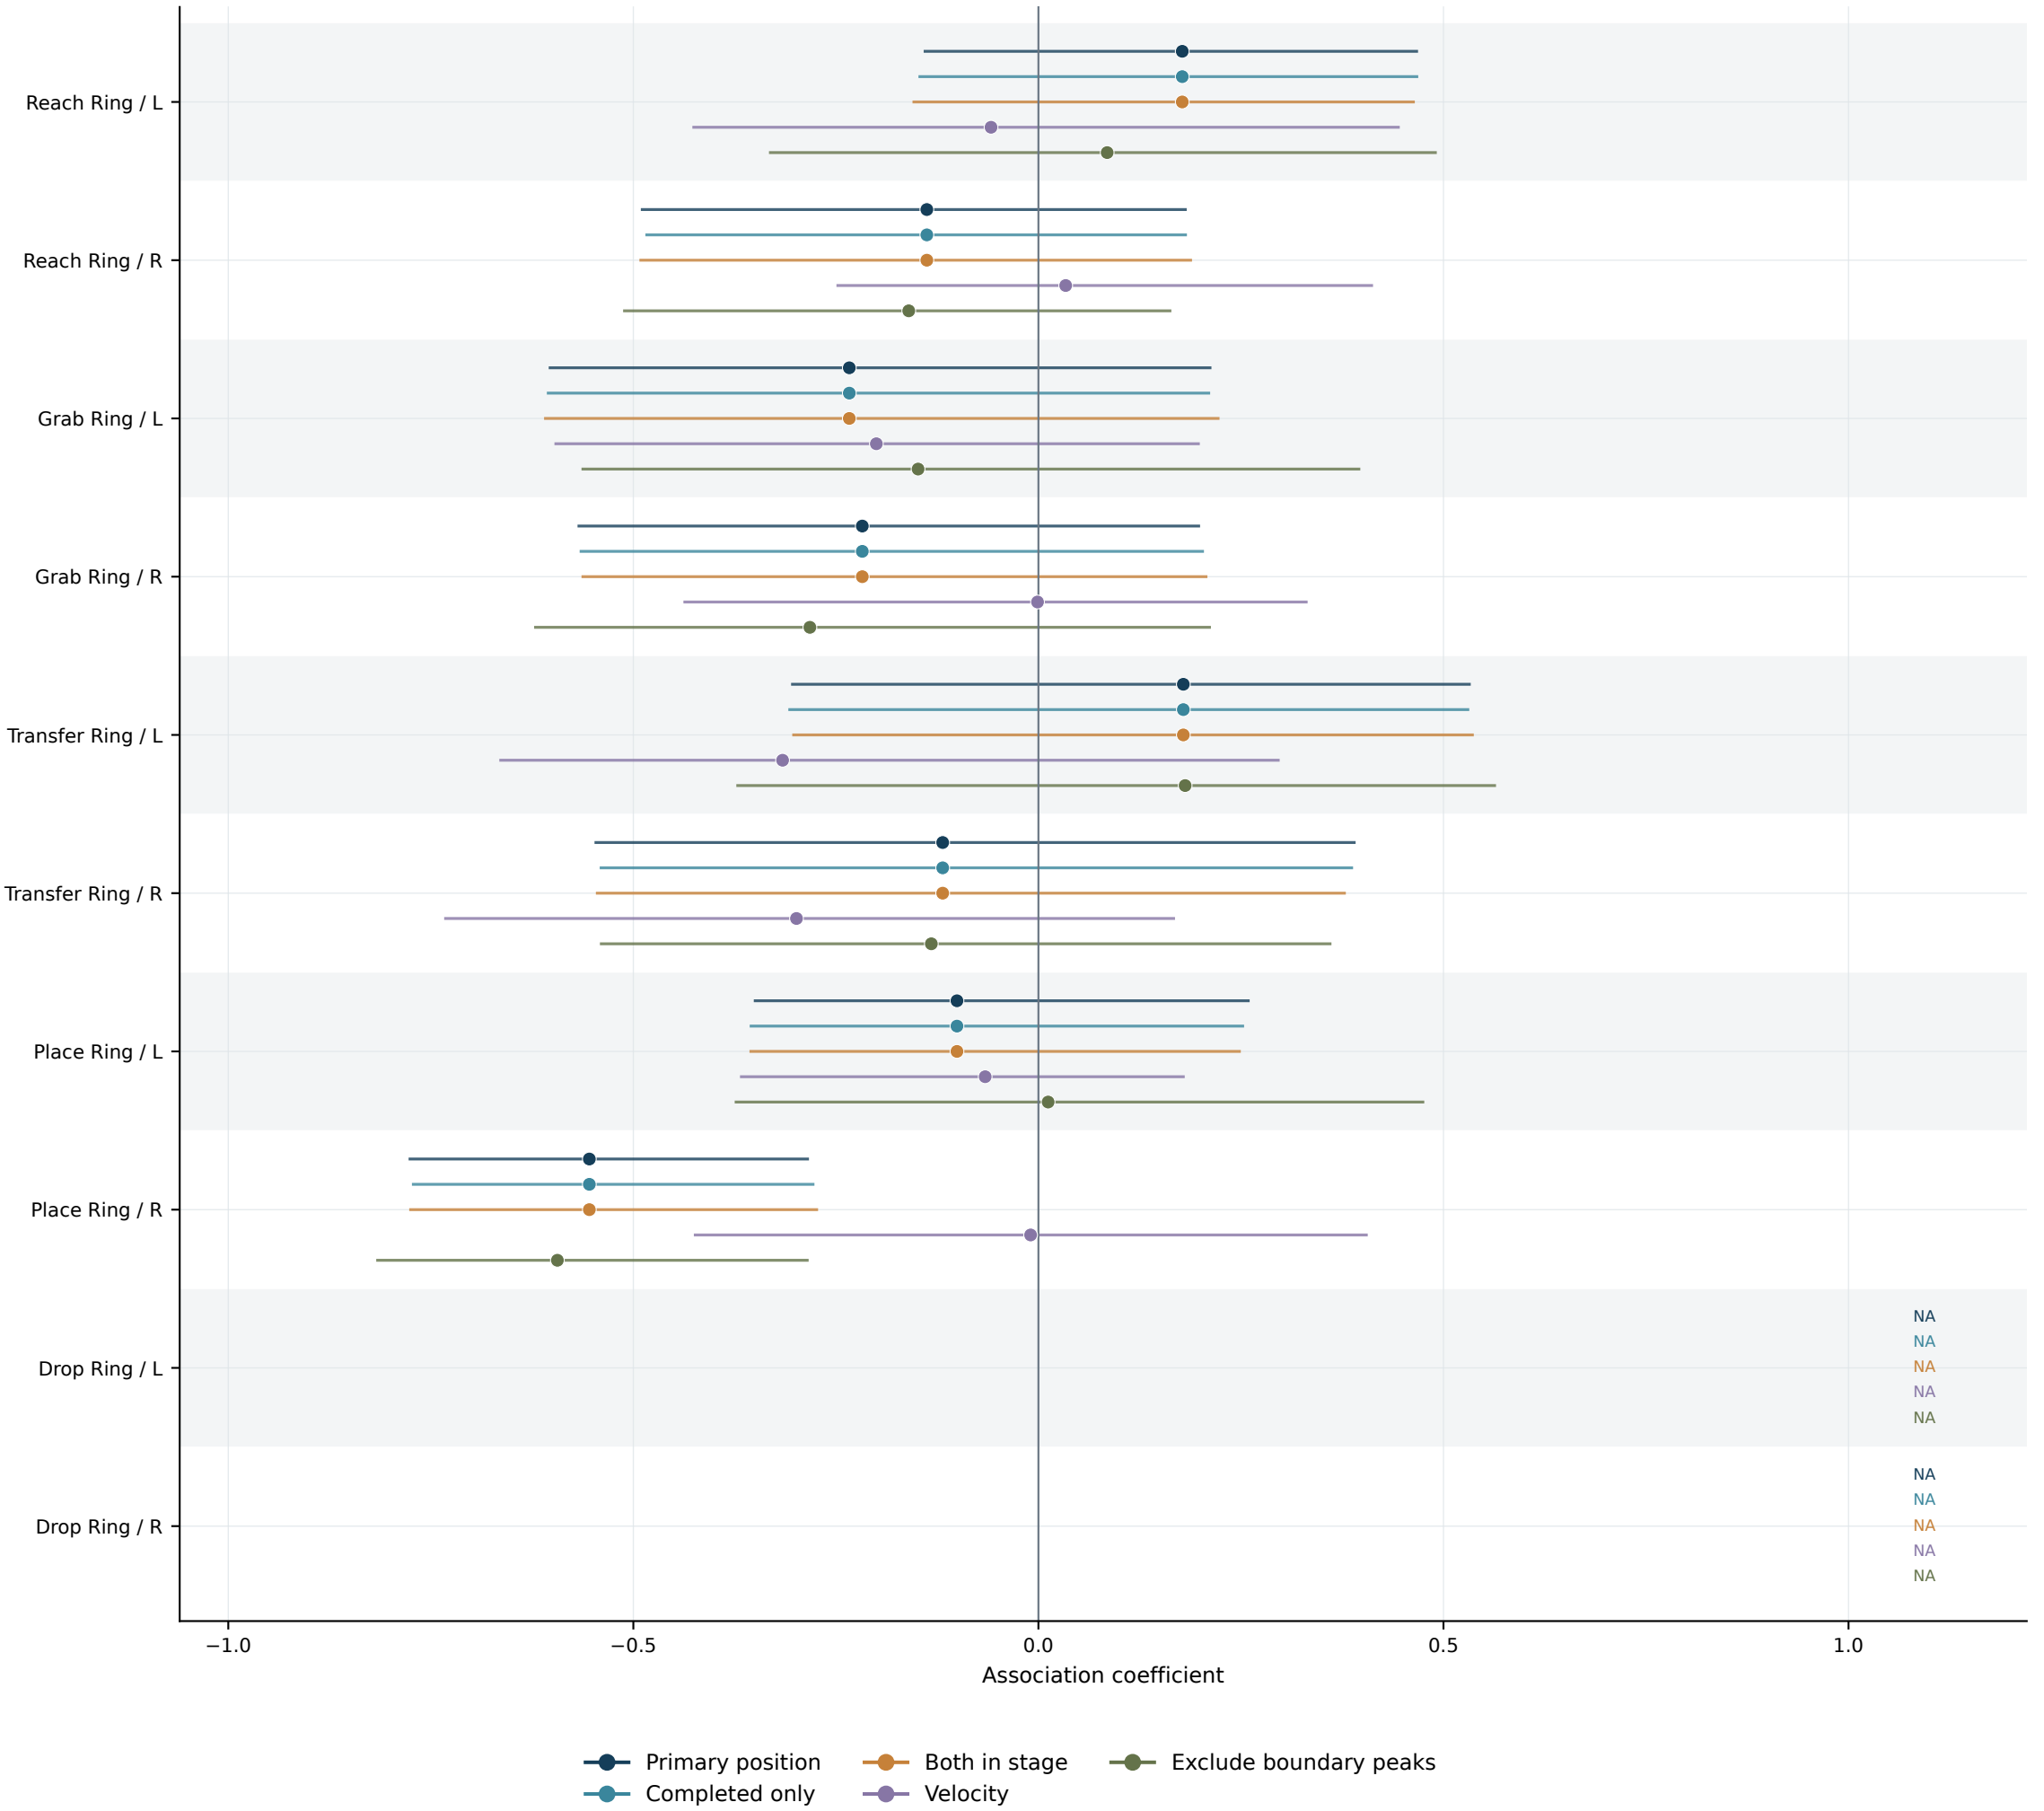


Participant-bootstrap intervals. Dotted intervals: unreliable. Diamonds: q < 0.05 in that scenario's family.
Scenario samples may differ; this display is a robustness comparison, not a formal test of scenario differences.

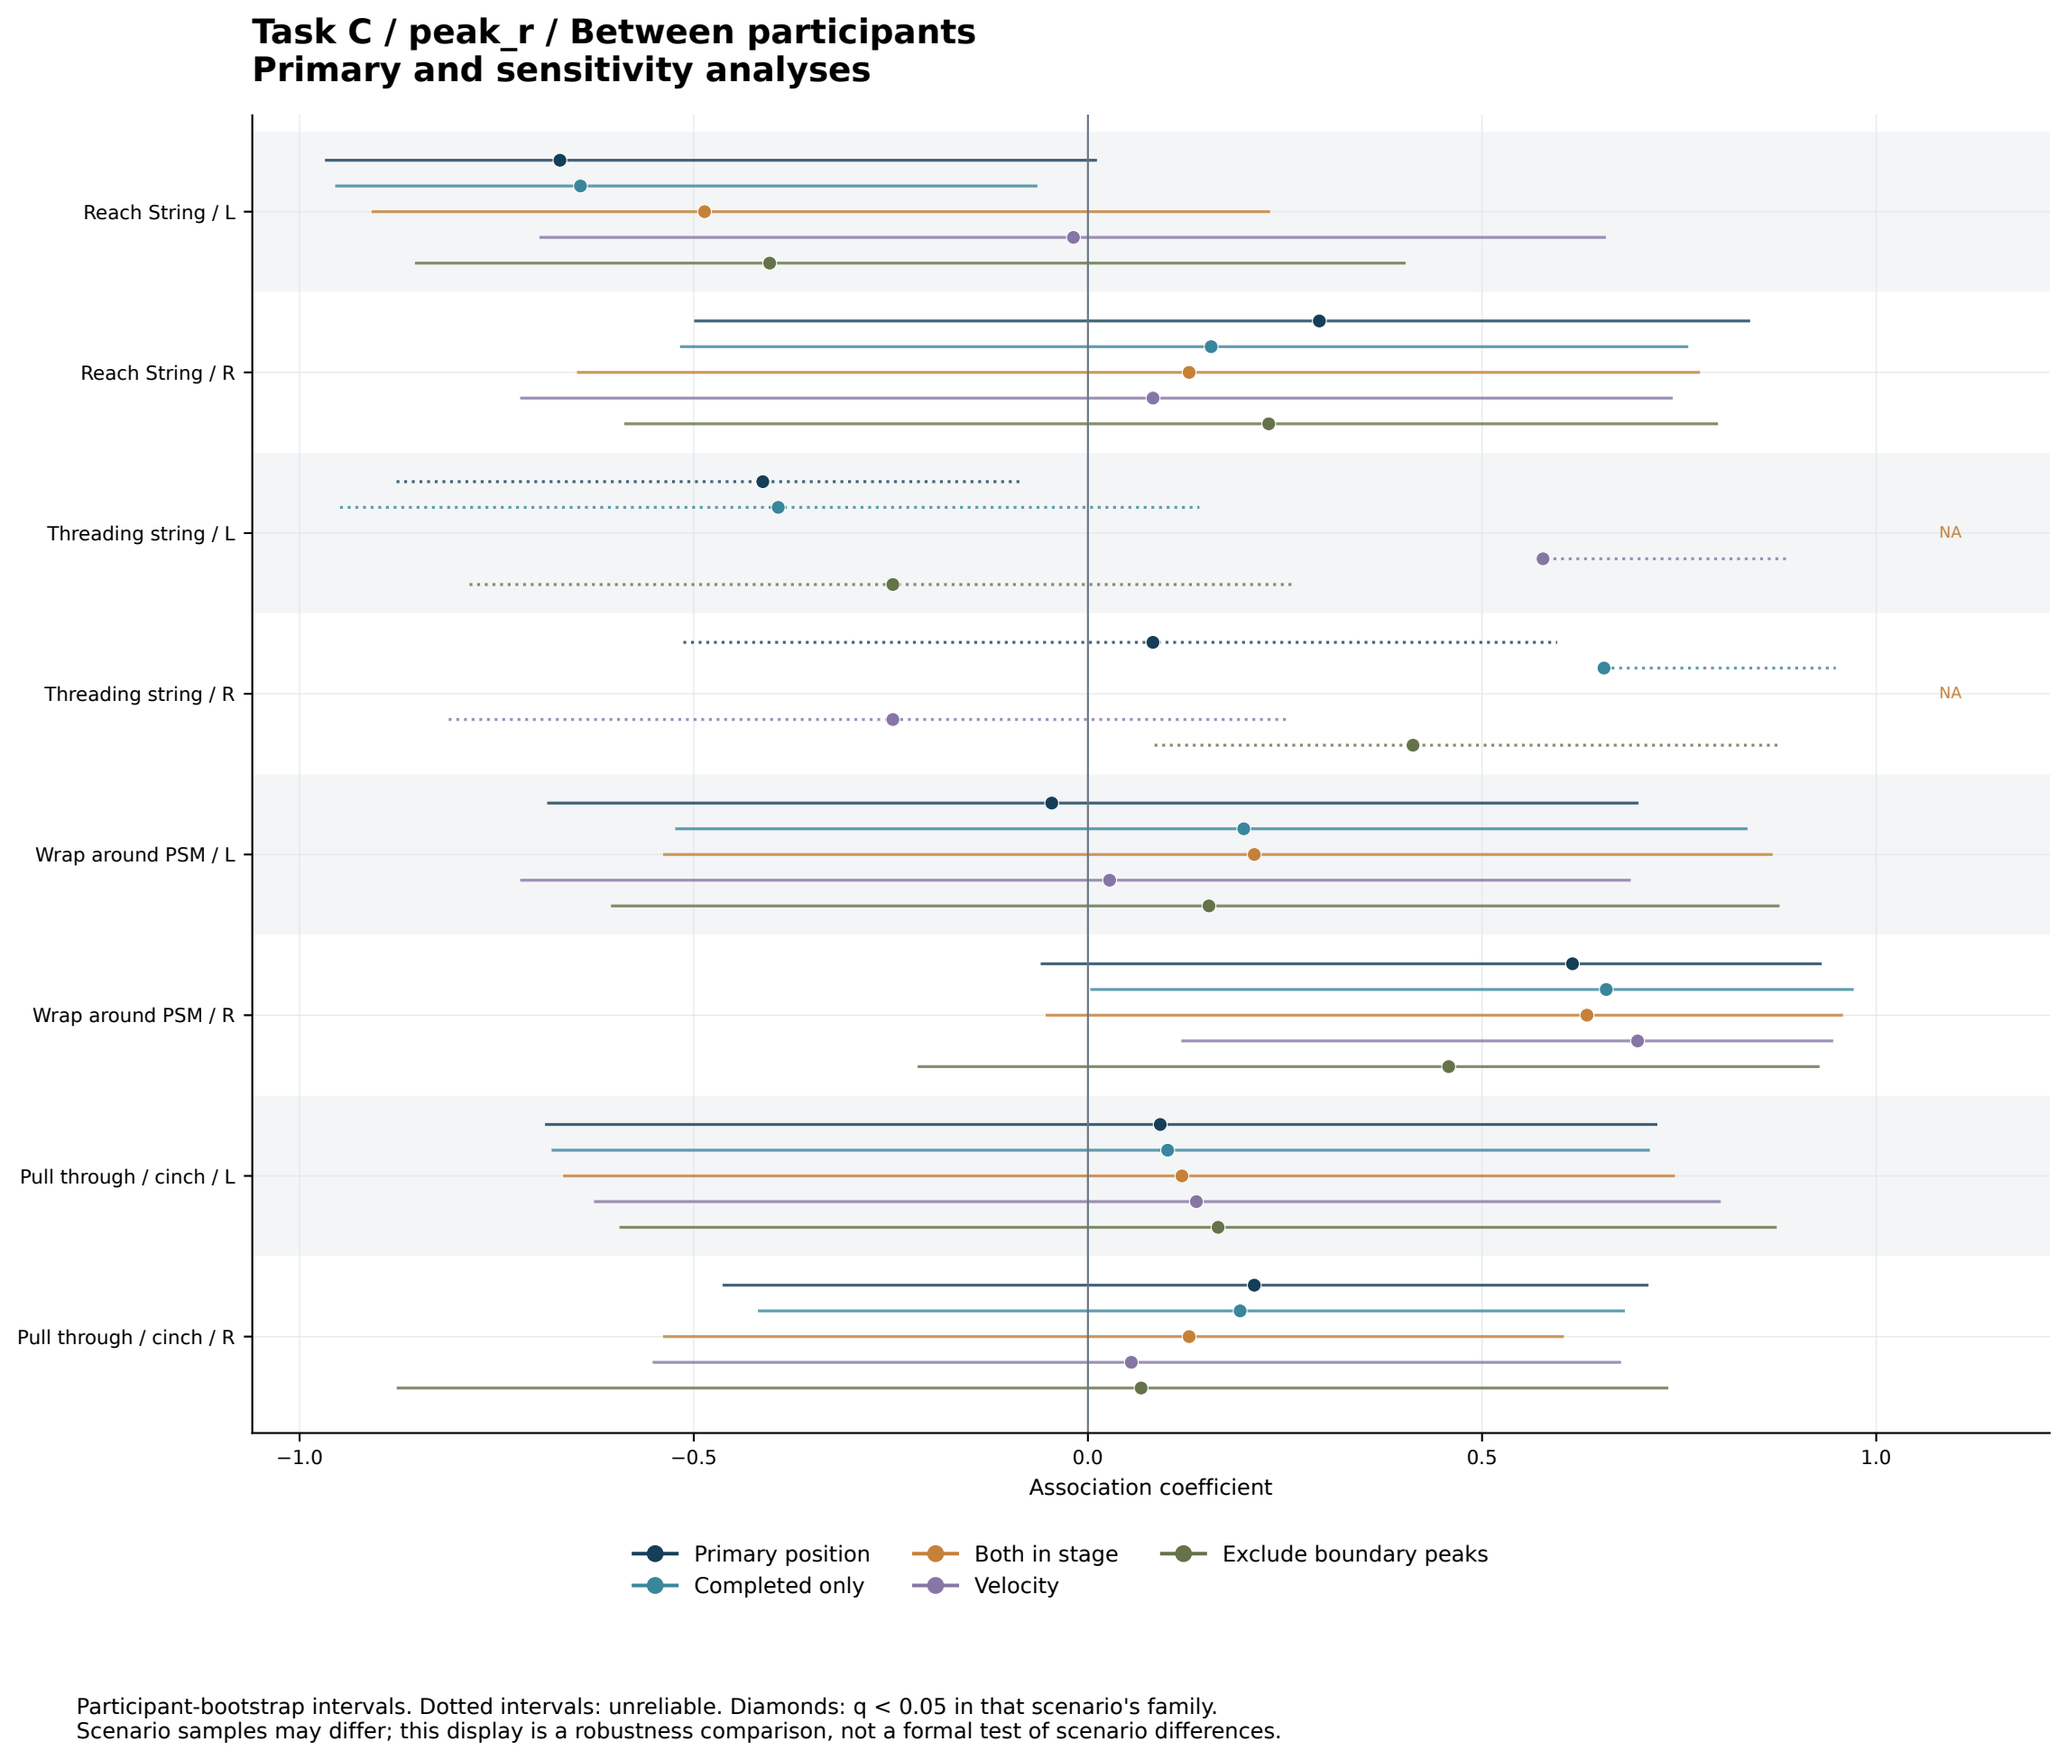


Participant-bootstrap intervals. Dotted intervals: unreliable. Diamonds: q < 0.05 in that scenario's family.
Scenario samples may differ; this display is a robustness comparison, not a formal test of scenario differences.

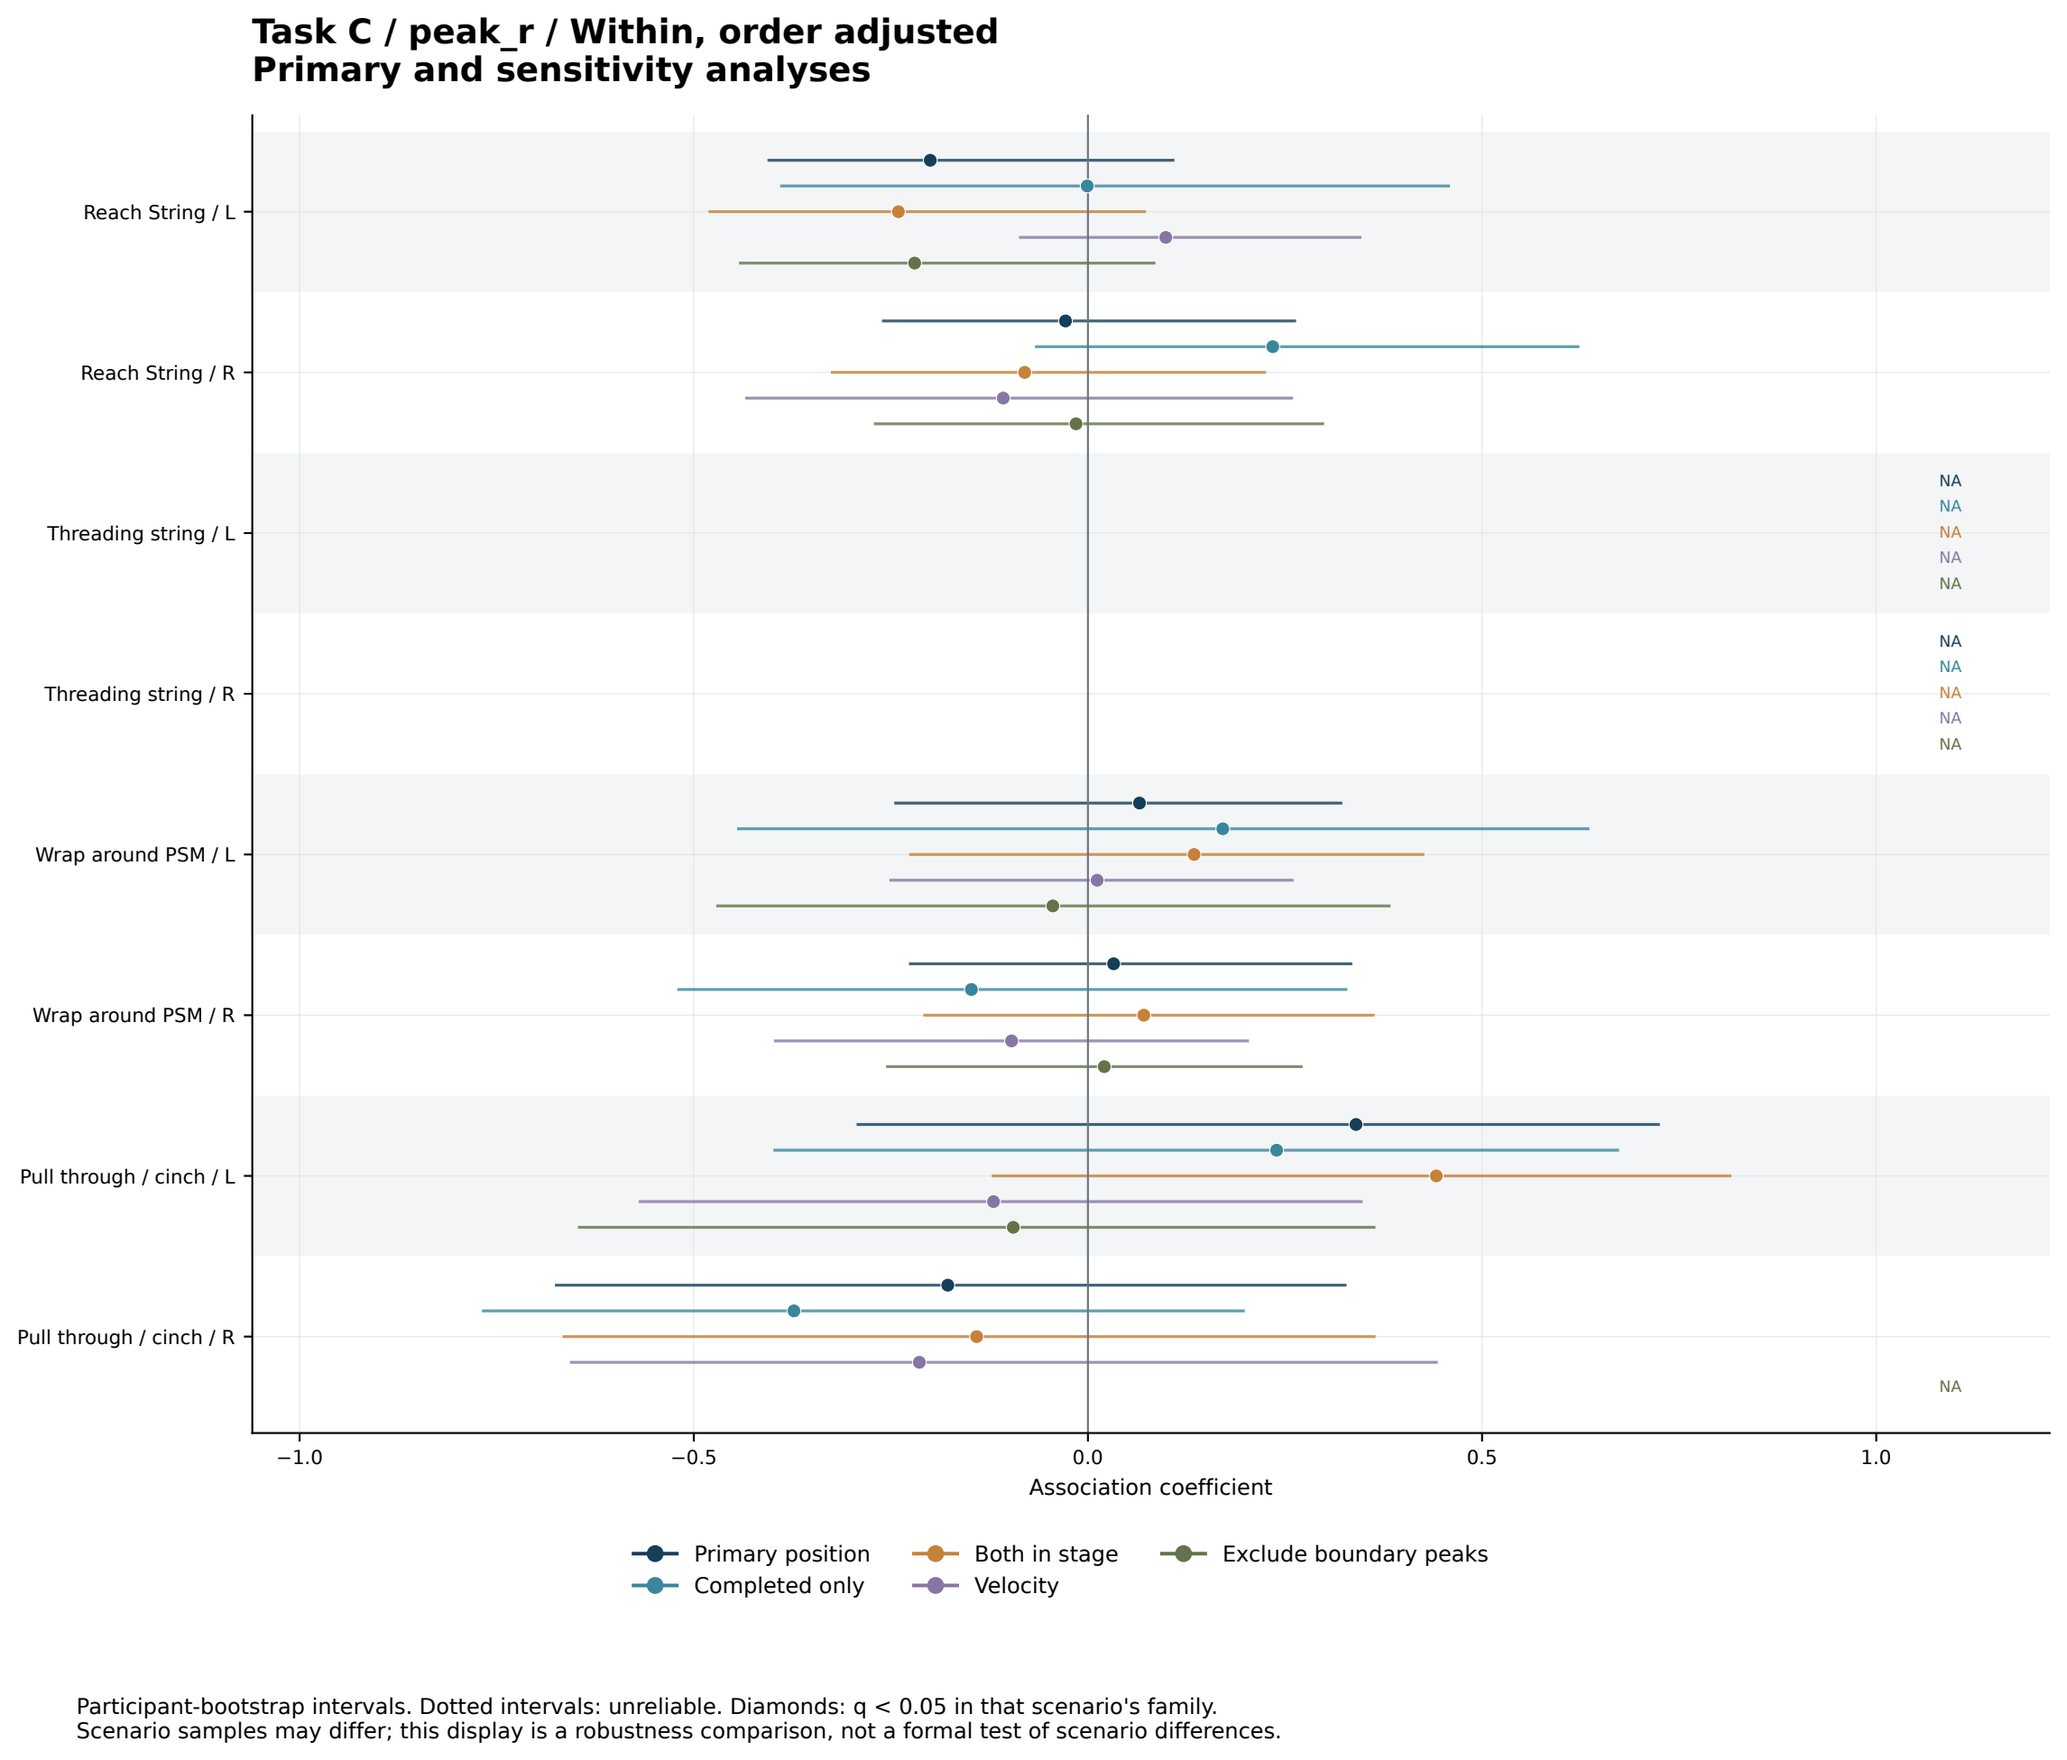

Participant-bootstrap intervals. Dotted intervals: unreliable. Diamonds: q < 0.05 in that scenario's family.
Scenario samples may differ; this display is a robustness comparison, not a formal test of scenario differences.

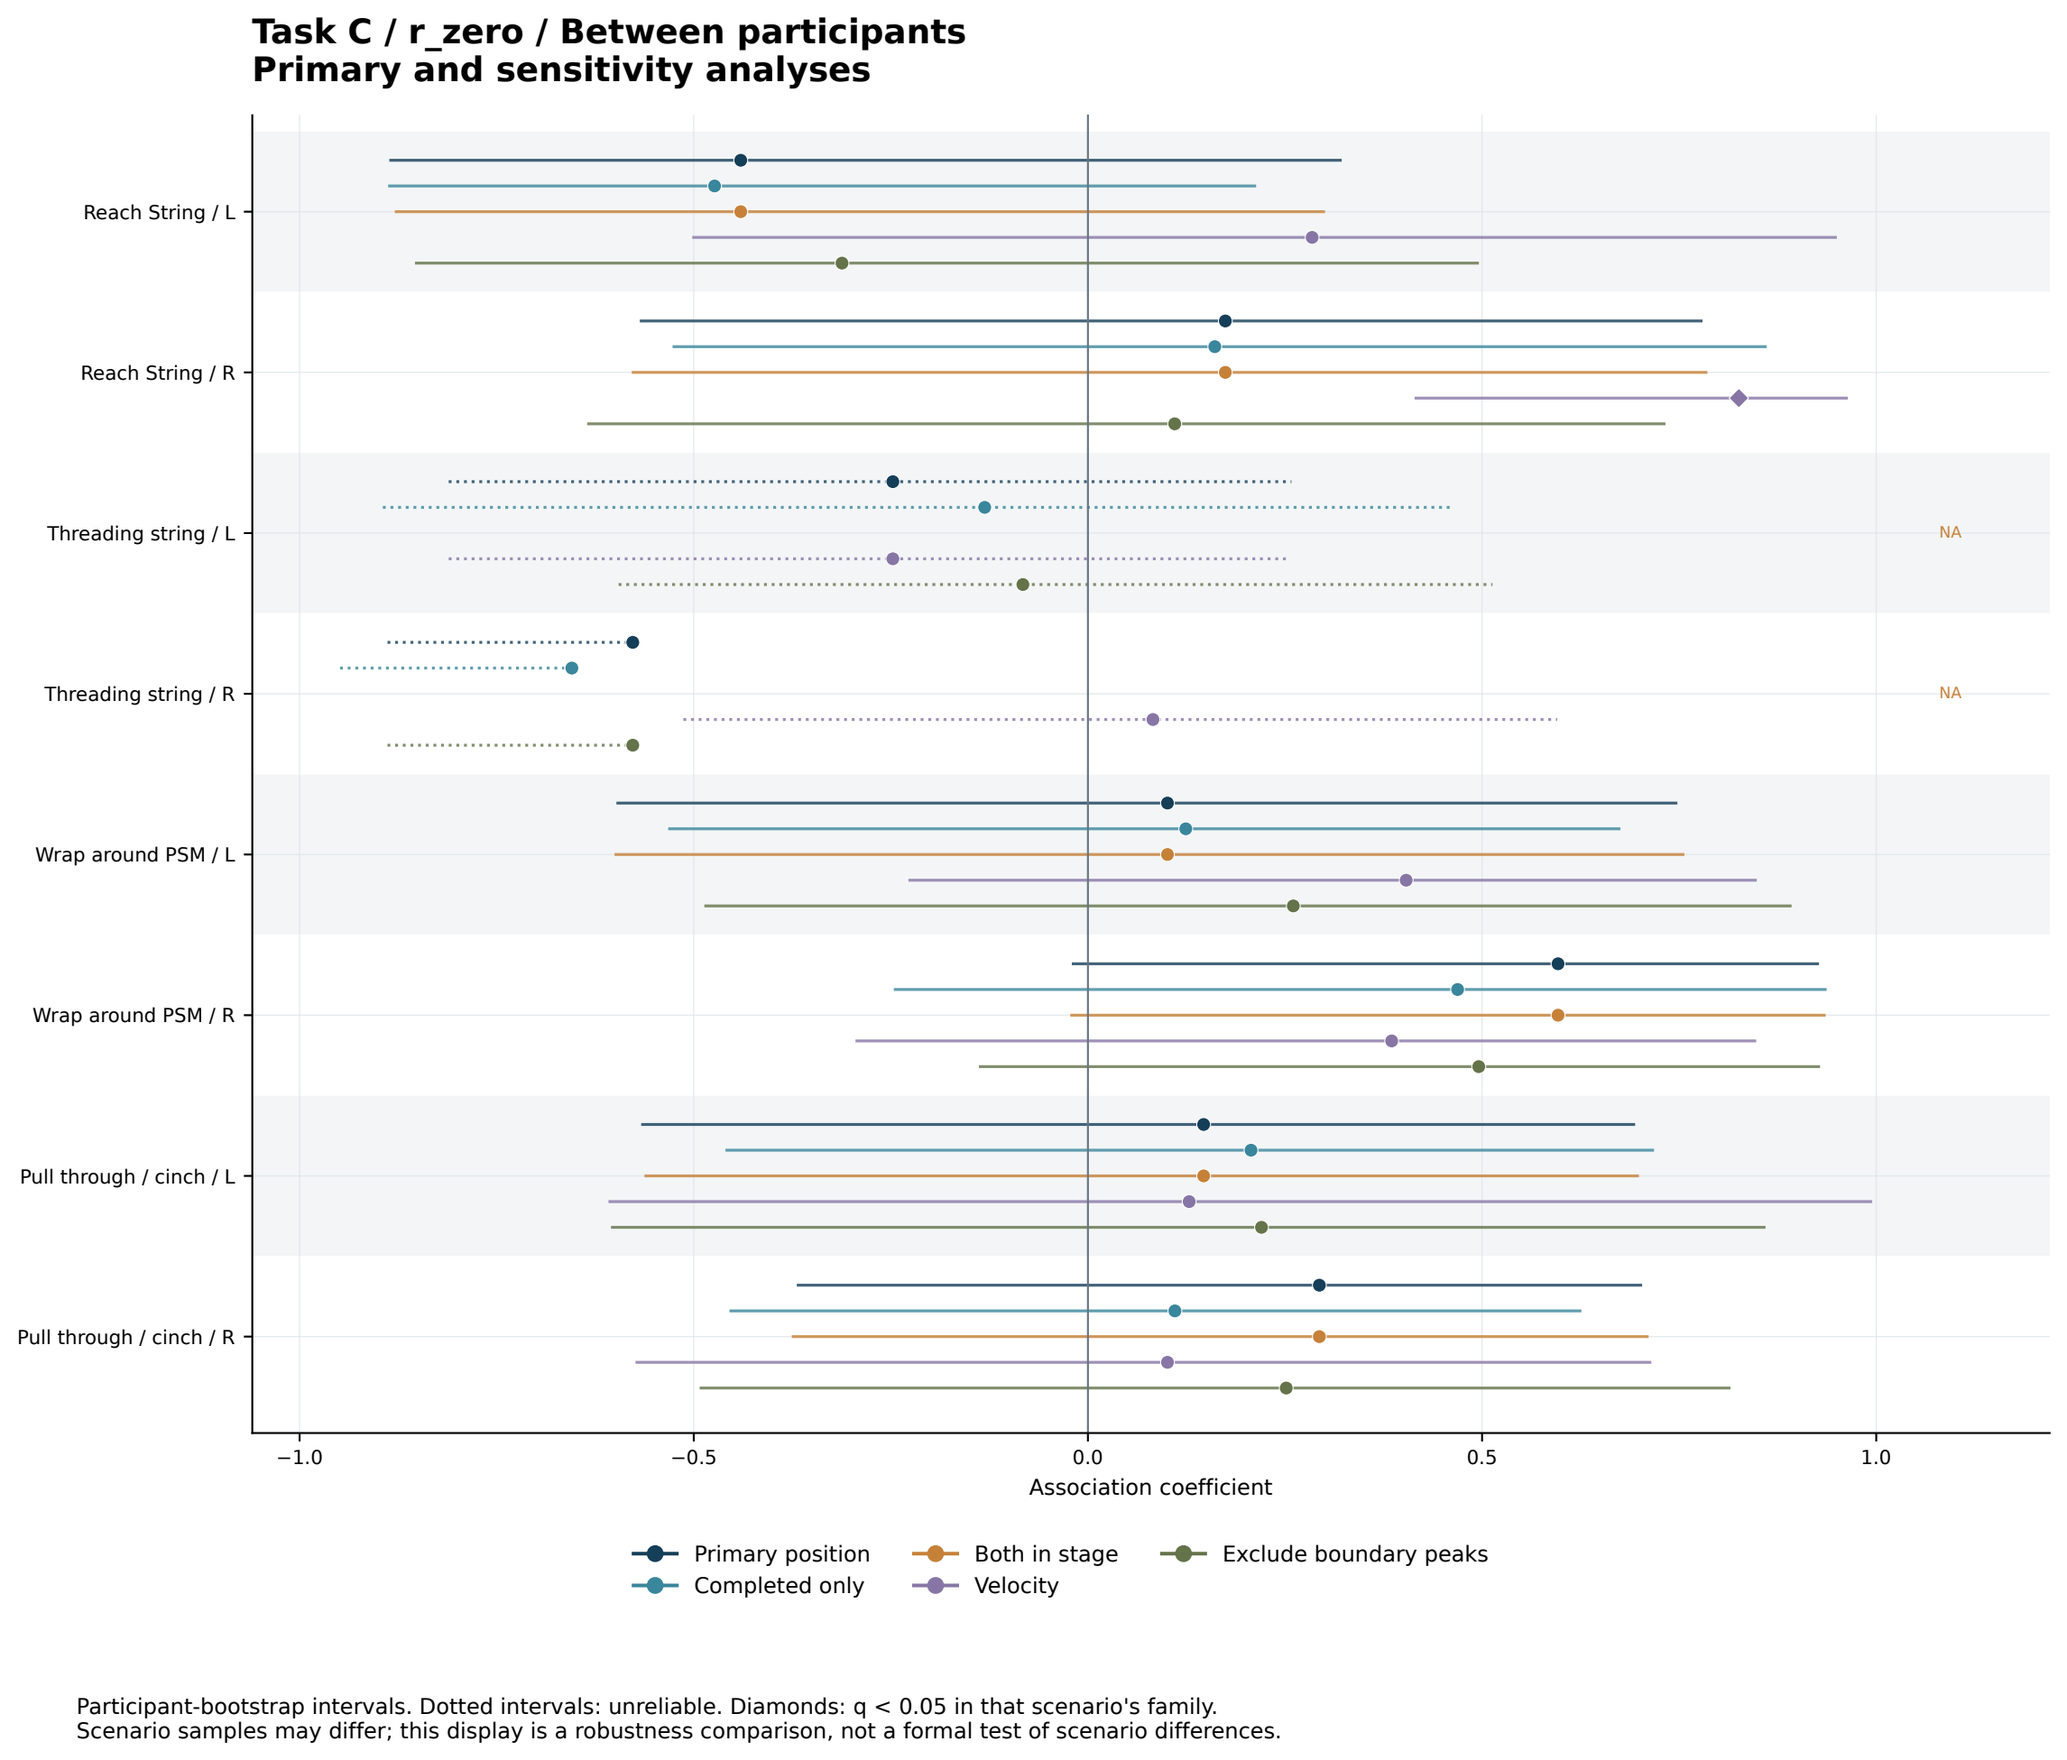
Task C / r_zero / Between participants
Primary and sensitivity analyses
Reach String / L
Reach String / R
Threading string / L
Threading string / R
Wrap around PSM / L
Wrap around PSM / R
Pull through / cinch / L
Pull through / cinch / R
NA
NA
−1.0
−0.5
0.0
0.5
1.0
Association coefficient
Primary position
Completed only
Both in stage
Velocity
Exclude boundary peaks
Participant-bootstrap intervals. Dotted intervals: unreliable. Diamonds: q < 0.05 in that scenario's family.
Scenario samples may differ; this display is a robustness comparison, not a formal test of scenario differences.

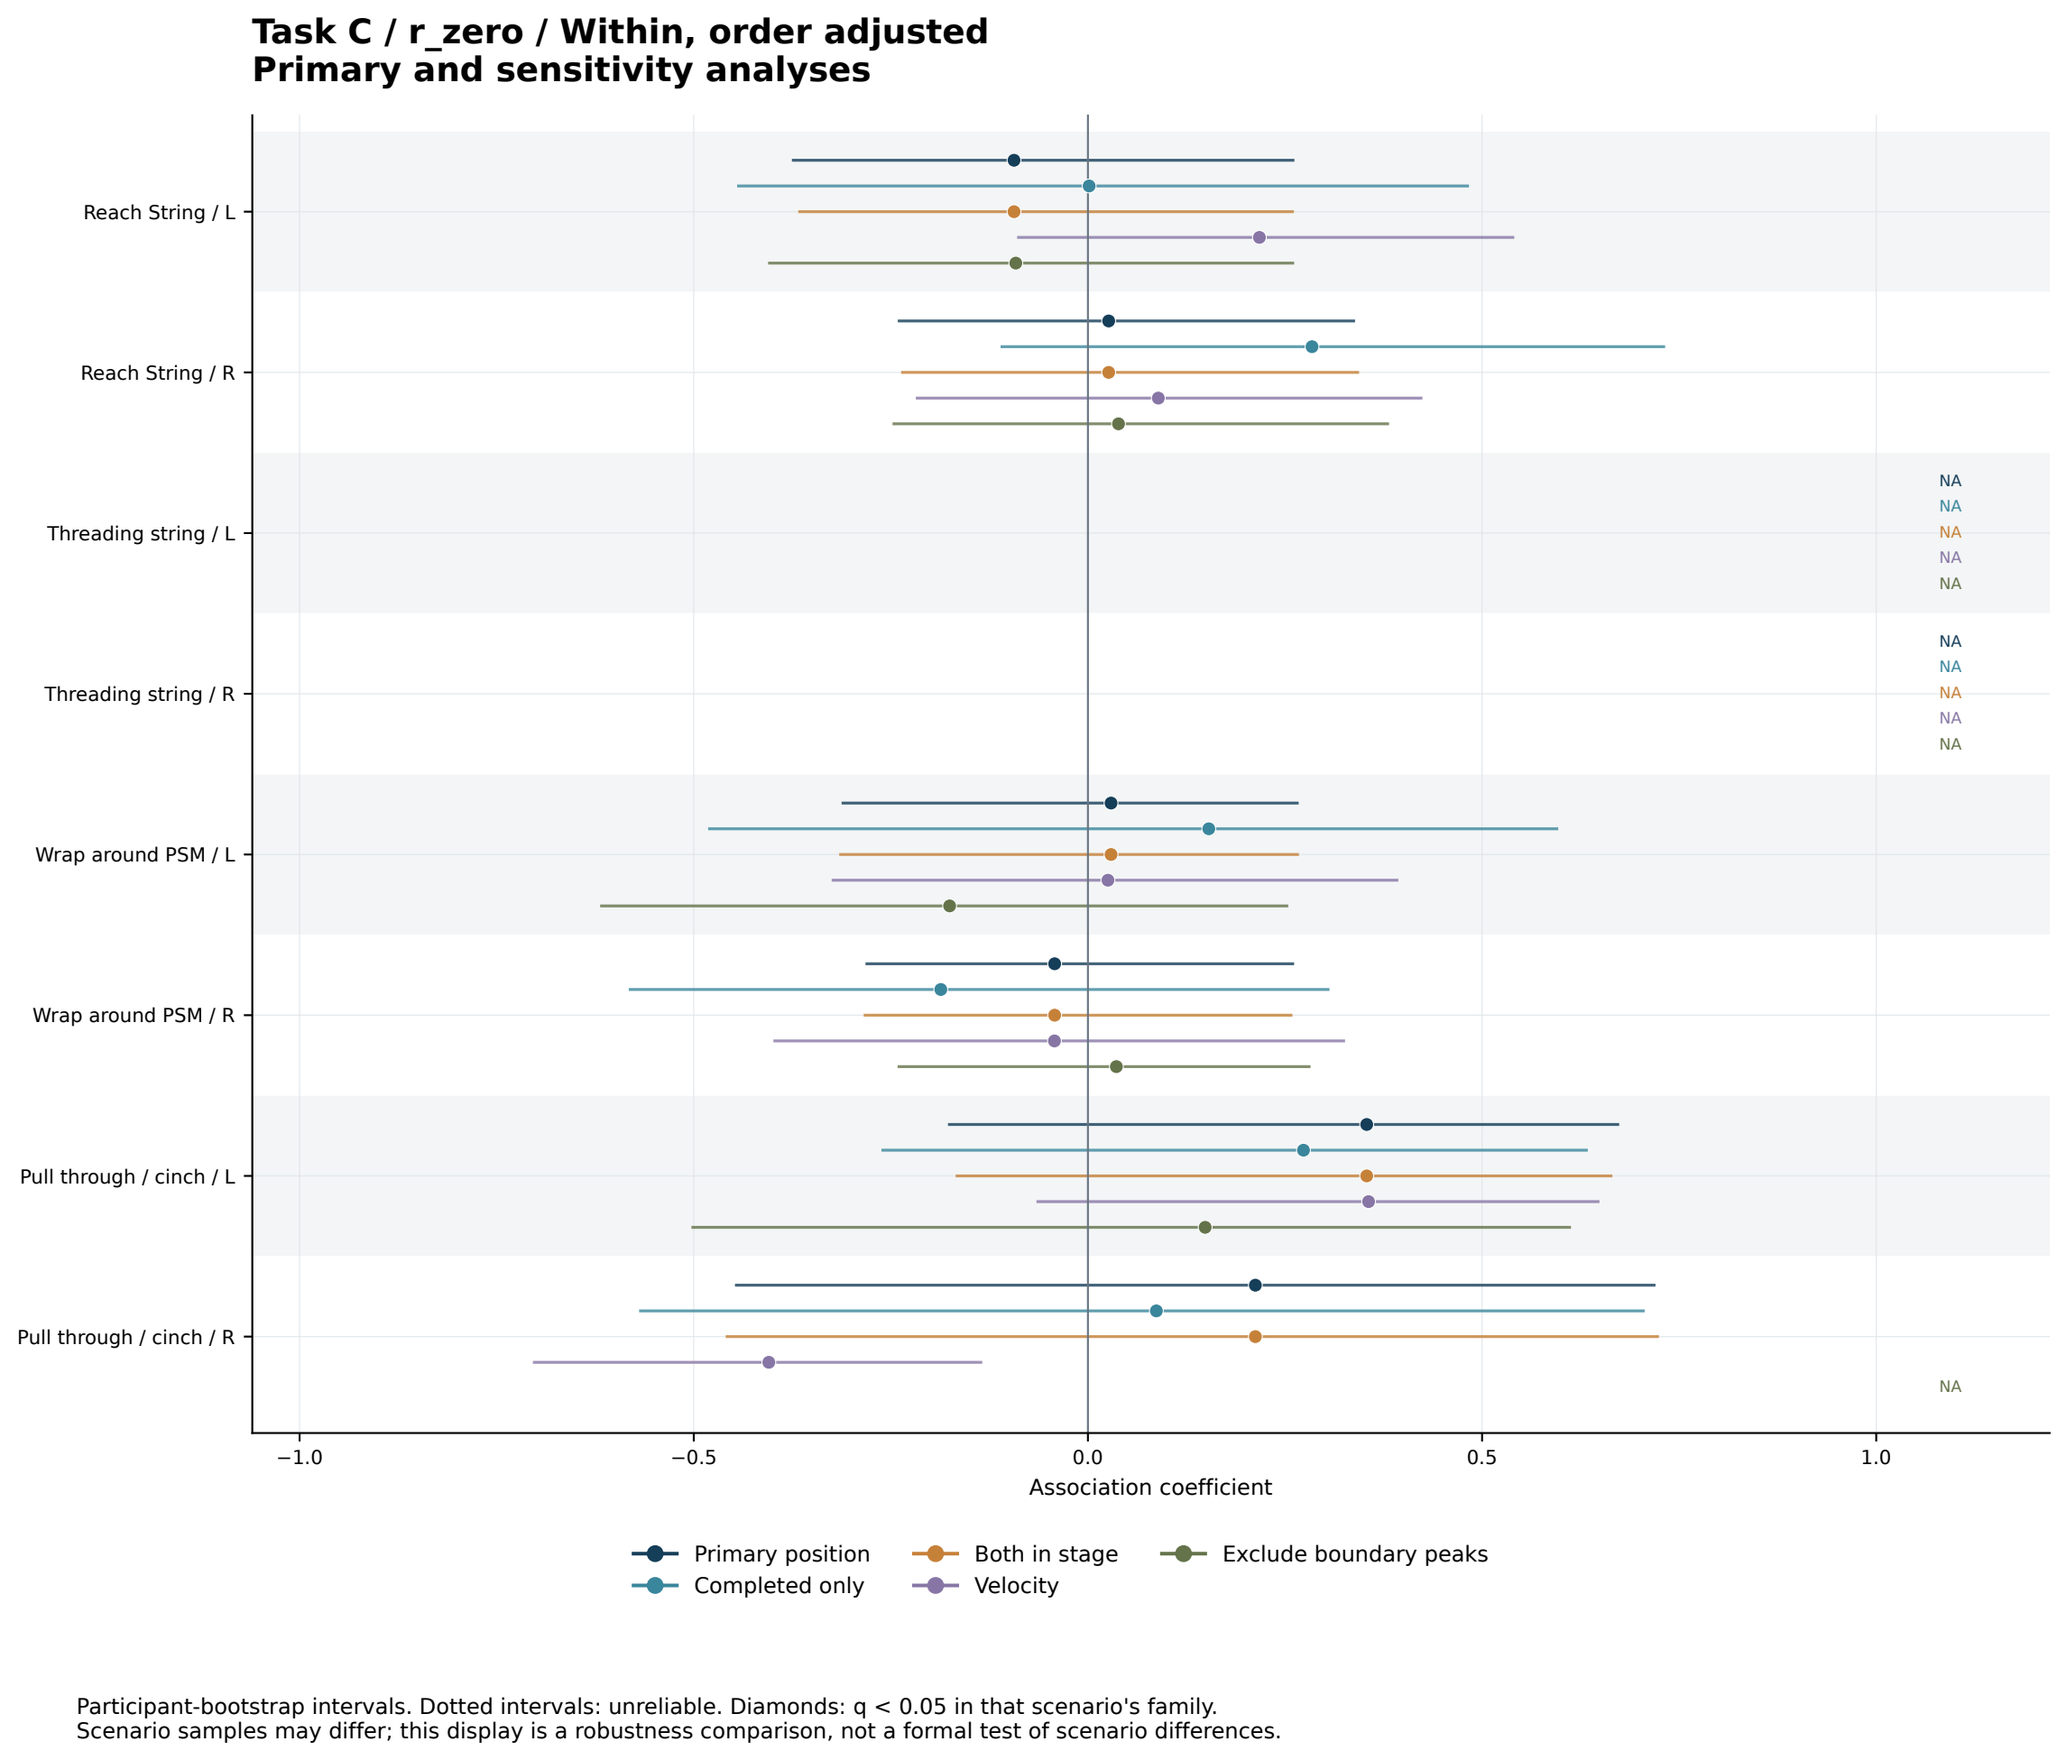

Participant-bootstrap intervals. Dotted intervals: unreliable. Diamonds: q < 0.05 in that scenario's family.
Scenario samples may differ; this display is a robustness comparison, not a formal test of scenario differences.