





	Development JS				
Application A	NodeJS				
	Dependencies				
	Written by Python				
Application B	Python3				
	Dependencies				
Application C	Written by Python				
	Python2				
	Dependencies				







	Development JS				
Application A	NodeJS				
	Dependencies				
	Written by Python				
Application B	Python3				
	Dependencies				
	Written by Python				
Application C	Python2				
	Dependencies				

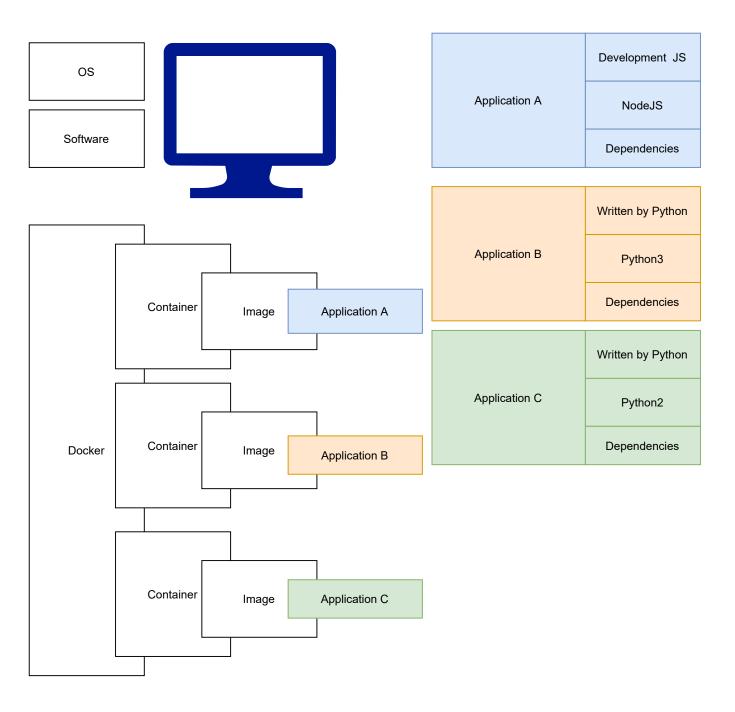

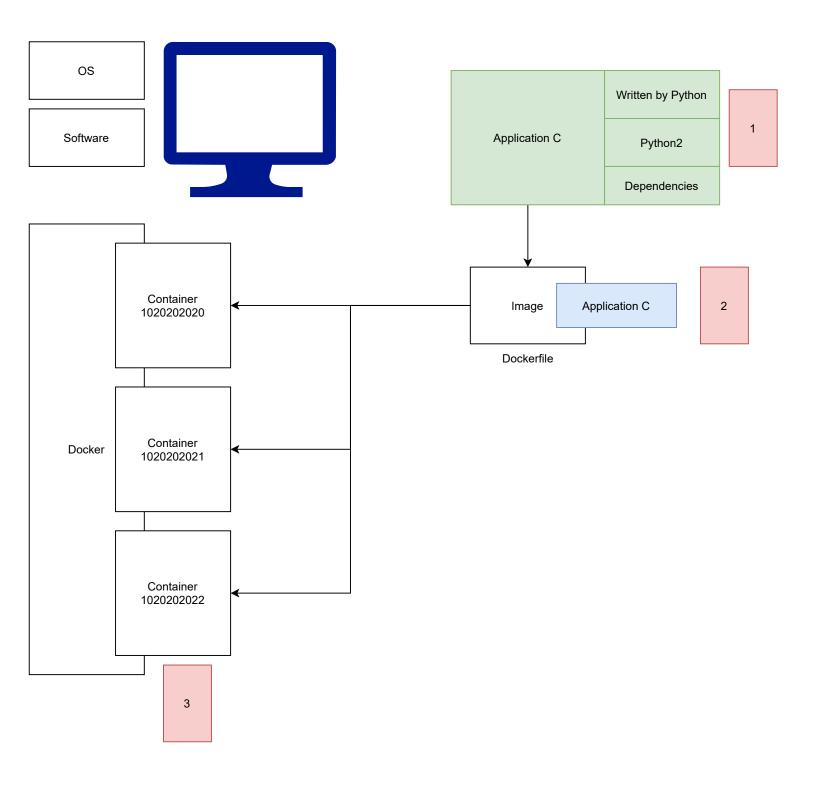


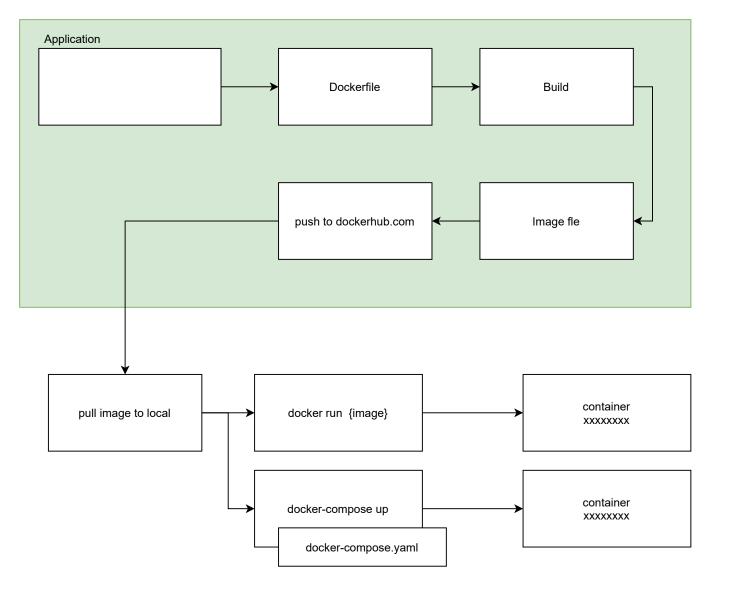

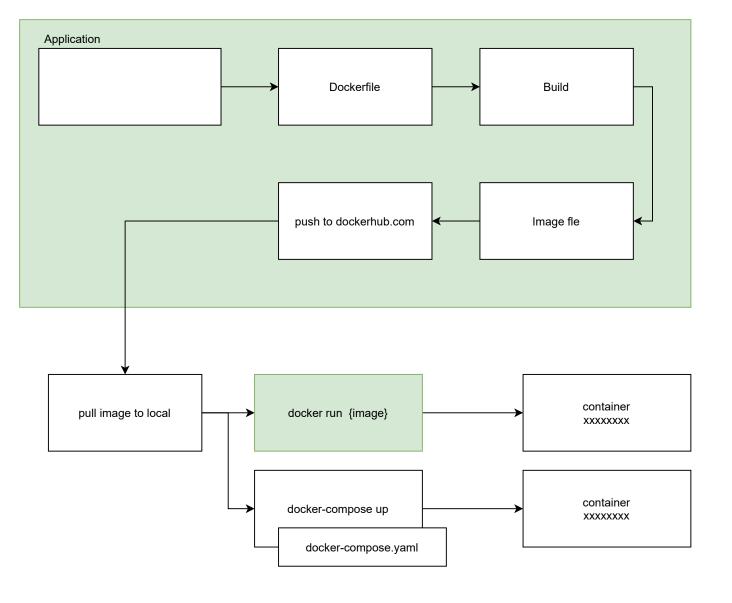

docker CLI	port (left) outside : inside	name	environment	background process	ir
docker run	-p 127.0.0.1:3306:3306	name mydb	-e MARIADB_ROOT_PASSWORD=mysecret	-d	mariadb

How to using

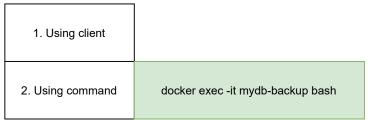

nages

:10.6.3-focal