


oauth2client_1::OAuth2Client

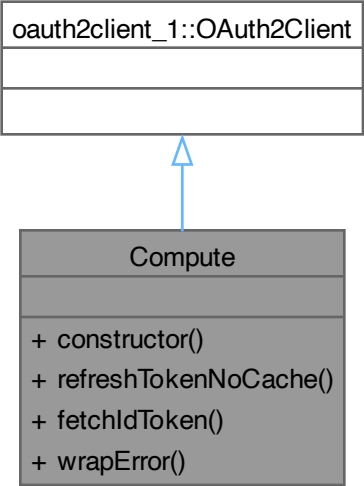

```
classDiagram
    class OAuth2Client {
    }
    class Compute {
    }
    Compute --|> OAuth2Client
```

The diagram illustrates a class hierarchy. At the top is the 'oauth2client_1::OAuth2Client' class, represented by a white box with a black border and two empty internal compartments. Below it is the 'Compute' class, represented by a grey box with a black border. The 'Compute' class has a header compartment labeled 'Compute', an empty middle compartment, and a bottom compartment containing four methods: '+ constructor()', '+ refreshTokenNoCache()', '+ fetchIdToken()', and '+ wrapError()'. A blue arrow with a hollow triangular head points from the top of the 'Compute' class to the bottom of the 'oauth2client_1::OAuth2Client' class, indicating that 'Compute' inherits from 'OAuth2Client'.

Compute

- + constructor()
- + refreshTokenNoCache()
- + fetchIdToken()
- + wrapError()