
# Apache - 웹페이지

2021963057 장문용 2021863058 장현호 2021963052 이재협 2020875029 신성우

### 목차




역할 분담 및 목표



윈도우 - Apache 설치



Composer



프로젝트 연동

# 1. 제작정보

#### 코드 커뮤니티: 아팟찌

코딩 학습 중 마주하는 다양한 궁금증을 신속히 해결하고, 작성한 코드가 다른 개발자에게도 도움이 되도록 지원하기 위해 제작되었습니다.

누구나 자유롭게 코드를 업로드하고 서로의 의견을 활발하게 교류할 수 있는 커뮤니티 환경을 목표로 제작하였습니다.

#### PPT 목표



누구나 쉽게 따라 하며 서버를 구축할 수 있도록, 간단하고 직관적인 구성으로 제작하였습니다.

#### 제작: 프레임워크

#### \*리액트

사용자 인터페이스를 만들기 위한 자바스크립트 라이브러리

#### \*아파치

클라이언트의 HTTP 요청을 처리하여 웹 페이지를 제공

#### \*라라벨

깔끔하고 표현력 있는 문법을 가진 PHP 기반 웹 애플리케이션 프레임워크

### 제작:역할분담

#### 조장

- 기능명세서 작성





#### \* 백

- DB 테이블 정의

- API 작성

- AWS 관리

조장 : 장문용

백 : 장현호, 장문용

프론트 : 신성우, 이재협

#### \* 프론트


- 컴포넌트 생성

- CSS 생성

- API 연동

# 1. Apache 설치


#### Apache 설치 : 다운로드

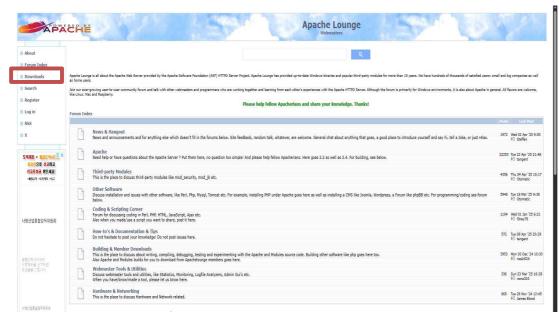

Apache Lounge를 검색하여 홈페이지에 접속


Download 클릭

## Apache 설치 : 다운로드

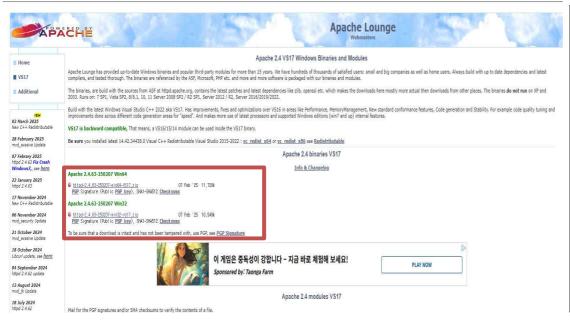


사용자의 컴퓨터에 맞는 버전의 Apache를 다운로드 후 압축을 해제한다.


#### Apache 설치 : 압축해제

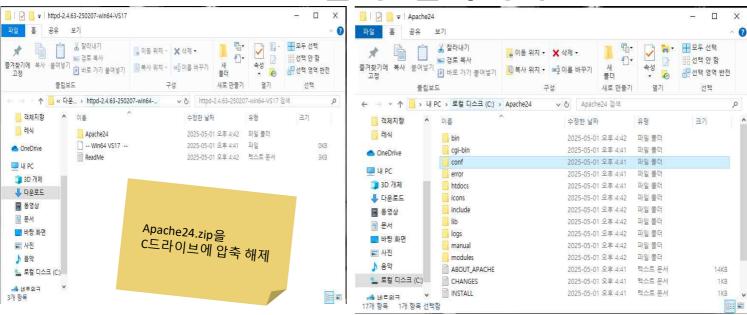

## Apache 윈도우서비스 등록

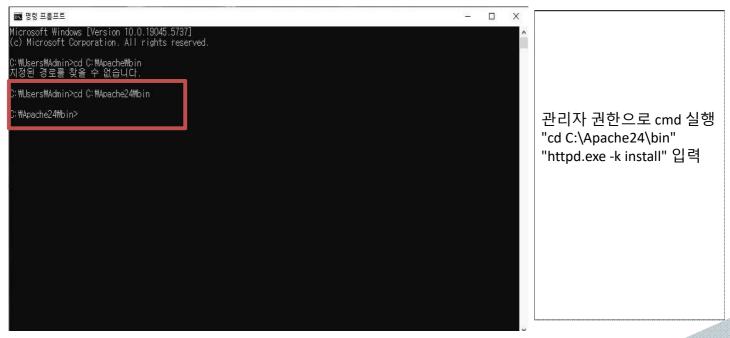



#### Apache 설치:모니터 실행

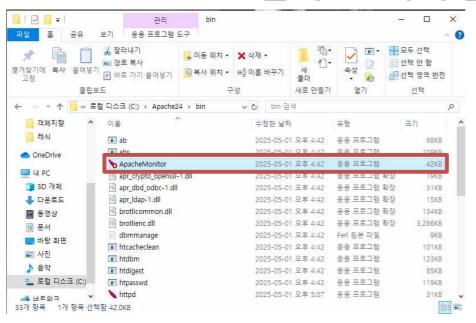

c:\Apache24\bin 폴더로 가서 ApacheMonitor.exe 를 실행


## Apache 설치:모니터 실행





Monitor 실행 후 Start 클릭

# Apache 설치 : 확인




#### It works!

http://localhost/ 또는 http://localhost/ 으로 접속하면 "It works!" 가 화면에 출력되며 서버가 작동

# 2. PHP 설치

#### PHP설치 1

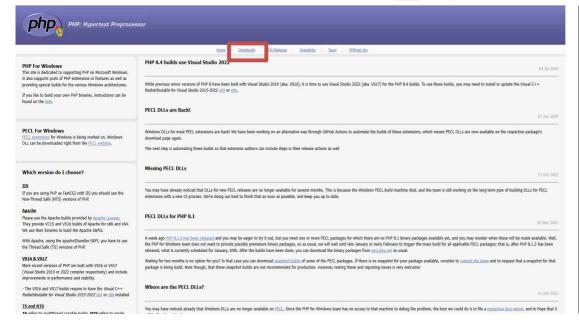

"php windows" 검색 → 공식 홈페이지 접속 → Download

#### PHP설치 2

FITE 7.1. Supports rong and OTT o pacies. See ore manual

#### Archives

Past releases are available from our <u>archives</u>, older versions not found there can be found at the <u>Museum</u>.

#### PHP 8.3 (8.3.21)

Download source code [27,41MB]

Download tests package (phpt) [16.61MB]

#### VS16 x64 Non Thread Safe (2025-May-06 16:16:22)

- Zip [30.7MB]
- sha256: 7ff517c5945fe50bd41b69a8365678ebde5dcf56e85ac422fb5669b6c7d5a9ce
- Debug Pack [30.34MB]
- sha255: 08e3cd907/3c9fc211484931c3b9b99112ae8b2e2a99560e97f94b14b3238b00

   <u>Development package (SDK to develop PHP extensions)</u> [1.26MB]

  sha256: 7c9e4e2dcf437a4dd959aea0249a0ab0a36f33c9b6324d5a0e49b033b4c580c5

#### VS16 x64 Thread Safe (2025-May-06 16:15:28)

- Zip [30.84MB]
- sha256: beac2027a60a76728e7db9752abc13545fe3ff5226dd887d9bae489d8b72aa46
- Debug Pack [30.29MB]
- sha256: 92fb33a4eb607f1aab41a45c5763772c805685fdc4528764d2afa949e15c10da
- Development package (SDK to develop PHP extensions) [1.26MB]
   sha256: 0551d636a2579bc1fe280700fe4bcc8c42933f6d2759640e19e17704b1d7ab27

VS16 x86 Non Thread Safe (2025-May-06 16:14:38)


- Zip [27.57MB]
- sha256: e87140e523164b9d8d483fbd0e82ef5056c6f5cf22bdcdd78f9d76f8b3664d63
- Debug Pack [30.25MB]
- sha256: f344aacb62afc6fffe9c604309f2817404d6263dd728fc45f7cf349ce900bb10
- <u>Development package (SDK to develop PHP extensions)</u> [1.26MB]
   sha256: bd6cfb01744bc62e6e351c2dd4dde28f5f4800b1971600432d07caa6911a1ce0

Thread Safe 버전 중 사용자의 시스템에 맞는 .zip 파일 다운로드하기

│\* 정식 버전을 사용하기 위해 8.3 다운로드

# ✔ 정리하자면: PHP 비전 설명 PHP 8.3 ✓ 정식 버전 (안정) — 사용 가능 PHP 8.4 ※ 아직 정식 출시 전 — 테스트 중 or 개발 중 PHP 8.4.7 ※ 아예 없는 버전 — 비공식 벨드거나 가짜 버전일 가능성 금

#### PHP설치 3

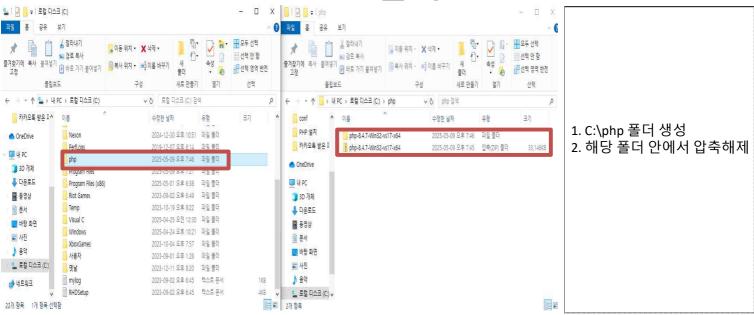



#### A Dependency Manager for PHP

Latest: 2.8.8 (changelog)

**Getting Started** 

Download

Documentation

**Browse Packages** 

Issues

GitHub

Authors: Nils Adermann, Jordi Boggiano and many community contributions

Sponsored by:



Logo by: Max Grigorian

Home | Getting Started | Download | Documentation | Browse Packages

Download Composer Latest: v2.8.8

#### Windows Installer

The installer - which requires that you have PHP already installed - will download Composer for you and set up your PATH environment variable so you can simply call composer from any directory.

Download and rur Composer-Setup.exe - it wall install the latest composer version whenever it is executed.

#### Command-line installation

To quickly install Composer in the current directory, run the following script in your terminal. To automate the installation, use the guide on installing Composer programmatically.

```
php -r "copy('https://getcomposer.org/installer', 'composer-setup.php');"
php -r "if (hash_file('sha384', 'composer-setup.php') === 'dac665fdc30fdd8ec78b38b9800061b4150413ff2e3b6f88543c636f7cd84f6
php composer-setup.php
php -r "unlink('composer-setup.php');"
```


This installer script will simply check some <a href="hp.ini">php.ini</a> settings, warn you if they are set incorrectly, and then download the latest composer .phar in the current directory. The 4 lines above will, in order:


- Download the installer to the current directory
- Verify the installer SHA-384, which you can also cross-check here
- · Run the installer
- Remove the installer

Most likely, you want to put the composer .phar into a directory on your PATH, so you can simply call composer from any directory (*Global install*), using for example:

sudo mv composer.phar /usr/local/bin/composer

- 1. 검색창에 Composer 검색
- 2. Download 클릭
- 3. windows installer 하단의 Composer-Setup.exe 클릭

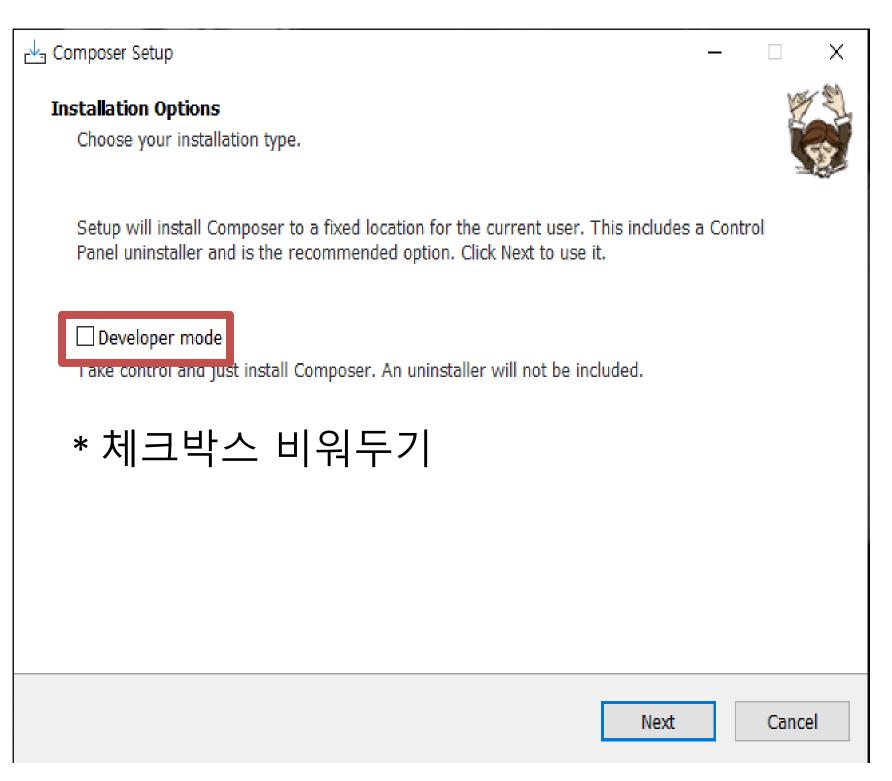


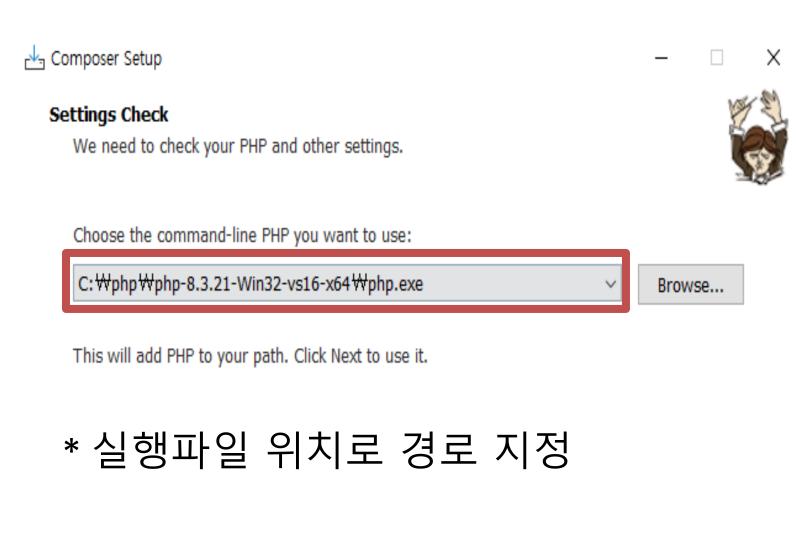


Back

Next

Cancel

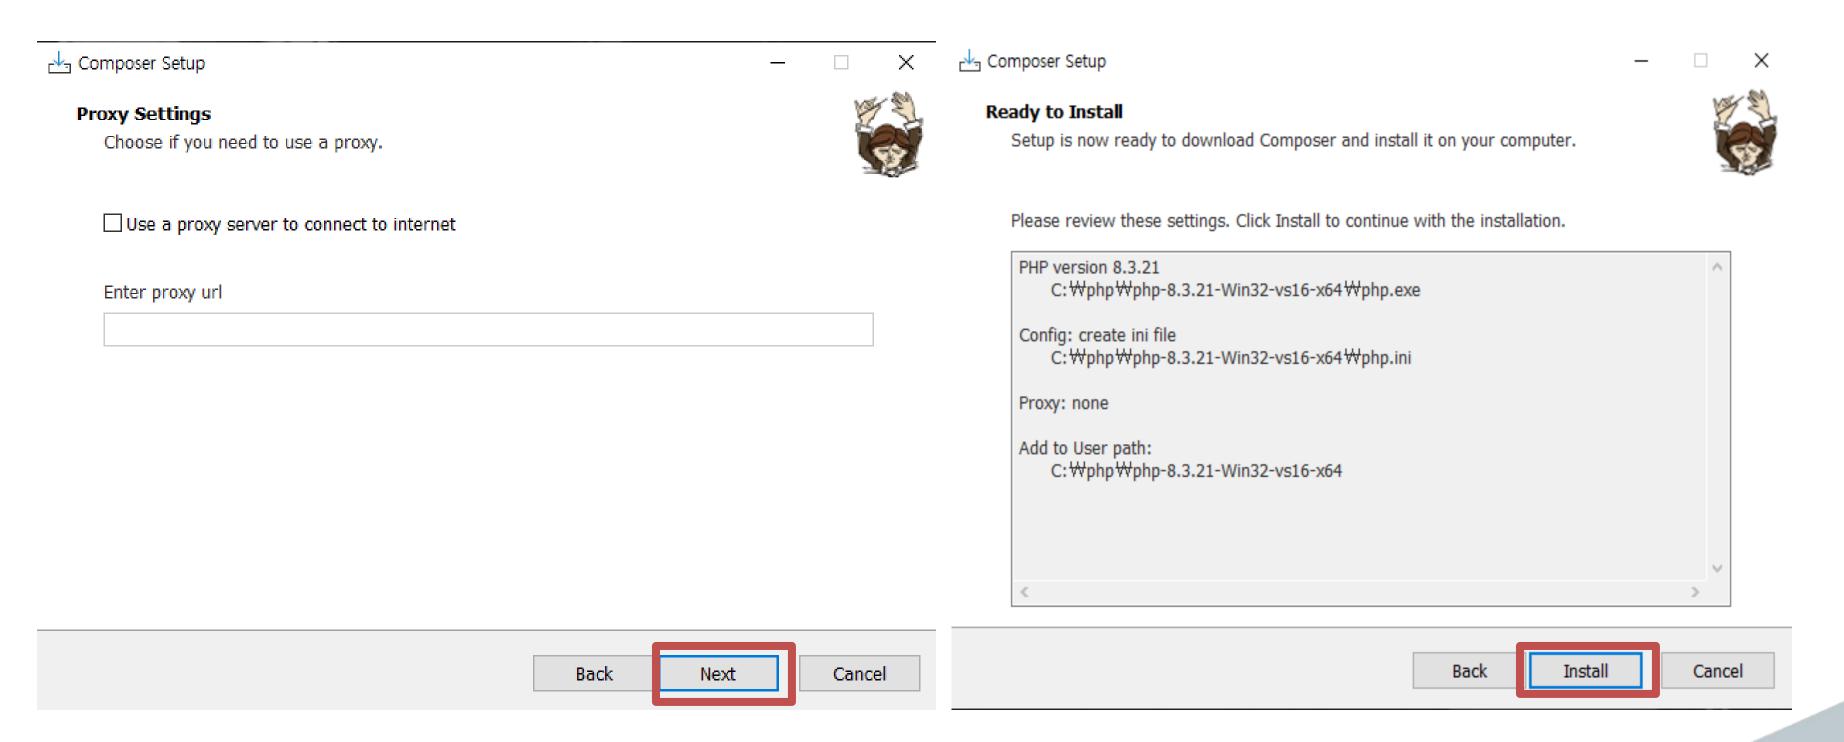



#### Information

Please read the following information before continuing.


#### Important

You must open a new command window to use Composer for the first time, because your environment has changed and running programs may not be aware of this.

If this does not work, you will have to do one of the following:

- Close all File Explorer windows, then open a new command window. OR
- Logoff and Logon again, then open a new command window.

As a last resort you pay need to rear type computer.





#### Completing Composer Setup

Setup has installed Composer on your computer.
Usage: Open a command window and type "composer"

Click Finish to exit Setup.


☐ View online documentation



Back Finish

## 4. 프로젝트 연동

#### 프로젝트 연동: 주석 제거

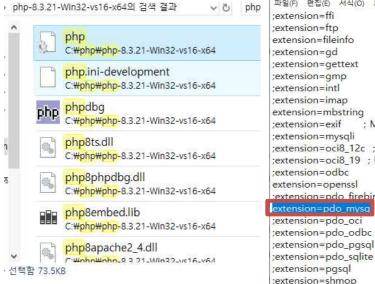



- 1. php.ini 실행
- 2. extension = pdo mysql 주석 제거
- extension dir = "C:\php\ext" 경로 수정
- 4. extension=fileinfo 주석 제거

#### 프로젝트연동: 주석 제거

- ; The directory under which PHP opens the script using /~username used only
- ; if nonempty.
- ; https://php.net/user-dir user dir =
- ; Directory in which the loadable extensions (modules) reside.
- ; https://php.net/extension-dir
- ;extension\_dir = "./"
- : On windows:

extension\_dir = "C:₩php₩ext"

- ; Directory where the temporary files should be placed.
- ; Defaults to the system default (see sys\_get\_temp\_dir)
- ;sys\_temp\_dir = "/tmp"

- 1. php.ini 실행
- 2. extension = pdo\_mysql 주석 제거
- 3. extension\_dir = "C:\php\ext" 경로 수정
- 4. extension=fileinfo 주석 제거

#### 프로젝트연동: 주석 제거

- ; The Idap extension must be before curl if OpenSSL 1.0.2 and OpenLDAP is used ; otherwise it results in segfault when unloading after using SASL. ; See https://github.com/php/php-src/issues/8620 for more info. ;extension=ldap extension=curl :extension=ffi ;extension=ftp extension=fileinfo :extension=ad ;extension=gettext ;extension=qmp :extension=intl ;extension=imap extension=mbstring :extension=exif ; Must be after mbstring as it depends on it ;extension=mysqli extension=oci8 12c; Use with Oracle Database 12c Instant Client extension=oci8\_19; Use with Oracle Database 19 Instant Client;
- 1. php.ini 실행
- 2. extension = pdo\_mysql 주석 제거
- 3. extension\_dir = "C:\php\ext" 경로 수정
- 4. extension=fileinfo 주석 제거


### 프로젝트 연동: Git Clone

- git clone
   https://github.com/GUBBIB/WebProgramingTeamProjec
   <u>t</u>
- cd WebProgramingTeamProject -> git pull origin LocalServer
- 3. cd front-end -> npm install -> npm run build
- 4. cd ../back-end -> composer install
- 5. cp .env.example .env

## 프로젝트연동:env 수정


```
back-end > .env
      APP NAME=Laravel
      APP ENV=local
      APP KEY=base64:aH17/BHccnCkP0bpP1nTeZi1sJ8QeO/amfR5e9T1mLg=
      APP DEBUG=true
      APP URL=http://localhost
      APP LOCALE=en
      APP FALLBACK LOCALE=en
      APP FAKER LOCALE=en US
      APP MAINTENANCE DRIVER-file
      # APP MAINTENANCE STORE=database
      PHP CLI SERVER WORKERS=4
      BCRYPT ROUNDS=12
      LOG CHANNEL=stack
      LOG STACK=single
      LOG DEPRECATIONS CHANNEL=null
      LOG LEVEL=debug
      DB CONNECTION=mysql
      DB HOST=13.60.93.77
      DB PORT=3306
      DB DATABASE=laravel db
      DB_USERNAME=laravel_user
      DB PASSWORD=1111
 30
      SESSION DRIVER=cookie
      SESSION LIFETIME=120
      SESSION ENCRYPT=false
      SESSION PATH=/
      SESSION DOMAIN=
```

#### 프로젝트 연동: 주석 제거

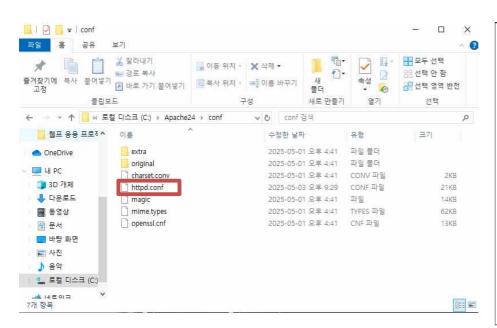


- 1. C:\Apache24\conf\httpd.conf
- 2. Ctrl + F → Virtual hosts 검색
- 3. 해당 단어 아랫줄 주석 제거

#### 프로젝트 연동: 주석 제거

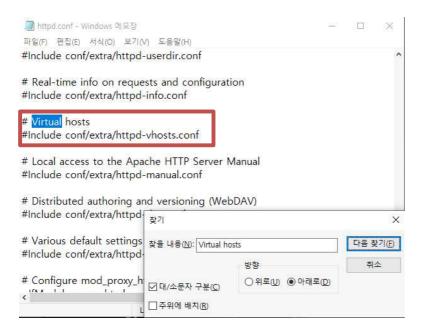

- 1. C:\Apache24\conf\httpd.conf
- 2. Ctrl + F → Virtual hosts 검색
- 3. 해당 단어 아랫줄 주석 제거

#### 프로젝트연동:코드추가

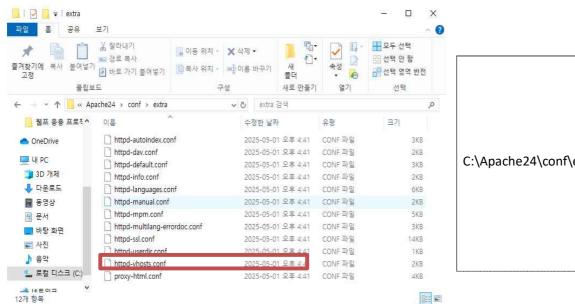

C:\Apache24\conf\extra\httpd-vhosts.conf 이동

#### 프로젝트연동:코드추가

- 1. C:\Apache24\conf\extra\httpd-vhosts.conf
- 2. 모든 내용 지우기
- 3. DocumentRoot와 <Directory>는 본인의 React 프로젝트의 /build 디렉토리 경로로 수정 필요

#### 프로젝트 연동:주의사항

php artisan key:generate 하는데 오류가 나는 경우 = composer install이 잘못 된것

- 1. rm -rf vendor
- 2. composer install

### 프로젝트연동:서버작동

- 1. cd back-end
- 2. php artisan serve --port=8000 입력
- \* 아파치 서버는 꼭 껐다가 키기

# 사이트주소

http://13.60.93.77/