Cute Http File Server JWT Chinese

```
Cute Http File Server jwt
获取admin的Cookie
JWT解密与伪造
实验效果
before login
first
second
successful jwt forgery
```

Cute Http File Server jwt

官网地址:iscute.cn/chfs

官网github地址:Offical github website address: https://github.com/ods-im/CuteHttpFileServer

获取admin的Cookie

该项目无注册功能,故本地搭建环境,手动创建新用户,我们这里创建一个admin用户 then locally login

obtain their cookies after login successfully

```
JavaScript
     GET / HTTP/1.1
 1
 2
     Host: 192,168,129,1
     User-Agent: Mozilla/5.0 (Windows NT 10.0; Win64; x64; rv:122.0) Gecko/2010
     0101 Firefox/122.0
4 Accept: text/html,application/xhtml+xml,application/xml;q=0.9,image/avif,i
     mage/webp,*/*;q=0.8
5
     Accept-Language: zh-CN, zh; q=0.8, zh-TW; q=0.7, zh-HK; q=0.5, en-US; q=0.3, en; q=0.5
     0.2
 6
    Accept-Encoding: gzip, deflate
7
    Connection: close
     Cookie:JWT=eyJhbGci0iJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJhY2Mi0iJhZG1pbiIsImV4cC
8
     I6MTcw0DI2NDY4NH0.Xc17butuxI0Jkq1pwI8CHsNJndo8gXdjvmqfDLzh8Q4;user=admin
9
     Upgrade-Insecure-Requests: 1
10
11
```

JWT解密与伪造

JWT解密,payload中只含有我们刚才注册的admin用户,而不检验目前用户的密码.同时且对称密钥也解出来了.自此便可利用jwt实现任意身份的登录.

注意:payload具有时间限制,若失效请重新登录抓取新的Cookie



实验效果


before login

first

现在我们尝试不用密码,而是用我们伪造的jwt,去实现登录



second

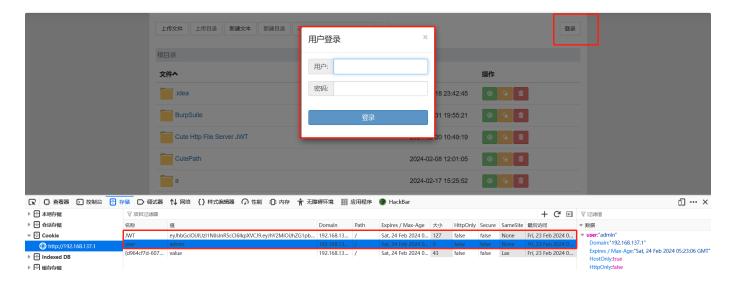

successful jwt forgery

