

100

Leonardo Melo

Sr. Software Engineer

PDF generated at: 22 May 2026 17:13:58 UTC

View this report on HackerRank

Score

100% • 225.0 / 225
scored in Atenea Mercantil Sr. Software Engineer in 82 min 19 sec on 5 Apr 2026 08:40:56 AST

Candidate Information

- Emailleonardo@ateneamercantil.com
- TestAtenea Mercantil Sr. Software Engineer
- Candidate PacketView
- Taken on5 Apr 2026 08:40:56 AST
- Time taken82 min 19 sec/ 105 min
- Work Experience> 5 years
- Invited byTalentio
- Invited on31 Mar 2026 12:58:47 AST

Skill Distribution

No.	Skill	Score
1	Problem Solving Intermediate	100%

2	REST API Intermediate	100%	
3	SQL Intermediate	100%	

Tags Distribution

Medium	100%	Greedy	100%
Priority Queue	100%	Interviewer Guidelines	100%
Trees	100%	REST API	100%
Back-End Development	100%	JSON	100%
CPCE Questions	100%	Database	100%
SQL	100%	Union	100%
Theme: Finance	100%	Aggregation	100%

Questions

Problem Solving (Intermediate) • 75 / 75

No.	Question	Skill	Score	Code Quality	Time Taken	Status
1	Thread Count Coding	Problem Solving (Intermediate)	75/75	-	38 min 46 sec	

REST API (Intermediate) • 75 / 75

No.	Question	Skill	Score	Code Quality	Time Taken	Status
2	REST API: Get Author Articles Coding	REST API (Intermediate)	75/75	-	24 min 36 sec	

SQL (Intermediate) • 75 / 75

No.	Question	Skill	Score	Code Quality	Time Taken	Status
3	SQL: Finance Bonds and Stocks Cash Flows Stats DbRank	SQL (Intermediate)	75/75	-	18 min 35 sec	

1. Thread Count

 Correct

Coding

Medium

Greedy

Priority Queue

Interviewer Guidelines

Trees

Question description

A system has *service_nodes* micro-services connected in a tree structure. Each micro-service can have a maximum number of *threads[i]*, and adjacent micro-services must have maximum threads differing by exactly 1.


Some configurations were lost, and only *k* micro-services have known thread values, provided as *currentValues[i] = [micro-service index, maximum threads]*.

Find the maximum number of threads for each micro-service such that the total number of threads in the system is minimized.

Example

service_nodes = 5

```
service_from = [1, 2, 3, 4]
service_to = [2, 3, 4, 5]
k = 2
currentValues = [[1, 3], [5, 3]]
```

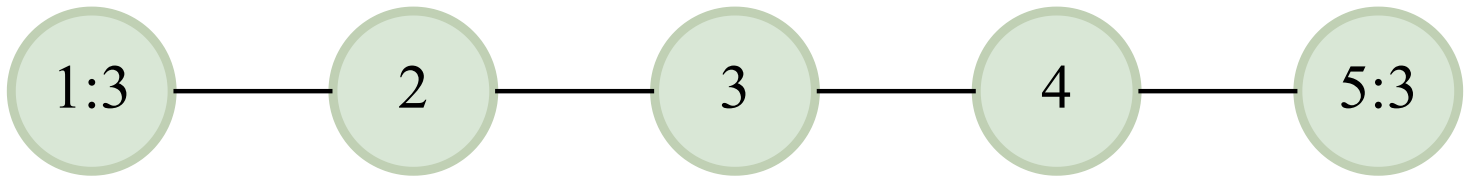

The micro-services are connected as: (1,2), (2,3), (3,4), (4,5). Known configurations: micro-service 1 has 3 threads, micro-service 5 has 3 threads.

The optimal thread configuration is [3, 2, 1, 2, 3], where adjacent services differ by exactly 1 and the total is minimized.

Function Description

Complete the function *getMinSumNodeValues* in the editor with the following parameter(s):

- int service_nodes*: the number of micro-services in the system
- int service_from[service_nodes - 1]*: one end of the edges
- int service_to[service_nodes - 1]*: other end of the edges
- int k*: number of known configurations
- int currentValues[k][2]*: the [micro-service index, maximum threads] pairs.

Returns

int[service_nodes]: the initial configuration of the micro-services with the minimum possible live threads overall.

Constraints

- $1 \leq \text{service_nodes} \leq 10^5$
- $1 \leq \text{service_from}[i], \text{service_to}[i] \leq \text{service_nodes}$
- $1 \leq k \leq \text{service_nodes}$
- $1 \leq \text{currentValues}[i][0] \leq \text{service_nodes}$
- $1 \leq \text{currentValues}[i][1] \leq 10^6$

▼ INPUT FORMAT FOR CUSTOM TESTING

The first line contains two space-separated integers, *service_nodes* and *service_nodes - 1*, the number of micro-services and the number of edges.

Each of the next *service_nodes - 1* lines contains two space-separated integers *service_from[i]* and *service_to[i]*.

The next line contains an integer, *k*, the number of configurations left.

The next line contains an integer, *k*, the number of rows in *currentValues*.

The next line contains an integer, *2*, the number of columns in *currentValues[i]*.

Each line *i* of the next *k* lines (where $0 \leq i < k$) contains two integers, *currentValues[i][0]*, and *currentValues[i][1]*.

▼ SAMPLE CASE 0


Sample Input For Custom Testing

STDIN	FUNCTION
----	-----
4 3	→ service_nodes = 4, service_nodes - 1 = 3
1 2	→ service_from = [1, 2, 2], service_to = [2, 3, 4]
2 3	
2 4	
3	→ k = 3
3	→ currentValues[] size rows = 3
2	→ currentValues[][] size c = 2
1 3	→ currentValues = [[1, 3], [2, 4], [3, 3]]
2 4	
3 3	

Sample Output

```
3
4
3
3
```

Explanation

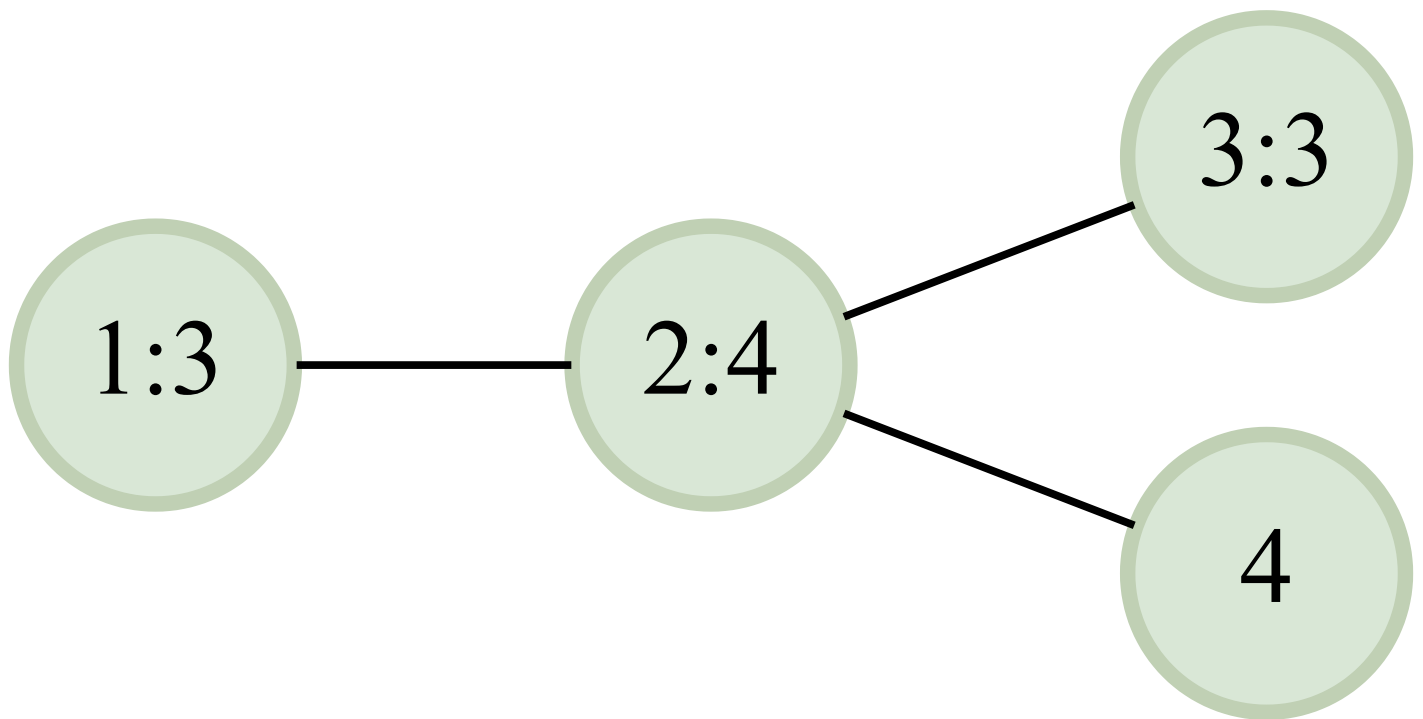

There are 4 micro-services, and 3 edges: (1, 2), (2, 3), and (2, 4).

There are 3 configurations left: 1, 2, and 3, with values 3, 4, and 3, respectively.

The initial configuration is [3, 4, 3, 3], with the maximum live threads on adjacent micro-services differing by exactly one.

▼ SAMPLE CASE 1

Sample Input For Custom Testing

STDIN	FUNCTION
----	-----
3 2	→ service_nodes = 3, service_nodes - 1 = 2
1 2	→ service_from = [1, 1], service_to = [2, 3]
1 3	
2	→ k = 2
2	→ currentValues[] size r = 2
2	→ currentValues[][] size c = 2
2 4	→ currentValues = [[2, 4], [3, 6]]
3 6	


Sample Output

```

5
4
6

```

Explanation

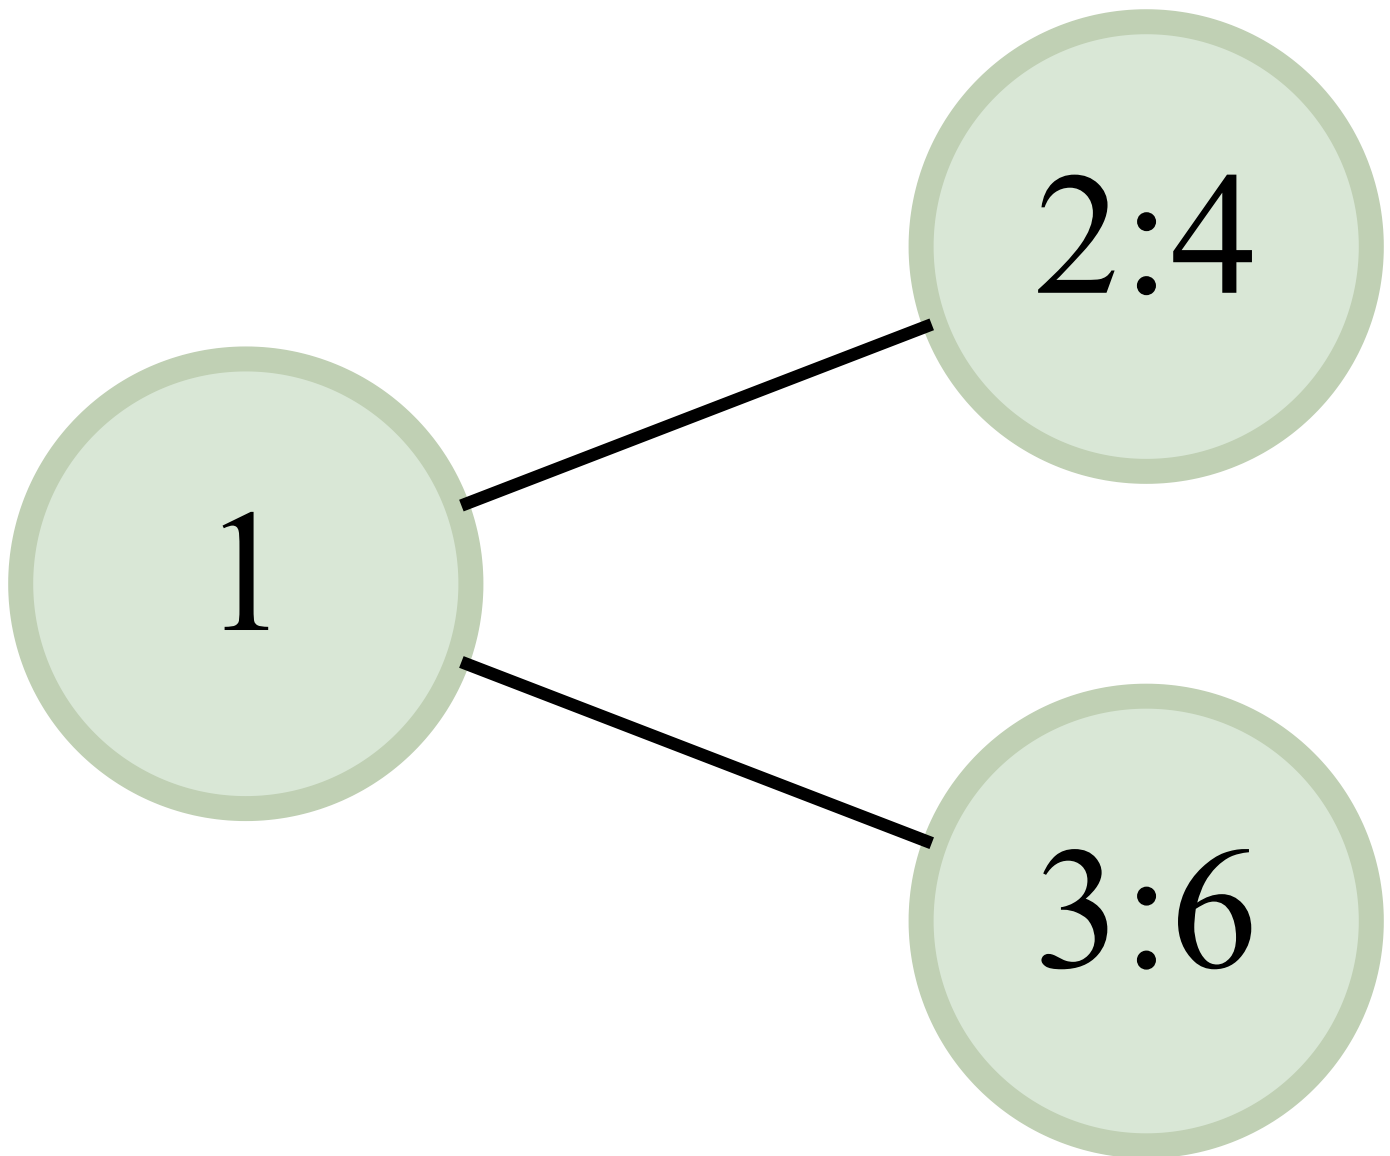

There are 3 micro-services, and 2 edges: (1, 2), and (1, 3).

There are 2 configurations left: 2 and 3, with values 4 and 6, respectively.

The initial configuration is [5, 4, 6], with the maximum live threads on adjacent micro-services differing by exactly one.

Interviewer guidelines

▼ SOLUTION

Skills: Priority Queue (Heaps), Trees, Greedy

Since, the total live threads in the system is required to be minimum, we can start with the highest valued node, all the adjacent nodes can be given the value 1 less than that of the node. It's because the parity of the number written on a node will remain unchanged, and if we have to number a node with value 1 more than the current number then that node will already be numbered from the previous higher valued nodes.

So, a priority queue is used and all the initial values given are pushed into the priority queue along with the index. Then, in each step, pop the highest value and if the adjacent nodes already does not have a set value, set its value to the current node - 1. In this manner, all the values can be found out.

Optimal Solution:

```
import heapq

def getMinSumNodeValues(service_nodes, service_from, service_to, k, currentValues):
    adj_list = [[] for _ in range(service_nodes + 1)]
    for i in range(len(service_from)):
        adj_list[service_from[i]].append(service_to[i])
        adj_list[service_to[i]].append(service_from[i])

    pq = []
    visited = [False] * (service_nodes + 1)

    for i in range(k):
        vertex, value = currentValues[i]
        heapq.heappush(pq, (-value, vertex))
        visited[vertex] = True

    a = [0] * (service_nodes + 1)

    while len(pq) > 0:
        v_value, v = heapq.heappop(pq)
        a[v] = -v_value

        for u in adj_list[v]:
            if not visited[u]:
                heapq.heappush(pq, -(a[v] - 1), u)
                visited[u] = True

    return a[1:]
```

▼ COMPLEXITY ANALYSIS

Time Complexity - $O(\text{service_nodes} * \log(\text{service_nodes}))$

The creation and traversal of the tree have operations linearly proportional to the number of micro-services. The heap multiplies the number of operations logarithmically. Hence, the time complexity is $O(\text{service_nodes} * \log(\text{service_nodes}))$.

Space Complexity - $O(\text{service_nodes})$

The auxiliary space used for storing the tree and the heaps is linearly proportional to the number of micro-services. Hence, the space complexity is $O(\text{service_nodes})$.

Candidate's Solution

Language used: Java 17

```
1 import java.io.*;
2 import java.math.*;
3 import java.security.*;
4 import java.text.*;
5 import java.util.*;
6 import java.util.concurrent.*;
7 import java.util.function.*;
8 import java.util.regex.*;
9 import java.util.stream.*;
10 import static java.util.stream.Collectors.joining;
11 import static java.util.stream.Collectors.toList;
12
13
14
15 class Result {
16
17     /*
18      * Complete the 'getMinSumNodeValues' function below.
19      *
20      * The function is expected to return an INTEGER_ARRAY.
21      * The function accepts following parameters:
22      * 1. UNWEIGHTED_INTEGER_GRAPH service
23      * 2. INTEGER k
24      * 3. 2D_INTEGER_ARRAY currentValues
25      */
26
27     /*
28      * For the unweighted graph, <name>:
29      *
30      * 1. The number of nodes is <name>Nodes.
```

```
31     * 2. The number of edges is <name>Edges.
32     * 3. An edge exists between <name>From[i] and <name>To[i].
33     *
34     */
35
36     public static List<Integer> getMinSumNodeValues(int serviceNodes,
List<Integer> serviceFrom, List<Integer> serviceTo, int k,
List<List<Integer>> currentValues) {
37
38         int numero =    serviceNodes;
39
40         //Lista adyacencia
41         List<Integer>[] adj = new ArrayList[numero + 1];
42         for (int i = 1;i <= numero;i++) adj[i] = new ArrayList<>();
43         for (int i = 0; i < serviceFrom.size();i++){
44             int u = serviceFrom.get(i);
45             int v = serviceTo.get(i);
46             adj[v].add(u);
47             adj[u].add(v);
48         }
49         int[] dp = new int [numero + 1];
50         Arrays.fill(dp,-1000000000);
51         for(List<Integer> entry : currentValues){
52             dp[entry.get(0)] = entry.get(1);
53         }
54         int[] order = new int[numero];
55         int[] parent = new int[numero +1];
56         boolean[] visited = new boolean[numero +1];
57         int head = 0, tail = 0;
58         order[tail++] = 1;
59         visited[1] = true;
60         while( head < tail){
61             int u = order[head++];
62             for( int v : adj[u]){
63                 if(!visited[v]){
64                     visited[v] = true;
65                     parent[v] = u;
66                     order[tail++] = v;
67                 }
68             }
69         }
70         //propagacion bottom-up
71         for(int i = numero - 1; i >= 0; i--){
72             int u = order[i];
73             int p = parent[u];
74             if(p != 0){
```

```
75         dp[p] = Math.max(dp[p], dp[u] - 1);
76     }
77 }
78 //Propagacion top-down
79 for(int i = 0; i < numero; i++){
80     int u = order[i];
81     for (int v : adj[u]){
82         if(v != parent[u]){
83             dp[v] = Math.max(dp[v], dp[u] - 1);
84         }
85     }
86 }
87 List<Integer> resultado = new ArrayList<>();
88 for(int i = 1; i <= numero; i++){
89     resultado.add(dp[i]);
90 }
91 return resultado;
92 }
93 }
94 }
95 }
96
97 public class Solution {
98     public static void main(String[] args) throws IOException {
99         BufferedReader bufferedReader = new BufferedReader(new
100         InputStreamReader(System.in));
101         BufferedWriter bufferedWriter = new BufferedWriter(new
102         FileWriter(System.getenv("OUTPUT_PATH")));
103
104         String[] serviceNodesEdges =
105         bufferedReader.readLine().replaceAll("\\s+", "").split(" ");
106
107         int serviceNodes = Integer.parseInt(serviceNodesEdges[0]);
108         int serviceEdges = Integer.parseInt(serviceNodesEdges[1]);
109
110         List<Integer> serviceFrom = new ArrayList<>();
111         List<Integer> serviceTo = new ArrayList<>();
112
113         IntStream.range(0, serviceEdges).forEach(i -> {
114             try {
115                 String[] serviceFromTo =
116                 bufferedReader.readLine().replaceAll("\\s+", "").split(" ");
117
118                 serviceFrom.add(Integer.parseInt(serviceFromTo[0]));
119                 serviceTo.add(Integer.parseInt(serviceFromTo[1]));
120             } catch (IOException ex) {
```

```

117         throw new RuntimeException(ex);
118     }
119 });
120
121     int k = Integer.parseInt(bufferedReader.readLine().trim());
122
123     int currentValuesRows =
Integer.parseInt(bufferedReader.readLine().trim());
124     int currentValuesColumns =
Integer.parseInt(bufferedReader.readLine().trim());
125
126     List<List<Integer>> currentValues = new ArrayList<>();
127
128     IntStream.range(0, currentValuesRows).forEach(i -> {
129         try {
130             currentValues.add(
131                 Stream.of(bufferedReader.readLine().replaceAll("\\s+$",
""))
.split(" "))
132                 .map(Integer::parseInt)
133                 .collect(toList())
134             );
135         } catch (IOException ex) {
136             throw new RuntimeException(ex);
137         }
138     });
139
140     List<Integer> result = Result.getMinSumNodeValues(serviceNodes,
serviceFrom, serviceTo, k, currentValues);
141
142     bufferedWriter.write(
143         result.stream()
144             .map(Object::toString)
145             .collect(joining("\n"))
146         + "\n"
147     );
148
149     bufferedReader.close();
150     bufferedWriter.close();
151 }
152 }
153

```

TESTCASE	DIFFICULTY	TYPE	STATUS	SCORE	TIME TAKEN	MEMORY USED
----------	------------	------	--------	-------	------------	-------------

Testcase 0	Easy	Sample	Success	1	0.0665 sec	34 KB
Testcase 1	Easy	Sample	Success	1	0.0817 sec	33.9 KB
Testcase 2	Easy	Sample	Success	1	0.0649 sec	34 KB
Testcase 3	Easy	Hidden	Success	3	0.0494 sec	33.8 KB
Testcase 4	Easy	Hidden	Success	3	0.0795 sec	34.1 KB
Testcase 5	Easy	Hidden	Success	3	0.0624 sec	34.2 KB
Testcase 6	Medium	Hidden	Success	5	0.1005 sec	37.9 KB
Testcase 7	Medium	Hidden	Success	6	0.1832 sec	43.5 KB
Testcase 8	Medium	Hidden	Success	6	0.2093 sec	56.6 KB
Testcase 9	Medium	Hidden	Success	6	0.6081 sec	69.6 KB
Testcase 10	Hard	Hidden	Success	8	0.5991 sec	86.1 KB
Testcase 11	Hard	Hidden	Success	8	0.6473 sec	114 KB
Testcase 12	Hard	Hidden	Success	8	0.7122 sec	114 KB

Testcase 13	Hard	Hidden	Success	8	0.7229 sec	144 KB
Testcase 14	Hard	Hidden	Success	8	1.0626 sec	161 KB

🚫 No comments.

2. REST API: Get Author Articles

✓ Correct

Coding

REST API

Back-End Development

Medium

JSON

CPCE Questions

Interviewer Guidelines

Question description

Write an HTTP GET method to retrieve article information from a database. The query response is paginated and can be accessed by appending `&page=num` to the query string.

Given an author name, the *getArticleTitles* function must:

1. Query `https://jsonmock.hackerrank.com/api/articles?author=<authorName>&page=<num>` where `<authorName>` is the author name and `<num>` is the page number.
2. Initialize an array to store article titles.
3. For each article in the data field:
 - If *title* is not null, use *title* as the name.
 - If *title* is null but *story_title* is not null, use *story_title*.
 - If both are null, ignore the article.
4. Fetch all pages based on the *total_pages* count.
5. Return the array of titles.

The query response from the website is a JSON response with the following five fields:

- *page*: The current page.
- *per_page*: The maximum number of results per page.
- *total*: The total number of records in the search result.
- *total_pages*: The total number of pages that must be queried to get all the results.

- *data*: An array of JSON objects containing article information

Function Description

Complete the function *getArticleTitles* in the editor with the following parameter(s):

string author: the author string to search on

Returns

string[]: a list of the articles as described

Note: Please review the header in the code stub to see available libraries for API requests in the selected language. Required libraries can be imported in order to solve the question. Check our full list of supported libraries at <https://www.hackerrank.com/environment>.

▼ SCHEMA

You are provided 1 table: ARTICLES.

ARTICLES		
Name	Type	Description
title	STRING	This is the first column. It is the title of the article
url	STRING	URL of the article
author	STRING	the author name of the article
num_comments	LONG	total number of comments
story_id	LONG	unique identifier number for the article
story_title	STRING	an additional title for the article
story_url	STRING	an additional URL for the article
parent_id	LONG	unique identifier number of the parent article
created_at	LONG	created time of the article

▼ SAMPLE CASE 0

Sample Input For Custom Testing

```
STDIN      Function
-----
epaga  →  author = 'epaga'
```

Sample Output

A Message to Our Customers
Apple’s declining software quality

Explanation

ARTICLES						
title	url	author	num_comments	story_id	story_title	story_id
A Message to Our Customers	null	epaga	967	null	null	1
Google Is Eating Our Mail	null	saintamh	685	null	null	1
null	null	epaga	705	null	Apple’s declining software quality	1

▼ SAMPLE CASE 1

Sample Input For Custom Testing

```
STDIN      Function
-----
saintamh  →  author = 'saintamh'
```

Sample Output

Google Is Eating Our Mail

Explanation

ARTICLES						
----------	--	--	--	--	--	--

title	url	author	num_comments	story_id	story_title	sto
A Message to Our Customers	null	epaga	967	null	null	r
Google Is Eating Our Mail	null	saintamh	685	null	null	r
null	null	epaga	705	null	Apple's declining software quality	r

Interviewer guidelines

▼ SOLUTION

Concepts covered: API Requests, JSON parsing

Python 3 solution:

```
def getArticleTitles(author):  
  
    page = 0  
    pages = 1  
    titles = []  
  
    while page <= pages:  
        page += 1  
        url = f'https://jsonmock.hackerrank.com/api/articles?author={author}&page={page}'  
        req = requests.get(url)  
        json_data = json.loads(req.content.decode('utf-8'))  
        if page == 1:  
            pages = json_data['total_pages']  
        for article in json_data['data']:  
            if article['title']:  
                titles.append(article['title'])  
            elif article['story_title']:  
                titles.append(article['story_title'])  
  
    return titles
```

Candidate's Solution

Language used: Java 17

```
1 import java.io.*;
2 import java.math.*;
3 import java.security.*;
4 import java.text.*;
5 import java.util.*;
6 import java.util.concurrent.*;
7 import java.util.function.*;
8 import java.util.regex.*;
9 import java.util.stream.*;
10 import static java.util.stream.Collectors.joining;
11 import static java.util.stream.Collectors.toList;
12 import java.net.*;
13 import org.json.simple.*;
14 import org.json.simple.parser.*;
15 import java.net.http.*;
16 import java.net.URI;
17 import org.json.simple.parser.JSONParser;
18 import org.json.simple.parser.ParseException;
19 import com.google.gson.*;
20 class Result {
21
22     /*
23      * Complete the 'getArticleTitles' function below.
24      *
25      * The function is expected to return a STRING_ARRAY.
26      * The function accepts STRING author as parameter.
27      *
28      * URL for cut and paste:
29      * https://jsonmock.hackerrank.com/api/articles?author=
30      * <authorName>&page=<num>
31      */
32
33     public static List<String> getArticleTitles(String author) {
34         List<String> titulo = new ArrayList<>();
35         int currentP = 1;
36         int totalP = 1;
37
38         HttpClient client = HttpClient.newHttpClient();
39         Gson gson = new Gson();
40
41         try {
42             do {
43                 String urlString = String.format(
```

```
44         "https://jsonmock.hackerrank.com/api/articles?
author=%s&page=%d",
45         URLEncoder.encode(author, "UTF-8"),
46         currentP
47     );
48     HttpRequest request = HttpRequest.newBuilder()
49         .uri(URI.create(urlString))
50         .GET()
51         .build();
52     HttpResponse<String> response = client.send(request,
HttpResponse.BodyHandlers.ofString());
53
54     if (response.statusCode() == 200) {
55         //cuerpo de la respuesta
56         JsonObject jsonResponse = gson.fromJson(response.body(),
JsonObject.class);
57
58         // Actualizar total de páginas
59         if (currentP == 1) {
60             totalP = jsonResponse.get("total_pages").getAsInt();
61         }
62
63         // Procesar el array "data"
64         JSONArray data = jsonResponse.getAsJSONArray("data");
65         for (JsonElement element : data) {
66             JsonObject article = element.getAsJsonObject();
67
68             // Lógica de prioridad: title > story_title > ignore
69             if (!article.get("title").isJsonNull()) {
70                 titulo.add(article.get("title").getString());
71             } else if (!article.get("story_title").isJsonNull())
{
72         titulo.add(article.get("story_title").getString());
73             }
74         }
75
76         currentP++;
77     } else {
78         break;
79     }
80
81     } while (currentP <= totalP);
82
83 } catch (Exception e) {
84     e.printStackTrace();
```

```

85         }
86
87         return titulo;
88
89     }
90
91 }
92 public class Solution {
93     public static void main(String[] args) throws IOException {
94         BufferedReader bufferedReader = new BufferedReader(new
InputStreamReader(System.in));
95         BufferedWriter bufferedWriter = new BufferedWriter(new
FileWriter(System.getenv("OUTPUT_PATH")));
96
97         String author = bufferedReader.readLine();
98
99         List<String> result = Result.getArticleTitles(author);
100
101         bufferedWriter.write(
102             result.stream()
103                 .collect(joining("\n"))
104             + "\n"
105         );
106
107         bufferedReader.close();
108         bufferedWriter.close();
109     }
110 }
111

```

TESTCASE	DIFFICULTY	TYPE	STATUS	SCORE	TIME TAKEN	MEMORY USED
TestCase 0	Easy	Sample	Success	1	1.2091 sec	78.6 KB
TestCase 1	Easy	Sample	Success	1	1.1481 sec	79 KB
TestCase 2	Easy	Sample	Success	1	1.1437 sec	77.7 KB

TestCase 3	Easy	Hidden	Success	4	1.1631 sec	79.5 KB
TestCase 4	Easy	Hidden	Success	4	1.222 sec	77.4 KB
TestCase 5	Easy	Hidden	Success	4	1.1179 sec	78.1 KB
TestCase 6	Easy	Hidden	Success	10	0.9857 sec	78.6 KB
TestCase 7	Easy	Hidden	Success	10	1.0592 sec	78.1 KB
TestCase 8	Easy	Hidden	Success	10	1.1015 sec	78.7 KB
TestCase 9	Easy	Hidden	Success	10	1.2885 sec	77.6 KB
TestCase 10	Easy	Hidden	Success	10	1.2234 sec	79.7 KB
TestCase 11	Easy	Hidden	Success	10	1.1288 sec	79.4 KB

 No comments.

3. SQL: Finance Bonds and Stocks Cash Flows Stats

 Correct

DbRank

Database

SQL

Medium

Union

Theme: Finance

Aggregation

Question description

A company manages various financial assets, including bonds and stocks, and wants to calculate statistics on historical cash flows for each asset. The statistic required is the sum of cash flows per asset.

The result should have the following columns: *name* / *asset_type* / *sum_cash_flows*.

- *name* - name of the bond or stock
- *asset_type* - type of the asset ("Bond" or "Stock")
- *sum_cash_flows* - the sum of cash flows for a specific asset with two places after the decimal, e.g., 10.00.

The results should be sorted in ascending order by *name*.

Note:

- Only assets that have a sum of cash flows greater than 2000.00 should be included in the result.

▼ SCHEMA

bonds			
name	type	constraint	description
id	INT	PRIMARY KEY	Bond ID
name	VARCHAR(255)	UNIQUE	Name of the bond

bond_payments			
name	type	constraint	description
bond_id	INT	FOREIGN KEY(bond_id => bonds.id)	Reference to the bond
cash_flow	DECIMAL(5,2)		Cash flow for the bond

stocks			
name	type	constraint	description

id	INT	PRIMARY KEY	Stock ID
name	VARCHAR(255)	UNIQUE	Name of the stock

stock_payments			
name	type	constraint	description
stock_id	INT	FOREIGN KEY(stock_id => stocks.id)	Reference to the stock
dividend	DECIMAL(5,2)		Dividend paid for the stock

▼ SAMPLE DATA TABLES

bonds	
id	name
1	ABC Bond
2	XYZ Bond
3	Global Bond

bond_payments	
bond_id	cash_flow
1	62.00
1	129.00
1	276.00

1	369.00
1	483.00
2	86.00
2	229.00
2	240.00
2	319.00
2	325.00
2	365.00
2	433.00
2	463.00
3	85.00
3	108.00
3	169.00
3	185.00
3	341.00
3	454.00
3	499.00

stocks	
id	name

1	Apple Inc.
2	Microsoft Corporation
3	Amazon.com Inc.

stock_payments	
stock_id	dividend
1	71.00
1	189.00
1	195.00
1	341.00
1	456.00
2	52.00
2	55.00
2	145.00
2	211.00
2	236.00
2	319.00
2	324.00
2	334.00
2	482.00

3	97.00
3	124.00
3	210.00
3	372.00
3	398.00
3	400.00

▼ EXPECTED OUTPUT

name	asset_type	sum_cash_flows
Microsoft Corporation	Stock	2158.00
XYZ Bond	Bond	2460.00

Interviewer guidelines

```
SELECT
  name,
  'Bond'      AS asset_type,
  SUM( cash_flow ) AS sum_cash_flows
FROM
  bonds
  JOIN bond_payments
    ON bonds.id = bond_payments.bond_id
GROUP BY
  name
HAVING
  sum_cash_flows > 2000
UNION
SELECT
  name,
```

```
'Stock'      AS asset_type,
SUM( dividend ) AS sum_cash_flows
FROM
  stocks
  JOIN stock_payments
    ON stocks.id = stock_payments.stock_id
GROUP BY
  name
HAVING
  sum_cash_flows > 2000
ORDER BY
  name;
```

Candidate's Solution

Language used: MySQL

```
1  SELECT name,asset_type,CAST(sum_cash_flows AS DECIMAL(10,2)) AS
   sum_cash_flows
2  FROM (
3      SELECT b.name, 'Bond' AS asset_type, SUM(bp.cash_flow) AS sum_cash_flows
4      FROM bonds b
5      JOIN bond_payments bp ON b.id = bp.bond_id
6      GROUP BY b.id,b.name
7      UNION ALL
8      SELECT s.name, 'Stock' AS asset_type, SUM(sp.dividend) AS sum_cash_flows
9      FROM stocks s
10     JOIN stock_payments sp ON s.id = sp.stock_id
11     GROUP BY s.id,s.name
12 ) AS aggregated_assets
13 WHERE sum_cash_flows > 2000
14 ORDER BY name ASC;
```

Time taken: 0.02 sec

⚠ No comments.