

How does RN really work?




JS VM
(async)

```
call('GWPAdPlacementView', 'initWithFrame',  
    [{x: 0, y: 0, width: 320, height: 240}])
```

Bridge
(batch)

Native

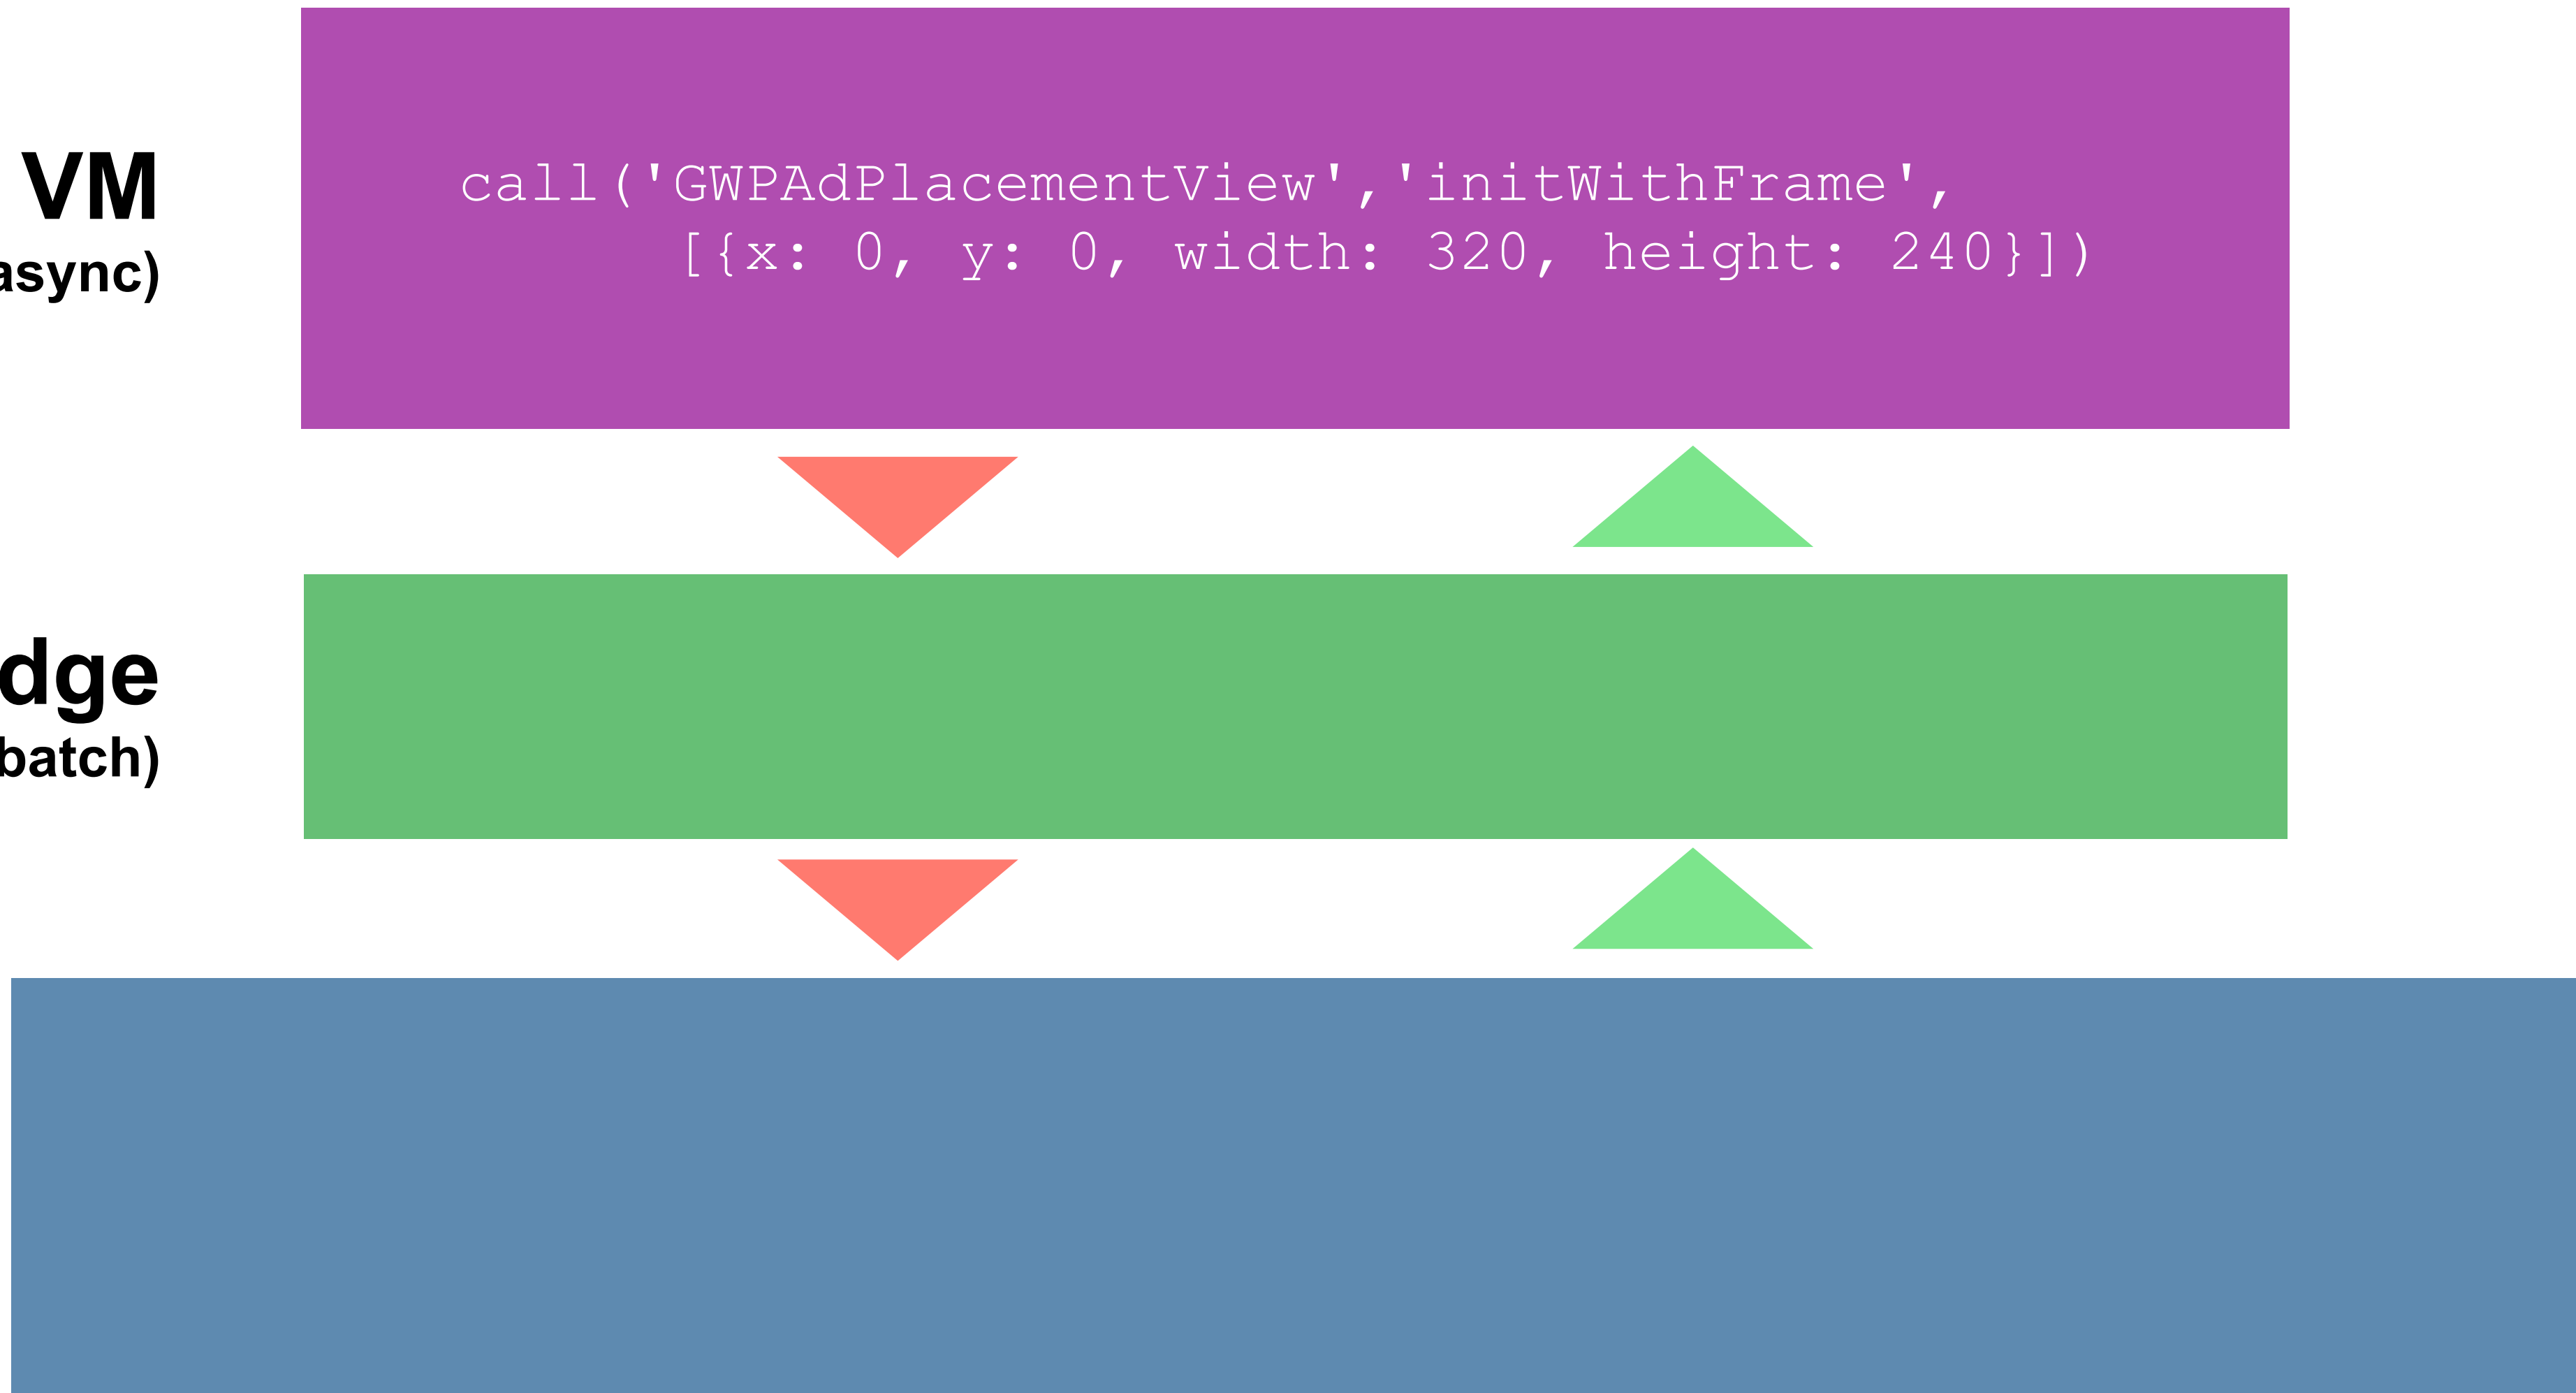

How does RN really work?



JS VM
(async)

```
call('GWPAdPlacementView', 'initWithFrame',  
     [{x: 0, y: 0, width: 320, height: 240}])
```

Bridge
(batch)

```
[['GWPAdPlacementView', 'initWithFrame',  
  [{x: 0, y: 0, width: 320, height: 240}]]]
```

Native

