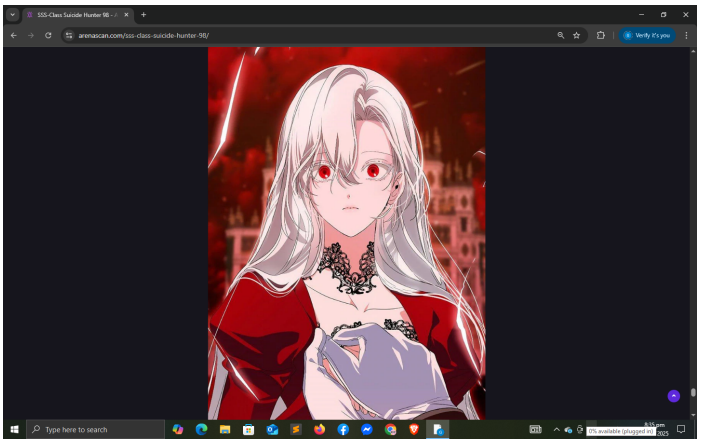

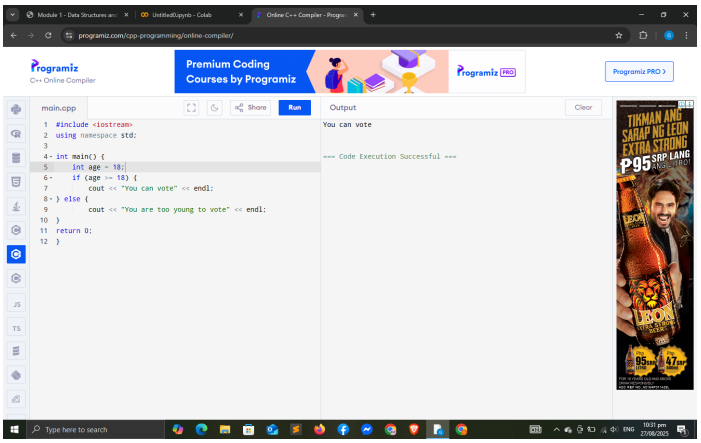
Premium Coding Courses by Programiz
main.cpp
Run
Output
Clear
#include <iostream>
using namespace std;
int main() {
int age = 18;
if (age >= 18) {
cout << "You can vote" << endl;
} else {
cout << "You are too young to vote" << endl;
}
return 0;
}
You can vote
=== Code Execution Successful ===

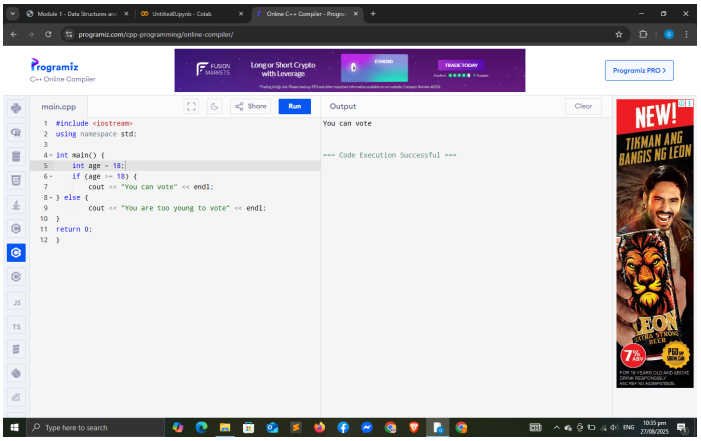
main.cpp
Run
Output
Clear
#include <iostream>
using namespace std;
int main() {
int age = 18;
if (age >= 18) {
cout << "You can vote" << endl;
} else {
cout << "You are too young to vote" << endl;
}
return 0;
}
You can vote
=== Code Execution Successful ===

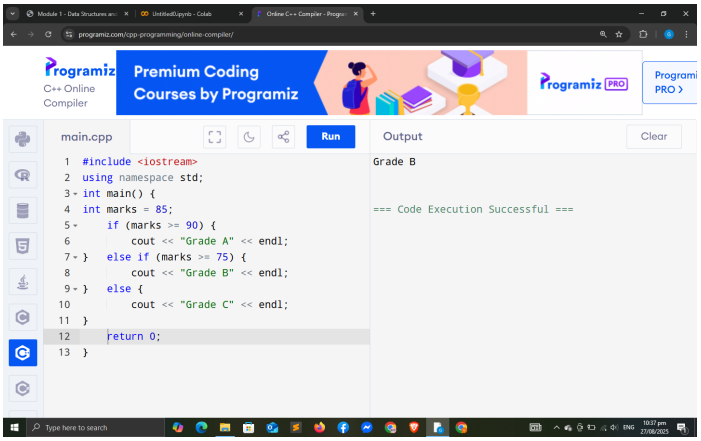
Premium Coding Courses by Programiz
main.cpp
Run
Output
Clear
#include <iostream>
using namespace std;
int main() {
int marks = 85;
if (marks >= 90) {
cout << "Grade A" << endl;
} else if (marks >= 75) {
cout << "Grade B" << endl;
} else {
cout << "Grade C" << endl;
}
return 0;
}
Grade B
=== Code Execution Successful ===

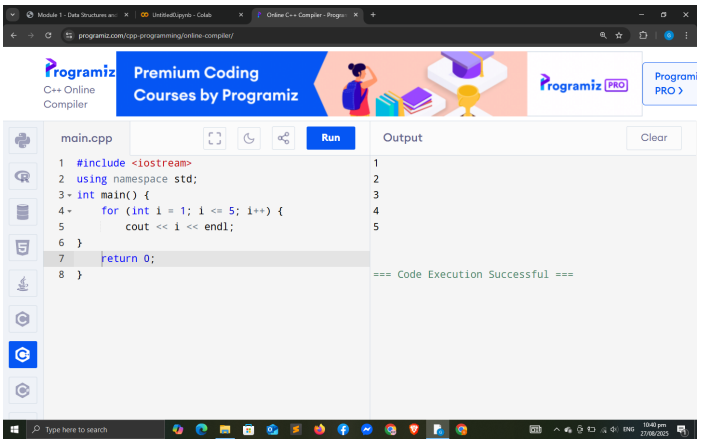
Programiz
C++ Online Compiler
Premium Coding Courses by Programiz
Programiz PRO
main.cpp
Run
Output
Clear
#include <iostream>
using namespace std;
int main() {
for (int i = 1; i <= 5; i++) {
cout << i << endl;
}
return 0;
}
1
2
3
4
5
=== Code Execution Successful ===

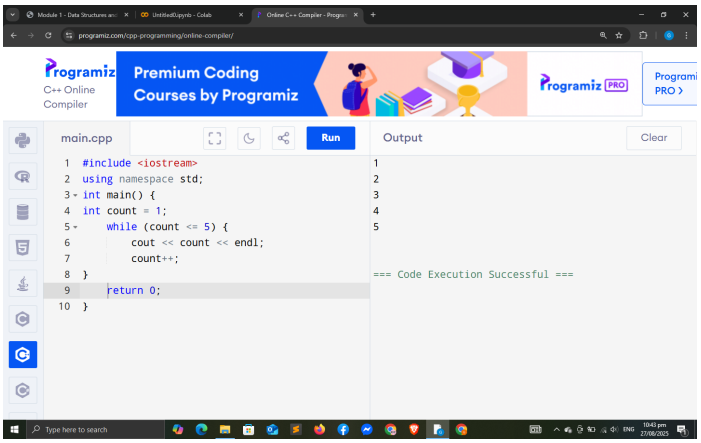
Programiz
C++ Online Compiler
Premium Coding Courses by Programiz
Programiz PRO
main.cpp
Run
Output
Clear
#include <iostream>
using namespace std;
int main() {
int count = 1;
while (count <= 5) {
cout << count << endl;
count++;
}
return 0;
}
1
2
3
4
5
=== Code Execution Successful ===

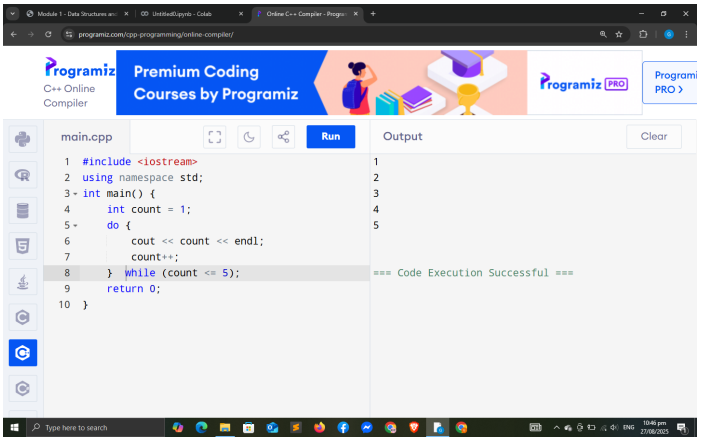
Programiz
C++ Online Compiler
Premium Coding Courses by Programiz
Programiz PRO
main.cpp
Run
Output
Clear
#include <iostream>
using namespace std;
int main() {
int count = 1;
do {
cout << count << endl;
count++;
} while (count <= 5);
return 0;
}
1
2
3
4
5
=== Code Execution Successful ===

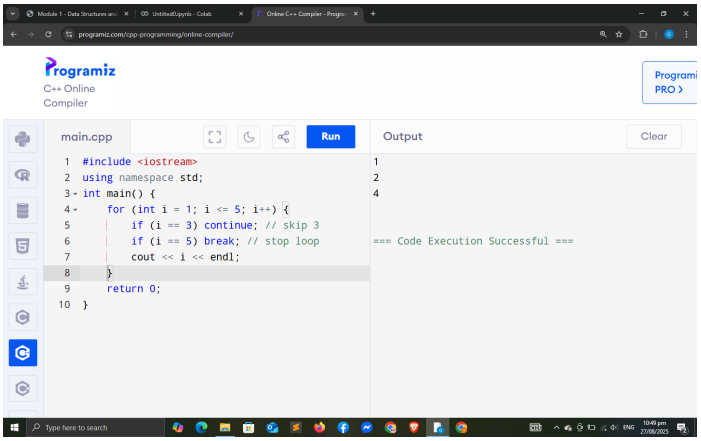
Programiz
C++ Online Compiler
main.cpp
Run
Output
Clear
#include <iostream>
using namespace std;
int main() {
for (int i = 1; i <= 5; i++) {
if (i == 3) continue; // skip 3
if (i == 5) break; // stop loop
cout << i << endl;
}
return 0;
}
1
2
4
=== Code Execution Successful ===

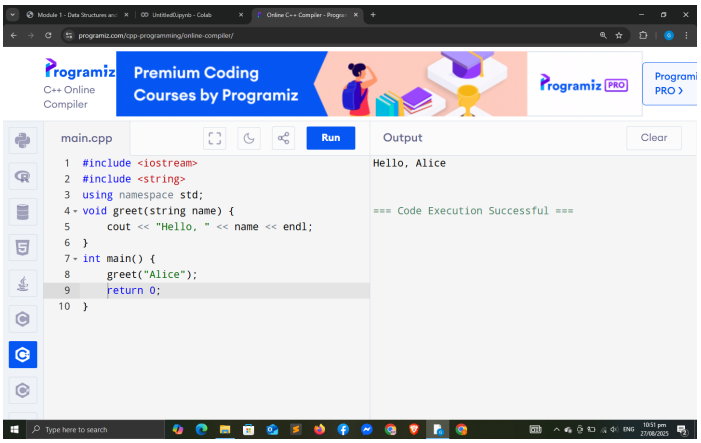
Programiz
C++ Online Compiler
Premium Coding Courses by Programiz
Programiz PRO
main.cpp
Run
Output
Clear
#include <iostream>
#include <string>
using namespace std;
void greet(string name) {
cout << "Hello, " << name << endl;
}
int main() {
greet("Alice");
return 0;
}
Hello, Alice
=== Code Execution Successful ===

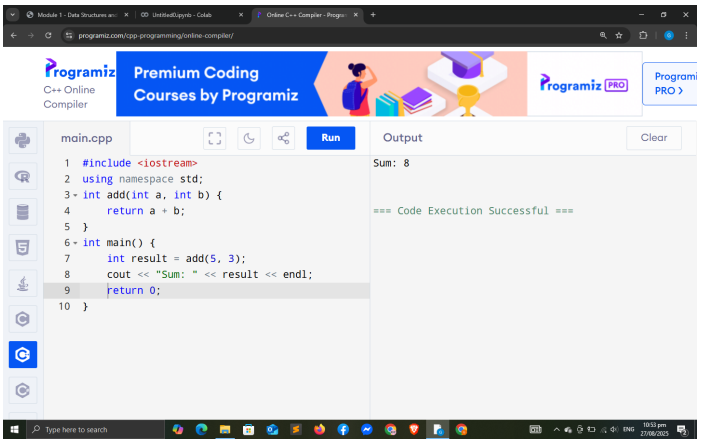
Programiz
C++ Online Compiler
Premium Coding Courses by Programiz
Programiz PRO
main.cpp
Run
Output
Clear
#include <iostream>
using namespace std;
int add(int a, int b) {
return a + b;
}
int main() {
int result = add(5, 3);
cout << "Sum: " << result << endl;
return 0;
}
Sum: 8
=== Code Execution Successful ===

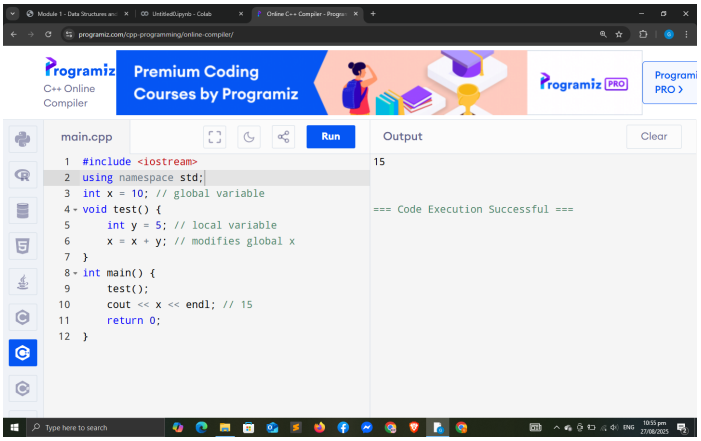
Programiz
C++ Online Compiler
Premium Coding Courses by Programiz
Programiz PRO
main.cpp
Run
Output
Clear
#include <iostream>
using namespace std;
int x = 10; // global variable
void test() {
int y = 5; // local variable
x = x + y; // modifies global x
}
int main() {
test();
cout << x << endl; // 15
return 0;
}
15
=== Code Execution Successful ===