


3 I. Turing Machine Abstraction and Composition


Functional Abstraction for Subroutines

We can apply functional abstraction to TM's which compute specific functions.

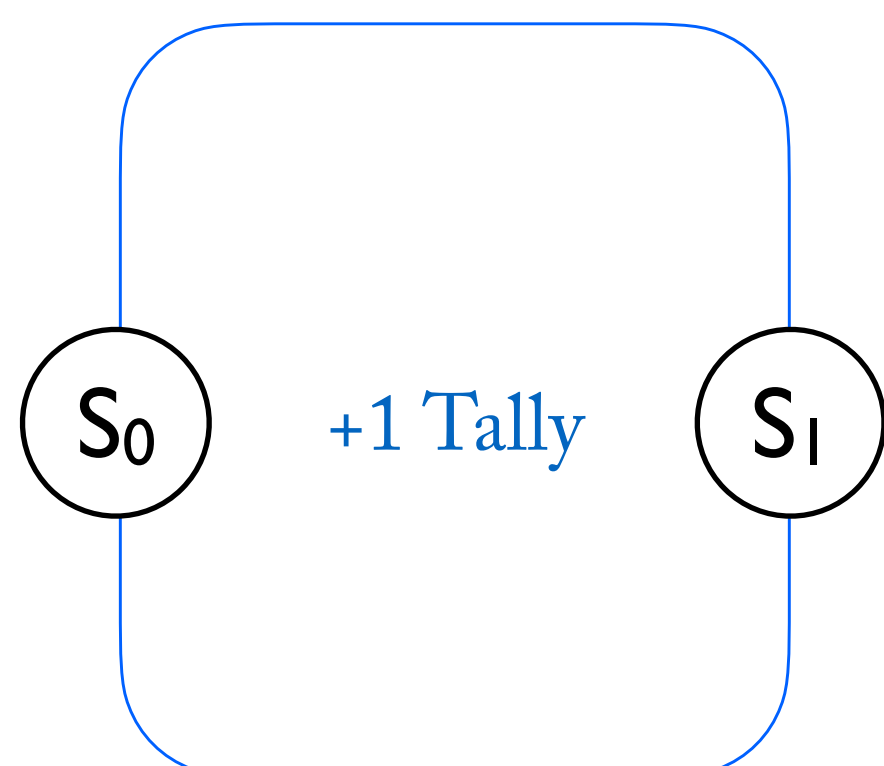


This boxed TM starts in S_0 and halts in S_1 . By the time it halts, it will have computed +1 T.

Boxed TMs will be easier to combine into larger machines if they start *and* finish in standard position. For example, this TM computes +1 T and returns to standard position:

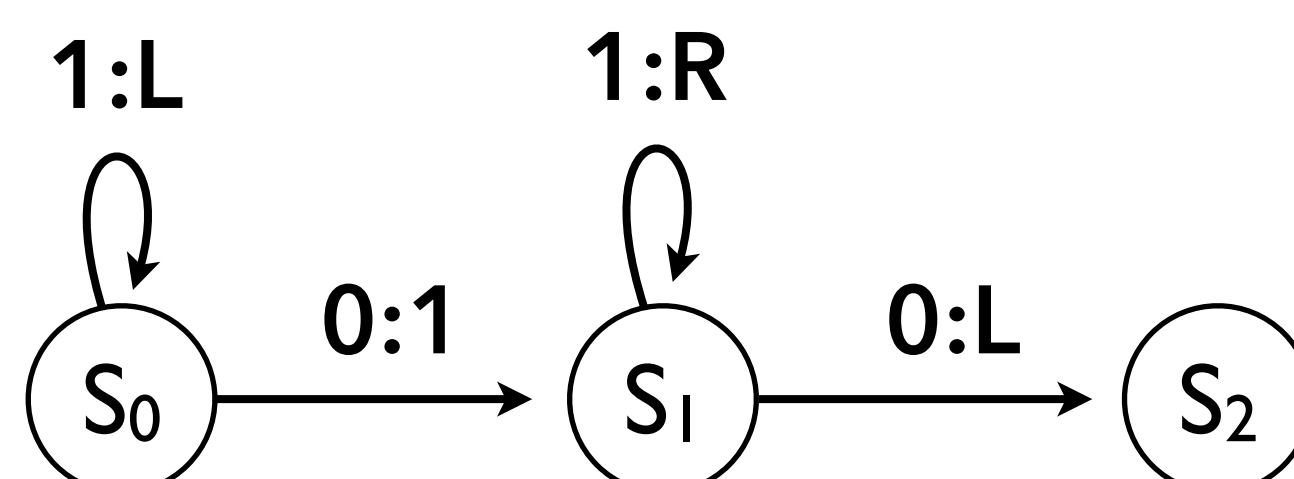

We can box this machine by drawing a frame around it that intersects only with initial state and the halting state:

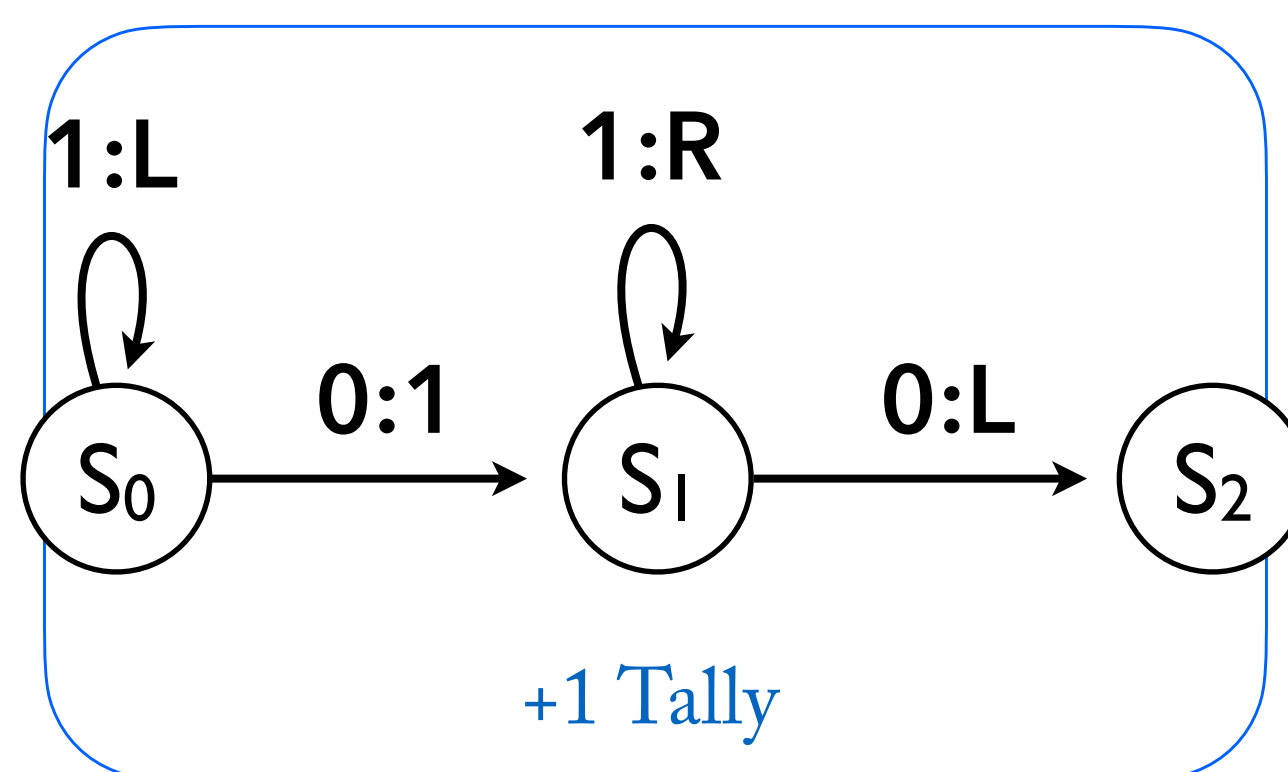

Then we can kick away the internal states:




Constraints on boxing

To prevent technical errors, we have to impose a few constraints on when a boxed machine may be introduced.


A machine M can be **boxed** only when:

1. M computes a function f .
2. S_A is the **initial state** of the machine.
3. S_B is the only **terminal node** of the machine:
 - a) M halts in standard position;
 - b) M halts in S_B ;
 - c) M halts in no other state (given the task);
 - d) there are no transitions from S_B to other internal states of M .

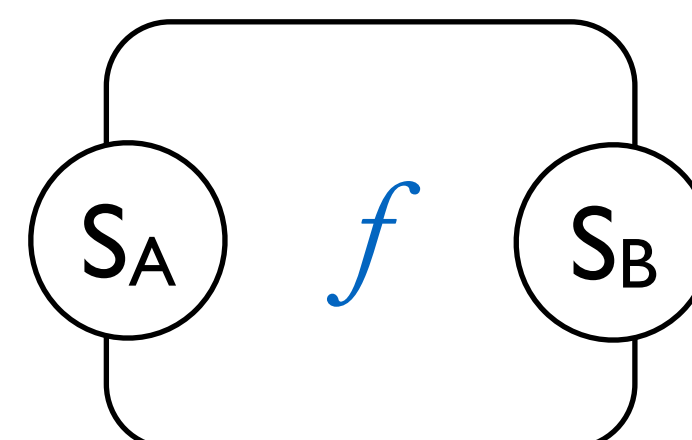


A boxed machine M can only be used in a larger circuit when there are no transitions from S_A to any states outside of M .


So this is right:

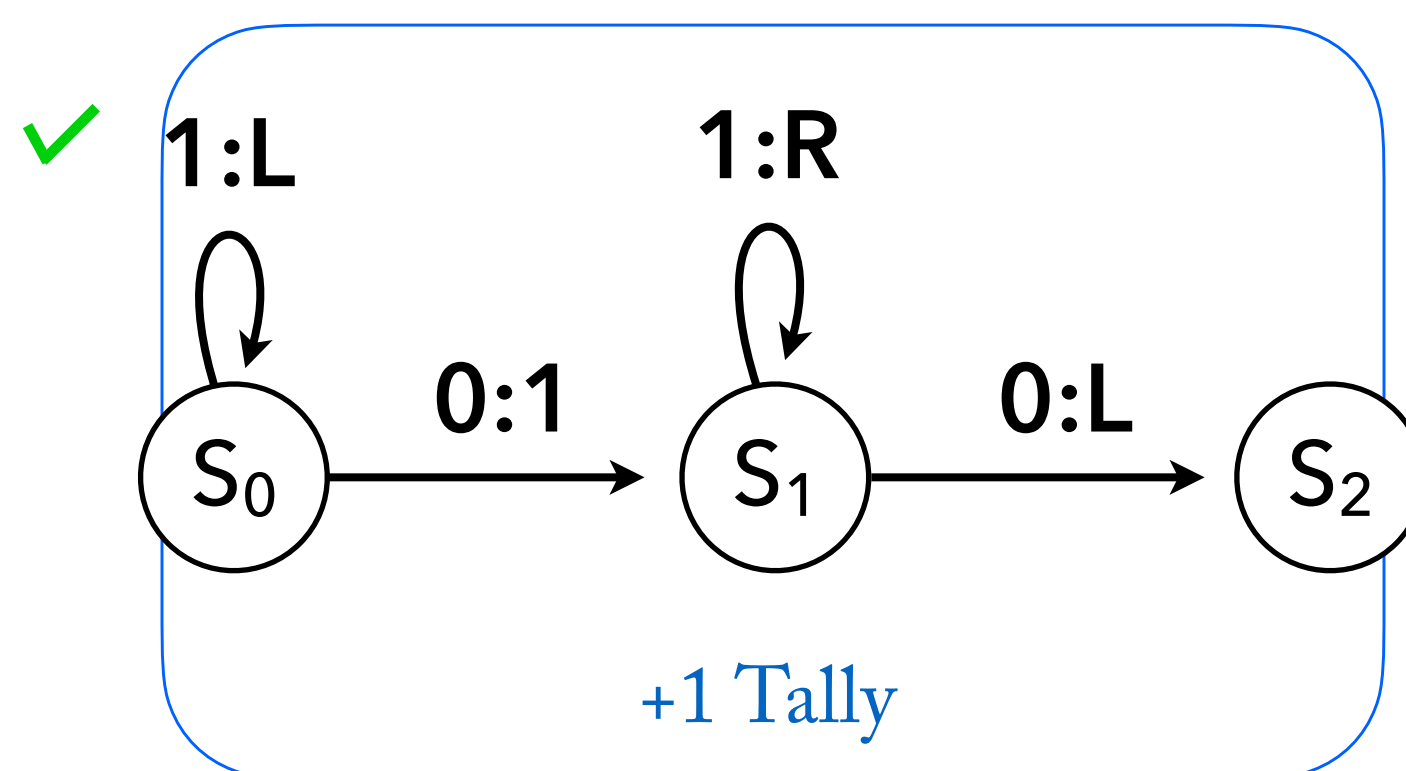

But this is wrong:

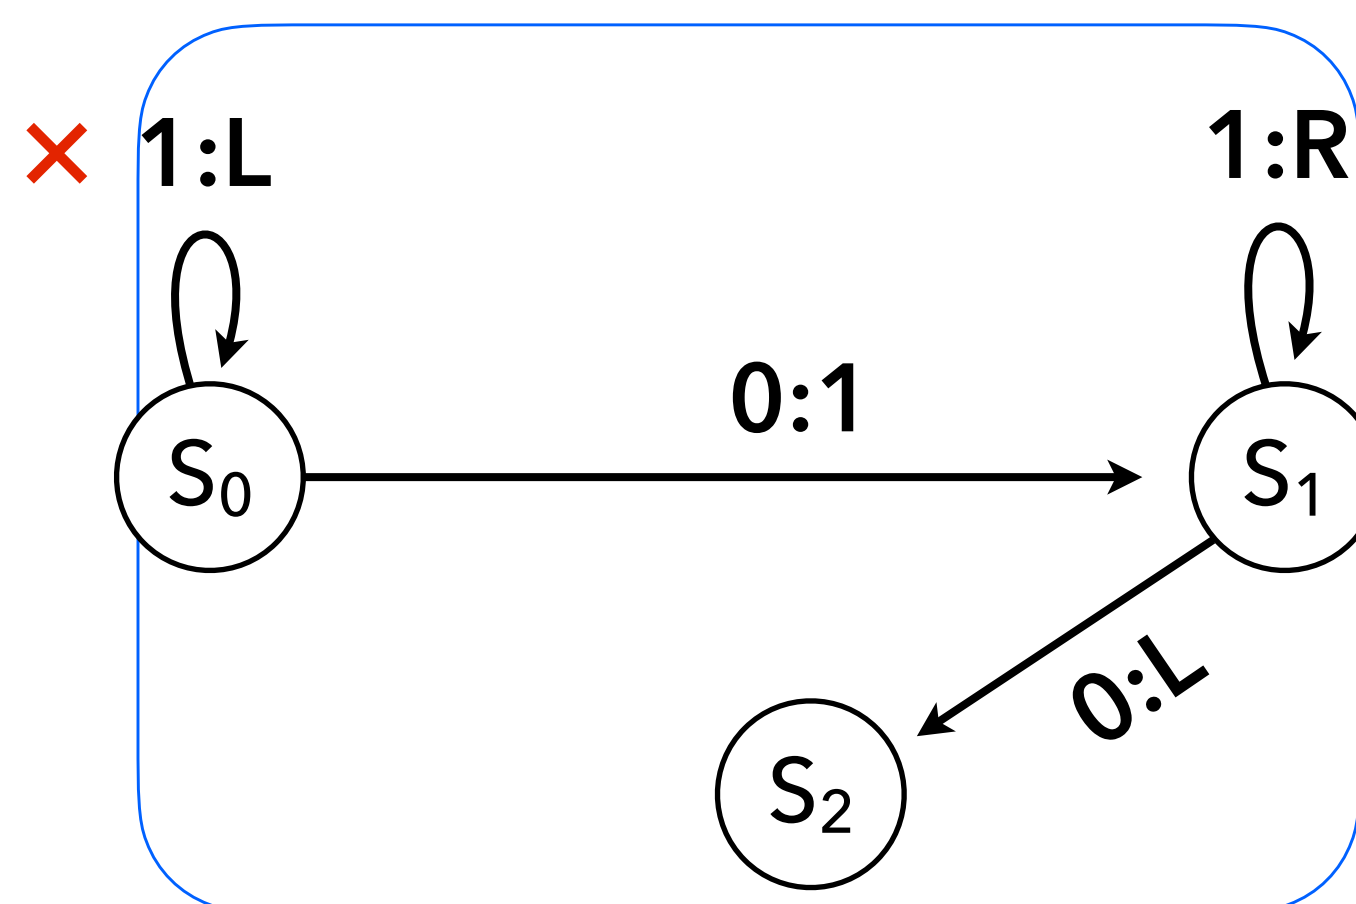


And this is wrong:

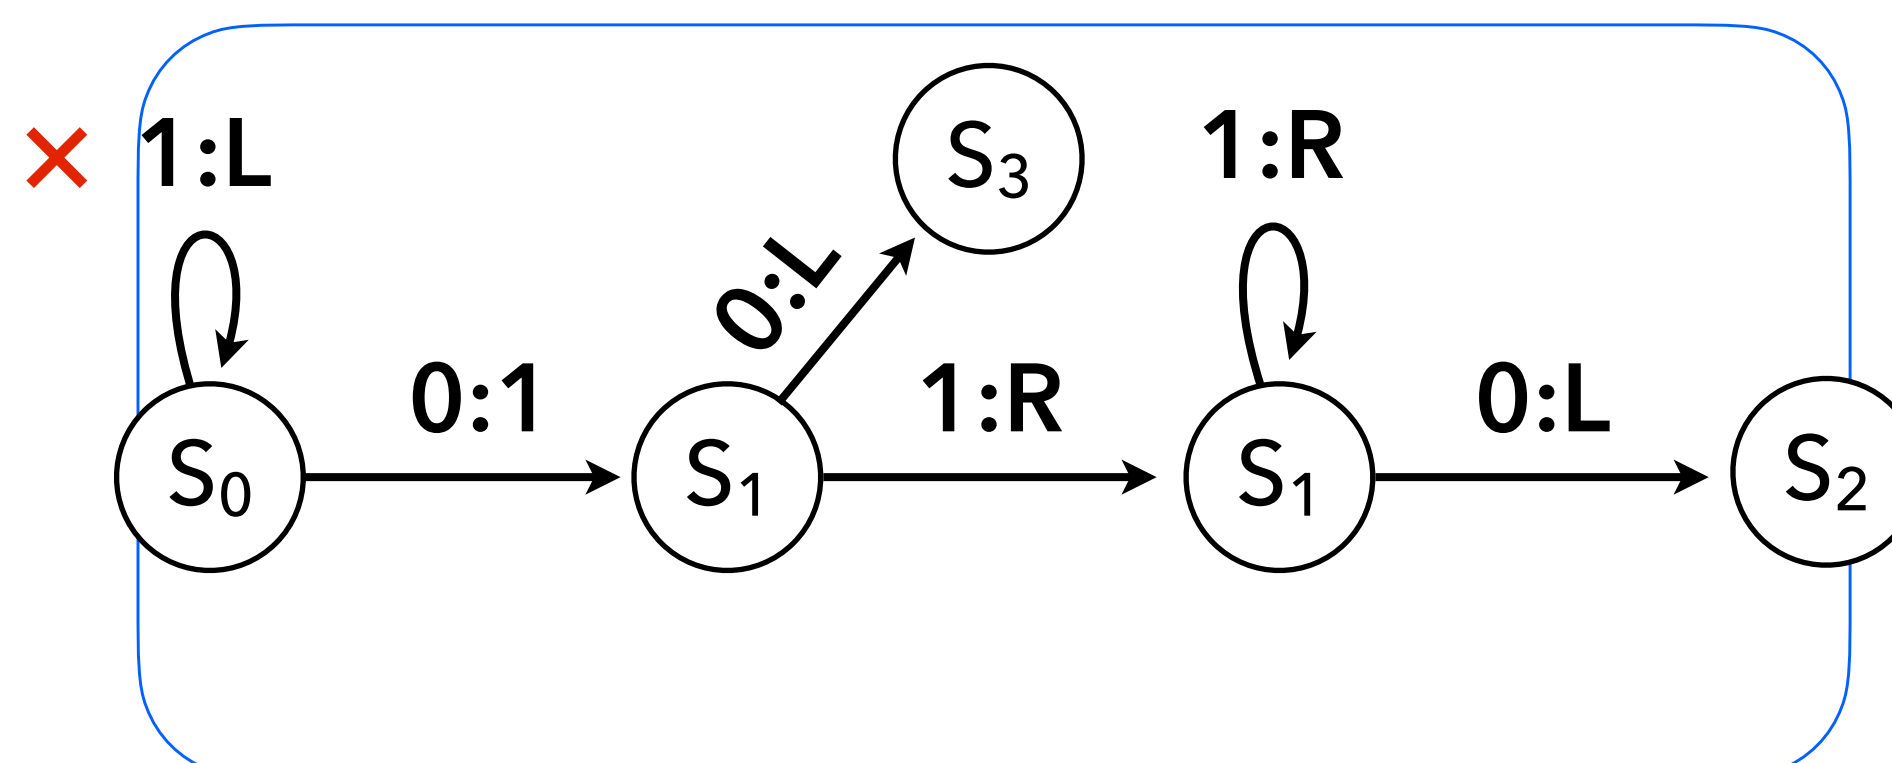


Function Composition

Boxed machines can be composed together to form larger machines:

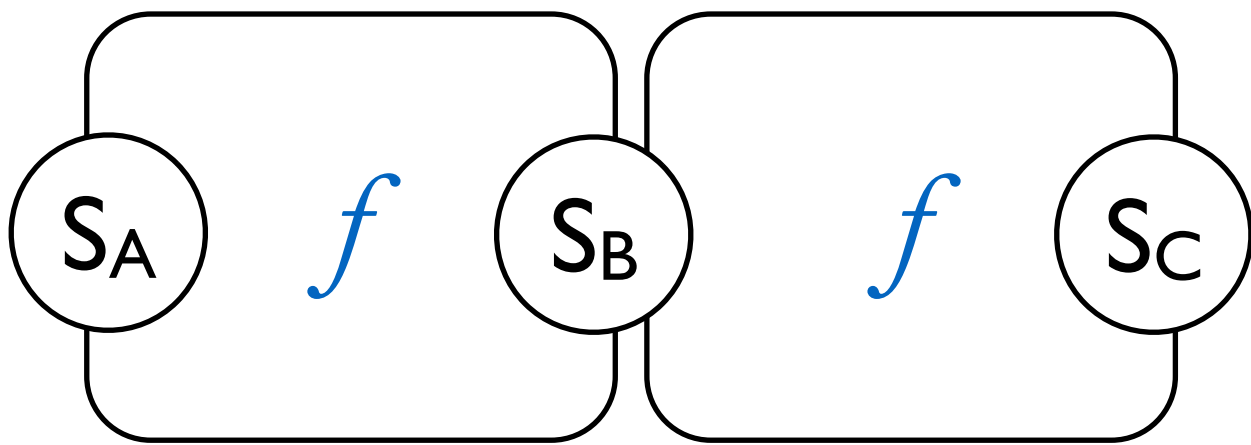

For example, this machine computes +2 T.

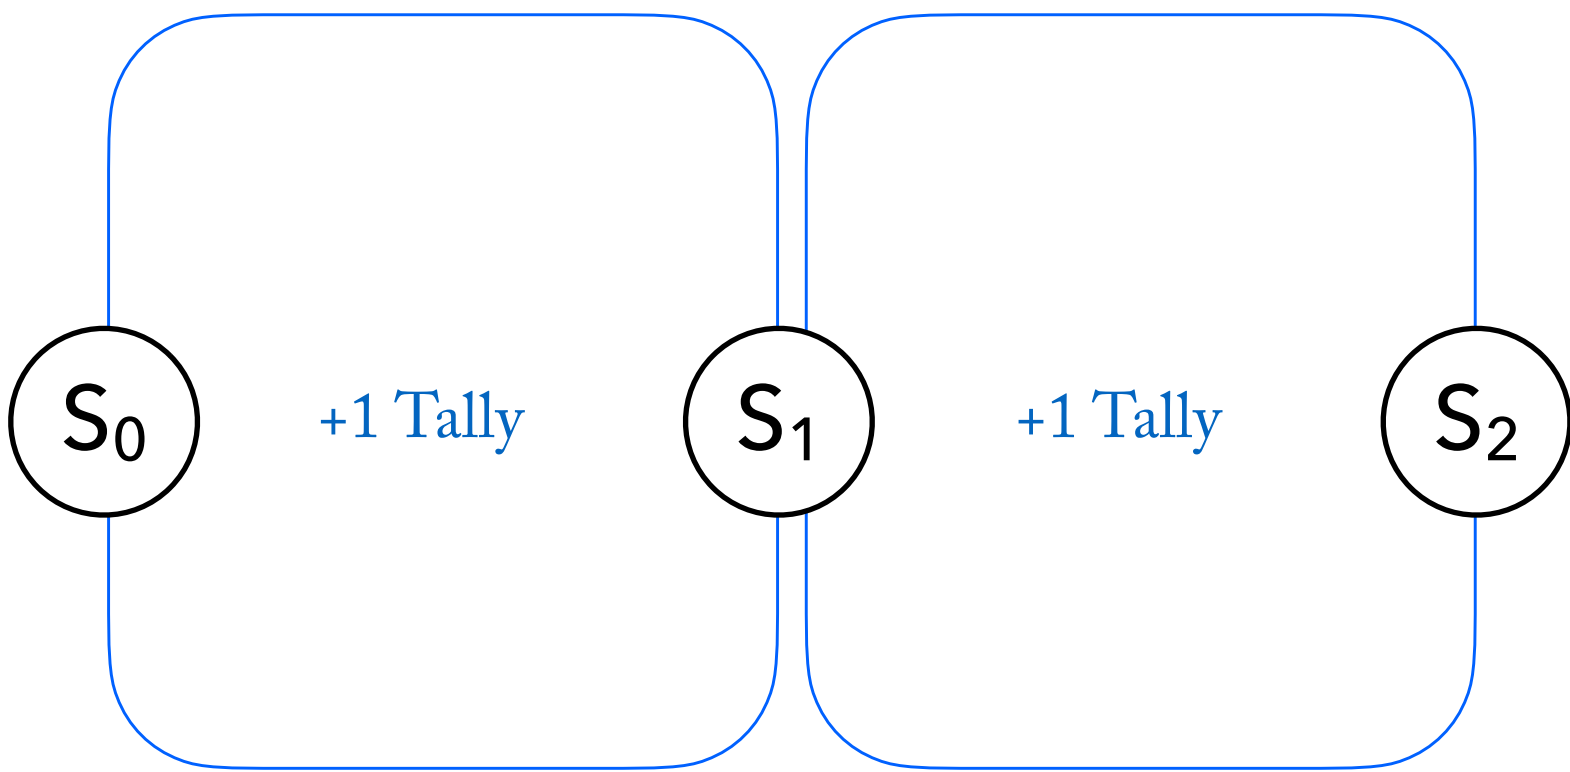

Boxed machines can be integrated with unboxed elements as well.

This machines moves left over a first block and then performs +1 T on a second block, then returns to standard position.

