


Get All

localhost:8000/<model name>

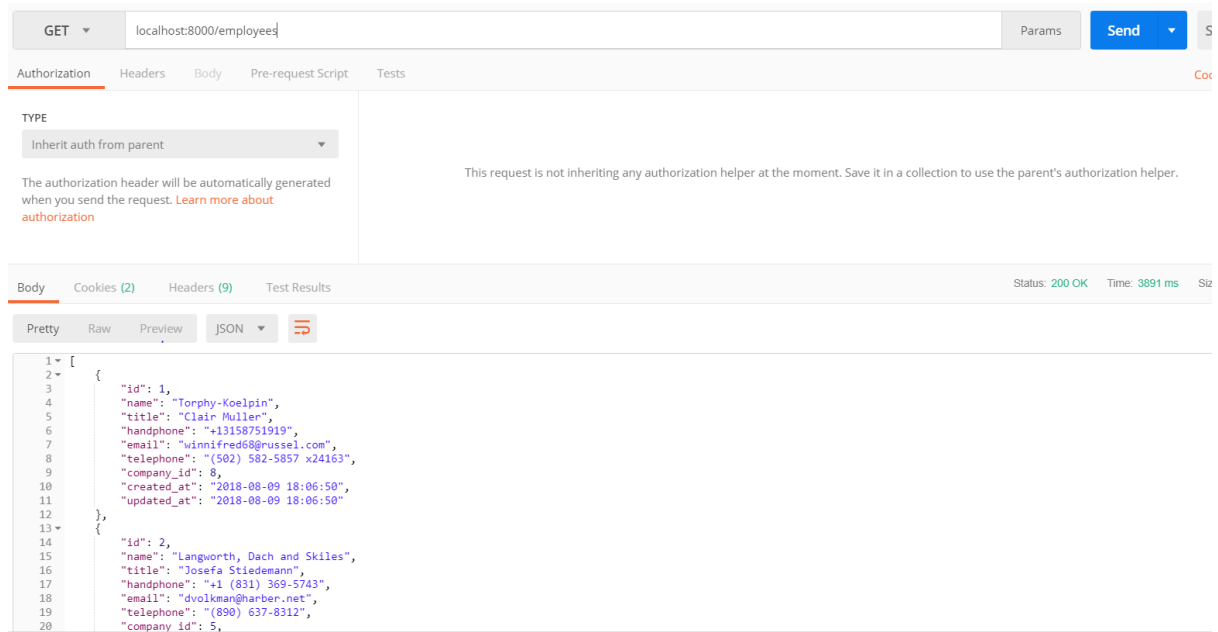

GET localhost:8000/employees

Authorization Headers Body Pre-request Script Tests

TYPE: Inherit auth from parent

The authorization header will be automatically generated when you send the request. [Learn more about authorization](#)

This request is not inheriting any authorization helper at the moment. Save it in a collection to use the parent's authorization helper.


Body Cookies (2) Headers (9) Test Results Status: 200 OK Time: 3891 ms Size

Pretty Raw Preview JSON

```
1 [
2   {
3     "id": 1,
4     "name": "Torphy-Koelpin",
5     "title": "Clair Muller",
6     "handphone": "+13158751919",
7     "email": "winnifred6@russell.com",
8     "telephone": "(502) 582-5857 x24163",
9     "company_id": 8,
10    "created_at": "2018-08-09 18:06:50",
11    "updated_at": "2018-08-09 18:06:50"
12  },
13  {
14    "id": 2,
15    "name": "Langworth, Dach and Skiles",
16    "title": "Josefa Stiedemann",
17    "handphone": "+1 (831) 369-5743",
18    "email": "dvolkman@harber.net",
19    "telephone": "(890) 637-8312",
20    "company_id": 5,
```

Get specific

localhost:8000/<model name>/id

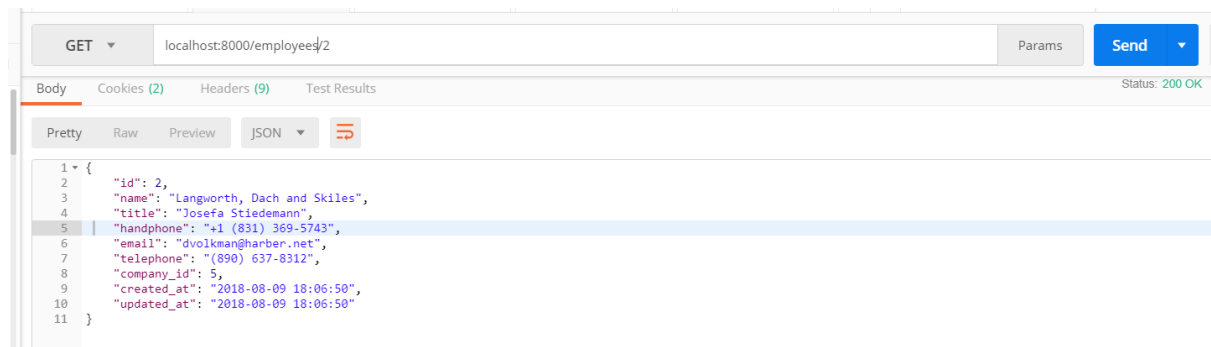

GET localhost:8000/employees/2

Body Cookies (2) Headers (9) Test Results Status: 200 OK


Pretty Raw Preview JSON

```
1 {
2   "id": 2,
3   "name": "Langworth, Dach and Skiles",
4   "title": "Josefa Stiedemann",
5   "handphone": "+1 (831) 369-5743",
6   "email": "dvolkman@harber.net",
7   "telephone": "(890) 637-8312",
8   "company_id": 5,
9   "created_at": "2018-08-09 18:06:50",
10  "updated_at": "2018-08-09 18:06:50"
11 }
```


Create an object

localhost:8000/<model name>/create


First select post from the method

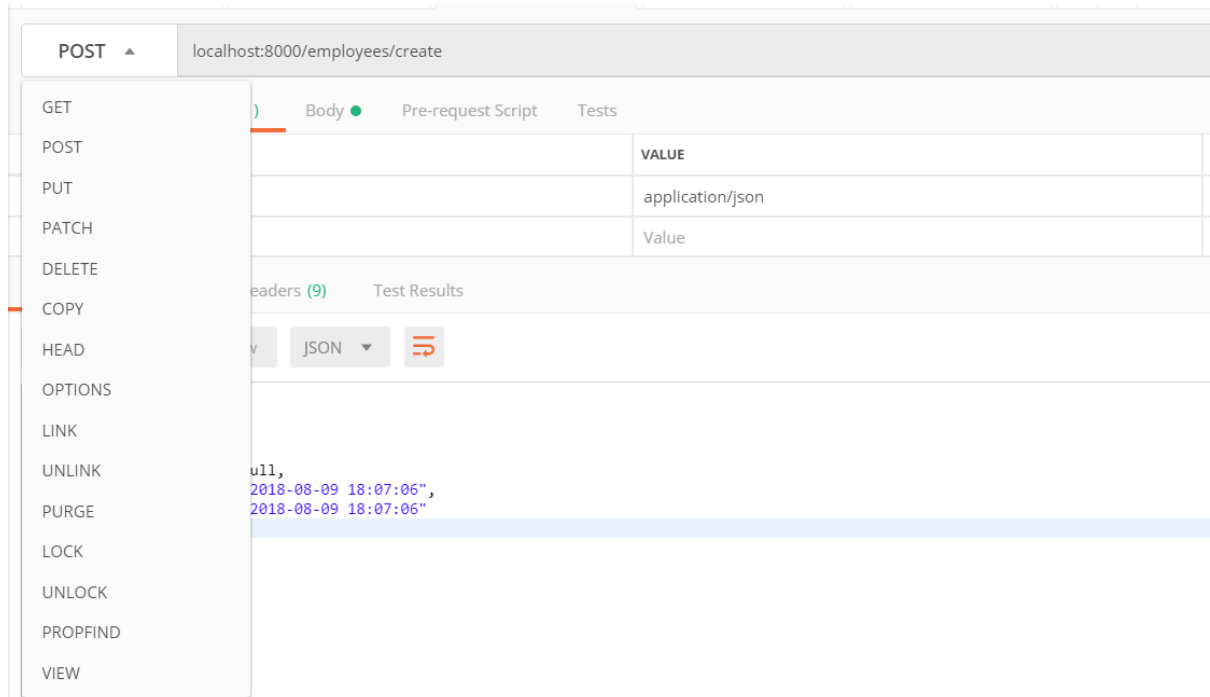

Next the content type is application/json

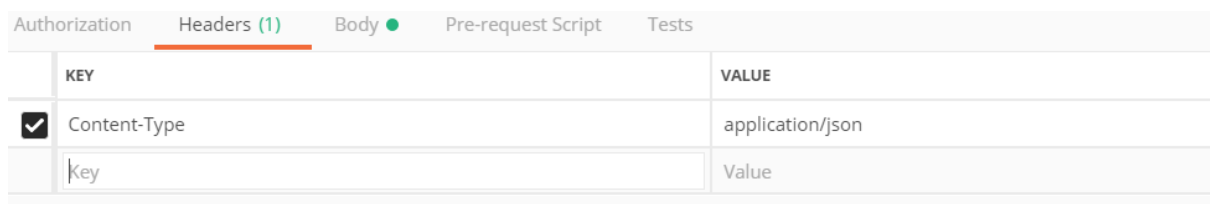

Lastly is select the uxml format then type in the fields

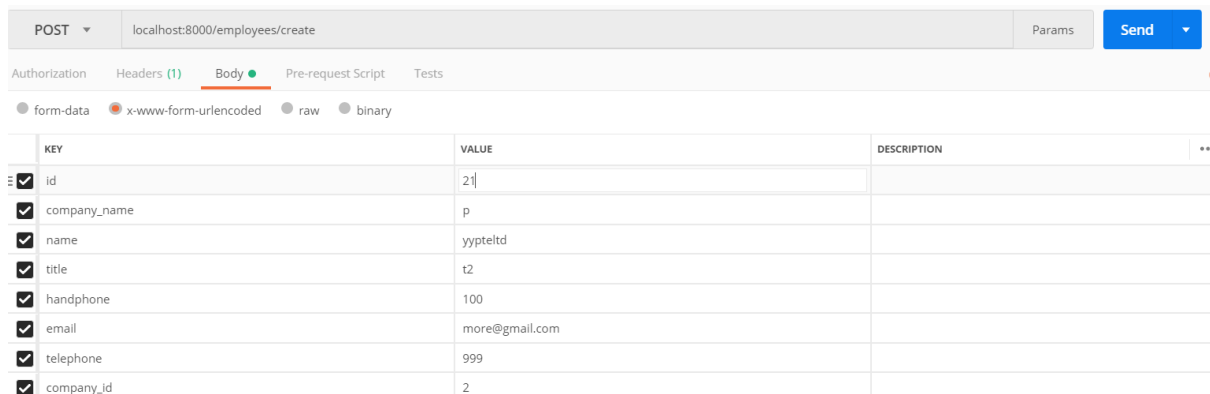

If success will return u the object u just created


```

1 {
2   "id": 21,
3   "name": "yypteltd",
4   "title": "t2",
5   "handphone": "100",
6   "email": "more@gmail.com",
7   "telephone": "999",
8   "company_id": "2",
9   "updated_at": "2018-08-10 06:59:21",
10  "created_at": "2018-08-10 06:59:21"
11 }

```


Delete specific

Localhost:8000/<model name>/id

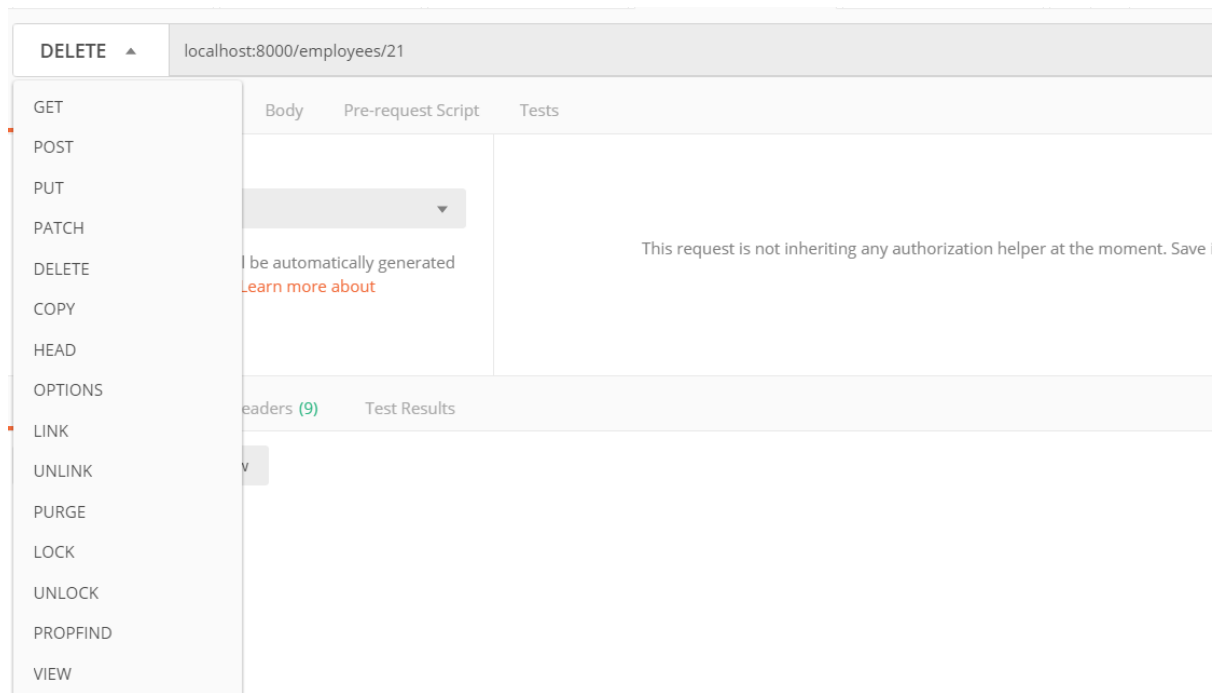

Select delete


If successful will return status 204;

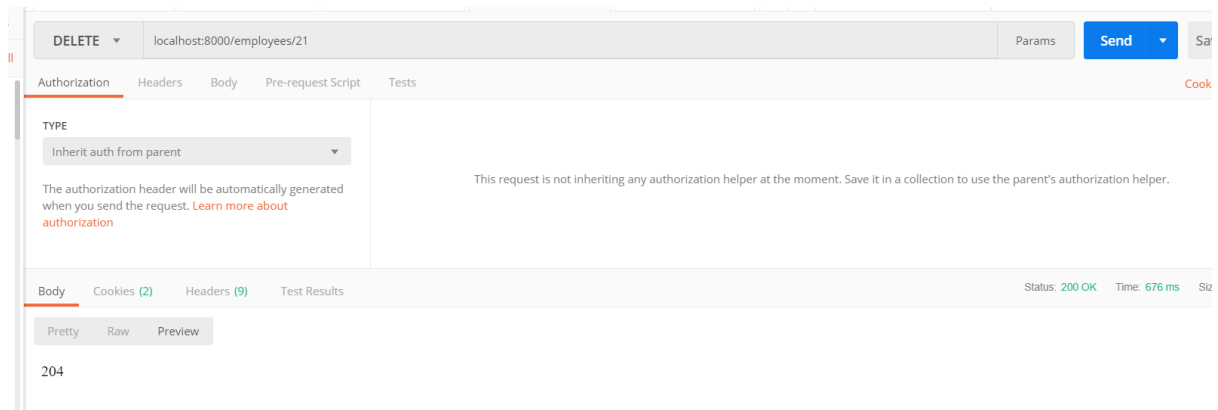

Update specific

localhost:8000/<model name>/id

This method is put

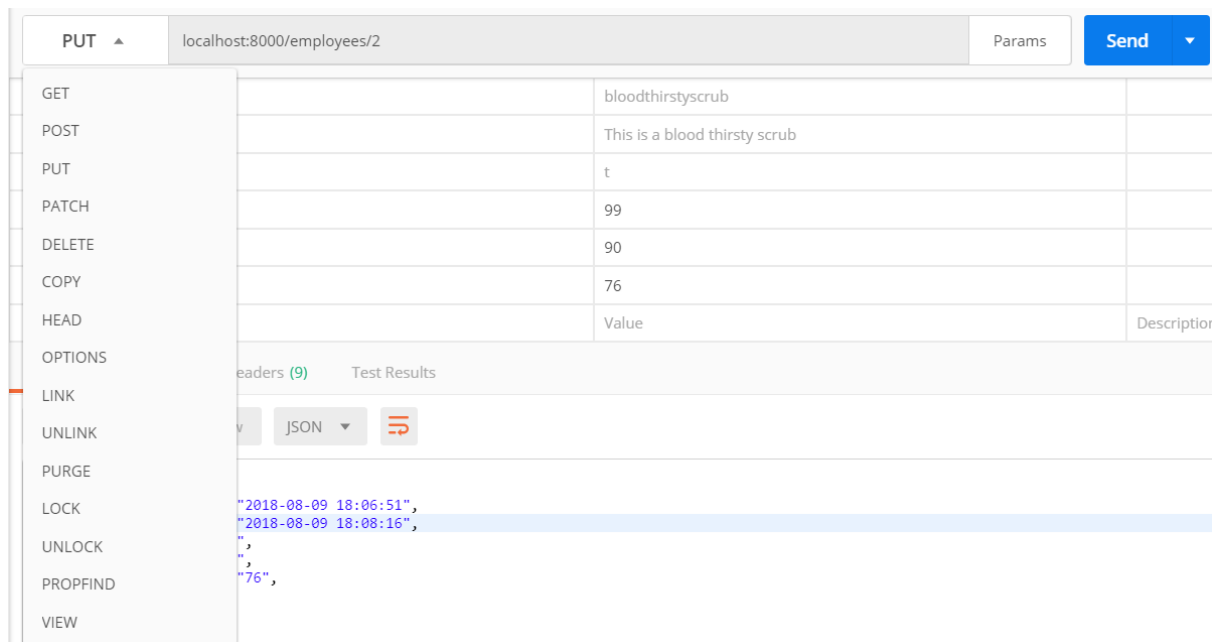

So example I am changing my employee of id 2

Previously:

GET localhost:8000/employees/2

Body Cookies (2) Headers (9) Test Results

Pretty Raw Preview JSON ↺

```
1 {
2   "id": 2,
3   "name": "Langworth, Dach and Skiles",
4   "title": "Josefa Stiedemann",
5   "handphone": "+1 (831) 369-5743",
6   "email": "dvolkman@harber.net",
7   "telephone": "(890) 637-8312",
8   "company_id": 5,
9   "created_at": "2018-08-09 18:06:50",
10  "updated_at": "2018-08-09 18:06:50"
11 }
```

After changing:

PUT localhost:8000/employees/2

Pretty Raw Preview JSON ↺

```
1 {
2   "id": 2,
3   "name": "yy",
4   "title": "overlord",
5   "handphone": "9003",
6   "email": "yiyao@gmail.com",
7   "telephone": "7890",
8   "company_id": "3",
9   "created_at": "2018-08-09 18:06:50",
10  "updated_at": "2018-08-10 07:04:13"
11 }
```

Then I do a get specific to match

GET localhost:8000/employees/2 Params Send

Body Cookies (2) Headers (9) Test Results Status: 200 OK

Pretty Raw Preview JSON ↺

```
1 {
2   "id": 2,
3   "name": "yy",
4   "title": "overlord",
5   "handphone": "9003",
6   "email": "yiyao@gmail.com",
7   "telephone": "7890",
8   "company_id": 3,
9   "created_at": "2018-08-09 18:06:50",
10  "updated_at": "2018-08-10 07:04:13"
11 }
```