


GalaxyGate + RunPod track

Scan for the guide

runpodtrack.galaxygate.app

Coffee & Code AI Agent Hackathon

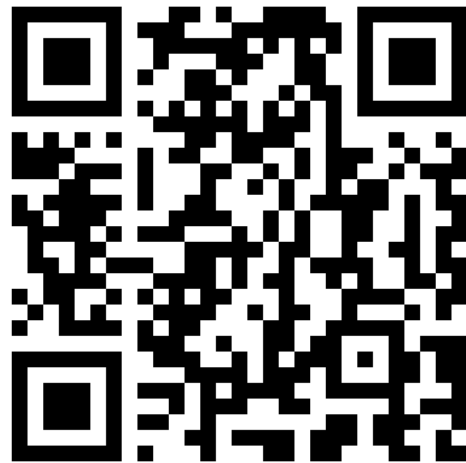

Before you start

Do the account steps, open the section for your tool, then build.

- A laptop, a GitHub account and an email inbox.
- One teammate sets up and shares the URL.
- Your team name is 3 to 32 characters, lowercase letters, digits and hyphens, starting and ending with a letter or digit.
- Setup takes a while, so stay at the laptop and watch for approval prompts.
- You are done when the health check and one generation pass and your URL opens on your phone.
- Help is at the GalaxyGate table.

Accounts

1. Register at <https://dash.galaxygate.net/-/register> with the coupon `PHILLYHACKATHON-60`, open the verification email, and sign in. An older account needs the coupon applied at the GalaxyGate table.
2. Sign up at <https://console.runpod.io/signup>, then claim your RunPod credit and enter the swag raffle at <https://runpod.galaxygate.app>.
3. In the RunPod console open Settings, API Keys, Create API Key. Name it `hackathon-app`, permission `ALL`, and copy it now, because RunPod shows it once. It belongs in your app's environment, never in your repository.

Coupon:

Coupon code

❶ Optional. Applies credit to your new account.

Using Claude Code

Open a terminal in a new empty folder named `hackathon` and connect the two MCP servers.

```
claude mcp add -t http galaxygate https://mcp.galaxygate.net/mcp
claude mcp add -t http runpod https://mcp.getrunpod.io/
```

Start `claude --permission-mode manual` there, type `/mcp`, and sign in to both servers. Always start Claude Code from this folder with that flag, so it asks you to approve each step instead of refusing one on its own.

Fill in your team name and key, then paste this.

```
TEAM_NAME=yourteam
RUNPOD_API_KEY=rpa_paste-your-key-here
```

Fetch

```
https://raw.githubusercontent.com/Gadgetguycj/philly-hackathon/main/AGENT.md
and follow it step by step. Stop and tell me if it does not load.
```

Using Cursor

Install Cursor from <https://cursor.com/download>, sign in, and open a new empty folder named `hackathon`.

In Cursor's Explorer click New File, type `.cursor/mcp.json` as the whole name, and paste this. If it exists, add both entries to its `mcpServers` object.

```
{
  "mcpServers": {
    "galaxygate": { "url": "https://mcp.galaxygate.net/mcp" },
    "runpod": { "url": "https://mcp.getrunpod.io/" }
  }
}
```

Using Cursor: sign in, then paste

Save, restart Cursor, open Customize, MCP, and sign in to each server that says Needs login. Check both toggles are on.

Fill in your team name and key, then paste this.

```
TEAM_NAME=yourteam  
RUNPOD_API_KEY=rpa_paste-your-key-here
```

Fetch

```
https://raw.githubusercontent.com/Gadgetguycj/philly-hackathon/main/AGENT.md  
and follow it step by step. Stop and tell me if it does not load.
```

Your team name is 3 to 32 characters, lowercase letters, digits and hyphens, starting and ending with a letter or digit.

Using Codex

Open a terminal in a new empty folder named `hackathon`. Codex on the web cannot connect MCP servers.

```
codex mcp add galaxygate --url https://mcp.galaxygate.net/mcp
codex mcp login galaxygate
codex mcp add runpod --url https://mcp.getrunpod.io/
codex mcp login runpod
```

Codex blocks network access until you allow it. Put these lines in `~/.codex/config.toml`, creating it if missing, then start `codex`.

```
sandbox_mode = "workspace-write"

[sandbox_workspace_write]
network_access = true
```

Using Codex: paste this

Fill in your team name and key, then paste this.

```
TEAM_NAME=yourteam  
RUNPOD_API_KEY=rpa_paste-your-key-here
```

Fetch


```
https://raw.githubusercontent.com/Gadgetguycj/philly-hackathon/main/AGENT.md  
and follow it step by step. Stop and tell me if it does not load.
```

Your team name is 3 to 32 characters, lowercase letters, digits and hyphens, starting and ending with a letter or digit.

The demos: Text to Speech

Both run on GalaxyGate servers with GPU work on RunPod, and setup puts Text to Speech on yours.

Text to Speech, <https://runpoddemo1.galaxygate.app>. Paste up to 2000 words, pick a voice from 20, hear it aloud. Code: <https://github.com/Gadgetguycj/philly-hackathon/tree/main/demos/tts>

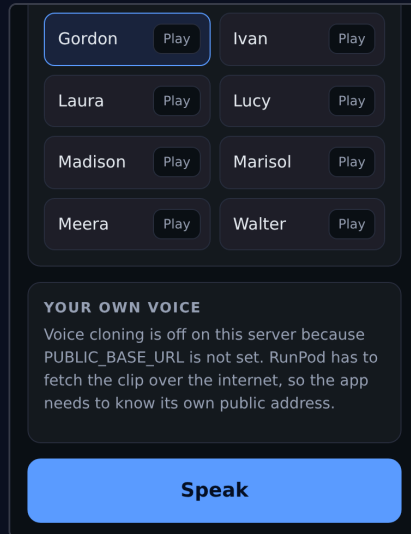

Clone <https://github.com/Gadgetguycj/philly-hackathon> here, push it to a public repository of mine, then follow the redeploy section of <https://raw.githubusercontent.com/Gadgetguycj/philly-hackathon/main/AGENT.md> for my repository and demos/tts.

The demos: Bookbuilder

Bookbuilder, <https://runpoddemo2.galaxygate.app>. Name a subject and watch a fast mixture of experts model write a 30 page book. Code: <https://github.com/Gadgetguycj/philly-hackathon/tree/main/demos/bookbuilder>



Clone <https://github.com/Gadgetguycj/philly-hackathon> here, push it to a public repository of mine, then follow the redeploy section of <https://raw.githubusercontent.com/Gadgetguycj/philly-hackathon/main/AGENT.md> for my repository and demos/bookbuilder.

Build

- Your app and your key live on your server.
- Only your server calls RunPod.
- Change a demo or start your own app, push it, and redeploy with the prompt above.

Optional, and worth extra credit:

```
Using the RunPod MCP, create a serverless endpoint for the  
model I name, then add a route to my app that calls it.
```

Submit, and what is required

- Submit at <https://coffee-and-code-agent.devpost.com/> and select the GalaxyGate prize.
- Give judges your app URL, one input to try, and the ids from `HACKATHON.md`.
- Include no keys or environment screens.

Required to be judged, and neither earns points:

- Your app runs on a GalaxyGate server a judge can open.
- Your app does its GPU work on RunPod and you can show the request.

Scoring, out of 100

Judges score live with their own inputs, out of 100.

- **It works, 20.** The judge's first input produces the promised result (10). A second, different input works (5). Nothing crashes, blanks, or spins forever (5).
- **Simple to use, 20.** A first-timer finishes the core task with no instructions (10). The screen says what is happening (5). The README gets a stranger running (5).
- **Reliable, 15.** Results survive a reload and a second run (5). Upstream errors reach the user instead of a hang (5). Two people using it at once do not break it (5).
- **Secure, 10.** Secrets live only in the server's environment (5). Only your server calls RunPod, never the browser (5).
- **Scalable, 10.** GPU work runs on an endpoint that scales to zero and adds workers (5). App state lives outside the container (5).

Scoring, and extra credit

- **Agentic, 10.** The app decides its next step from model output or tools instead of one fixed call, and the judge can see it (10).
- **Creativity, 15.** An idea the judge has not seen before (5). A use of the GPU that is not just a chat box (5). A moment in the demo that makes the judge react (5).

Extra credit, up to 15, each for a visible reason:

- **More of GalaxyGate, 5 each, up to 10.** A second server doing real work, private networking, a floating IP, a backup or snapshot, or a load balancer.
- **More of RunPod, 5.** A second endpoint or model, a network volume, or a pod for training or a batch job.

Ties break on Simple to use, then Reliable.

When something fails

- **A tool call is denied or says Needs login.** Redo that sign-in in your tool.
- **A tool call says** `denied by auto mode` **and** `Blocked by classifier`, **and no approval prompt appears.** Press shift+tab until Claude Code shows manual mode, then tell your agent to continue.
- **The agent stopped.** Paste the same block in a new chat, with the same team name and key.
- **A generation returns 401.** Make a new RunPod key and have your agent update the app's environment.
- **RunPod returns 402.** Your credit is gone, so check the console.
- **Anything else.** Ask your agent for the app logs, then bring the error text and `HACKATHON.md` to the table.

After the event

- Delete your server in the GalaxyGate panel.
- Revoke the `hackathon-app` key in the RunPod console.