

Cucumber Report

05-Sep-2025, 8:51:18 pm

Start : Sep 05, 8:51:16.744 pm

End : Sep 05, 8:51:17.840 pm

Duration : 1.096 s

Features


Scenarios

Steps

PASSED - 0
FAILED - 1
SKIPPED - 0


PASSED - 0
FAILED - 1
SKIPPED - 0

PASSED - 0
FAILED - 1
SKIPPED - 1

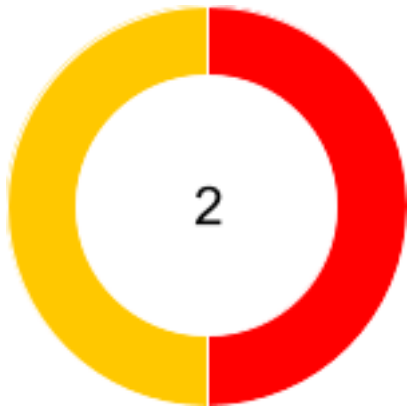


Feature		Scenario				Step			
Name	Duration	T	P	F	S	T	P	F	S
<u>Giftcard scenarios</u>	1.096 s	1	0	1	0	2	0	1	1

Tag	Scenario				Feature			
Name	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>	<i>T</i>	<i>P</i>	<i>F</i>	<i>S</i>
@giftcard1	1	0	1	0	1	0	1	0
@giftcardapi	1	0	1	0	1	0	1	0
@api	1	0	1	0	1	0	1	0

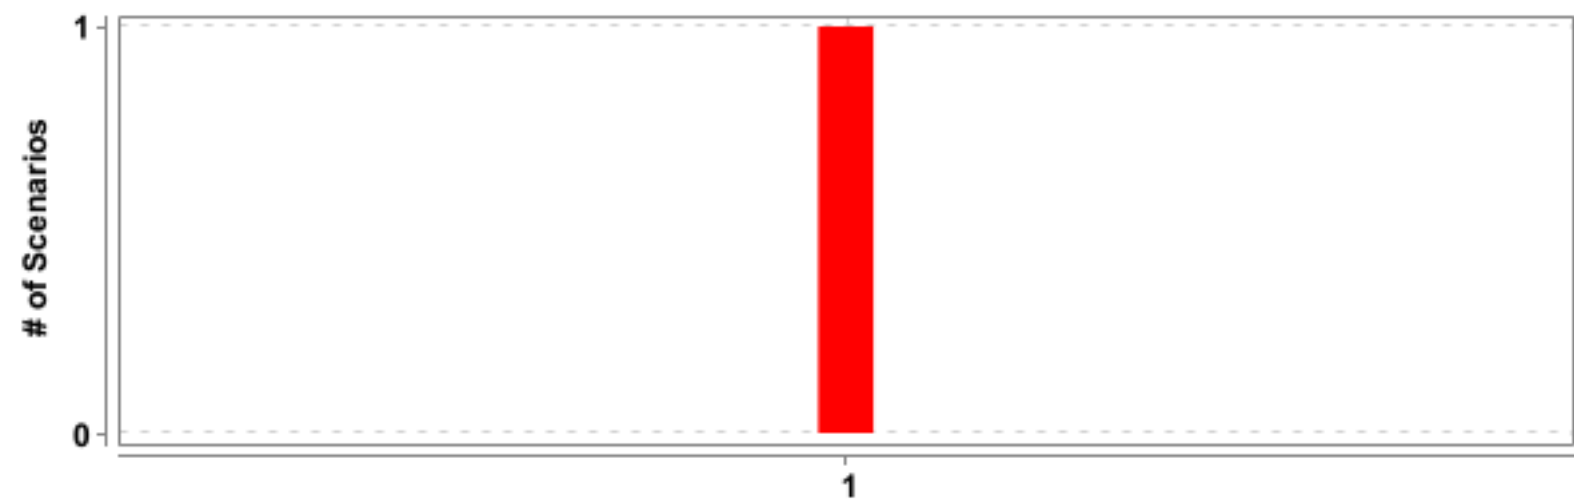

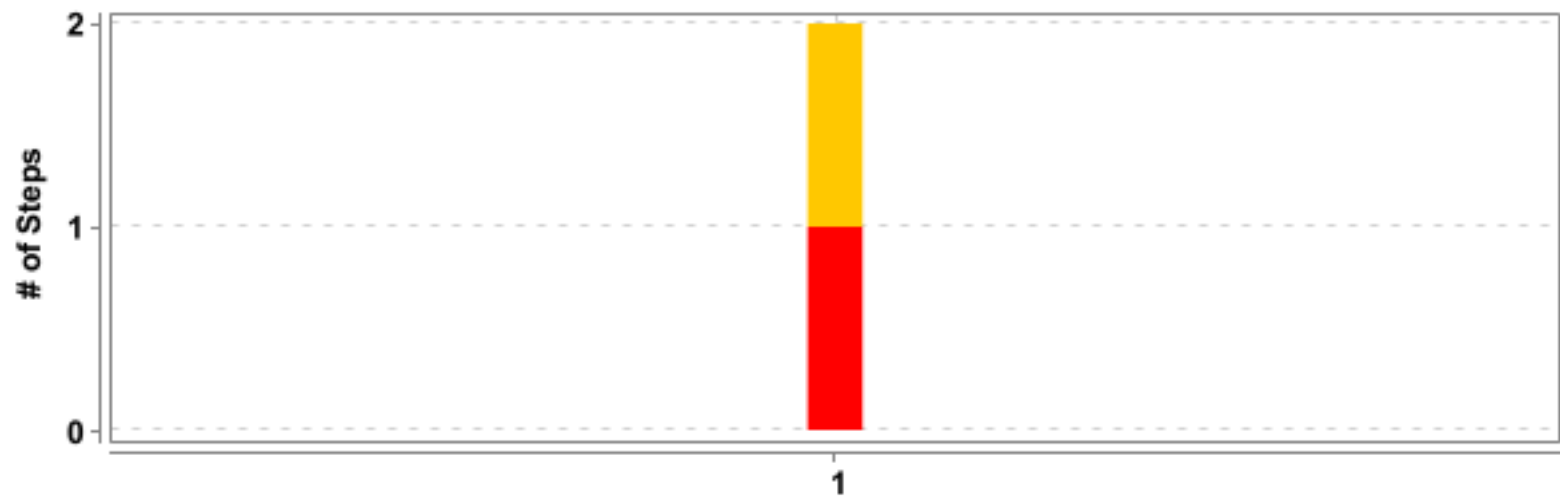

#	Feature Name	T	P	F	S	Duration
1	<u>Giftcard scenarios</u>	1	0	1	0	1.096 s





#	Feature Name	Scenario Name	T	P	F	S	Duration
1	<u>Giftcard scenarios</u>	<u>gift_card_1-Check giftcard balance</u>	2	0	1	1	1.091 s

Giftcard scenarios

FAILED	DURATION - 1.096 s	Scenarios Total - 1 Pass - 0 Fail - 1 Skip - 0		Steps Total - 2 Pass - 0 Fail - 1 Skip - 1	
/ 8:51:16.744 pm // 8:51:17.840 pm /					

gift_card_1-Check giftcard balance
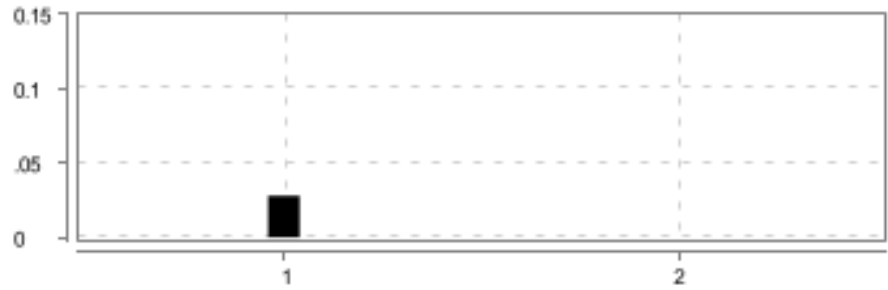
<div>FAILED</div> <div>DURATION - 1.091 s</div>			<div>Steps</div> <div>Total - 2</div> <div>Pass - 0</div> <div>Fail - 1</div> <div>Skip - 1</div>	
/ 8:51:16.749 pm // 8:51:17.840 pm /				
Giftcard scenarios				
@giftcard1 @giftcardapi @api				

#	Step / Hook Details	Status	Duration
1	<p>Given user access token is generated</p> <p>io.cucumber.core.exception.CucumberException: Failed to instantiate class apiStepDef.AcmeTestAPI at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:143) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.getInstance(ObjectFactoryServiceLoader.java:127) at io.cucumber.java.AbstractGlueDefinition.invokeMethod(AbstractGlueDefinition.java:47) at io.cucumber.java.JavaStepDefinition.execute(JavaStepDefinition.java:29) at io.cucumber.core.runner.CoreStepDefinition.execute(CoreStepDefinition.java:66) at io.cucumber.core.runner.PickleStepDefinitionMatch.runStep(PickleStepDefinitionMatch.java:63) at io.cucumber.core.runner.ExecutionMode\$1.execute(ExecutionMode.java:10) at io.cucumber.core.runner.TestStep.executeStep(TestStep.java:86) at io.cucumber.core.runner.TestStep.run(TestStep.java:57) at io.cucumber.core.runner.PickleStepTestStep.run(PickleStepTestStep.java:51) at io.cucumber.core.runner.TestCase.run(TestCase.java:95) at io.cucumber.core.runner.Runner.runPickle(Runner.java:75) at io.cucumber.testng.TestNGCucumberRunner.lambda\$runScenario\$1(TestNGCucumberRunner.java:132) at io.cucumber.core.runtime.CucumberExecutionContext.lambda\$runTestCase\$3(CucumberExecutionContext.java:110) at io.cucumber.core.runtime.RethrowingThrowableCollector.executeAndThrow(RethrowingThrowableCollector.java:23)</p>	FAILED	0.028 s

#	Step / Hook Details	Status	Duration
	<p> at io.cucumber.core.runtime.CucumberExecutionContext.runTestCase(CucumberExecutionContext.java:110) at io.cucumber.testng.TestNGCucumberRunner.runScenario(TestNGCucumberRunner.java:129) at io.cucumber.testng.AbstractTestNGCucumberTests.runScenario(AbstractTestNGCucumberTests.java:35) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke0(Native Method) at java.base/jdk.internal.reflect.NativeMethodAccessorImpl.invoke(NativeMethodAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingMethodAccessorImpl.invoke(DelegatingMethodAccessorImpl.java:43) at java.base/java.lang.reflect.Method.invoke(Method.java:568) at org.testng.internal.MethodInvocationHelper.invokeMethod(MethodInvocationHelper.java:133) at org.testng.internal.TestInvoker.invokeMethod(TestInvoker.java:584) at org.testng.internal.TestInvoker.invokeTestMethod(TestInvoker.java:172) at org.testng.internal.MethodRunner.runInSequence(MethodRunner.java:46) at org.testng.internal.TestInvoker\$MethodInvocationAgent.invoke(TestInvoker.java:804) at org.testng.internal.TestInvoker.invokeTestMethods(TestInvoker.java:145) at org.testng.internal.TestMethodWorker.invokeTestMethods(TestMethodWorker.java:146) at org.testng.internal.TestMethodWorker.run(TestMethodWorker.java:128) at java.base/java.util.ArrayList.forEach(ArrayList.java:1511) at org.testng.TestRunner.privateRun(TestRunner.java:770) at org.testng.TestRunner.run(TestRunner.java:591) at org.testng.SuiteRunner.runTest(SuiteRunner.java:402) at org.testng.SuiteRunner.runSequentially(SuiteRunner.java:396) at org.testng.SuiteRunner.privateRun(SuiteRunner.java:355) at org.testng.SuiteRunner.run(SuiteRunner.java:304) at org.testng.SuiteRunnerWorker.runSuite(SuiteRunnerWorker.java:53) at org.testng.SuiteRunnerWorker.run(SuiteRunnerWorker.java:96) at org.testng.TestNG.runSuitesSequentially(TestNG.java:1180) at org.testng.TestNG.runSuitesLocally(TestNG.java:1102) at org.testng.TestNG.runSuites(TestNG.java:1032) at org.testng.TestNG.run(TestNG.java:1000) at org.testng.remote.AbstractRemoteTestNG.run(AbstractRemoteTestNG.java:115) at org.testng.remote.RemoteTestNG.initAndRun(RemoteTestNG.java:251) at org.testng.remote.RemoteTestNG.main(RemoteTestNG.java:77) Caused by: java.lang.reflect.InvocationTargetException at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance0(Native Method) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:77) at java.base/jdk.internal.reflect.DelegatingConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) at io.cucumber.core.runtime.ObjectFactoryServiceLoader\$DefaultJavaObjectFactory.cacheNewInstance(ObjectFactoryServiceLoader.java:135) ... 45 more Caused by: java.lang.ExceptionInInitializerError at apiStepDef.AcmeTestAPI.<init>(AcmeTestAPI.java:23) </p>		

#	Step / Hook Details	Status	Duration
	... 51 more Caused by: java.lang.NullPointerException: Cannot invoke "utils.ConfigLoader.getProperty(String)" because "api.common.ApiRequest.loader" is null at api.common.ApiRequest.<clinit>(ApiRequest.java:32)		
2	When a Kount session is created	SKIPPED	0.000 s
	AFTER - Hooks.Hooks.tearDown(io.cucumber.java.Scenario) java.lang.NullPointerException: Cannot invoke "org.openqa.selenium.TakesScreenshot.getScreenshotAs(org.openqa.selenium.OutputType)" because the return value of "utils.DriverFactory.getMobileDriver()" is null at Hooks.Hooks.tearDown(Hooks.java:95)	FAILED	0.012 s