Scopes of Bean

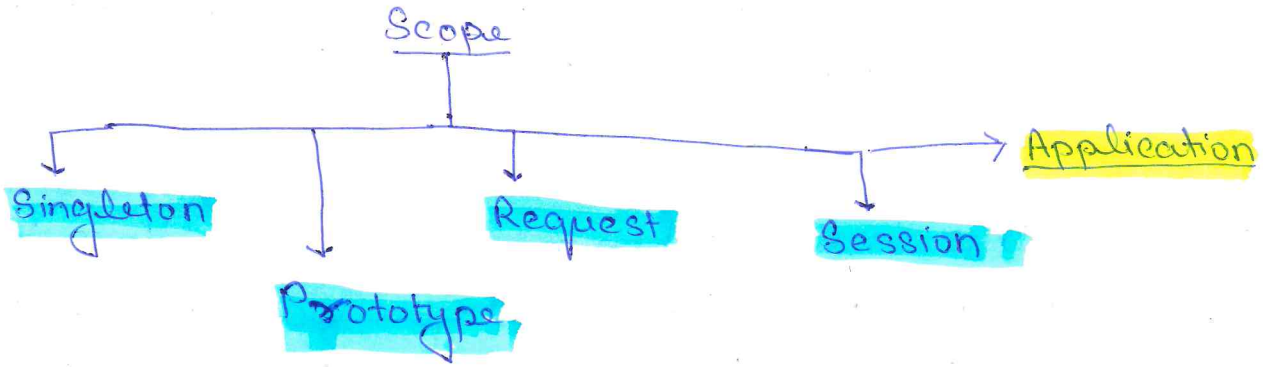

① Sigleton :-

- Default scope
- Only 1 instance created per IOC.
- Eagerly initialized by IOC (means at the time of application startup, object get created)

```
@Scope(ConfigurableBeanFactory.SCOPE_PROTOTYPE)
                               SINGLETON
```

② Prototype :-

- Each time new object is Created.
- Its Lazily Initialized, means when object is created only when its required.

```
@Scope(ConfigurableBeanFactor, SCOPE_PROTOTYPE)
```

or

```
@Scope("prototype")
```

Concept && Coding

3 Request :-

- New Object is created for each HTTP request
- Lazily initialized.

4 Session :-

- New Object is created for each HTTP ~~request~~ Session.
- Lazily initialized.
- When use accesses any endpoint, session is created
- Remains active, till it does not expires.

servlet.server.exp:

5 Application :-

Multiple IOC will run. One object shared ~~one~~ multipl IOC.

Concept && Coding