

# WHAT MATTERS IN THE STRUCTURED PRUNING OF GENERATIVE LANGUAGE MODELS?

Michael Santacrose, Yelong Shen

Microsoft

Redmond, WA

{misantac, yeshe}@microsoft.com

Zixin Wen & Yuanzhi Li

Machine Learning Department

Carnegie Mellon University

Pittsburgh, PA

{zixinw, yuanzhi}@andrew.cmu.edu

## ABSTRACT

Auto-regressive large language models such as GPT-3 require enormous computational resources to use. Traditionally, structured pruning methods are employed to reduce resource usage. However, their application to and efficacy for generative language models is heavily under-explored. In this paper we conduct an comprehensive evaluation of common structured pruning methods, including magnitude, random, and movement (Lagunas et al., 2021) pruning on the feed-forward layers in GPT-type models. Unexpectedly, *randomly pruning* results in performance that is comparable to the best established methods, across multiple natural language generation tasks. To understand these results, we provide a framework for measuring neuron-level redundancy of models pruned by different methods, and discover that established structured pruning methods do not take into account the distinctiveness of neurons, leaving behind excess redundancies. In view of this, we introduce Globally Unique Movement (GUM) to improve the uniqueness of neurons in pruned models. We then discuss the effects of our techniques on different redundancy metrics to explain the improved performance.

提供了一个框架来测量不同方法修剪的模型的神经元级别的冗余度，并发现已有的结构化修剪方法没有考虑神经元的特殊性，留下了多余的冗余

引入全局唯一运动(GUM)来提高修剪模型中神经元的唯一性

## 1 INTRODUCTION

Large language models (LLMs), such as the state-of-the-art GPT-3 model (Brown et al., 2020) with up to 175 billion parameters, have achieved remarkable performance in natural language processing (NLP) tasks. However, training and deploying such massive models also poses significant challenges in terms of computational cost, energy consumption, and environmental impact. Therefore, it is crucial to develop effective methods to reduce the size of LLMs without compromising their quality.

Neural network pruning is a long-standing model compression method (Janowsky, 1989; Mozer & Smolensky, 1988; Frankle & Carbin, 2018; Karnin, 1990; Blalock et al., 2020). It can be broadly classified into two types: *unstructured* and *structured*. Unstructured pruning removes individual weights from the network based on some criteria, resulting in sparse weight matrices that can be stored and processed more efficiently. Structured pruning, on the other hand, eliminates whole components, such as neurons, channels, or blocks, leading to smaller architectures to reduce end-to-end inference latency. While unstructured pruning has been extensively studied and applied to LLMs (Wang et al., 2020b; Xu et al., 2021; Zafrir et al., 2021; Li et al., 2022), structured pruning is more challenging and less explored. However, structured pruning is also more desirable in many practical scenarios, such as deploying these models on resource-constrained devices or providing fast services based on LLMs.

Existing work on structured pruning for LMs focuses on BERT-like networks (Devlin et al., 2018) that consist of an encoder-decoder or an encoder-only architecture (Li et al., 2020; Xia et al., 2022; Zhang et al., 2022; Yao et al., 2021). These models are mainly used for natural language understanding (NLU) tasks, such as question answering, sentiment analysis, or natural language inference. Among the various methods, Block Movement Pruning (Lagunas et al., 2021) is a recent and popular technique that removes weight blocks based on movement. However, there is a lack of systematic research on structured pruning for decoder-only architectures such as GPT-2 (Radford et al., 2019), GPT-3 (Brown et al., 2020), or GPT-Neo (Black et al., 2021), which are mainly used for natural language generation (NLG) tasks, such as text summarization, machine translation, or text completion. While

there are some works that apply unstructured pruning (Li et al., 2022) or many kinds of orthogonal compression techniques to decoder-only LLMs (Wang et al., 2020a; Li et al., 2021; Edalati et al., 2022; Tao et al., 2022; Xu & Hu, 2022; Chen et al., 2021), there is no comprehensive evaluation of traditional structured pruning for these models on NLG tasks.

In this work, we compress decoder-only auto-regressive language models. Due to the lack of prior literature towards the same goal, we evaluate the performance of several general-domain pruning methods on NLG tasks, including magnitude and movement pruning. However, we find these methods can struggle or under-perform compared to naïve baselines, leading to the following question:

*What determines the performance of structured pruning on generative language models?*

We aim to fill this gap by conducting a systematic study of structured *fine-pruning* (pruning while finetuning) methods for decoder-only LLMs on NLG tasks<sup>1</sup> and further proposing a novel method that combines the strengths of different existing methods. Our main contributions are:

- To our knowledge, we perform the **first systematic evaluation** of several structured pruning methods to decoder-only LLMs on NLG tasks. However, we find that these established methods only achieve marginal improvements over a simple baseline in which we **randomly prune** neurons during the finetuning process, which is vastly different from the cases of pruning BERT-like models.
- Along with our evaluation of the original form of these pruning methods, we also systematically evaluate the impacts of knowledge distillation to their performances. We find **distillation largely closes the gaps between different methods**, further narrowing the advantage of best methods over random pruning.
- We propose an empirical analysis framework for structured pruning that relies on **two fundamental measures of redundancy: sensitivity and uniqueness**. Sensitivity reflects how much the removal of a network component affects the output of the model, while uniqueness reflects how much the information provided by a network component differs from others. The prediction given by our framework matches well with empirical observations, and help reveal the latent properties that determines the performance of different pruning methods.
- To show the impact made possible by our analysis, we propose a proof-of-concept method, **Globally Unique Movement** (GUM), that aims to maximize both sensitivity and uniqueness by pruning network components based on their global movement and local uniqueness scores. GUM outperforms the existing methods on several NLG tasks and achieves competitive compression rates, proving that future methods should preserve both sensitivity and uniqueness.

## 2 BACKGROUND & METHODS

There are many general-domain pruning methods. We focus on *fine-pruning*, a relevant technique for language models which performs automated gradual pruning (Zhu & Gupta, 2017) while fine-tuning. We focus on pruning the MLPs of generative models. At inferencing time, generative models can cache attention vector states. Therefore, especially in large models, MLPs account for more time than attention for new tokens. MLPs also seem to store factual knowledge (Petroni et al., 2019; Meng et al., 2022), making their reduction possibly challenging.

**Notation and Background** We shall define some notations for the MLP layers. Let  $\sigma(\cdot) : \mathbb{R}^m \mapsto \mathbb{R}^m$  be an element-wise activation function (e.g. GELU), and let  $W_1 \in \mathbb{R}^{m \times d}$ ,  $W_2 \in \mathbb{R}^{d \times m}$  be two weight matrices and  $b \in \mathbb{R}^m$  be the bias vector. For an input token  $x \in \mathbb{R}^d$ , the MLP layer output of  $x$  is expressed as  $\text{MLP}(x) = x + W_2 h(x)$  with intermediate output  $h(x) = \sigma(W_1 \text{LN}(x))$ , where LN represents layer normalization. We use  $\odot$  to denote element-wise multiplications. Lastly, we use  $\mathcal{L}$  to denote the loss of the task. We study methods of reducing  $m$ , the intermediate dimension, which is usually set at  $m = 4d$ .

<sup>1</sup>All code publicly available at [https://github.com/santacml/nn\\_pruning\\_uniqueness](https://github.com/santacml/nn_pruning_uniqueness)

	Magnitude	Gradual Random	Hard Mvmt.	Soft Mvmt.	GUM
Score $S$	$L_2$ -norms	Random (frozen)	Eq. 1	Eq. 1	Eq. 1
Selection	$\text{Top}_v(S)$	$\text{Top}_v(S)$	$\text{Top}_v(S)$	Threshold	$\text{Top}_v(S)$
Structure	Local	Local	Local	Global	Global
Regularization	None	None	$R(S)$	$R(S)$	$R(S) + R_{\text{sim}}(S)$ (Eq. 4)
Criteria	Magnitude	Random	Sensitivity	Sensitivity	Sensitivity&Uniqueness

Table 1: Comparison of pruning methods used.  $R(S)$  is defined in Section 2 and  $R_{\text{sim}}(S)$  is described in Eq. 4

**Movement Pruning** Movement Pruning (Sanh et al., 2020) is a popular fine-pruning method. In this paper, we focus on the *block* version of movement pruning (Lagunas et al., 2021), and we first introduce the original unstructured method. Let  $\mathcal{L}(W)$  be the task loss with weight parameters  $W$ . For each weight parameter  $W_{i,j}$ , we compute a accumulated score  $S_{i,j}$  at iteration  $T$ , by the following expression<sup>2</sup>:

$$S_{i,j}^{(T)} = -\eta_S \sum_{t \leq T} W_{i,j}^{(t)} \cdot \frac{\partial \mathcal{L}(W^{(t)})}{\partial W_{i,j}} \quad (1)$$

Afterwards, the scores are used to compute a mask  $M$  with entries  $M_{i,j} \in \{0, 1\}$ . And we apply the mask by  $W' = M \odot W$ ,  $b' = M \odot b$ , and  $U' = U \odot M$  to remove the masked weights.

There are two ways to compute the mask  $M$ :  $M = \text{Top}_v(S)$  for **hard movement** and  $M = \mathbb{1}_{\text{sigmoid}(S) > \tau}$  for **soft movement**.  $\tau$  and  $v$  are both hyperparameters, and  $\text{Top}_v(S)$  is defined as:

$$\text{Top}_v(S)_i = \begin{cases} 1, & S_i \text{ in top } v\%, \\ 0, & \text{otherwise.} \end{cases} \quad (2)$$

Additionally, mask scores are regularized via a regularization term with multiplier  $\lambda_{\text{mvp}}$  of the form  $R(S) = \lambda_{\text{mvp}} \sum_{i,j} \text{sigmoid}(S_{i,j})$ . Hard movement prunes all layers by the same amount. Soft movement, however, allows for adaptive sparsity for different layers, which is known to be crucial for high-sparsity regimes (He et al., 2018b; Mallya et al., 2018), and is seen to be the superior method for NLU tasks in Sanh et al. (2020). Block pruning expands on this method to operate on groups of weights by combining mask scores per block, allowing for structured pruning (Lagunas et al., 2021).

**Magnitude Pruning** We use a mask version of block magnitude pruning (a block extension of group-lasso, like Shen et al. (2021)) as the baseline. For each set  $G$  of parameters, we assign  $S_G = (\sum_{(i,j) \in G} |W_{i,j}|^2)^{1/2}$  as the mask score and gradually prune groups with the smallest scores.

**Gradual Random pruning** Random pruning approaches have been explored previously (Yu et al., 2017; Blalock et al., 2020), and in particular gradual, random pruning (Gale et al., 2019) has been found to perform relatively well. We further explore random pruning in conjunction with distillation. Our gradual random method freezes  $S$  at random initialization for the duration of finetuning and prunes using  $\text{Top}_v(S)$ .

**Knowledge Distillation** In practice, pruning is often paired with knowledge distillation (Hinton et al., 2015) to boost performance, such as in Sanh et al. (2020). Distillation loss adds KL divergence between a teacher model and smaller student model. When used, we distill from a finetuned, full-parameter version of the model being pruned.

### 3 EVALUATING FINE-PRUNING FOR GENERATIVE LANGUAGE MODELS

We present our framework for understanding the redundancy of pruning methods. In this work, we focus on improving the seminal work of movement pruning proposed in Sanh et al. (2020). However, naively applying movement often results in incremental or worse performance compared to random. We dissect our results using a systematic framework and analyze their behaviors and properties.

<sup>2</sup>Gradients are calculated straight-through to the mask scores, otherwise it is undefined (Bengio et al., 2013).

Model	Method	50% / + Distil	25% / + Distil	10% / + Distil
GPT-Neo-125m Finetuned: <b>65.92</b>	Soft	63.81 / 65.25	63.23 / 65.04	62.996* / 64.95*
	$L_2$ -Magnitude	62.71 / 65.32	61.35 / 64.58	61.10 / 63.90
	Gradual Random	64.29 / 65.74	63.06 / 65.10	62.27 / 64.63
	Hard/Top <sub>v</sub>	65.33 / 65.94	64.88 / 65.79	64.23 / 65.17
	GUM	63.88 / <b>66.23</b>	64.36 / <b>66.18</b>	63.81 / <b>65.65</b>

Table 2: **GPT-Neo-125m**: Performance in  $\text{Acc}_{lf}$  on the validation set for decreasing amount leftover on WikiSQL. GUM outperforms compared to other methods, soft movement struggles to match other methods, and gradual random nearly performs as well as Top<sub>v</sub>. \* indicates having 1-3% excess leftover neurons unpruned.

Model	Method	50% / + Distil	25% / + Distil	10% / + Distil
GPT-2-sm Finetuned: <b>70.32</b>	Soft	68.27 / 69.32	67.74 / 69.314	67.25* / 69.11*
	$L_2$ -Magnitude	68.33 / 69.62	66.92 / 68.96	66.02 / 68.43
	Gradual Random	69.07 / 69.61	67.78 / 69.35	66.77 / 69.00
	Hard/Top <sub>v</sub>	69.62 / 69.93	69.10 / 69.33	68.30 / 69.26
	GUM	68.62 / <b>70.38</b>	68.82 / <b>69.63</b>	68.07 / <b>69.46</b>

Table 3: **GPT-2-sm**: Performance in  $\text{Acc}_{lf}$  on the validation set for decreasing amount leftover on WikiSQL. \* indicates having 1-3% excess leftover neurons unpruned.

### 3.1 OBSERVATIONS OF PREVIOUS PRUNING METHODS

**Soft Movement (BERT’s Best Method) Struggles for GPT-like Models** It is shown in Lagunas et al. (2021) that soft movement enjoys better performance over hard movement when block pruning encoder-decoder models. However, we find the method severely struggles when using the original implementation<sup>3</sup> on GPT-like models due to highly sensitive hyperparameters. For instance, the mask regularization parameter  $\lambda_{mvp}$  can either be too large and prune too aggressively, or too little, resulting in under-pruning as shown below. Even after grid searching  $\lambda_{mvp}$  we still find subpar performance, and given the extremely high runtimes for this method as listed in Appendix A, we find this method impractical to use.

**Random Pruning Works Surprisingly Well** One might expect movement to easily beat random pruning, however, we find their performances to only slightly differ or sometimes match, especially under distillation. Other works have noted random pruning’s effectiveness (Gale et al., 2019), but we find the difference in generative tasks to be particularly slim. As shown in Tables 2 and 4, random pruning performs very close to both hard and soft movement pruning over WikiSQL and Wikitext datasets. Moreover, when combined with distillation, the gaps are largely closed between random pruning and other methods, which is also another intriguing observation itself, as we discuss below.

**Distillation Closes the Gaps Between Different Methods** As shown in Table 2 and Table 3, methods with very different performances would perform rather similar if distilled from a non-pruned, finetuned model. Indeed, both WikiSQL and Wikitext experiments in Table 4 and Table 5 showed that when the network has fewer left-over neurons (e.g., 10% or 25%), the difference of accuracies or perplexities often fall below half of the difference without distillation. This observation remains consistent across models of different sizes, architectures, and tasks. Results for GPT-neo with 1.3-billion parameters in Table 6 shows that pruning a larger model can still benefit from distillation. Knowledge distillation often boosts the performance of weaker methods even more, which might suggest the differences between methods are largely due to the inability to learn more diverse features set in fine-pruning, as suggested by the theoretical results in Allen-Zhu & Li (2020) on distillations.

<sup>3</sup>Soft movement is the best to our knowledge at time of writing. Code is available at [https://github.com/huggingface/nn\\_pruning](https://github.com/huggingface/nn_pruning). In this code, mask scores are added directly to the optimizer and are affected by optimizer algorithm or other hyperparameters. We use this code for a fair comparison between architectures, but manually updating the mask according to the definition might help (Zhang et al., 2022).

### 3.2 TWO TYPES OF REDUNDANCY MEASURES: SENSITIVITY AND UNIQUENESS

In order to understand why these pruning methods display such behaviors, we devise a framework to characterize the leftover neurons of pruned network based on two criteria: sensitivity and uniqueness<sup>4</sup>. We formalize these notions of redundancy as follows:

**Definition 3.1 (Redundancy Criteria)** Given a set of neurons  $\{h_i(\cdot)\}_{i \in [m]}$  and input  $X$ , we call one neuron  $h_i$  **redundant** if it meets at least one of the following two conditions:

1. **Sensitivity/Saliency:** the neuron is **not salient** if its outputs are either negligible or has small gradient when optimizing for the downstream task, mathematically described as

$$\mathbb{E} \left[ \left| h_i(X) \cdot \frac{\partial \mathcal{L}}{\partial h_i(X)} \right| \right] \approx 0$$

2. **Uniqueness:** the neuron is **not unique** if its outputs could be reconstructed entirely with a linear combination of the outputs from other neurons, mathematically described as

$$h_i(X) \in \text{span}(\{h_j(X)\}_{j \neq i}), \quad \text{over all inputs } X$$

Intuitively, a sensitive neuron has outputs that greatly contribute to the final output, while a unique neuron has outputs which are different from that of others. These metrics are independent from one another, so a neuron could be highly salient but replaceable by other neurons, or it could be highly unique but ultimately contribute little to the network. Consider a toy example where two neurons  $h_i$  and  $h_j$  have the same non-zero weights and large gradient. Neuron  $h_i$  could easily be removed by doubling the outputs of  $h_j$ , so they are not unique, but both are highly salient.

### 3.3 THE GENERAL TRADE-OFF BETWEEN SENSITIVITY AND UNIQUENESS

Equipped with Definition 3.1, we find the following important trends. Figure 1 and Figure 2 show that without distillation, different methods often have a preference of focus on one of the redundancy measures. We now comment on trends across all experimental result tables (Table 2, 3, 4, 5, 6, 7, 8). Regardless of method, as more pruning occurs, sensitivity decreases and uniqueness increases in general. The best performing methods strike a balance between both measures, establishing a strong correlative link between these metrics and final pruning performance. Under distillation, however,

<sup>4</sup>These are two known concepts in literature, but have not been both combined into one pruning method.

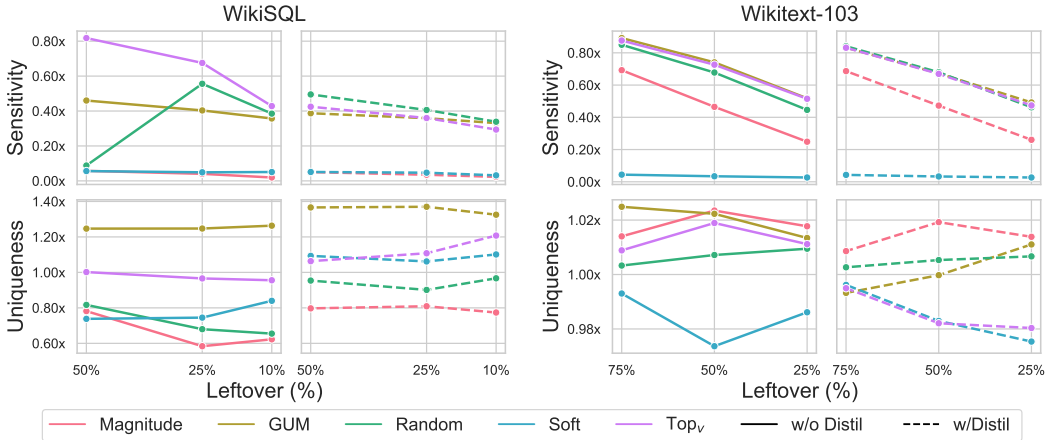


Figure 1: Sensitivity and Uniqueness measured on the training set for GPT-Neo-125m. The vertical axis is defined as the ratio of the corresponding metric between the pruned model and a baseline model (which is non-pruned and fully fine-tuned) with a maximum of 1x. We are able to use these graphs to analyze and compare the performance of different pruning methods. Details of measurements are given in Appendix E.

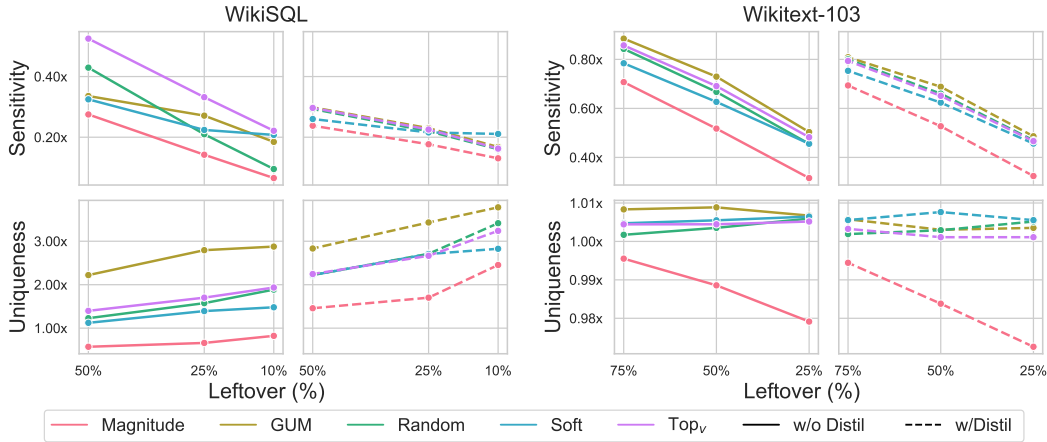


Figure 2: Sensitivity and Uniqueness measured on the training set for GPT-2-sm. The vertical axis is defined as the ratio of the corresponding metric between the pruned model and a baseline model (which is non-pruned and fully fine-tuned) with a maximum of 1x. Details of measurements are given in Appendix E

sensitivity seemingly concentrates across methods, which likely corresponds to the . For individual methods, we can further characterize their redundancy properties as below that align well with their performances:

- *Magnitude pruning* universally scores worst on both metrics, explaining its poorer performance in all experiments. However, with distillation, gaps of sensitivity between methods noticeably decreases, which partially describes why distillation improves it significantly.
- *Random pruning* obtains similar distillation sensitivity and uniqueness, though slightly lower, to hard movement, lending credence to its overall high performance. However, sensitivity is markedly lower without distillation as is reflected in all figures. *This shows that hard movement does not target uniqueness*, given random pruning does not target uniqueness.
- *Soft movement pruning* also usually scores poorly on both metrics, and sometimes abysmally as in its sensitivity in Figure 1 helping describe its overall poor performance.
- *Hard movement pruning* consistently obtains the highest sensitivity with not-far-behind uniqueness across different datasets and architectures. This correlates with the high performance when distillation is not used. However, when combined with distillation, the gaps of sensitivity between methods converge, and the advantage of hard movement fades.
- *GUM*, our proof-of-concept method, nearly always obtains best uniqueness while maintaining decent sensitivity, further improved using distillation, explaining its superiority across various tasks. However, GUM has a larger performance increase for GPT-Neo-125m than for GPT-2-sm on WikiSQL; this is explained in Figure 2 as pruned GPT-2 already has high baseline uniqueness for WikiSQL ( $\sim 2x$ ) so further increase incurs diminishing returns.

Given the training/validation split and general noise in the datasets, there are some outlier points, for instance, GUM’s surprisingly poor distilled uniqueness for Wikitext in Figure 1. We observe higher absolute uniqueness on Wikitext in general (around 95% of neurons are unique per cosine similarity), meaning pruned uniqueness can vary over datasets.

## 4 GLOBALLY UNIQUE MOVEMENT

After observing the lack of uniqueness amongst leftover neurons, we set out to improve the performance of hard movement. We introduce two techniques which together comprise Globally Unique Movement (GUM). In essence, we encourage a score-weighted uniqueness term by multiplying the score regularizer and the cosine similarity together, to obtain a balance of uniqueness and sensitivity.



**Tackling Non-Unique Redundancy** Regularizing or pruning via similarity is a well-explored topic (Ayinde et al., 2019; Zhu et al., 2018; Srinivas & Babu, 2015; Santacrose et al., 2020). However, our approach integrate more cleanly with movement to insulate weights from regularization, with only a small increase in training time as listed in Appendix A. Our approach regularizes mask scores based on cosine similarity<sup>5</sup>. Cosine similarity between the outputs of any two neurons given input  $X$  (for example, a batch of tokens) is defined simply as

$$\text{sim}(h_i(X), h_j(X)) = \frac{h_i(X)^\top h_j(X)}{\|h_i(X)\|_2 * \|h_j(X)\|_2} \quad (3)$$

However, calculating similarity with only intra-batch estimates is noisy and unreliable, so we introduce a running version of its estimates in Algorithm 1 to obtain the cosine similarity between neurons  $h_i(\cdot)$  and  $h_j(\cdot)$ . Now, we build on the regularization term  $R_{\text{sim}}(S)$  of movement pruning to define a new regularization: Let  $N_{\text{left}}$  be the number of leftover neurons, for each group  $j \in [m]$  and its corresponding score  $S_j$ , we define a term  $U_j = \frac{1}{N_{\text{left}}} \sum_{i \in [m], i \neq j} \text{sim}(h_j, h_i)$ , and then we multiply  $U_j$  to the original terms in  $R(S)$  to obtain

$$R_{\text{sim}}(S) = \lambda_{\text{mvp}} \sum_j U_j \cdot \text{sigmoid}(S_j) \quad (4)$$

**Global Top<sub>v</sub> for Soft-Like Movement** Hard movement removes the same amount of weights per layer independently. Global Top<sub>v</sub> instead uses Top<sub>v</sub> function on the set of all mask scores in the network jointly. Global Top<sub>v</sub> was originally explored for movement (Sanh et al., 2020) and was found to perform similarly. We find when used in conjunction with uniqueness regularization, Global outperforms Local. Global Top<sub>v</sub> intuitively allows for more flexibility when pruning. When pruning locally, it is necessary to choose the least common pruning percent - if one layer requires 50% neurons before severe degradation, all layers must keep 50%. Global comparison removes this loophole in a similar manner to soft movement<sup>6</sup>.

## 5 RESULTS

In this section, we present results on three different kinds of generative language modeling tasks: language modeling with Wikitext-103 (Merity et al., 2016), text-to-text generation and natural language understanding with SAMsum (Gliwa et al., 2019), and exact match measurable text-to-code generation with WikiSQL (Zhong et al., 2017). Details and hyperparameters are listed in Appendix F. When distilling, the teacher model used is the finetuned version of the original-size model. To ensure trends hold when scaling up, we present one experiment with GPT-Neo-1.3b in section 5. For all pruning amounts, we will present in terms of final percentage *leftover* - i.e., 75% of neurons remain after pruning. For soft movement, final prune percentage is shown in parentheses when it differs from desired by a large amount. In general, GUM is found to outperform Top<sub>v</sub> by a margin similar to the difference between Top<sub>v</sub> and gradual random pruning, with some exceptions. While small, we argue this gap shows the effectiveness of preserving neuron uniqueness alongside saliency.

Model	Method	75% / + Distil	50% / + Distil	25% / + Distil
GPT-Neo-125m Finetuned: <b>16.138</b>	Soft	17.814 / 17.651	19.470 / 19.053	21.169 / 20.469*
	$L_2$ -Magnitude	18.524 / 18.048	20.834 / 20.041	23.692 / 22.604
	Gradual Random	17.307 / 17.144	18.900 / 18.410	21.458 / 20.546
	Hard/Top <sub>v</sub>	16.974 / 17.142	18.253 / 18.369	20.495 / 20.194
	GUM	<b>16.822</b> / 17.158	<b>17.881</b> / 18.314	20.059 / <b>19.833</b>

Table 4: **GPT-Neo-125m**: Performance in perplexity (PPL) on the validation set for decreasing amount leftover on Wikitext-103. \* indicates having 1-3% excess leftover neurons are unpruned.

<sup>5</sup>Solving for linear combinations of neurons during training is prohibitively expensive, so we consider cosine similarity as a "first-order" proxy.

<sup>6</sup>Appendix D shows an example pruning distribution for one pruned network.

---

**Algorithm 1** Running Cosine Similarity Update

---

**Require:** a set of neurons  $h_i(\cdot)$  for  $i \in [m]$ , inputs from a set  $\mathcal{Z}$  (usually intermediate outputs of attention layers), an update multiplier  $\lambda_{\text{sim}}$ ;

- 1: Initialize  $\text{sim}^{(0)}(h_i, h_j) = 0$  for  $i, j \in [m]$ ,  $C_{i,j}^{(0)} = 0$ , and  $Q_i^{(0)} = 0$  for  $i \in [m]$ ;
- 2: **while** training **do**
- 3:   Sample a input  $X \in \mathcal{Z}$ , compute the output vector neuron  $h_j(X)$  for  $j \in [m]$ ;
- 4:   Update  $C_{i,j}^{(t+1)} \leftarrow (1 - \lambda_{\text{sim}})C_{i,j}^{(t)} + \lambda_{\text{sim}}h_i(X)^\top h_j(X)$ ,  $\forall i, j \in [m]$
- 5:   Update  $Q_i^{(t+1)} \leftarrow (1 - \lambda_{\text{sim}})Q_i^{(t)} + \lambda_{\text{sim}}\|h_i(X)\|_2^2$ ,  $\forall i \in [m]$
- 6:   Update similarity by:

$$\text{sim}^{(t+1)}(h_i, h_j) \leftarrow C_{i,j}^{(t+1)} / \sqrt{Q_i^{(t+1)} Q_j^{(t+1)}}, \quad \forall i, j \in [m]$$

7: **end while**

---

**Wikitext-103** Results on the Wikitext-103 dataset Merity et al. (2016), one of the most popular datasets for causal language modeling, are shown in Tables 4 and 5. Because performance on Wikitext-103 is in perplexity (PPL), it is a highly consistent and discriminatory dataset to prune on. We are unable to ever fully recover original model performance after pruning, suggesting that any compression increases uncertainty. Distillation generally hurts performance across all methods.

Model	Method	75% / + Distil	50% / + Distil	25% / + Distil
GPT-2-sm Finetuned: <b>15.571</b>	Soft	16.754 / 16.950	18.261 / 18.051	19.948 / <b>19.473*</b>
	$L_2$ -Magnitude	17.399 / 17.414	19.595 / 19.178	22.593 / 21.667
	Gradual Random	16.574 / 16.823	17.974 / 17.862	20.444 / 19.798
	Hard/Top <sub>v</sub>	16.363 / 16.730	17.611 / 17.742	20.016 / <b>19.663</b>
	GUM	<b>16.242</b> / 16.680	<b>17.444</b> / 17.692	19.877 / 19.681

Table 5: **GPT-2-sm**: Performance in perplexity (PPL) on the validation set for decreasing amount leftover on Wikitext-103. \* indicates having 1-3% excess leftover neurons unpruned.

**WikiSQL** As opposed to the other datasets, WikiSQL Zhong et al. (2017) contains hard ground-truth labels for comparison via Exact Match (EM). Due to this, our best performance is achieved in WikiSQL, where GUM is able to remove up to 75% of neurons while maintaining performance on GPT-Neo. Results are shown in Tables 2 and 3. We also present results for GPT-Neo-1.3b only on WikiSQL in Table 6. Results for this experiment follow a similar trend to smaller models.

Model	Method	50% / + Distil	25% / + Distil	10% / + Distil
GPT-Neo-1.3B Finetuned: <b>74.88</b>	Gradual Random	72.18 / <b>74.76</b>	70.38 / 73.83	68.56 / 72.77
	Hard/Top <sub>v</sub>	73.33 / 74.75	72.18 / 74.54	71.14 / 73.77
	GUM	72.88 / 74.70	71.80 / <b>74.62</b>	71.35 / <b>74.157</b>

Table 6: **GPT-Neo-1.3B**: Performance in  $\text{Acc}_{lf}$  for decreasing amount leftover on WikiSQL.

**SAMsum** Results on SAMsum Gliwa et al. (2019) are presented in Tables 7 and 8. Popular for encoder-decoder models, this dataset entails summarizing short instant message conversations. Larger generative models have been explored for this task (Feng et al., 2021; Zhang et al., 2019), achieving competitive results. Here we observe that GUM generally outperforms Top<sub>v</sub>, following the trends of other datasets.

## 6 ADDITIONAL RELATED WORKS

**General Domain Pruning** Neural net pruning has been proposed years before the explosion of deep learning research (Janowsky, 1989; Mozer & Smolensky, 1988; Karnin, 1990), and are



Method	Leftover %	Rouge_1	Rouge_2	Rouge_L	Rouge_LSUM
No Prune		38.68	14.74	31.73	31.76
Gradual Random	50% / + Distil	35.54 / 36.82	12.71 / 13.40	29.11 / 30.28	29.04 / 30.27
	25% / + Distil	33.11 / 35.71	11.01 / 13.13	27.39 / 29.50	27.37 / 29.48
	10% / + Distil	31.83 / 34.60	10.02 / 11.72	26.49 / 28.40	26.46 / 28.34
Hard/Top <sub>v</sub>	50% / + Distil	37.68 / 36.94	14.17 / 13.72	31.12 / 30.64	31.09 / 30.62
	25% / + Distil	36.38 / 37.34	13.00 / <b>14.24</b>	29.96 / <b>31.17</b>	29.95 / <b>31.15</b>
	10% / + Distil	33.07 / 36.12	10.95 / 12.62	27.70 / 29.70	27.68 / 29.67
GUM	50% / + Distil	37.22 / <b>38.45</b>	13.79 / <b>14.27</b>	30.72 / <b>31.35</b>	30.72 / <b>31.36</b>
	25% / + Distil	36.18 / <b>37.57</b>	13.18 / 13.71	29.99 / 30.91	30.00 / 30.93
	10% / + Distil	34.72 / <b>36.52</b>	11.88 / <b>13.40</b>	28.82 / <b>29.97</b>	28.79 / <b>29.96</b>

Table 7: **GPT-Neo-125m**: Validation results on SAMsum. Higher is better for all metrics. In general, more pruning hurts performance, and GUM outperforms Top<sub>v</sub>.

Method	Leftover %	Rouge_1	Rouge_2	Rouge_L	Rouge_LSUM
No Prune		40.83	16.85	33.72	33.70
Gradual Random	50% / + Distil	39.29 / 39.69	15.25 / 15.74	32.16 / 32.72	32.15 / 32.72
	25% / + Distil	38.09 / 39.73	14.43 / 15.35	31.16 / 32.72	31.15 / 32.66
	10% / + Distil	36.91 / 38.88	13.02 / 14.71	30.13 / 31.85	30.13 / 31.83
Hard/Top <sub>v</sub>	50% / + Distil	39.93 / 40.23	16.43 / 16.07	33.40 / 33.39	33.38 / 33.39
	25% / + Distil	38.84 / <b>40.49</b>	14.88 / <b>16.12</b>	31.83 / <b>33.46</b>	31.82 / <b>33.45</b>
	10% / + Distil	38.28 / 39.49	14.58 / 15.32	31.36 / 32.57	31.37 / 32.57
GUM	50% / + Distil	38.80 / <b>40.74</b>	15.52 / <b>16.22</b>	32.27 / <b>33.99</b>	32.23 / <b>33.95</b>
	25% / + Distil	37.56 / 39.74	14.24 / 15.72	30.94 / 32.93	30.91 / 32.93
	10% / + Distil	39.12 / <b>39.80</b>	15.01 / <b>15.79</b>	32.20 / <b>32.96</b>	32.21 / <b>32.95</b>

Table 8: **GPT-2-sm**: Validation results on SAMsum. Higher is better for all metrics. In general, more pruning hurts performance, and GUM outperforms Top<sub>v</sub>.

summarized in an outdated survey [Reed \(1993\)](#). Previous works have explored many approaches of pruning neural nets [\(Wen et al., 2016; Han et al., 2015b;a; Li et al., 2016\)](#). Recently, the *lottery ticket hypothesis* [Frankle & Carbin \(2018\)](#) proposed a new direction to prune at initialization instead. However, there is also a massive divergence of methods or claims that it is not worthwhile [\(Liu et al. \(2018\); Blalock et al. \(2020\)\)](#). Regardless, many strong techniques exist in modern incarnations across all kinds of architectures [\(Yang et al., 2016; Luo et al., 2017; He et al., 2018a\)](#).

**Compressing Language Models** Compressing LLMs in particular has spawned a unique kind of pruning. Given that LLMs first undergo pre-training on massive amounts of data, works such as [Xu et al. \(2021\); Zafrir et al. \(2021\); Li et al. \(2022\)](#) find ways to prune and finetune these models on downstream data. Building on automated gradual pruning [\(Zhu & Gupta, 2017\)](#) and learned threshold pruning [\(Azarian et al., 2020\)](#), movement pruning [\(Sanh et al., 2020\)](#) and further block movement [\(Lagunas et al., 2021\)](#) have become highly popular methods for *fine-pruning*, combining finetuning with pruning for overall best performance. Since then, many works have attempted to improve on movement pruning [\(Yao et al., 2021; Zhang et al., 2022; Xia et al., 2022; Kwon et al., 2022\)](#).

## 7 CONCLUSION

In this paper, we have performed an evaluation of structured pruning on generative language models, finding existing methods to improve over random pruning less than expected. In addition, we have proposed a framework for analyzing pruning methods in terms of uniqueness and saliency, two important criteria for preserving model quality and diversity. We have presented a novel method based on these metrics, GUM, for structured pruning of generative models, based on uniqueness regularization and global Top<sub>v</sub> pruning. We also acknowledge the limitations of our method, which can reduce saliency and performance, suggesting possible directions for improving uniqueness pruning. We believe our work can serve as an initial step towards understanding and improving structured pruning of generative models.

---

## REFERENCES

- Zeyuan Allen-Zhu and Yuanzhi Li. Towards understanding ensemble, knowledge distillation and self-distillation in deep learning. *arXiv preprint arXiv:2012.09816*, 2020.
- Babajide O. Ayinde, Tamer Inanc, and Jacek M. Zurada. Regularizing deep neural networks by enhancing diversity in feature extraction. *IEEE Transactions on Neural Networks and Learning Systems*, 30(9):2650–2661, 2019. doi: 10.1109/TNNLS.2018.2885972.
- Kambiz Azarian, Yash Bhalgat, Jinwon Lee, and Tijmen Blankevoort. Learned threshold pruning, 2020. URL <https://arxiv.org/abs/2003.00075>.
- Yoshua Bengio, Nicholas Léonard, and Aaron Courville. Estimating or propagating gradients through stochastic neurons for conditional computation, 2013. URL <https://arxiv.org/abs/1308.3432>.
- Sid Black, Leo Gao, Phil Wang, Connor Leahy, and Stella Biderman. GPT-Neo: Large Scale Autoregressive Language Modeling with Mesh-Tensorflow, March 2021. URL <https://doi.org/10.5281/zenodo.5297715>. If you use this software, please cite it using these metadata.
- Davis Blalock, Jose Javier Gonzalez Ortiz, Jonathan Frankle, and John Gutttag. What is the state of neural network pruning?, 2020. URL <https://arxiv.org/abs/2003.03033>.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners, 2020. URL <https://arxiv.org/abs/2005.14165>.
- Xuxi Chen, Tianlong Chen, Yu Cheng, Weizhu Chen, Zhangyang Wang, and Ahmed Hassan Awadallah. Dsee: Dually sparsity-embedded efficient tuning of pre-trained language models, 2021. URL <https://arxiv.org/abs/2111.00160>.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding, 2018. URL <https://arxiv.org/abs/1810.04805>.
- Ondřej Dušek, Jekaterina Novikova, and Verena Rieser. Evaluating the State-of-the-Art of End-to-End Natural Language Generation: The E2E NLG Challenge. *Computer Speech & Language*, 59: 123–156, January 2020. doi: 10.1016/j.csl.2019.06.009.
- Ali Edalati, Marzieh Tahaei, Ahmad Rashid, Vahid Nia, James Clark, and Mehdi Rezagholizadeh. Kronecker decomposition for GPT compression. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pp. 219–226, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.acl-short.24. URL <https://aclanthology.org/2022.acl-short.24>.
- Xiachong Feng, Xiaocheng Feng, Libo Qin, Bing Qin, and Ting Liu. Language model as an annotator: Exploring dialogpt for dialogue summarization, 2021. URL <https://arxiv.org/abs/2105.12544>.
- Jonathan Frankle and Michael Carbin. The lottery ticket hypothesis: Finding sparse, trainable neural networks. 2018. doi: 10.48550/ARXIV.1803.03635. URL <https://arxiv.org/abs/1803.03635>.
- Trevor Gale, Erich Elsen, and Sara Hooker. The state of sparsity in deep neural networks, 2019. URL <https://arxiv.org/abs/1902.09574>.
- Bogdan Gliwa, Iwona Mochol, Maciej Biesek, and Aleksander Wawer. SAMSum corpus: A human-annotated dialogue dataset for abstractive summarization. In *Proceedings of the 2nd Workshop on New Frontiers in Summarization*. Association for Computational Linguistics, 2019. doi: 10.18653/v1/d19-5409. URL <https://doi.org/10.18653/v1/d19-5409>.

- 
- Song Han, Huizi Mao, and William J Dally. Deep compression: Compressing deep neural networks with pruning, trained quantization and huffman coding. *arXiv preprint arXiv:1510.00149*, 2015a.
- Song Han, Jeff Pool, John Tran, and William Dally. Learning both weights and connections for efficient neural network. *Advances in neural information processing systems*, 28, 2015b.
- Yihui He, Ji Lin, Zhijian Liu, Hanrui Wang, Li-Jia Li, and Song Han. Amc: Autotml for model compression and acceleration on mobile devices. In *Proceedings of the European Conference on Computer Vision (ECCV)*, September 2018a.
- Yihui He, Ji Lin, Zhijian Liu, Hanrui Wang, Li-Jia Li, and Song Han. Amc: Autotml for model compression and acceleration on mobile devices, 2018b. URL <https://arxiv.org/abs/1802.03494>.
- Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the knowledge in a neural network, 2015. URL <https://arxiv.org/abs/1503.02531>.
- Steven A. Janowsky. Pruning versus clipping in neural networks. *Phys. Rev. A*, 39:6600–6603, Jun 1989. doi: 10.1103/PhysRevA.39.6600. URL <https://link.aps.org/doi/10.1103/PhysRevA.39.6600>.
- E.D. Karnin. A simple procedure for pruning back-propagation trained neural networks. *IEEE Transactions on Neural Networks*, 1(2):239–242, 1990. doi: 10.1109/72.80236.
- Woosuk Kwon, Sehoon Kim, Michael W. Mahoney, Joseph Hassoun, Kurt Keutzer, and Amir Gholami. A fast post-training pruning framework for transformers, 2022. URL <https://arxiv.org/abs/2204.09656>.
- François Lagunas, Ella Charlaix, Victor Sanh, and Alexander M. Rush. Block pruning for faster transformers, 2021. URL <https://arxiv.org/abs/2109.04838>.
- Bingbing Li, Zhenglun Kong, Tianyun Zhang, Ji Li, Zhengang Li, Hang Liu, and Caiwen Ding. Efficient transformer-based large scale language representations using hardware-friendly block structured pruning, 2020. URL <https://arxiv.org/abs/2009.08065>.
- Hao Li, Asim Kadav, Igor Durdanovic, Hanan Samet, and Hans Peter Graf. Pruning filters for efficient convnets. *arXiv preprint arXiv:1608.08710*, 2016.
- Tianda Li, Yassir El Mesbahi, Ivan Kobzyev, Ahmad Rashid, Atif Mahmud, Nithin Anchuri, Habib Hajimolahoseini, Yang Liu, and Mehdi Rezagholizadeh. A short study on compressing decoder-based language models, 2021. URL <https://arxiv.org/abs/2110.08460>.
- Yuchao Li, Fuli Luo, Chuanqi Tan, Mengdi Wang, Songfang Huang, Shen Li, and Junjie Bai. Parameter-efficient sparsity for large language models fine-tuning, 2022. URL <https://arxiv.org/abs/2205.11005>.
- Zhuang Liu, Mingjie Sun, Tinghui Zhou, Gao Huang, and Trevor Darrell. Rethinking the value of network pruning, 2018. URL <https://arxiv.org/abs/1810.05270>.
- Jian-Hao Luo, Jianxin Wu, and Weiyao Lin. Thinet: A filter level pruning method for deep neural network compression. In *Proceedings of the IEEE International Conference on Computer Vision (ICCV)*, Oct 2017.
- Arun Mallya, Dillon Davis, and Svetlana Lazebnik. Piggyback: Adapting a single network to multiple tasks by learning to mask weights, 2018. URL <https://arxiv.org/abs/1801.06519>.
- Kevin Meng, David Bau, Alex Andonian, and Yonatan Belinkov. Locating and editing factual associations in gpt, 2022. URL <https://arxiv.org/abs/2202.05262>.
- Stephen Merity, Caiming Xiong, James Bradbury, and Richard Socher. Pointer sentinel mixture models, 2016.

- 
- Michael C Mozer and Paul Smolensky. Skeletonization: A technique for trimming the fat from a network via relevance assessment. In D. Touretzky (ed.), *Advances in Neural Information Processing Systems*, volume 1. Morgan-Kaufmann, 1988. URL <https://proceedings.neurips.cc/paper/1988/file/07e1cd7dca89a1678042477183b7ac3f-Paper.pdf>.
- Fabio Petroni, Tim Rocktäschel, Patrick Lewis, Anton Bakhtin, Yuxiang Wu, Alexander H. Miller, and Sebastian Riedel. Language models as knowledge bases?, 2019. URL <https://arxiv.org/abs/1909.01066>.
- Alec Radford, Jeff Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. 2019.
- Russell Reed. Pruning algorithms-a survey. *IEEE transactions on Neural Networks*, 4(5):740–747, 1993.
- Victor Sanh, Thomas Wolf, and Alexander M. Rush. Movement pruning: Adaptive sparsity by fine-tuning, 2020. URL <https://arxiv.org/abs/2005.07683>.
- Michael L. Santacrose, Daniel Koranek, and Rashmi Jha. Detecting malware code as video with compressed, time-distributed neural networks. *IEEE Access*, 8:132748–132760, 2020. doi: 10.1109/ACCESS.2020.3010706.
- Maying Shen, Pavlo Molchanov, Hongxu Yin, and Jose M Alvarez. When to prune? a policy towards early structural pruning. *arXiv preprint arXiv:2110.12007*, 2021.
- Suraj Srinivas and R. Venkatesh Babu. Data-free parameter pruning for deep neural networks, 2015. URL <https://arxiv.org/abs/1507.06149>.
- Chaofan Tao, Lu Hou, Wei Zhang, Lifeng Shang, Xin Jiang, Qun Liu, Ping Luo, and Ngai Wong. Compression of generative pre-trained language models via quantization. *arXiv preprint arXiv:2203.10705*, 2022.
- Hanrui Wang, Zhekai Zhang, and Song Han. Spatten: Efficient sparse attention architecture with cascade token and head pruning, 2020a. URL <https://arxiv.org/abs/2012.09852>.
- Ziheng Wang, Jeremy Wohlwend, and Tao Lei. Structured pruning of large language models. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*. Association for Computational Linguistics, 2020b. doi: 10.18653/v1/2020.emnlp-main.496. URL <https://doi.org/10.18653/v1/2020.emnlp-main.496>.
- Wei Wen, Chunpeng Wu, Yandan Wang, Yiran Chen, and Hai Li. Learning structured sparsity in deep neural networks, 2016. URL <https://arxiv.org/abs/1608.03665>.
- Mengzhou Xia, Zexuan Zhong, and Danqi Chen. Structured pruning learns compact and accurate models, 2022. URL <https://arxiv.org/abs/2204.00408>.
- Dongkuan Xu, Ian E. H. Yen, Jinxi Zhao, and Zhibin Xiao. Rethinking network pruning – under the pre-train and fine-tune paradigm, 2021. URL <https://arxiv.org/abs/2104.08682>.
- Guangxuan Xu and Qingyuan Hu. Can model compression improve nlp fairness, 2022. URL <https://arxiv.org/abs/2201.08542>.
- Tien-Ju Yang, Yu-Hsin Chen, and Vivienne Sze. Designing energy-efficient convolutional neural networks using energy-aware pruning, 2016. URL <https://arxiv.org/abs/1611.05128>.
- Zhewei Yao, Xiaoxia Wu, Linjian Ma, Sheng Shen, Kurt Keutzer, Michael W. Mahoney, and Yuxiong He. Leap: Learnable pruning for transformer-based models, 2021. URL <https://arxiv.org/abs/2105.14636>.
- Ruichi Yu, Ang Li, Chun-Fu Chen, Jui-Hsin Lai, Vlad I. Morariu, Xintong Han, Mingfei Gao, Ching-Yung Lin, and Larry S. Davis. Nisp: Pruning networks using neuron importance score propagation, 2017. URL <https://arxiv.org/abs/1711.05908>.
- Ofir Zafrir, Ariel Larey, Guy Boudoukh, Haihao Shen, and Moshe Wasserblat. Prune once for all: Sparse pre-trained language models, 2021. URL <https://arxiv.org/abs/2111.05754>.

Qingru Zhang, Simiao Zuo, Chen Liang, Alexander Bukharin, Pengcheng He, Weizhu Chen, and Tuo Zhao. Platon: Pruning large transformer models with upper confidence bound of weight importance, 2022. URL <https://arxiv.org/abs/2206.12562>.

Yizhe Zhang, Siqi Sun, Michel Galley, Yen-Chun Chen, Chris Brockett, Xiang Gao, Jianfeng Gao, Jingjing Liu, and Bill Dolan. Dialogpt: Large-scale generative pre-training for conversational response generation, 2019. URL <https://arxiv.org/abs/1911.00536>.

Victor Zhong, Caiming Xiong, and Richard Socher. Seq2sql: Generating structured queries from natural language using reinforcement learning. *CoRR*, abs/1709.00103, 2017.

Michael Zhu and Suyog Gupta. To prune, or not to prune: exploring the efficacy of pruning for model compression, 2017. URL <https://arxiv.org/abs/1710.01878>.

Xiaotian Zhu, Wengang Zhou, and Houqiang Li. Improving deep neural network sparsity through decorrelation regularization. In *Proceedings of the Twenty-Seventh International Joint Conference on Artificial Intelligence, IJCAI-18*, pp. 3264–3270. International Joint Conferences on Artificial Intelligence Organization, 7 2018. doi: 10.24963/ijcai.2018/453. URL <https://doi.org/10.24963/ijcai.2018/453>.

## A COMPUTATIONAL RUNTIME COMPARISON

The training runtime of all pruning methods are compared in Tables 9, 10, and 11. For all experiments, Soft movement has a greatly increased runtime compared to other pruning methods. This is due to the over-pruning problem previously described: if soft movement prunes too many neurons, it must default to hard movement as a backup. To reach a specific pruning percentage, this must occur, resulting in significantly more computation.

GUM is certainly slower than hard movement, however, we find the difference to be minimal. Compared to no pruning, all pruning methods add a significant amount of time to training, especially when also combined with distillation. Therefore, the additional runtime incurred by GUM is small in comparison.

Model	No Prune	$L_2$	Random	Hard	GUM	Soft
GPT-Neo-125m	4.75	10.5	9.93	10.26	11.46	25.33
GPT-Neo-125m + Distil	-	13.83	13.83	13.93	15.4	31.5
GPT-2-sm	6.83	11.62	10.06	10.07	12.83	27.5
GPT-2-sm + Distil	-	9.28	14.22	14.55	17.08	32.67
GPT-Neo-1.3b	3.92	-	11.83	12.25	12.83	-
GPT-Neo-1.3b + Distil	-	-	14.5	14.8	15.56	-

Table 9: **WikiSQL Training Runtime in Hours.** GPT-Neo-125m and GPT-2-sm were run on 8xV100 GPUs, while GPT-Neo-1.3b was run on 8xA100 GPUs. All results are averaged over all pruning runs, which are comparable given neuron removal occurs after training.

Model	No Prune	$L_2$	Random	Hard	GUM	Soft
GPT-Neo-125m	5.42	8.55	6.82	7.1	8.87	18.08
GPT-Neo-125m + Distil	-	11.9	11.9	11.8	13.45	23.33
GPT-2-sm	4.72	6.45	6.17	6.12	9.1	17.13
GPT-2-sm + Distil	-	11.33	10.88	11.12	13.48	22.17

Table 10: **Wikitext Training Runtime in Hours.** GPT-Neo-125m and GPT-2-sm were run on 8xV100 GPUs. All results are averaged over all pruning runs, which are comparable given neuron removal occurs after training.

Model	No Prune	Random	Hard	GUM
GPT-Neo-125m	1.72	2.22	2.37	2.71
GPT-Neo-125m + Distil	-	4.45	5.13	5.33
GPT-2-sm	1.55	2.41	2.27	2.79
GPT-2-sm + Distil	-	3.96	3.93	4.17

Table 11: **SAMsum Training Runtime in Hours.** GPT-Neo-125m and GPT-2-sm were run on 8xV100 GPUs. All results are averaged over all pruning runs, which are comparable given neuron removal occurs after training.

## B E2E NLG CHALLENGE RESULTS

We also tested pruning on the E2E NLG Challenge [Dušek et al. \(2020\)](#) in Tables [12](#) and [13](#). A highly popular dataset, performance in this domain is measured by a variety of metrics that all measure the quality of the output indirectly as opposed to the direct measurement versus ground truth in other experiments.

After many rounds of hyperparameter optimization, results for GPT-2-sm loosely follow previously seen trends, however, GPT-Neo-125m results are highly inconsistent. For this model removing even 90% of neurons can result in best performance, and increasing pruning does not monotonically affect performance, two highly concerning phenomenon unseen in other datasets.

We speculate these inconsistencies could be due to many reasons; such as the open-endedness of the problem domain, or too little training data. Measuring the performance of generative models is a non-trivial task, especially when model outputs are highly similar as is the case when pruning.

For these reasons, we do not further experiment on this dataset and leave it out of our main analysis. However, we include this experiment to show that in some cases, pruning results can be inconsistent for language models. Further exploration is required into this area.

Method & Leftover %	BLEU	NIST	METEOR	ROUGE_L	CIDEr
No Prune	68.22	8.6315	0.4479	0.7103	2.3141
Top <sub>v</sub> 75%	68.26	8.6660	0.4486	0.7108	2.3120
Top <sub>v</sub> 25%	<u>68.80</u>	<u>8.6780</u>	0.4487	0.7126	<u>2.3238</u>
Top <sub>v</sub> 10%	68.15	8.6377	0.4472	<u>0.7144</u>	2.2955
GUM 75%	68.07	8.5698	0.4458	0.7090	2.2835
GUM 25%	68.22	8.6597	<u>0.4495</u>	0.7093	2.3230
GUM 10%	68.26	8.6684	0.4490	0.7109	2.3012

Table 12: **GPT-Neo-125m:** Testing results on the E2E NLG Challenge. Higher is better for all metrics. Even at 10% leftover, performance is similar to the baseline, for both Top<sub>v</sub> and GUM.

Method & Leftover %	BLEU	NIST	METEOR	ROUGE_L	CIDEr
No Prune	68.05	8.6547	0.4623	0.7143	2.4500
Top <sub>v</sub> 75%	66.79	8.5064	0.4590	0.7119	2.4308
Top <sub>v</sub> 25%	<u>66.85</u>	<u>8.5115</u>	0.4587	<u>0.7098</u>	<u>2.4322</u>
Top <sub>v</sub> 10%	66.63	8.4783	0.4588	0.7091	2.4368
GUM 75%	<u>68.02</u>	<u>8.6552</u>	<u>0.4619</u>	<u>0.7134</u>	<u>2.4502</u>
GUM 25%	66.58	8.4853	<u>0.4588</u>	<u>0.7098</u>	2.4286
GUM 10%	<u>67.06</u>	<u>8.5237</u>	<u>0.4601</u>	<u>0.7122</u>	<u>2.4417</u>

Table 13: **GPT-2-sm:** Testing results on the E2E NLG Challenge. Higher is better for all metrics. In general, more pruning results in worse performance, and GUM outperforms Top<sub>v</sub>.



## C UNIQUENESS REGULARIZATION PER LAYER

The goal of uniqueness regularization is to punish similarity between neurons, especially those with high similarity. Figure 3 shows that GUM is generally successful in removing neurons with high similarity across all layers.

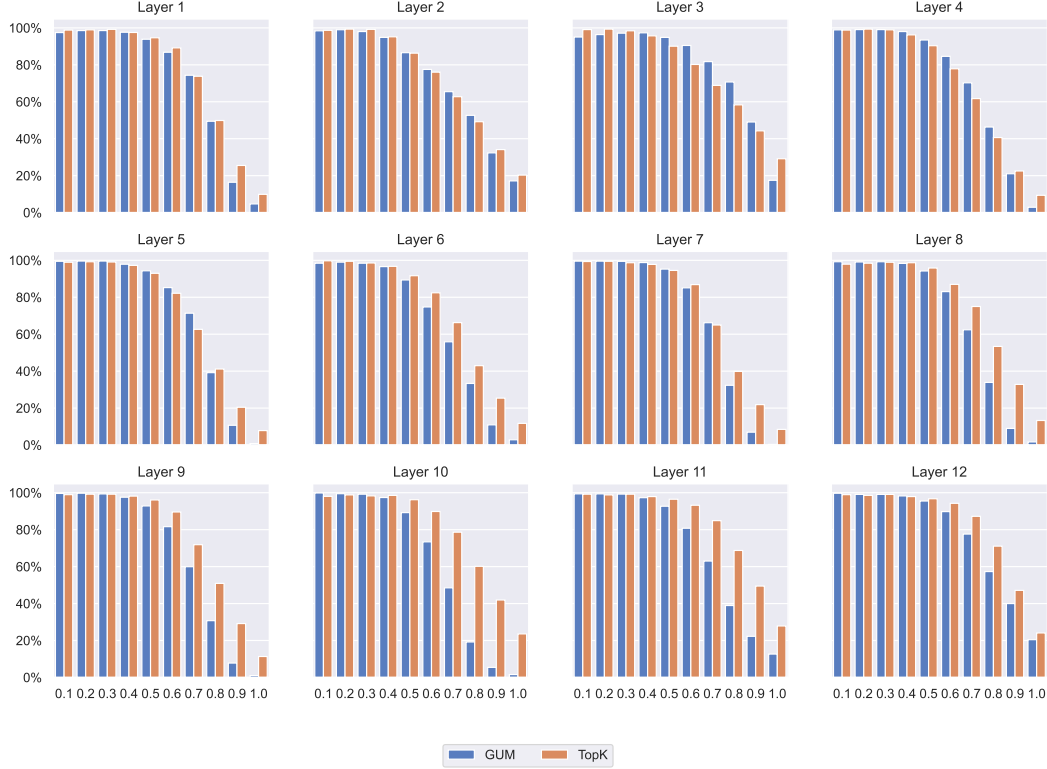


Figure 3: For each layer, this graph shows the percentage of neurons with at least one similarity per range. Similarity is defined as the absolute value of cosine similarity over the entire validation dataset, increasing from 0 to 1.  $\text{Top}_v$  and GUM are compared, training on WikiSQL with GPT-Neo-125m. Total leftover neurons is exactly 25% of all neurons.

## D GLOBAL $\text{Top}_v$ REMOVAL PER LAYER

A natural question arises with Global  $\text{Top}_v$  pruning: what is the final prune percentage per-layer? Figure 4 shows the prune percentages per layer for one sample training run. From this test, later layers are clearly prioritized, with a large emphasis on the last layer. While the exact layers pruned more or less will vary with noise, model, and dataset, we observe this trend to generally hold true.

## E UNIQUENESS AND SENSITIVITY GRAPHING

To measure sensitivity for a model, we measure the global sum of sensitivity for all neurons  $\{h_i(\cdot)\}_{i \in [m]}$  in feedforward layers  $\{l \in L\}$  on the training dataset via (taking the absolute value to account for sign):

$$\sum_l \sum_i |h_i(X) \cdot \frac{\partial \mathcal{L}}{\partial h_i(X)}|$$

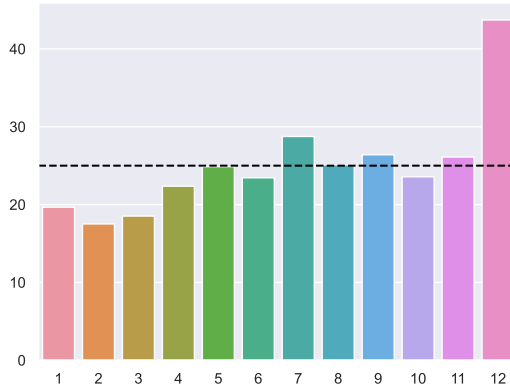


Figure 4: The percentage leftover for layers 1-12 after Global  $\text{Top}_v$  pruning, using GUM training on WikiSQL with GPT-Neo-125m. Total leftover neurons is exactly 25% of all neurons.

To measure uniqueness for a model, we measure the cosine similarity of each neuron with each other neuron as in equation 3 over the entire dataset, measuring each pair only once. This can be measured using the running cosine similarity without a decay multiplier. Then, we measure the percentage of neurons with at least 1 similarity above 0.8 to another neuron (i.e. these neurons nearly match each other) across the entire network.

Both sensitivity and uniqueness are not useful on their own, but are useful relative to other models. We therefore divide both metrics by the value obtained for the fully finetuned version of the model.

Overall, uniqueness values for Wikitext-103 and for WikiSQL were quite different. Neurons on Wikitext-103 seem to already be highly unique, with some specific layers containing a large amount of redundancy, while WikiSQL has redundancy throughout the entire network.

Figures 5 and 6 show non-re-scaled results for the previous graphs. These graphs show uniqueness as a percent of all neurons (i.e. 50% of neurons are unique) and sensitivity as a raw value.

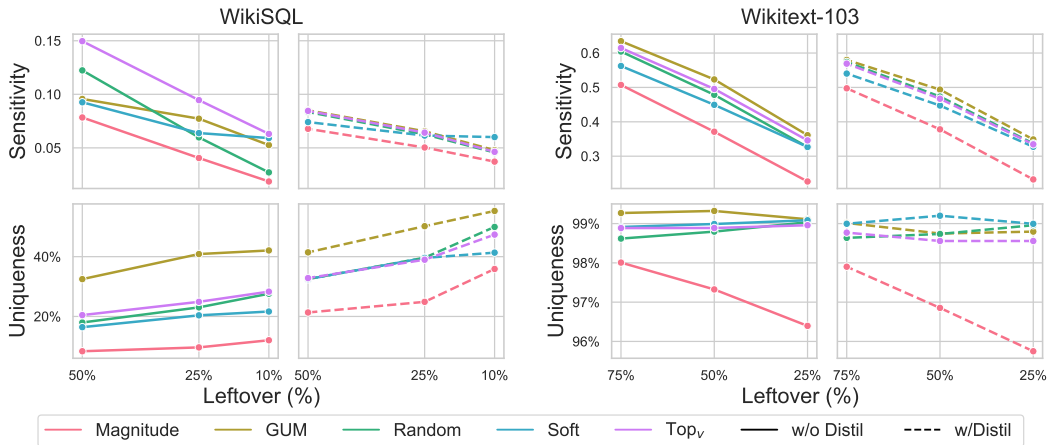


Figure 5: Sensitivity and Uniqueness measured without re-scaling, for GPT-2-sm.

## F TRAINING HYPERPARAMETERS

All training hyperparameters are provided. Only one random seed was attempted per training run. We note that it is possible different pruning amounts require different hyperparameters and therefore performance could be better, however, searching for each possible combination would be far too

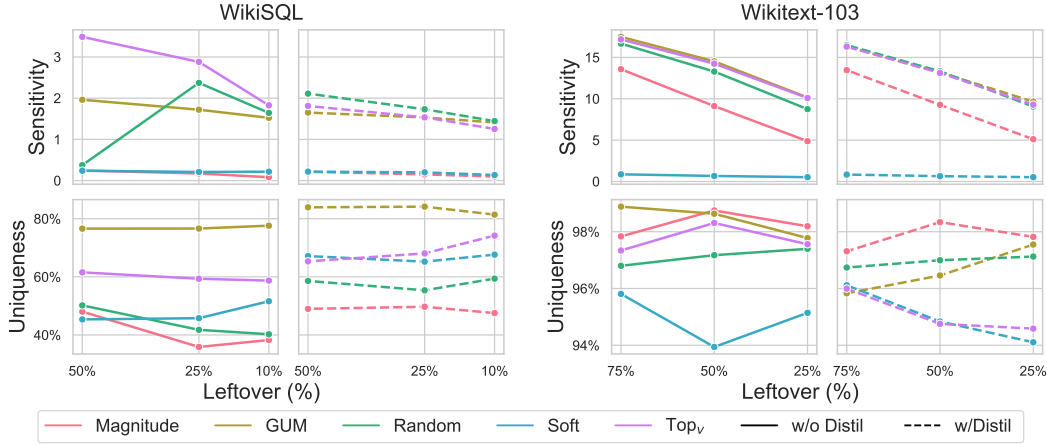


Figure 6: Sensitivity and Uniqueness measured without re-scaling, for GPT-Neo-125m.

expensive. Therefore, the same hyperparameters are used for different pruning percentages. Only the best combination for each model is listed, but each model had its hyperparameters tuned manually. We explored hyperparameters by starting with known values from literature, then performing grid searches on relevant pruning values (i.e. distillation temperature, or  $\lambda_{gum}$ ).

L1 regularization was used on the mask scores for all models. Learning weight decayed linearly to 0 for all models. LR means Learning Rate, WD means Weight Decay, and LS means Label Smoothing. When distillation was used, the teacher was trained using the same hyperparameters (sans pruning arguments).

Adam $\beta_1$	Adam $\beta_2$	Adam $\epsilon$	Batch	LR Warmup Percent	GUM $\lambda_c$
0.9	0.999	1e-4	8	10%	0.99

Table 14: Shared hyperparameters for all runs.

**WikiSQL** A max token length of 512 was used. Strings were not converted to lowercase. Special tokens were added by the tokenizer.

GPT-Neo-125m used a mask LR of 1e-2 for Hard Movement/GUM and 1e1 for Soft Movement. GPT-2-sm used a mask LR of 1e-2 for Hard Movement/GUM and 1e1 for Soft Movement. Soft movement required a large mask learning rate as it would otherwise not converge - other combinations of more regularization were attempted.

Model	LR	WD	Epochs	$\lambda_{mvp}$	$\lambda_{gum}$	LS	Distil $\alpha$	Distil Temp.
GPT-Neo-125m	5e-4	0.05	10	2	1e2	0.05	0.5	2
GPT-2-sm	3e-4	0.1	11	2	1e1	0.05	0.9	1
GPT-Neo-1.3b	2e-4	0.05	6	2	1e1	0	0.5	1

Table 15: WikiSQL hyperparameters.

**Wikitext-103** A max token length of 1024 was used. Strings were not converted to lowercase. Special tokens were added by the tokenizer.

GPT-Neo-125m used a mask LR of 1e-2 for Hard Movement/GUM and 1e1 for Soft Movement. GPT-2-sm used a mask LR of 1e-2 for Hard Movement/GUM and 1e1 for Soft Movement. Soft

movement required a large mask learning rate as it would otherwise not converge - other combinations of more regularization were attempted.

For Wikitext-103 specifically, Soft Movement also required an extremely large  $\lambda_{mvp}$ . This causes a large increase in pruning at the beginning of training, which could explain the overall poor performance. Without this large value, however, Soft Movement would not converge to the desired pruning amount.

Model	LR	WD	Epochs	$\lambda_{mvp}$	$\lambda_{gum}$	LS	Distil $\alpha$	Distil Temp.
GPT-Neo-125m	5e-4	0.05	3	2, 1e2 (Soft)	1e1	0.05	0.9	1
GPT-2-sm	3e-4	0.1	3	2, 1e2 (Soft)	1e1	0.05	0.9	1

Table 16: Wikitext-103 hyperparameters.

**SAMsum** A max token length of 1024 was used. Strings were not converted to lowercase, and whitespace was not stripped. More than 3 or 4 epochs starts to result in overtraining for both models, so both were limited to not overtrain.

For GPT-Neo-125m, both methods used a mask LR of 1e-2. For GPT-2-sm, GUM required a mask LR of 1e-3, while TopK used a mask LR of 1e-2. However, for both models  $\lambda_{gum}$  must be 1e1 for no distillation, and 1e2 for distillation, as too high a  $\lambda_{gum}$  results in poor non-distil performance. Soft movement was not attempted on this dataset.

Model	LR	WD	Epochs	$\lambda_{mvp}$	$\lambda_{gum}$	LS	Distil $\alpha$	Distil Temp.
GPT-Neo-125m	5e-4	0.01	4	2	1e1/1e2	0.01	0.5	1
GPT-2-sm	3e-4	0.05	6	2	1e1	0.01	0.9	1

Table 17: SAMsum hyperparameters.

**E2E** A max token length of 512 was used. When testing, BEAM search was used with 10 beams, a length penalty of .9, and no ngram repeat size of 4.

GPT-Neo-125m used a mask LR of 1e-2 for Hard Movement/GUM and 1e1 for Soft Movement. GPT-2-sm used a mask LR of 1e-2 for Hard Movement/GUM and 1e1 for Soft Movement. Soft movement required a large mask learning rate as it would otherwise not converge - other combinations of more regularization were attempted.

Model	LR	WD	Epochs	$\lambda_{mvp}$	$\lambda_{gum}$	LS	Distil $\alpha$	Distil Temp.
GPT-Neo-125m	5e-4	0.01	6	2, 1e1 (Soft)	1e1	0.05	0.5	2
GPT-2-sm	3e-4	0.1	6	2, 1e2 (Soft)	1e1	0.05	0.9	1

Table 18: E2E NLG Challenge hyperparameters.