

3 Results

Equations are left as images for a later pass rather than transcribed into notation that would be wrong half the time. The remaining processors are direct ports and are documented against the source files they come from. Every threshold in the code was set by looking at a failure, not by tuning against a corpus. That makes the thresholds easy to defend and easy to revise when a new failure appears.

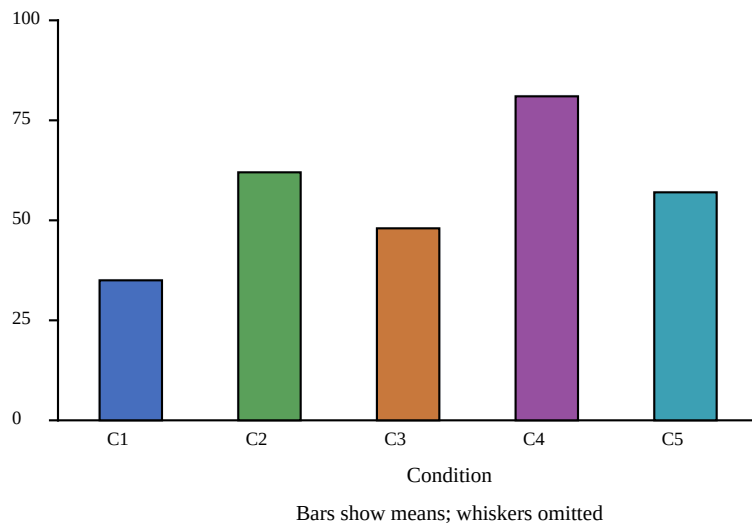


Figure 1 Adoption by Condition

Figure 1 shows adoption rising with each condition.


That makes the thresholds easy to defend and easy to revise when a new failure appears. We report where the approach breaks so that a reader can decide whether it fits their documents. Multi-line table cells remain the weakest point and are listed as partial support. Journals that style every heading identically defeat the height clustering and lose a level.

4 Process

Journals that style every heading identically defeat the height clustering and lose a level. Scanned pages inherit every error of the recogniser, including stray page numbers in the middle of a paragraph. None of these failures corrupts the surrounding text; they degrade the structure rather than the content. The synthetic set is regenerated from scripts, so a fixture can be changed and the change reviewed.

Stage	Actors	Outcome
Entry	Founders	Charter
Growth	Managers	Routines
Reform	Boards	Audit

Figure 2 Process Model of Adoption



The synthetic set is regenerated from scripts, so a fixture can be changed and the change reviewed. Expected outputs are committed beside the fixtures and compared byte for byte. A behaviour change that is intended is recorded by rewriting the expected files in the same commit. An unintended change fails the build before it reaches a release.