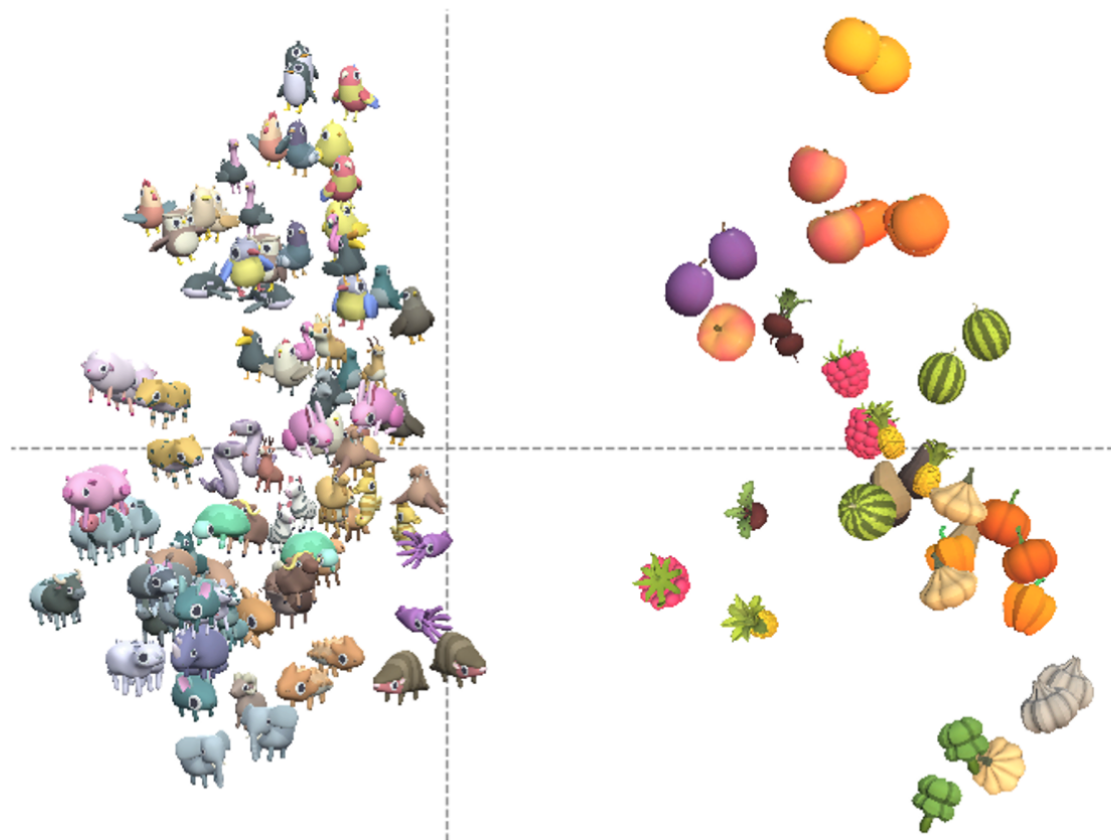
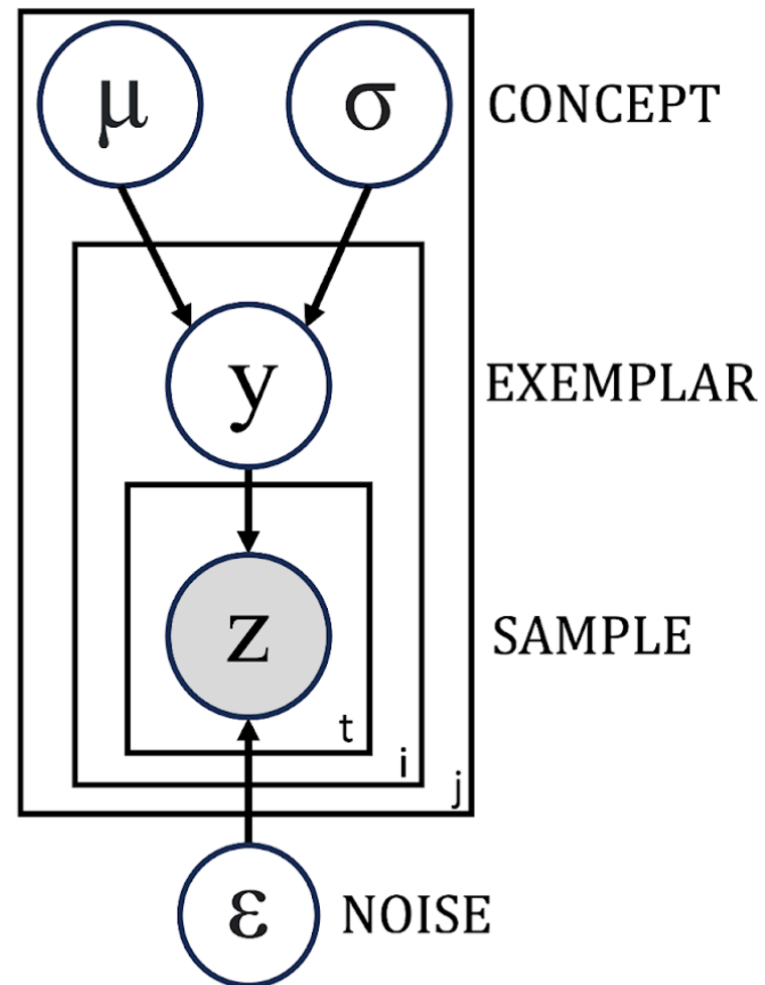


**A**

## Perceptual embeddings

**B**

## Learning model

**C**

## RANCH sampling algorithm

---

RANCH algorithm

---

- 1: **for** each exemplar  $y$  **do**
  - 2:    $sample \leftarrow T$
  - 3:   **while**  $sample$  is  $T$ , take another sample  $z$
  - 4:     update posterior  $P(\mu, \sigma | z)$
  - 5:     compute EIG of next sample  $z_{t+1}$
  - 6:     flip  $coin$  with  $p(lookaway) = \frac{EIG(env)}{EIG(z_{t+1}) + EIG(env)}$
  - 7:     **if**  $coin = T$
  - 8:        $sample \leftarrow F$
  - 9:     **end if**
  - 10:   **end while**
  - 11: **end for**
-