Sample Project: Evidence-Aware Writing Stage

Anonymous

Abstract

We compare baseline, main and ablation conditions on a synthetic smoke task. The supplied observations motivate cautious follow-up within the recorded scope.

1 Introduction

The approved smoke comparison illustrates the workflow. Pretraining and adaptation motivate the background[1, 2]; these runs do not reproduce those methods.

2 Related Work

BERT describes pretraining[1], while LoRA studies low-rank adaptation[2]. Abstract-only access limits reconstruction of experimental details.

3 Method

The approved plan compares baseline, main and ablation conditions. The frozen task configuration identifies a smoke test; unavailable implementation details remain unspecified.

4 Experimental Setup

Only runs supporting the selected comparisons enter the frozen environment summary.

5 Results

Comparison C1: the observed mean difference is 0.0857, with p-value 0.0017 and 3 seeds in the first group. This observation is limited to the evaluated scope. Comparison C2: the observed mean difference is 0.0428, with p-value 0.0343 and 3 seeds in the first group.

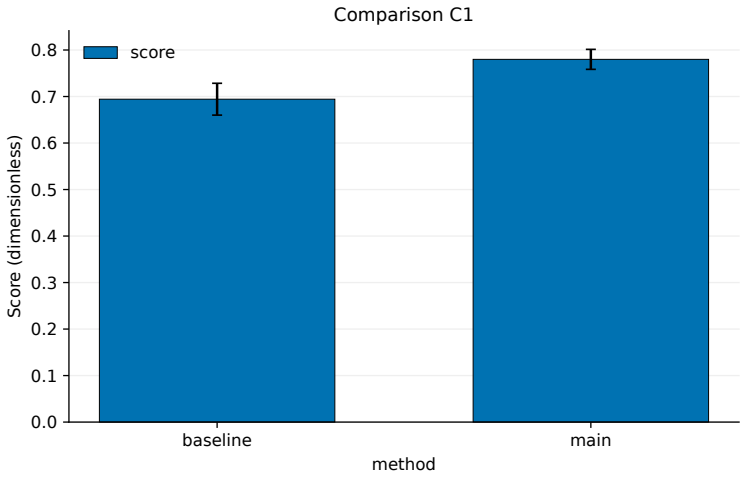


Figure 1: Recorded comparison; error bars show confidence intervals.

6 Discussion

The observed differences may motivate further evaluation; they do not establish a general causal effect.

6.1 Limitations

This synthetic smoke task and its limited seeds cannot establish performance on real tasks. Local offline citation checks do not verify scientific claims.

7 Conclusion

The recorded comparisons illustrate a reproducible pipeline within the approved scope. No generalization beyond these observations is established.

Generative AI Use

An AI agent generated manuscript prose using writing/section v3. Runtime model backend: SampleWritingLLM. Writing roles: writing.writer. Recorded automatic compile-repair attempts: 0; accepted: 0. Evidence checking is enabled (evidence_check=true). Claim planning used writing.claims; experimental values are resolved deterministically by code. Deterministic evidence verification is followed by semantic review using writing.reviewer. Bounded targeted revision may use writing.reviser. Completed review and revision details are recorded in review artifacts. Approved idea and plan versions were supplied.

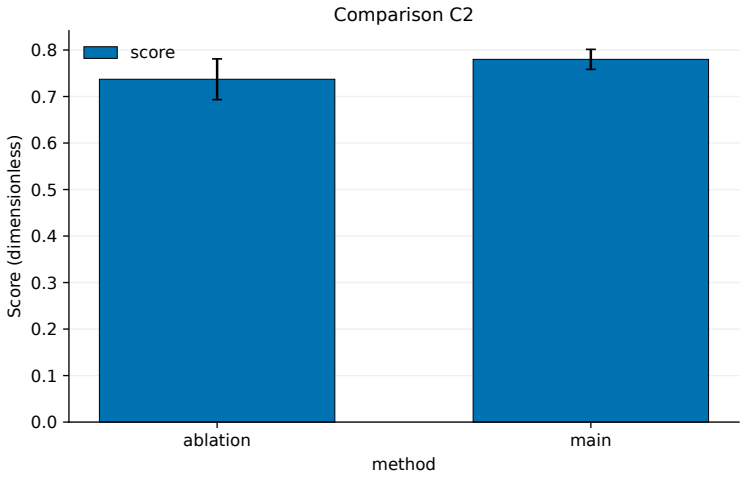


Figure 2: Recorded comparison; error bars show confidence intervals.

Manuscript feedback items processed: 0. This draft awaits manuscript approval; no publication authorization is implied. Prior manuscript approval records: 0. Figure presentation used writing.figure_spec (writing/figure_spec v1); values and graphics came from deterministic scripts.

References

[1] Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. In *NAACL*, 2019.

[2] Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models. In *ICLR*, 2022.