Recommendation of Yelp's Reviewers: Who Should You Listen to?

Luciana B. Maroun¹, Izabela K. T. Maffra¹, Thiago H. Silva¹, Pedro O. S. Vaz de Melo¹, Renato M. Assunção¹

¹Universidade Federal de Minas Gerais (UFMG)

{lubm, karennina, thiagohs, olmo, assuncao}@dcc.ufmg.br

Abstract. Online ratings are nowadays one of the most trusted sources of consumer confidence when they need to decide which business to choose. As a matter of fact, reviews have become so abundant that many times the task of deciding upon whether or not to elect a business is getting increasingly difficult – each person has their own values and intrinsic characteristics that contribute to forming an opinion. In this work, we discriminate relevant users from a review website considering the perspective of a second user. This way, we are able to infer what would be the individuals that think alike certain user and recommend their reviews amongst a plethora of diverse opinions.

1. Introduction

Consumer reviews have revolutionized the way that people choose which businesses to attend. It is now very common to turn to the web in order to make everyday decisions, such as where to eat or where to get a haircut. Yelp¹ is an opinion and experience sharing system about businesses of several kinds. In this platform, a user is able to write their impressions about certain place and rate it with a score from one to five stars. Therefore, before choosing where to go, someone can investigate what others think about different places and make a decision with a wider knowledge basis.

To illustrate the importance of such platforms, a survey recently discovered that 64% of all consumers scan reviews before choosing a service [Cone Communications Inc. 2011]. Businesses' owners, on the other hand, are being forced to direct their attention to such platforms, since it was found that an extra half star on average rating increase sales on 19% [Anderson and Magruder 2012].

However, users differ in values and taste. Thus, an opinion might be useful for someone and not so much for somebody else. Knowing the profile of an individual is helpful to understand the viewpoint behind a review and decide if its adequate considering the reader's angle.

The purpose of this work is to identify important reviewers on Yelp for determined user in order to recommend reviews aligned with the readers' preferences and style. Different features might be helpful in this process, including the friendship network of reviewers. In this work, we analyze the relevance of the friendship network in users profiling as well as of a hidden friendship network — defined by users who are similar but are not connected on the social network. By encountering individuals with similar opinions, validated by the homophilly on the network, we recommend the reviews of those to the reader and reduce the burden of manually searching for relevant viewpoints.

¹www.yelp.com

2. Dataset

The data used consists of a set of reviews, business, users and related content of Yelp's website regarding the metropolitan area of Phoenix released for a challenge². There are 15,585 businesses, 70,817 users and 335,022 reviews, which covers a period from 2005-02-01 until 2014-01-28.

Yelp also contains an online social network (OSN), thus users are able to be friends of each other. This network, however, is not the main purpose of the platform and does not entirely represent the true interaction between individuals — sometimes the motivation of connection is not really a friendship, but similar businesses preferences and reviewing behavior. A great part of the users, however, does not even have any friends: only 30, 255 of them are socially connected. This proves that this network is not enough for discovering reference reviewers, demanding an extrapolation with unobserved edges.

3. Network Analysis

As previously mentioned, the friendship network of Yelp is rather incomplete: the majority of users does not have any connections. The users that participate on the social network, however, are highly connected, since 40.92% of them are in the large connected component, which means that only 1.80% of the OSN participants are absent. The average degree of the whole network is 4.68 and the clustering coefficient is 0.06.

Figure 1. The visualization of the friendship network.

Yelp provides an option for users to vote in reviews that they found useful. Figure 2 relates the closeness centrality to the total useful votes received by a user. We observe that there are roughly three situations: users with low centrality and low usefulness; users with high centrality and low usefulness; and users with high centrality and high usefulness. There is not such a configuration in which users with high usefulness have low centrality. This is a motivation to consider the network structure as an evidence for profile of reviewers.

²www.yelp.com/dataset_challenge




Figure 2. Correlation between closeness centrality and the number of useful votes for a reviewer.

The third set of users cited, a minority, corresponds to reviewers that influence a lot of people. However, few useful votes might indicate that those reviewers provide important experiences for only certain kind of people. Thus, it is necessary to investigate further those reviewers in order to present the information they provide to the ones interested.

3.1. Homophilly Investigation

Aiming to validate the presence of homophilly in the network, it was conducted the following experiment: for each edge on the network, the business overlap was computed considering the jaccard similarity of reviewed establishments; a similar process was performed for a modified graph with the same nodes and number of edges, which were randomly assigned to pairs. The empirical cumulative distribution of the overlap values are depicted on figure 3. We observe a clear difference between the real and the random graphs — the second practically do not contain positive overlaps, while the first present some.




Figure 3. Empirial cumulative distribution of business overlap on real and random graphs.

3.2. Temporal Effect

Another important aspect when considering similarity of opinions is the date of the review. People that visit a place in the same day are more likely to experience the same events and to have approximate opinions. The figure 4 contains the correlation reviews given to the same establishment by friends in the same day 4a, not friends in the same day 4b, friends in different days 4c and not friends in different days 4d. The results are normalized — each cell represents the percentage of co-occurences for the given column. For example, in figure 4a, if one individual rates 1, there is a proportion of 70% of their friends who rated 1, nearly 30% who rated 2 and practically 0% who rated 3, 4 or 5.

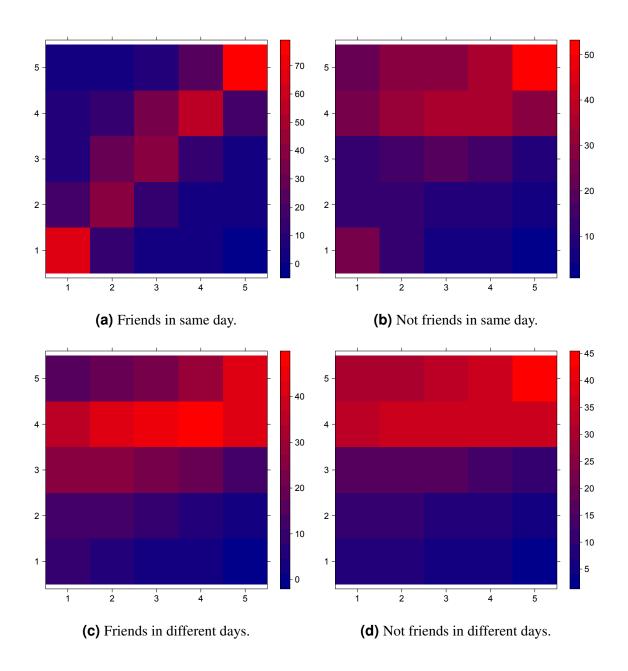


Figure 4. Correlation of votes between pair of users percentual by column.

We can observe a gradative pattern from a strong correlation of ratings to almost no correlation, in which the proportion of votes on each value rules the intensity. Another interesting observation is that there is a greater agreement between people in the same day than friends in alternative days. This may be related to the fact that people visiting a certain place in the same date have something in common.

3.3. Hidden Relationships

RECAST[Vaz de Melo et al. 2013] is an algorithm that identifies relationships in dataset of encounters of people and classifies the relationship between each pair of individuals as friend, bridge, acquaintance or random. Applying the method for reviews written in the

same date, supposing that the day of the review is the same of the attendance, we obtain the result presented on table 1.

Relationship	# Friends	# Bridges	# Acquaintances	# Random
Friends on Yelp	69	21	689	634
Not Friends on Yelp	16	3	5876	13205

Table 1: Discovered relationships using RECAST.

We can observe a great value for acquaintances for Yelp users which are not friends. This indicates the potential of hidden relationships, which might be an indication of some similarity of opinions.

4. Recommendation of Reviewers

Collaborative filtering is an algorithm which combines the evaluation of users in a bunch of topics in order to predict users rating in unseen ones. In this process, the evaluated elements have a set of attributes that define them and are closely related to their scores. The users, on the other hand, have a representative vector which are coefficients for the attributes and informes the importance given for each one of them. Considering this model, it is possible to discover close friends, which does not necessarily have to be friends in Yelp, by filtering those with small euclidian distance.

The algorithm basically solves an optmization problem which consists of:

$$min_{x^{1},\dots,x^{n_{e}},\theta^{1},\dots\theta^{n_{u}}} \sum_{(i,j):r(i,j)=1} ((\theta^{j})^{T}x^{i} - y^{(i,j)})^{2} + \lambda \sum_{i=1}^{n_{e}} \sum_{k=1}^{n} (x_{k}^{i})^{2} + \lambda \sum_{j=1}^{n_{u}} \sum_{k=1}^{n} (\theta_{k}^{j})^{2}$$

In this formula, x^i is the vector of attributes for the element i, θ^j is the coefficient vector for user j, r(i,j) is 1 if user j rated element i and 0 otherwise, $y^{(i,j)}$ is the rating given by user j to element i, n_e is the number of evaluated elements, n_u is the number of users, n is the number of attributes, i.e., the dimension of x and θ and λ is a regularization factor. This expression tries to find the set of x^i , $i=1,...,n_e$, and θ^j , $j=1,...,n_u$ which dot product $\theta^j \cdot x^i$ approximates the existing ratings $y^{(i,j)}$. The last two terms simply avoids the increase of the calculated parameters in module.

In the following, a clustering algorithm is performed on the set of obtained θ^j , $j = 1, ..., n_u$. Then, we recommend reviewers from the same cluster.

5. Related Work

The importance of recommending differently to each user has recently being addresed in the scientific community [Moghaddam et al. 2011, Tang et al. 2013]. They focus on review assessment, while our work is directed to reviewer recommendation. We believe users's opinion is the most important factor when finding a review useful.

Reviews, in general, are more volatile than reviewers. Recent studies found that review composition influence ranges from other's opinion to weather [Bakhshi et al. 2014, Sipos et al. 2014]. The aggregated pattern of a reviewer, then, is a more solid information to consider when performing recommendation.

6. Conclusions and Future Work

References

- Anderson, M. and Magruder, J. (2012). Learning from the crowd: Regression discontinuity estimates of the effects of an online review database. *The Economic Journal*.
- Bakhshi, S., Kanuparthy, P., and Gilbert, E. (2014). Demographics, weather and online reviews: A study of restaurant recommendations. WWW '14.
- Cone Communications Inc. (2011). Online influence trend tracker release and fact sheet.
- Moghaddam, S., Jamali, M., and Ester, M. (2011). Review recommendation: Personalized prediction of the quality of online reviews. In *Proceedings of the 20th ACM International Conference on Information and Knowledge Management*, CIKM '11, pages 2249–2252, New York, NY, USA. ACM.
- Sipos, R., Ghosh, A., and Joachims, T. (2014). Was this review helpful to you?: It depends! context and voting patterns in online content. In *Proceedings of the 23rd International Conference on World Wide Web*, WWW '14, pages 337–348, Republic and Canton of Geneva, Switzerland. International World Wide Web Conferences Steering Committee.
- Tang, J., Gao, H., Hu, X., and Liu, H. (2013). Context-aware review helpfulness rating prediction. In *Proceedings of the 7th ACM Conference on Recommender Systems*, RecSys '13, pages 1–8, New York, NY, USA. ACM.
- Vaz de Melo, P. O., Viana, A. C., Fiore, M., Jaffrès-Runser, K., Le Mouël, F., and Loureiro, A. A. (2013). Recast: telling apart social and random relationships in dynamic networks. In *Proceedings of the 16th ACM international conference on Modeling, analysis & simulation of wireless and mobile systems*, pages 327–334. ACM.