

CreateApkwWindow.xaml : UserControl

```
public static bool IsMainActive { get; set; }

public event EventHandler DialogClosed;

private bool _allowClose;

static public void DefaultGotAndLostEvent(TextBox textBox, string defaultText)

static public void DefaultGotAndLostEvent(RichTextBox textBox, string defaultText)

public new bool? ShowDialog()

public void CloseDialog()

private void NewArchiveName_GotFocus(object sender, RoutedEventArgs e)

private void NewArchiveName_LostFocus(object sender, RoutedEventArgs e)

private void NewArchiveDescription_GotFocus(object sender, RoutedEventArgs e)

private void NewArchiveDescription_LostFocus(object sender, RoutedEventArgs e)

private void Border_MouseLeftButtonDown(object sender, MouseButtonEventArgs e)

private async void CreateApkButton_Click(object sender, MouseButtonEventArgs e)

private bool ValidateName()


private static string GetRichTextBoxValue(RichTextBox textBox)


private void CloseButton_Click(object sender, MouseButtonEventArgs e)


private void Switch_Checked(object sender, RoutedEventArgs e)

private void Switch_Unchecked(object sender, RoutedEventArgs e)

private void ApplicationDataHandler_AdminRightsChanged(bool newValue)
```

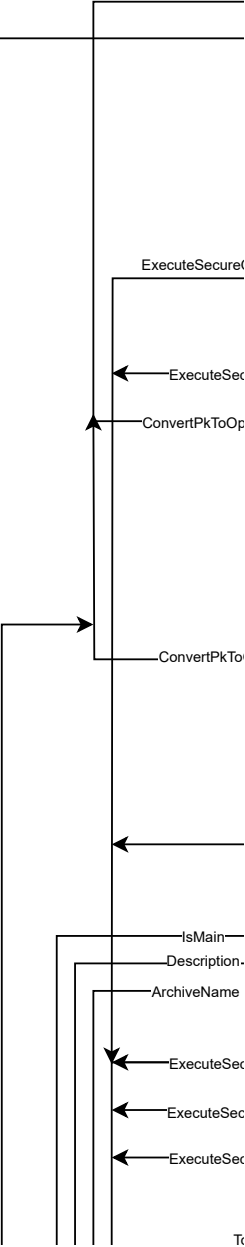

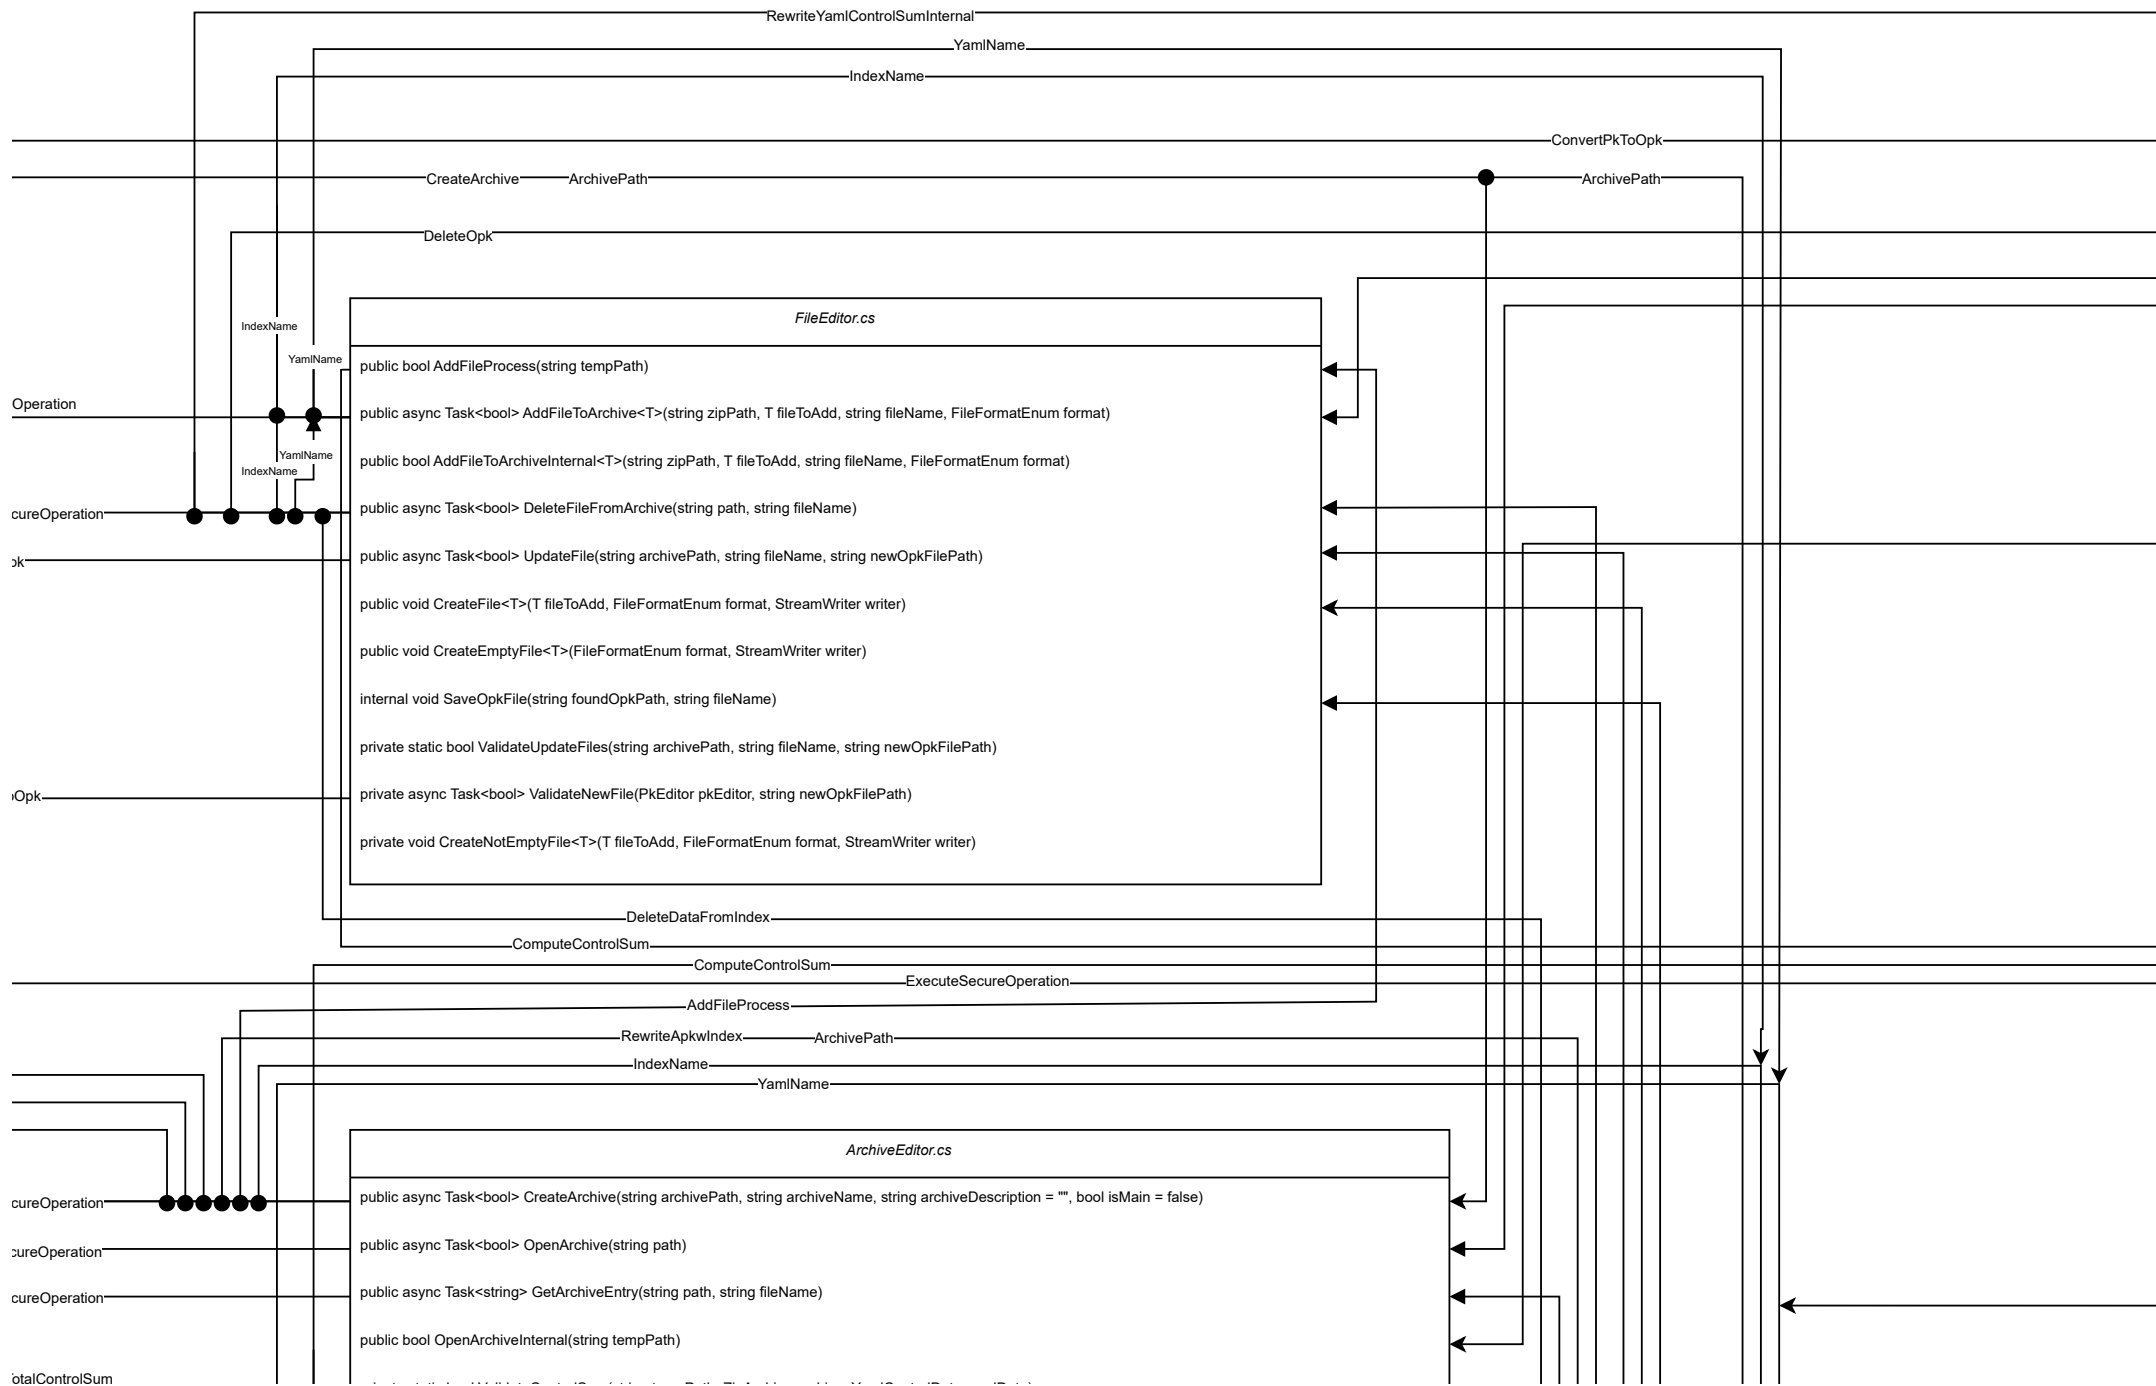

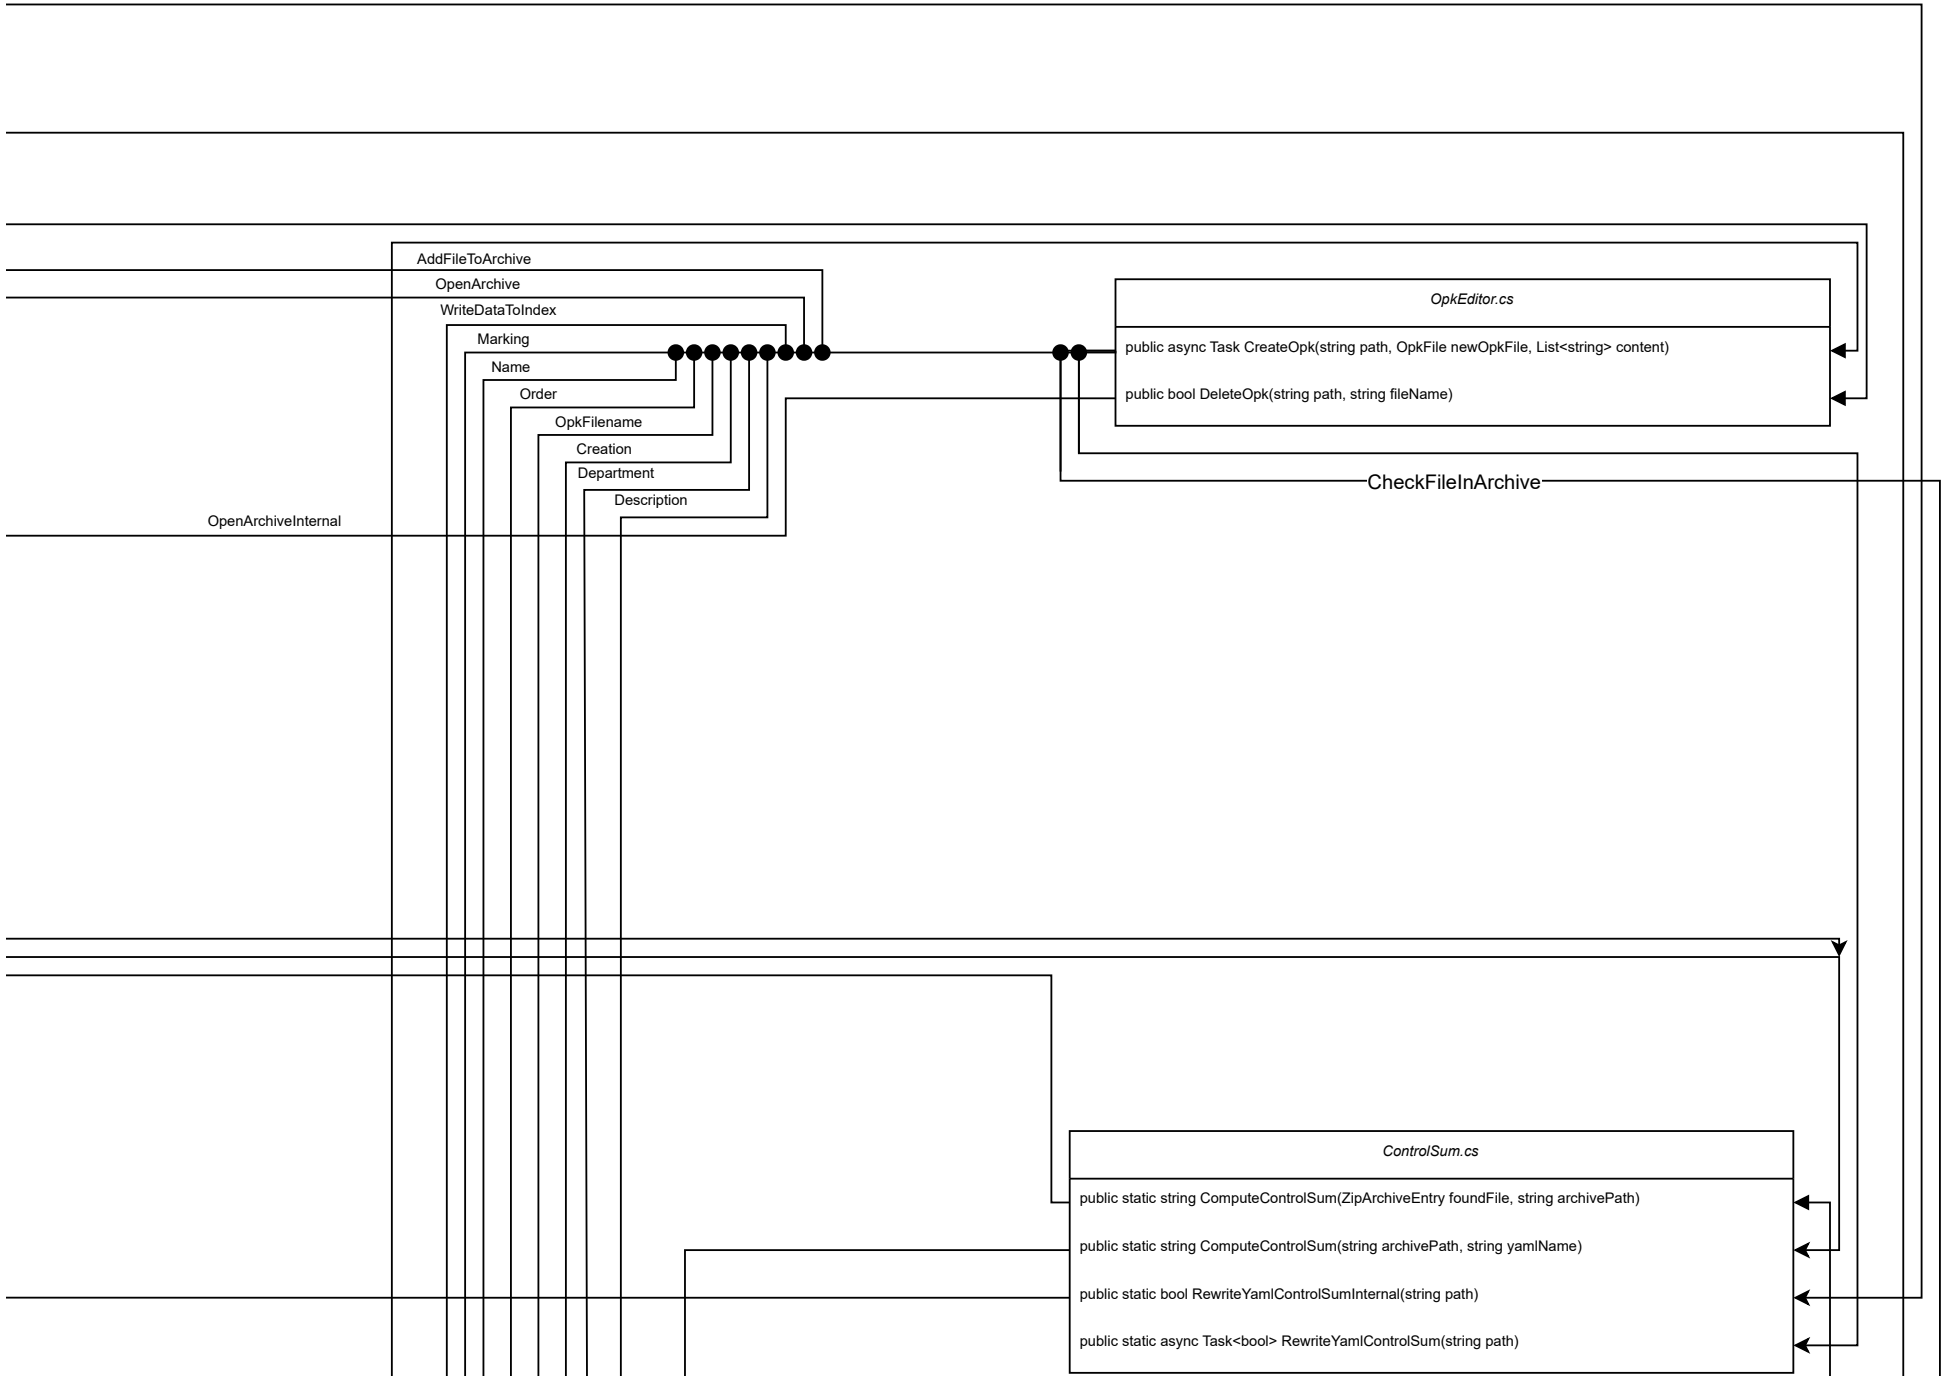

```
TableAllArchivesControl.xaml : UserControl

public event EventHandler<MouseButtonEventArgs> ArchiveSelected;

internal static JArray indexData;

private static bool visibleLeftColumn = true;

protected virtual void OnFileSelected(MouseButtonEventArgs e)

private void InitializeIndex()

private async Task LoadFilesToDataGridAsync()

private async void MenuButton_PreviewMouseDownAsync(object sender, MouseButtonEventArgs e)

private void CreateApk_PreviewMouseDownAsync(object sender, MouseButtonEventArgs e)

private async void Dialog_Closed(object sender, EventArgs e)

private async void apkFilesDataGrid_PreviewMouseDoubleClick(object sender, MouseButtonEventArgs e)
```

```
TableApkArchiveControl.xaml : UserControl

public event PreviewMouseDownEventHandler StartMeasureResistanceButtonPreviewMouseDown;

private static bool visibleLeftColumn = true;

private string _archiveName { get; set; }

private bool isMain { get; set; }

private OpkFile opkFile { get; set; }

private async Task<bool> IsArchiveMain(string archiveName)

private async Task ShowOpkFiles()

private async void Border_PreviewMouseDownAsync(object sender, MouseButtonEventArgs e)


private async void Add_PreviewMouseDown(object sender, MouseButtonEventArgs e)

private async Task TryConvertPkToOpkAsync(string archiveDirectory, PkEditor pkEditor, string filePath)





private async void Update_PreviewMouseDown(object sender, MouseButtonEventArgs e)

private static OpenFileDialog OpenPkFile(bool multiselect)

private async Task TryUpdateFileAsync(FileEditor fileEditor, string newOpkFile, string archiveDirectory)
```

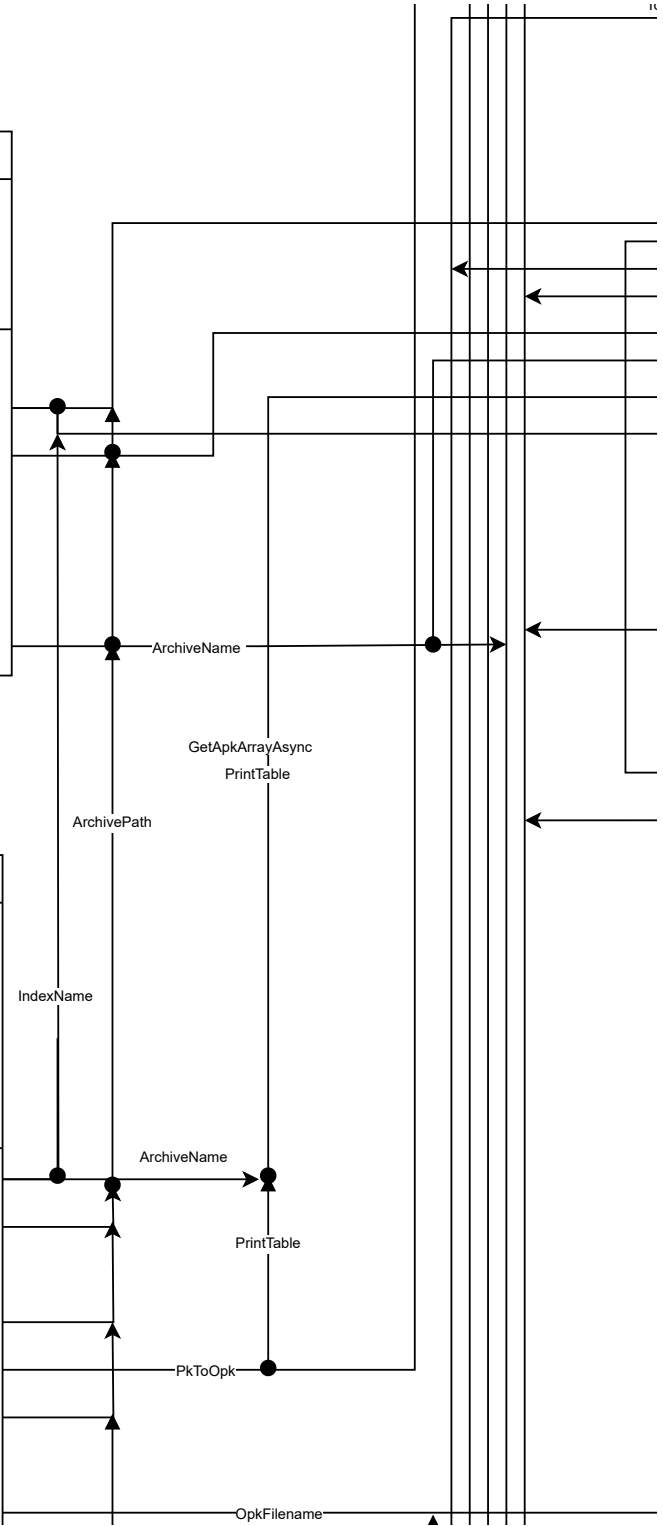



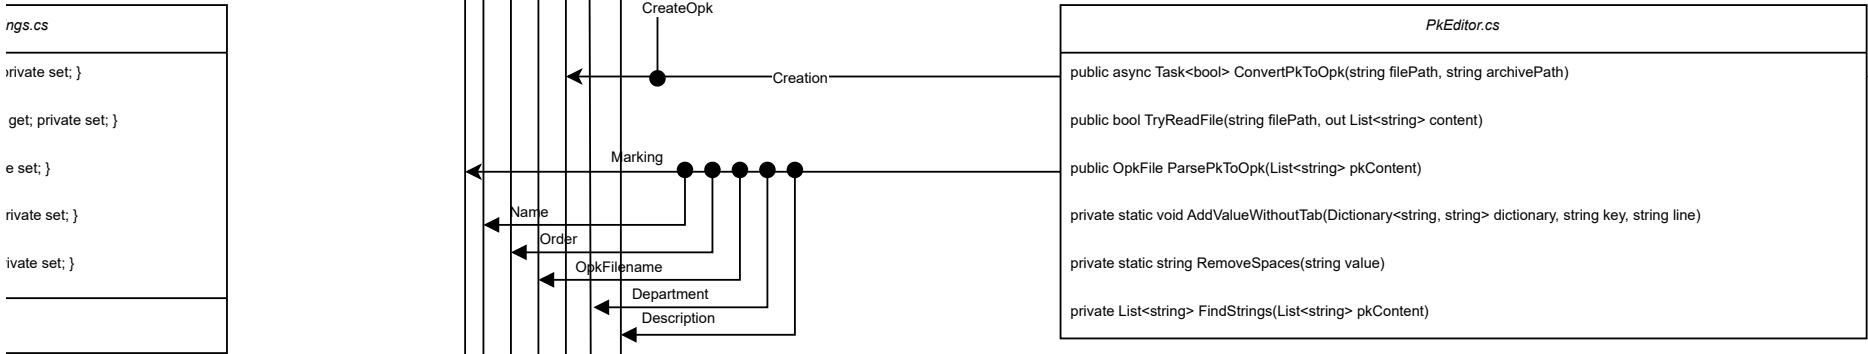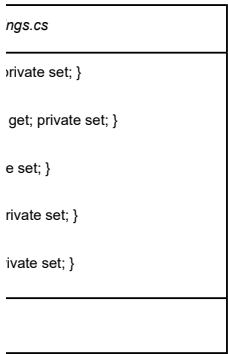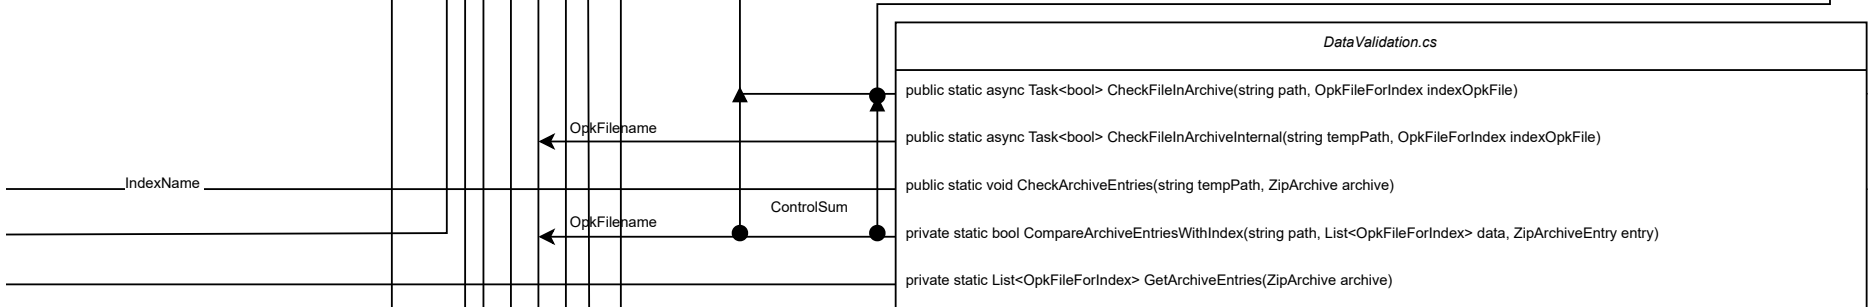

```
private static void ValidatePkFile(string newOpkFile)
```

```
private async void Delete_PreviewMouseDown(object sender, MouseButtonEventArgs e)
```

```
private void opkFilesDataGrid_SelectionChanged(object sender, SelectionChangedEventArgs e)
```

```
private void ApplicationDataHandler_AdminRightsChanged(bool newValue)
```

```
private async void SaveAs_PreviewMouseDown(object sender, MouseButtonEventArgs e)
```

```
private async Task<string> GetOpkPath()
```

```
private async void viewButton_PreviewMouseDown(object sender, MouseButtonEventArgs e)
```

```
private async void viewOpkFilesDataGrid_PreviewMouseDoubleClick(object sender, MouseButtonEventArgs e)
```

ArchivePath

OpkFilename

DeleteFil

GetArchivel

SaveOpkFili

OpkFilename

OpkFilename

OpkFilename


OpkFilename

public string Ar

public string Di

public bool IsV

public string Tc

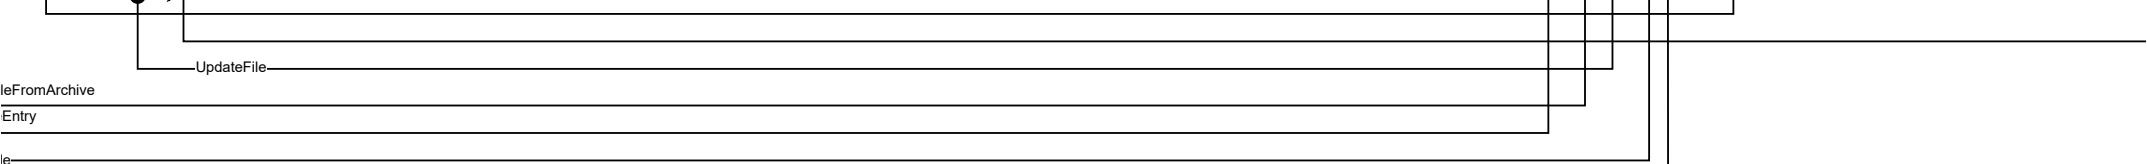

```
ArchiveEncryption.cs

private static readonly Dictionary<string, string> _tempPaths = new Dictionary<string, string>();

public async Task<T> ExecuteSecureOperation<T>(Func<string, Task<T>> operation, string archivePath, bool isNewArchive = false)

public static string InitializeArchiveDecryption(string encryptedArchivePath)

private static string ChoseTempPath(string archiveName)

private static string CreateTempPath(string archiveName, bool needCreate = false)

private static void RemoveTempFile(string archiveName, string tempPath)

private void EncryptArchiveProcess(string archivePath, string archiveName, string tempPath)

private void DecryptArchiveProcess(string archivePath, string archiveName, string tempPath)
```

```
ApkArchive.cs

rchiveName { get; set; }

escription { get; set; }

/main { get; set; }
```

```
YamlControlData

otalControlSum { get; set; }
```



