

Generating Images Using a Deep Convolutional GAN



Author: Kai Deng

Supervisor: Serhiy Yanchuk

A thesis submitted in partial fulfilment of the
requirements for the degree of
MSc Mathematical Modelling and Machine Learning

School of Mathematical Sciences,
University College Cork,
Ireland

September 2024

Declaration of Authorship

This report is wholly the work of the author, except where explicitly stated otherwise. The source of any material which was not created by the author has been clearly cited.

Date: 13/09/2024

Signature: Kai Deng

Acknowledgements

I would like to express my deepest gratitude to my supervisor, Dr Serhiy Yanchuk, for his invaluable guidance, continuous support, and insightful feedback throughout the course of my research. His expertise and encouragement have been instrumental in the successful completion of this thesis.

Abstract

Generative Adversarial Network (GAN) has gained attention for its ability to generate realistic data in various fields. In this thesis, I explore the performance of GAN in generating high-quality cat images, utilizing the Animal Faces-HQ dataset, which includes 16,130 high-resolution images. The focus is on comparing different architectural designs, specifically convolutional and dense layers, and investigating how data augmentation techniques influence model performance.

The findings suggest that convolutional architectures offer advantages in capturing spatial features, contributing to improved image quality. While data augmentation introduces diversity into the dataset, it also presents optimization challenges that can complicate the training process. These results highlight important considerations for future studies aiming to enhance GAN-generated images. The insights gained from this work may guide further exploration of more advanced architectures and larger datasets.

Contents

1	Introduction	6
2	Historical Models of Image Generation	8
2.1	Noise Contrastive Estimation (NCEs)	8
2.1.1	NCE Architecture	9
2.1.2	NCE Objective Function	10
2.1.3	Comparison with GANs	11
2.1.4	Applications of NCE	12
2.1.5	Limitations of NCE	13
2.2	Variational Autoencoders (VAEs)	13
2.2.1	VAE Architecture	14
2.2.2	VAE Objective Function	14
2.2.3	Comparison with GANs	15
2.2.4	Applications of VAEs	16
2.2.5	Limitations of VAEs	16
2.3	Diffusion Models	17
2.3.1	Diffusion Model Architecture	17
2.3.2	Diffusion Model Objective Function	18
2.3.3	Comparison with GANs	18
2.3.4	Applications of Diffusion Models	19
2.3.5	Limitations of Diffusion Models	20
3	Theoretical Background	22
3.1	Generative Adversarial Networks (GANs)	22
3.2	GAN Architecture	23

3.3	Objective Function of GAN	23
3.3.1	Discriminator's Loss Function	24
3.3.2	Generator's Loss Function	24
3.3.3	Modification for Vanishing Gradient Problem	24
3.4	GAN Training Process	25
3.4.1	Distribution Changes During GAN Training	26
3.4.2	Mathematical Formulation during GAN Training	27
3.5	Evaluating GAN Performance	30
3.6	Limitations of Accuracy in Evaluating GANs	31
4	Results and Discussion	33
4.1	Standard GAN Versus Other GAN Realizations	33
4.2	GAN With Convolutional or Dense layers	34
4.3	Exploring Layer Depth	38
4.4	Impact of Data Augmentation on Model Performance	39
4.5	Applying the Model to the Animal Faces-HQ Dataset	40
4.5.1	Model Structure and Training	40
4.5.2	Generated Results	43
4.6	Discussion	45
A	Appendix	47

List of Figures

2.1	NCE Architecture.	10
2.2	VAE Architecture.	14
2.3	Diffusion Model Architecture.	18
3.1	GAN Architecture.	23
3.2	Comparison of $\log(1 - D)$ and $-\log(D)$.	25
3.3	Diagram of GAN's Training Process.	26
3.4	GAN Training Accuracy over Epochs	31
3.5	Generated Images from GAN	32
4.1	Generator Architecture with Dense and Convolutional Layers	35
4.2	Discriminator Architecture with Dense and Convolutional Layers	36
4.3	Comparison of GAN Performance at 3000 Epochs	36
4.4	FID Scores Across 3000 Epochs	37
4.5	Cat Faces Generated by GAN	44

List of Tables

4.1	Average FID Scores for Different GAN Architectures (Lower is Better)	38
4.2	Average FID Scores for Different Data Augmentation Techniques	39

List of Codes

A.1	GAN Model with Dense Layers	47
A.2	GAN Model with Convolutional Layers	51
A.3	Explore Data Augmentaion (rotation 10, width and height shift 0.1 and horizontal flip)	55
A.4	Explore Data Augmentation (rotation 10, width and height shift 0.1)	60
A.5	Explore Data Augmetation (width and height shift 0.1)	64
A.6	Explore Data Augmetation (width and height shift 0.05)	69
A.7	Explore GAN with 4 Convolutional Layers in Generator and 3 Convolutional Layers in Discriminator	73
A.8	Explore GAN with 5 Convolutional Layers in Generator and 3 Convolutional Layers in Discriminator	78
A.9	Explore GAN with 6 Convolutional Layers in Generator and 3 Convolutional Layers in Discriminator	82
A.10	Explore GAN with 6 Convolutional Layers in Generator and 4 Convolutional Layers in Discriminator	87
A.11	Explore GAN with 6 Convolutional Layers in Generator and 5 Convolutional Layers in Discriminator	92
A.12	Explore GAN with 6 Convolutional Layers in Generator and 6 Convolutional Layers in Discriminator	97
A.13	Apply Animal Faces-HQ Dataset	102

Chapter 1

Introduction

Generative Adversarial Networks (GANs) have emerged as a transformative tool in generative modeling, framing the problem as a competition between two networks: a generator that creates synthetic data from noise, and a discriminator that differentiates between real and generated data [1]. Since their introduction in 2014, GANs have found applications in fields such as materials science, radiology, and computer vision [2], [3], [4]. For instance, CycleGAN has been applied in medical imaging, enhancing tasks like liver lesion classification through synthetic image augmentation, outperforming traditional methods in sensitivity and specificity [5]. Similarly, StyleGAN has shown effectiveness in image deformation and style transfer [6], further expanding the reach of GANs in the computer vision field, where they generate data without explicitly modeling probability density functions [3].

However, despite their success, training GANs presents notable challenges, including issues like mode collapse, training instability, and the high computational demands required for effective performance. Evaluating GANs is also complex, as traditional metrics such as accuracy are insufficient to measure the quality and diversity of generated data. These difficulties have driven the development of various architectures and training methods aimed at improving the stability and effectiveness of GANs.

The objective of this thesis is to contribute to a clearer understanding of the factors that influence GAN performance, particularly in generating real-

istic images. For this purpose, I use the Animal Faces-HQ (AFHQ) dataset, containing 16,130 high-resolution images at 512×512 pixels, to train a GAN model specifically for generating realistic cat images. The high resolution presents both opportunities and challenges, as it requires careful attention to the model’s architecture and training to avoid overfitting or underfitting.

This thesis is structured as follows: Chapter 1 introduces the research background, the motivation behind this work, and outlines the key objectives of the thesis. Chapter 2 offers an overview of previous models for image generation, including methods such as Noise Contrastive Estimation, Variational Autoencoders, and Diffusion Models, emphasizing their architectures, objectives, and applications. Chapter 3 focuses on Generative Adversarial Networks (GANs), discussing their theoretical foundation, including key concepts such as objective functions and training dynamics. Chapter 4 describes the experimental work, covering model selection, architecture exploration, the effects of data augmentation, and the application of the GAN model to the Animal Faces-HQ dataset. Lastly, it presents the results, their implications, and suggests directions for future research.

Chapter 2

Historical Models of Image Generation

This chapter provide an overview of three important generative modeling techniques: Noise Contrastive Estimation (NCE), Variational Autoencoders (VAEs), and Diffusion Models. These models have each played a significant role in the evolution of generative modeling and continue to influence modern approaches in the field.

2.1 Noise Contrastive Estimation (NCEs)

Noise Contrastive Estimation (NCE) was introduced in 2010 by Gutmann and Hyvärinen as a method for estimating parameters in unnormalized probabilistic models. It offers an efficient alternative to Maximum Likelihood Estimation (MLE), particularly in cases where MLE can become computationally expensive, especially with large-scale models. NCE reframes the challenge of normalizing probability distributions into a more manageable binary classification problem [7].

The core idea behind NCE is to treat MLE as a binary classification task. Traditionally, training models for unnormalized probability distributions using MLE involves calculating the partition function, which can be computationally infeasible for large datasets. NCE mitigates this difficulty

by incorporating noise samples drawn from a known distribution. The model is then trained to differentiate between real data and noise samples, with higher probabilities assigned to real data and lower probabilities to noise. This approach allows the model to learn the data distribution without the need for explicit normalization [8].

2.1.1 NCE Architecture

In NCE, the likelihood of a data point x is reformulated as the probability that it comes from the real data distribution rather than from the noise distribution. As depicted in Figure 2.1, the architecture of a typical NCE model includes an input layer, a hidden layer, and an output layer. The input layer receives both real and noise samples, while the hidden layer learns representations of these samples. The output layer functions as a binary classifier, producing probabilities that indicate whether a given sample is real or noise.

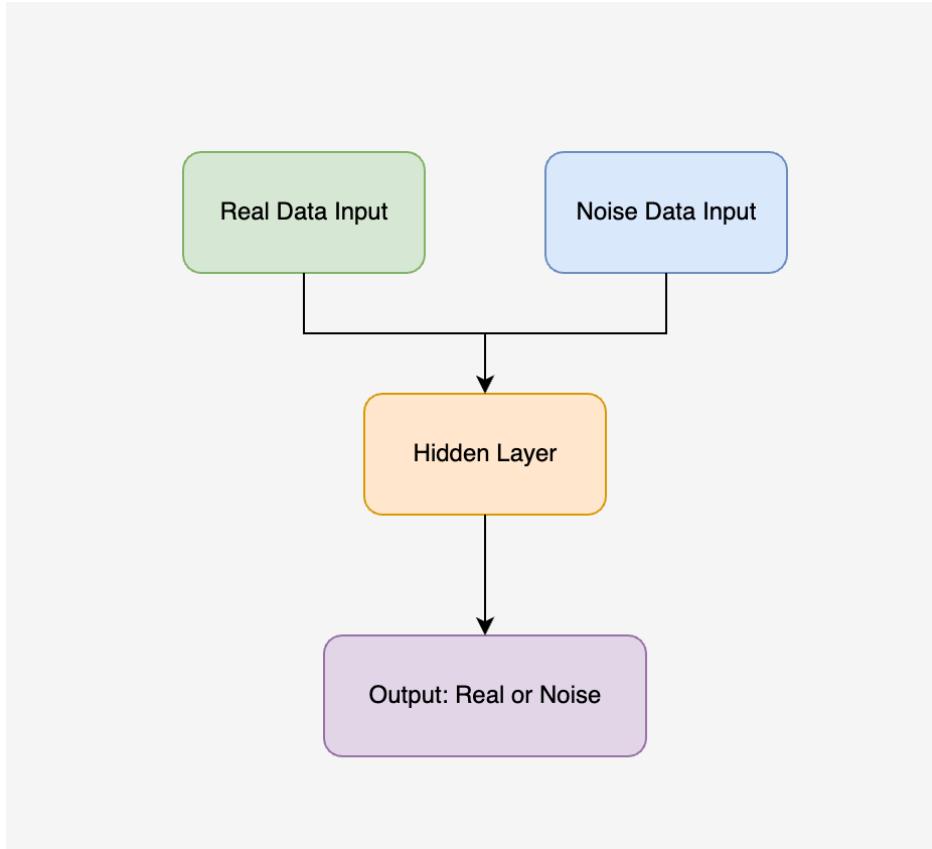


Figure 2.1: NCE Architecture.

- **Data and Noise Samples:** NCE introduces noise samples from a known distribution to compare with actual data. These noise samples act as negative examples in the classification task, while the real data serves as positive examples [7].
- **Binary Classification:** The task of differentiating between real and noise samples is framed as a binary classification problem, which can be optimized using standard logistic regression techniques [9].

2.1.2 NCE Objective Function

In NCE, the probability $P(y = 1|x)$, where $y = 1$ indicates that x is a real sample, is defined as:

$$P(y = 1|x) = \frac{p_\theta(x)}{p_\theta(x) + kp_{\text{noise}}(x)} \quad (2.1)$$

Where $p_\theta(x)$ is the unnormalized probability assigned to the sample x by the model, $p_{\text{noise}}(x)$ is the probability assigned to the noise sample, and k is the ratio of noise samples to real samples.

The corresponding probability that a sample x is from the noise distribution is given by:

$$P(y = 0|x) = \frac{kp_{\text{noise}}(x)}{p_\theta(x) + kp_{\text{noise}}(x)} \quad (2.2)$$

The NCE objective then seeks to maximize the log-probabilities of correctly classifying real and noise samples:

$$\mathcal{L}_{NCE} = \sum_{i=1}^N \left[\log P(y = 1|x_i) + \sum_{j=1}^k \log P(y = 0|x_j) \right] \quad (2.3)$$

This method circumvents the need for computing the partition function, which is typically required in Maximum Likelihood Estimation (MLE), making NCE particularly useful for large-scale models [8].

2.1.3 Comparison with GANs

Noise Contrastive Estimation (NCE) and Generative Adversarial Networks (GANs) are both prominent methods in generative modeling, but they take different approaches to training and model estimation.

- **Training Stability:** One of NCE’s key advantages over GANs is the stability it provides during training. GANs frequently suffer from challenges such as mode collapse and instability due to the adversarial nature of the training process, where the generator and discriminator are pitted against each other. NCE, by contrast, frames the training process as a straightforward binary classification task, which tends to be more stable and can be optimized with logistic regression [9].
- **Computational Efficiency:** Training GANs requires simultaneously

optimizing two models—the generator and the discriminator—which can lead to higher computational costs, particularly when tuning their interactions for better performance. NCE, on the other hand, simplifies the problem by reducing it to a comparison between real data and noise samples, avoiding the adversarial framework and offering a more computationally efficient solution, especially for large-scale models [10].

- **Handling Unnormalized Models:** NCE is particularly suited for training unnormalized probabilistic models, where computing the partition function is impractical or impossible. GANs, however, are focused on generating realistic samples and, while they do not require explicit normalization, they do not address the problem of unnormalized models as directly as NCE does [11].
- **Model Interpretability:** In NCE, the model explicitly learns to estimate the probability of real data versus noise, providing insights into the data distribution. In comparison, GANs focus on generating realistic samples without explicitly modeling probabilities, which can make their internal latent space less interpretable than that of NCE-based models.
- **Applications in Language Models and Word Embeddings:** NCE is particularly beneficial in tasks such as word embeddings and large-scale language models, where normalizing the likelihood function over vast vocabularies is computationally prohibitive. GANs have been applied in text generation, but NCE’s efficiency in handling large-scale vocabulary models makes it more suitable for these problems [11].

2.1.4 Applications of NCE

NCE is highly effective in a variety of machine learning tasks, particularly those that involve large datasets and unnormalized models:

- **Word Embeddings:** NCE is widely used in training word embeddings, where the size of the vocabulary makes normalization computationally infeasible.

- **Language Models:** Beyond word embeddings, NCE has been applied to training large-scale language models, where traditional likelihood-based methods may become computationally expensive.
- **Energy-Based Models:** NCE is also effective in training energy-based models, which typically require an intractable partition function for normalization.

NCE allows models to scale efficiently, making it an invaluable tool in areas ranging from natural language processing to computer vision.

2.1.5 Limitations of NCE

While NCE has proven to be a powerful estimation technique, it is not without limitations. A key challenge lies in selecting an appropriate noise distribution. Poor choices in this regard can lead to suboptimal parameter estimates and slower convergence during training [8].

- **Noise Distribution Sensitivity:** The success of NCE relies heavily on choosing a noise distribution that is sufficiently different from the real data distribution. If the noise distribution is poorly chosen, the model may struggle to differentiate between real and noise samples [8].
- **Handling Complex Data Distributions:** NCE may encounter difficulties with highly complex data distributions, particularly in cases where defining an appropriate noise distribution is challenging [8].

2.2 Variational Autoencoders (VAEs)

Variational Autoencoders (VAEs), introduced in 2013, represent one of the foundational approaches to generative modeling. The primary goal of VAEs is to model the underlying distribution of data by learning a compressed latent representation, denoted as z , from the input data x .

2.2.1 VAE Architecture

VAEs consist of two main components: an encoder and a decoder. The encoder maps input data into a latent space, where the latent variables are generally assumed to follow a Gaussian distribution. This assumption simplifies the training process and enables techniques such as the reparameterization trick, which facilitates backpropagation through stochastic layers [12]. The decoder then reconstructs the input data from the latent variables, ensuring that the essential characteristics of the data distribution are captured.

As illustrated in Figure 2.2, the VAE architecture comprises:

- **Encoder:** The encoder takes the input data x and compresses it into a latent representation z . The latent variables are sampled from a Gaussian distribution, which aids in simplifying the optimization process.
- **Decoder:** The decoder reconstructs the original data x' from the latent representation z , aiming to produce data that closely resembles the input.

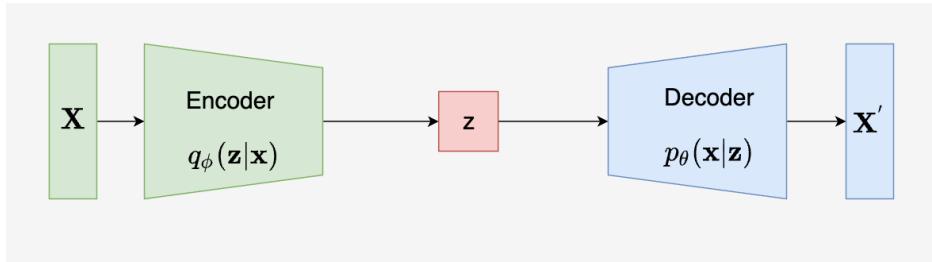


Figure 2.2: VAE Architecture.

2.2.2 VAE Objective Function

The VAE loss function is designed to balance two objectives: accurate data reconstruction and regularization of the latent space. The total loss combines a reconstruction loss with a Kullback-Leibler (KL) divergence term, which helps the model learn a smooth, continuous representation of the latent space [13].

The VAE aims to maximize the variational lower bound, encouraging both accurate reconstruction and a well-structured latent space. This, in turn, enables the model to generate new data by sampling from the latent space and reconstructing it using the decoder.

The loss function of a VAE is expressed as follows:

$$\mathcal{L} = \mathbb{E}_{q_\phi(z|x)}[\log p_\theta(x|z)] - D_{KL}(q_\phi(z|x)\|p(z)) \quad (2.4)$$

Where:

- \mathcal{L} : The total loss that the model seeks to minimize.
- $\mathbb{E}_{q_\phi(z|x)}[\log p_\theta(x|z)]$: This term represents the expected log-likelihood of the reconstructed data x' given the latent variable z . The distribution $q_\phi(z|x)$ corresponds to the encoder's approximation of the posterior, while $p_\theta(x|z)$ represents the decoder's likelihood of reconstructing the input data.
- $D_{KL}(q_\phi(z|x)\|p(z))$: The KL divergence measures the difference between the encoder's learned latent distribution $q_\phi(z|x)$ and the prior distribution $p(z)$, which is typically Gaussian.

2.2.3 Comparison with GANs

When compared to Generative Adversarial Networks (GANs), VAEs exhibit several advantages. One of the most notable strengths of VAEs is their training stability. In contrast to GANs, which involve training both a generator and a discriminator—a process that can lead to issues such as mode collapse—VAEs have a single objective function. This objective combines reconstruction loss and KL divergence, making the training process more straightforward and less prone to instability [12].

Another key strength of VAEs is their ability to generate smooth transitions between data points. This capability is particularly valuable for applications that require meaningful interpolation in the latent space, such as image generation, anomaly detection, and data imputation [14][15]. GANs,

on the other hand, do not explicitly model the latent space, which can limit their interpretability and flexibility in certain tasks.

However, GANs are often favored for generating sharper and more realistic images, particularly in high-resolution tasks. The adversarial loss in GANs encourages the generator to produce outputs that closely resemble real data, while VAEs, due to their reliance on Gaussian priors, tend to generate slightly blurrier images [16]. Nonetheless, VAEs offer greater flexibility and scalability, as they can be trained using standard gradient descent methods and do not require the complex adversarial framework inherent to GANs.

2.2.4 Applications of VAEs

The versatility of VAEs extends to a wide range of applications, many of which benefit from the structured latent space that VAEs provide:

- **Image Generation:** VAEs can generate new images by sampling from the latent space and decoding the latent vectors into realistic image representations.
- **Anomaly Detection:** VAEs are often used to identify outliers in data by examining reconstruction errors. Data points with high reconstruction loss may be flagged as anomalies.
- **Data Imputation:** VAEs are capable of filling in missing data by reconstructing the incomplete data from latent representations, making them useful for handling datasets with gaps or missing values.

2.2.5 Limitations of VAEs

While VAEs have proven effective in many applications, they also have certain limitations:

- **Blurred Outputs:** Due to the Gaussian prior assumption in the latent space, VAEs often generate blurrier outputs compared to GANs, which may affect performance in tasks requiring high-resolution and sharp images [16].

- **Difficulty with Discrete Data:** VAEs struggle to effectively model discrete data, as backpropagation through continuous latent variables is not well-suited to handle discrete structures [17].
- **Limited Diversity:** VAEs may not capture the full complexity and diversity of the data distribution as effectively as GANs, particularly when generating high-resolution images [18].

2.3 Diffusion Models

Diffusion models, emerging in the early 2020s, represent a significant advancement in generative modeling. These models progressively add noise to data and then learn to reverse this process, effectively "denoising" it back to its original form. This iterative process distinguishes diffusion models from traditional approaches like GANs and VAEs [19].

2.3.1 Diffusion Model Architecture

The core idea behind diffusion models relies on a Markov chain where noise is added in the forward process, starting from a simple distribution (e.g., Gaussian), and reversed through a learned denoising mechanism [20], [21]. This approach has proven effective in generating high-quality samples across various domains, such as image synthesis, audio generation, and medical imaging [22], [23]. In several benchmarks, diffusion models have outperformed GANs [19], [24].

The process involves two key steps, as shown in Figure 2.3:

- **Forward Process:** Gradually adds Gaussian noise to data x_0 , creating noisy versions of the data x_1, x_2, \dots, x_T . Each step increases the noise level, leading to a completely noisy version z .
- **Reverse Process:** The model learns to reverse the noise addition process, starting from the fully noisy version z , and progressively denoising it to recover data that resembles the original input x_0 .

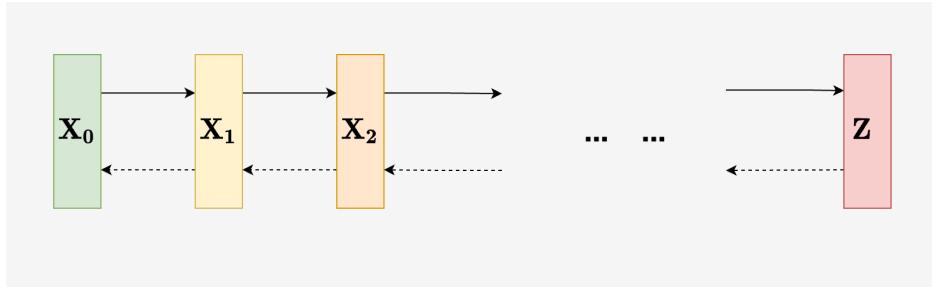


Figure 2.3: Diffusion Model Architecture.

2.3.2 Diffusion Model Objective Function

The training objective for diffusion models is to minimize the difference between the real data distribution and the distribution of generated data across all time steps:

$$L = \sum_{t=1}^T \mathbb{E}_{x_0, \epsilon} [\|\epsilon - \epsilon_\theta(x_t, t)\|^2] \quad (2.5)$$

where:

- L : The loss function to be minimized.
- T : The total number of time steps in the diffusion process.
- x_0 : The original data sample.
- x_t : The data at time step t , after adding noise.
- ϵ : The noise added to the data at each step.
- $\epsilon_\theta(x_t, t)$: The model's estimate of the noise at time step t .

2.3.3 Comparison with GANs

Diffusion models and Generative Adversarial Networks (GANs) represent two distinct approaches in generative modeling, each with its strengths and weaknesses. A key advantage of diffusion models is their training stability.

Unlike GANs, which often suffer from unstable dynamics due to the adversarial competition between the generator and discriminator, diffusion models follow a simpler, noise-reversal process that avoids these issues [25]. This stability helps diffusion models avoid problems like mode collapse, where GANs fail to capture the diversity of the data distribution [26], [27].

Diffusion models also excel in generating diverse, high-quality samples through a gradual denoising process, allowing for controlled generation [28]. In contrast, GANs tend to produce sharper but less diverse images, often overfitting to specific modes of the data [29], [30]. This trade-off between sharpness and diversity is a known limitation of GANs [31].

However, GANs remain preferred for tasks requiring extremely high-resolution and photorealistic images, such as human face generation, where they outperform diffusion models in terms of detail and realism [32], [33].

2.3.4 Applications of Diffusion Models

Diffusion models have found a wide range of applications, especially in fields where stability and quality of generation are important. Some notable applications include:

- **Image Generation:** Diffusion models have proven effective in generating photorealistic images, similar to GANs, but with more stable training dynamics. Recent innovations, such as classifier-free guidance, have further enhanced the quality of generated samples by allowing the model to generate data without relying on an explicit classifier [34].
- **Text-to-Image Generation:** Advancements in diffusion models have also been applied to text-to-image synthesis, where a text prompt is converted into a corresponding image. These models can produce diverse outputs based on input descriptions. Additionally, techniques like Denoising Diffusion Implicit Models (DDIMs) have accelerated the sampling process, making diffusion models more practical for real-time applications [35], [36].

- **Speech Synthesis:** Diffusion models have been applied to generating high-quality audio data. For example, they are used in text-to-speech systems to generate realistic human speech. These models have demonstrated remarkable performance in generating high-fidelity audio outputs [22], [20].
- **Anomaly Detection and Medical Imaging:** Similar to VAEs, diffusion models can be used to detect anomalies by evaluating how well a noisy sample can be denoised. Poor reconstructions may indicate that the input is anomalous or different from the training data. Diffusion models have also been applied in medical image segmentation tasks, such as the MedSegDiff model, which enhances segmentation by leveraging diffusion processes [23]. These models have shown their ability to handle complex data structures, proving their versatility across different domains.

Recent innovations in diffusion models have further enhanced their applicability and efficiency. By reducing the computational burden associated with the iterative sampling process, models like DDIMs maintain the generative capabilities of traditional diffusion models while improving their practicality for real-time applications [37].

2.3.5 Limitations of Diffusion Models

Despite the significant advancements that diffusion models have brought to generative modeling, they are not without limitations, which can be categorized into three primary areas: computational intensity, generation speed, and sample sharpness.

- **Computationally Intensive:** Diffusion models are computationally expensive due to their iterative nature, which involves progressively adding and removing noise from data. This process requires significantly more computational resources compared to GANs, which generate data in a single forward pass through the generator [38], [39].

This computational burden can limit their practical use, especially in scenarios requiring rapid generation [40].

- **Generation Speed:** Diffusion models are slower than GANs in terms of sample generation. Producing a single sample often requires hundreds or even thousands of time steps, significantly increasing the generation time compared to the near-instantaneous output of GANs [41], [35]. This can be a critical drawback in real-time applications.
- **Sample Sharpness:** While diffusion models generate diverse outputs, they may not always match the photorealism and fine detail achieved by GANs, especially in tasks requiring intricate details [19], [42]. This can affect their suitability for applications such as high-resolution image generation or medical imaging [40].

Chapter 3

Theoretical Background

This chapter provides an overview of Generative Adversarial Networks (GANs), focusing on their core architecture, objective function, and training dynamics. It introduces the interplay between the generator and discriminator in the adversarial training process, as well as the Fréchet Inception Distance (FID) metric for evaluating the quality and diversity of generated images.

3.1 Generative Adversarial Networks (GANs)

Generative Adversarial Networks (GANs) were introduced by Goodfellow et al. in 2014 and have become a widely used approach in generative modeling. GANs consist of two neural networks: a generator (G) and a discriminator (D), trained simultaneously through an adversarial process. The generator is tasked with producing synthetic data samples, while the discriminator tries to distinguish between real and generated samples. This architecture leads to a game-like dynamic between the two networks, where the generator improves its ability to create realistic data while the discriminator becomes better at distinguishing real from fake data [43], [44] and provide feedback to the generator, helping it to improve and generate more realistic samples over time [45].

3.2 GAN Architecture

The structure of GANs consists of two key components:

- **Generator (G):** The generator maps random noise z from a prior distribution, such as Gaussian or uniform, to synthetic data samples $G(z)$ that aim to replicate real data distributions.
- **Discriminator (D):** The discriminator receives input data, which can be either real data x or generated data $G(z)$, and outputs the probability that the data is real. The discriminator is trained to classify real samples as real and generated samples as fake [45].

The following figure illustrates the GAN architecture, where the generator produces synthetic data, and the discriminator learns to differentiate real from fake data.

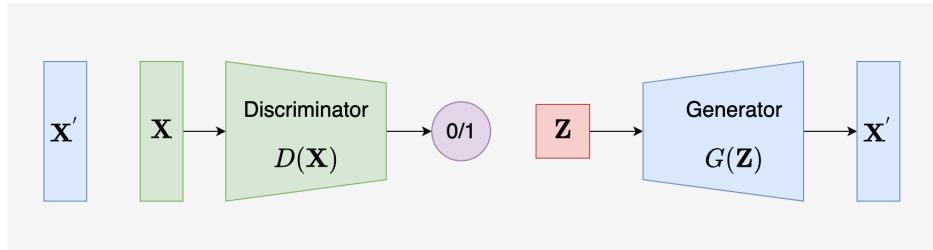


Figure 3.1: GAN Architecture.

3.3 Objective Function of GAN

The training of GANs involves optimizing two neural networks simultaneously through a minimax game. The objective function is defined as follows:

$$\min_G \max_D V(D, G) = \mathbb{E}_{x \sim p_{data}(x)}[\log D(x)] + \mathbb{E}_{z \sim p_z(z)}[\log(1 - D(G(z)))] \quad (3.1)$$

where :

- $z \sim p_z(z)$: The distribution from which the noise z is sampled. The generator transforms this noise into complex, high-dimensional data.

- $x \sim p_{data}(x)$: A sample x drawn from the true data distribution $p_{data}(x)$.
- $D(G(z))$: The discriminator's prediction for generated data $G(z)$.
- $D(x)$: The discriminator's prediction for real data x .
- $\mathbb{E}_{x \sim p_{data}(x)}[\log D(x)]$: The expectation of $\log D(x)$ over the real data distribution.
- $\mathbb{E}_{z \sim p_z(z)}[\log(1 - D(G(z)))]$: The expectation of $\log(1 - D(G(z)))$ over the noise distribution.

3.3.1 Discriminator's Loss Function

The discriminator's loss function measures its ability to distinguish between real and generated data. It is expressed as:

$$\mathcal{L}_D = -\mathbb{E}_{x \sim p_{data}(x)}[\log D(x)] - \mathbb{E}_{z \sim p_z(z)}[\log(1 - D(G(z)))] \quad (3.2)$$

The discriminator minimizes this loss function to improve its ability to classify real and generated data correctly.

3.3.2 Generator's Loss Function

The generator's loss function is designed to encourage it to generate data that can fool the discriminator. It is given by:

$$\mathcal{L}_G = -\mathbb{E}_{z \sim p_z(z)}[\log D(G(z))] \quad (3.3)$$

The generator minimizes this loss function to produce data that the discriminator classifies as real.

3.3.3 Modification for Vanishing Gradient Problem

To address the vanishing gradient problem during GAN training, the generator's loss is often modified. The original form $\log(1 - D(G(z)))$ can result

in small gradients when the discriminator accurately identifies fake data. Therefore, the alternative loss function for the generator is:

$$\mathcal{L}_G = \mathbb{E}_{z \sim p_z(z)}[-\log(D(G(z)))] \quad (3.4)$$

This modification ensures larger gradients and more stable training.

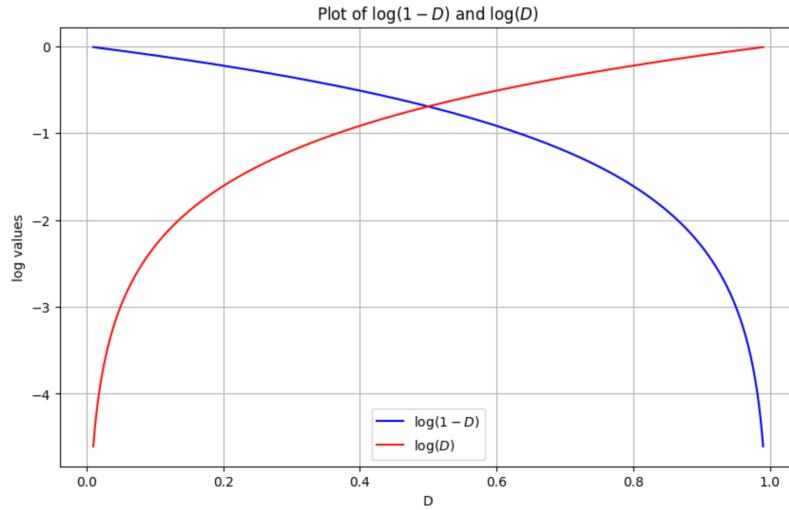


Figure 3.2: Comparison of $\log(1 - D)$ and $-\log(D)$.

3.4 GAN Training Process

During the training process of the GAN model, the generator and the discriminator are in constant competition. The generator aims to produce increasingly realistic samples to deceive the discriminator, while the discriminator works to accurately distinguish between real and generated samples. Initially, the generator produces samples that are of low quality and deviate significantly from the real data, as illustrated by the blue sine wave in Figure (a). As training progresses, the generator improves, and the generated samples become more refined, as shown by the smoother blue lines in Figures (b) and (c). Simultaneously, the distribution of the real samples and generated samples gradually align, and finally, in the optimal state represented by Figure (d), $p_{data}(x) = p_g(x)$, meaning that the generated samples closely

match the real samples. Throughout the training process, the distribution of the generated samples transitions from an initially noisy and scattered state to one that closely mirrors the real data distribution, indicating a significant enhancement in the quality of the generated samples.

3.4.1 Distribution Changes During GAN Training

A simple diagram shows how distribution change in GAN training.

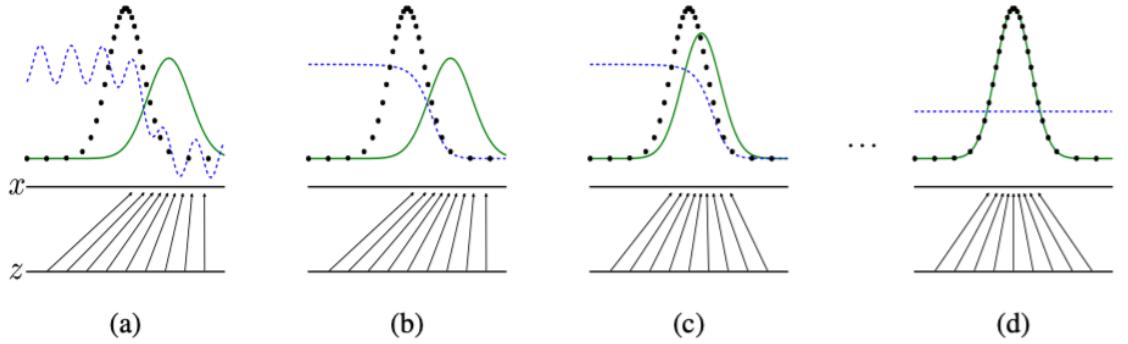


Figure 3.3: The green curve represents the distribution of generated samples. Initially, the generated samples may differ significantly from the real samples. As training progresses, the generated samples' distribution gradually approaches the real samples. The black dots represent the distribution of real samples, which remains unchanged throughout the training process and represents the target distribution. The blue dashed line represents the discriminator's output probability distribution. At the beginning of training, the discriminator can easily distinguish between real and generated data, resulting in a strong classification boundary. As training progresses and the generated data becomes more realistic, the discriminator's ability to differentiate between the two distributions weakens. Eventually, the discriminator's output approaches 0.5, indicating it can no longer effectively distinguish between real and generated data. The lines labeled x and z below represent the distribution of samples in the latent space. During GAN training, samples from the latent space z are mapped to the data space x through the generator.

Source: [46]

As training progresses, the samples generated by the generator gradually

become indistinguishable from the real data, leading to a minimized error between the two distributions. Initially, the generated samples exhibit significant differences from the real data, starting from a noisy and dispersed state. However, over time, the generator learns to map the latent space to the real data distribution more accurately. This results in the generated samples converging toward the real data distribution, ultimately aligning closely with the target distribution.

3.4.2 Mathematical Formulation during GAN Training

1. Problem Setup

In a Generative Adversarial Network (GAN), the objective is to train a generator G and a discriminator D to generate data that resembles the real data distribution. The objective function to be maximized is given by:

$$V(D, G) = \mathbb{E}_{x \sim p_{\text{data}}(x)}[\log D(x)] + \mathbb{E}_{z \sim p_z(z)}[\log(1 - D(G(z)))] \quad (3.5)$$

2. Rewriting the Objective Function

First, the objective function is rewritten in integral form:

$$V(D, G) = \int p_{\text{data}}(x) \log D(x) dx + \int p_z(z) \log(1 - D(G(z))) dz \quad (3.6)$$

By changing variables $x' = G(z)$, the generated data is represented as x' , which corresponds to samples produced by the generator G . This allows the second term to be rewritten as an integral over the generated data distribution $p_g(x)$. The integral now reflects the contribution of the generated samples to the objective function.

$$\int p_g(x) \log(1 - D(x)) dx \quad (3.7)$$

Thus, the objective function becomes:

$$V(D, G) = \int [p_{\text{data}}(x) \log D(x) + p_g(x) \log(1 - D(x))] dx. \quad (3.8)$$

3. Deriving the Optimal Discriminator

To find the optimal discriminator D^* , it needs to take the derivative of the objective function with respect to $D(x)$ and set it to zero.

Let:

$$f(D(x)) = p_{\text{data}}(x) \log D(x) + p_g(x) \log(1 - D(x)). \quad (3.9)$$

Taking the derivative with respect to $D(x)$:

$$\frac{d}{dD(x)} f(D(x)) = \frac{p_{\text{data}}(x)}{D(x)} - \frac{p_g(x)}{1 - D(x)}. \quad (3.10)$$

Setting the derivative to zero:

$$\frac{p_{\text{data}}(x)}{D(x)} = \frac{p_g(x)}{1 - D(x)} \quad (3.11)$$

Solving equation (3.11):

$$D(x) = \frac{p_{\text{data}}(x)}{p_{\text{data}}(x) + p_g(x)}. \quad (3.12)$$

4. Optimal Discriminator Formula

Therefore, the optimal discriminator D^* is given by:

$$D^*(x) = \frac{p_{\text{data}}(x)}{p_{\text{data}}(x) + p_g(x)}. \quad (3.13)$$

- When $p_{\text{data}}(x)$ is much larger than $p_g(x)$, $D^*(x) \approx 1$, indicating that the data point is almost certainly from the real data.
- When $p_{\text{data}}(x)$ is much smaller than $p_g(x)$, $D^*(x) \approx 0$, indicating that the data point is almost certainly from the generated data.
- When $p_{\text{data}}(x)$ is close to $p_g(x)$, $D^*(x) \approx 0.5$, indicating that the discriminator cannot confidently determine whether the data point is real

or generated, giving each a 50% probability.

5. Verifying the Optimal Discriminator

To verify that this D^* maximizes the objective function, substitute D^* back into the objective function:

$$V(D^*, G) = \int \left[p_{\text{data}}(x) \log \left(\frac{p_{\text{data}}(x)}{p_{\text{data}}(x) + p_g(x)} \right) + p_g(x) \log \left(1 - \frac{p_{\text{data}}(x)}{p_{\text{data}}(x) + p_g(x)} \right) \right] dx. \quad (3.14)$$

Since:

$$1 - D^*(x) = 1 - \frac{p_{\text{data}}(x)}{p_{\text{data}}(x) + p_g(x)} = \frac{p_g(x)}{p_{\text{data}}(x) + p_g(x)}, \quad (3.15)$$

substituting this in:

$$V(D^*, G) = \int \left[p_{\text{data}}(x) \log \left(\frac{p_{\text{data}}(x)}{p_{\text{data}}(x) + p_g(x)} \right) + p_g(x) \log \left(\frac{p_g(x)}{p_{\text{data}}(x) + p_g(x)} \right) \right] dx. \quad (3.16)$$

This objective function represents the negative of the cross-entropy, which is maximized when $D(x) = D^*(x)$. When $D(x) = 0.5$, the discriminator cannot distinguish between real and generated data, indicating that the generator has produced samples that closely resemble the real data. Maximizing the negative cross-entropy aligns the generated data distribution with the real data distribution.

6. Conclusion

Through the above derivation, it has shown that given the generator G , the optimal form of the discriminator D is:

$$D^*(x) = \frac{p_{\text{data}}(x)}{p_{\text{data}}(x) + p_g(x)}. \quad (3.17)$$

This demonstrates that the optimal discriminator D^* outputs the probability that the input data comes from the real data distribution. This formula provides a theoretical foundation for training GANs, guiding the updates to the generator G so that its generated data gradually approaches the real data

distribution.

3.5 Evaluating GAN Performance

Fréchet Inception Distance (FID) is a metric commonly used in Generative Adversarial Network (GAN) models to quantify the dissimilarity between two image distributions [47]. It measures the distance between the distributions of real images and generated images, providing a numerical assessment of the quality of generated images. FID has gained prominence in evaluating the performance of GANs due to its ability to capture both the quality and diversity of generated images [48]. The following is the objective function for FID:

$$\text{FID} = \|\mu_r - \mu_g\|^2 + \text{Tr}(\Sigma_r + \Sigma_g - 2(\Sigma_r \Sigma_g)^{1/2}) \quad (3.18)$$

$$\mu_r = \frac{1}{N} \sum_{i=1}^N f(x_i), \quad \Sigma_r = \frac{1}{N} \sum_{i=1}^N (f(x_i) - \mu_r)(f(x_i) - \mu_r)^T \quad (3.19)$$

$$\mu_g = \frac{1}{M} \sum_{i=1}^M f(G(z_i)), \quad \Sigma_g = \frac{1}{M} \sum_{i=1}^M (f(G(z_i)) - \mu_g)(f(G(z_i)) - \mu_g)^T \quad (3.20)$$

where:

- μ_r and μ_g : The feature means of the real and generated images, respectively.
- Σ_r and Σ_g : The feature covariance matrices of the real and generated images, respectively.
- Tr : The trace (the sum of the diagonal elements of the matrix).
- f : The feature extraction function, which extracts feature vectors from images using the Inception network. These feature vectors are used to

compute the mean and covariance for both real and generated images.

A lower FID value indicates that the distribution of the generated images is closer to that of real images, reflecting higher quality and diversity in the generated images [49]. Specifically, a FID value below 10 is considered to represent very high-quality generated images, while values between 10 and 50 indicate good quality, and values above 50 suggest average or poor quality [49].

3.6 Limitations of Accuracy in Evaluating GANs

Accuracy is not suitable for evaluating GANs because accuracy is an indicator of classification tasks, which is used to measure the prediction accuracy of the model in classification tasks, and cannot measure the quality and diversity of generated data. In generation tasks, there is no clear "correct answer" and the generated data has no "real label", so it is impossible to directly compare the correspondence between the generated data and a real sample.

The following is a result for a standard GANs model with high accuracy but generate low quality images.

```
1900 [D loss: 9.02800047697383e-06 | D accuracy: 100.0] [G loss: 0.0005307616665959358] [FID: -1.49196970922936e+87]
2/2 [=====] - 0s 28ms/step
1901 [D loss: 7.511995590903098e-06 | D accuracy: 100.0] [G loss: 0.0006589822005480528] [Epoch time: 0.51 seconds]
2/2 [=====] - 0s 29ms/step
1902 [D loss: 9.099765065911924e-06 | D accuracy: 100.0] [G loss: 0.0008528590551577508] [Epoch time: 0.48 seconds]
2/2 [=====] - 0s 29ms/step
1903 [D loss: 7.715634183114162e-06 | D accuracy: 100.0] [G loss: 0.0008156942203640938] [Epoch time: 0.48 seconds]
2/2 [=====] - 0s 29ms/step
1904 [D loss: 7.386817742371932e-06 | D accuracy: 100.0] [G loss: 0.0005978870904073119] [Epoch time: 0.49 seconds]
2/2 [=====] - 0s 29ms/step
1905 [D loss: 1.5066923879203387e-05 | D accuracy: 100.0] [G loss: 0.0014342099893838167] [Epoch time: 0.48 seconds]
2/2 [=====] - 0s 29ms/step
1906 [D loss: 1.9851730939990375e-05 | D accuracy: 100.0] [G loss: 0.0007973920437507331] [Epoch time: 0.49 seconds]
2/2 [=====] - 0s 29ms/step
1907 [D loss: 1.692915657258709e-05 | D accuracy: 100.0] [G loss: 0.0009673223830759525] [Epoch time: 0.49 seconds]
2/2 [=====] - 0s 29ms/step
1908 [D loss: 1.5433080079674255e-05 | D accuracy: 100.0] [G loss: 0.0010331417433917522] [Epoch time: 0.49 seconds]
2/2 [=====] - 0s 29ms/step
1909 [D loss: 3.74487547105673e-06 | D accuracy: 100.0] [G loss: 0.0008501751581206918] [Epoch time: 0.52 seconds]
```

Figure 3.4: GAN Training Accuracy over Epochs


```
▶ generate_images(generator, 10, 100)
⇒ 1/1 [=====] - 1s 844ms/step

```

Figure 3.5: Generated Images from GAN

FID (Fréchet Inception Distance) quantifies the difference between generated data and real data by comparing their distribution in the Inception network feature space. FID takes into account the overall distribution of generated data and real data, and can reflect the quality and diversity of generated data. A low FID value indicates that the distribution of generated data is very close to the distribution of real data, that is, the generated data is both realistic and diverse, so FID is a more suitable indicator for evaluating the performance of generative models.

Chapter 4

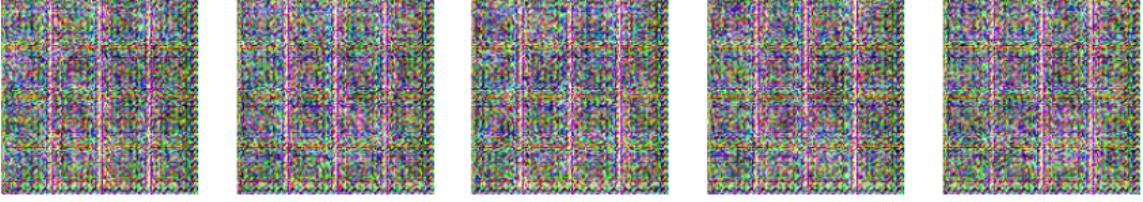Results and Discussion

This chapter details the numerical processes undertaken to evaluate the performance of various GAN architectures. It includes model selection, structural adjustments, exploration of layer depth, and the impact of data augmentation on model performance. Additionally, the chapter discusses the application of the chosen model to a new dataset, providing insights into the practical effectiveness of the models in generating high-quality images.

4.1 Standard GAN Versus Other GAN Realizations

Approximately a decade has passed since Goodfellow introduced Generative Adversarial Networks (GANs), during which numerous variants of GAN models have been developed. For the purpose of this study, I have selected seven distinct GAN models for examination and minimal implementation: Standard GANs, Conditional GANs, Auxiliary Classifier GANs, Cycle GANs, Domain Transfer Network GANs, Coupled GANs, and Style GANs. Based on their foundational nature, extensive research and documentation, training and implementation efficiency, and flexibility and versatility, Standard GANs were selected for this study. The following outlines the reasons for this choice.

1. Foundational Nature: Standard GANs, introduced by Ian Goodfel-

low et al. in 2014, serve as the foundational model for all subsequent GAN variants. Understanding the principles and mechanics of Standard GANs is crucial for comprehending more complex versions like Conditional GANs, Cycle GANs, and Style GANs. By focusing on the Standard GAN, this study lays a solid foundation for exploring more advanced models.

2. Widely Studied and Well-Documented: Standard GANs have been extensively researched, with a vast amount of literature available. This wealth of resources provides a robust theoretical background and a variety of implementation strategies, facilitating a more thorough and well-supported analysis. This also means that there is ample precedent for common challenges and solutions, making it easier to troubleshoot and refine the model during the study.
3. Training and Implementation Efficiency: Compared to more complex GAN variants, Standard GANs typically require less computational power and shorter training times, making them more accessible for experimentation and analysis. This efficiency allows for multiple experiments and parameter tuning within the constraints of the study, leading to more reliable and reproducible results.
4. Flexibility and Versatility: Standard GANs are highly versatile and can be adapted to a wide range of tasks and datasets. This flexibility makes them an excellent choice for a detailed study that may involve exploring various applications or extending the model to new domains.

4.2 GAN With Convolutional or Dense layers

On the MNIST dataset for 3000 epochs, I compared the generated images from two GAN architectures: one using dense layers and the other using convolutional layers (CNN). It was observed that the GAN with the CNN

architecture outperformed the dense layer architecture in terms of image quality, producing clearer and more realistic images.

As shown in Figures 4.1 and 4.2, the generator and discriminator architectures for both dense and convolutional layers are compared. Figure 4.1a illustrates the generator with dense layers, which consists of a series of fully connected layers, while Figure 4.1b shows the generator with convolutional layers, where convolutional and transpose convolutional layers are used to capture spatial features more effectively. The same comparison applies to the discriminator architectures shown in Figure 4.2. The dense-layer discriminator (Figure 4.2a) is built with fully connected layers, whereas the convolutional discriminator (Figure 4.2b) leverages convolutional layers to better identify patterns in the data.

Layer (type)	Output Shape	Param #
dense_30 (Dense)	(None, 256)	25856
leaky_re_lu_22 (LeakyReLU)	(None, 256)	0
batch_normalization_18 (Batch Normalization)	(None, 256)	1024
dense_31 (Dense)	(None, 512)	131584
leaky_re_lu_23 (LeakyReLU)	(None, 512)	0
batch_normalization_19 (Batch Normalization)	(None, 512)	2048
dense_32 (Dense)	(None, 1024)	525312
leaky_re_lu_24 (LeakyReLU)	(None, 1024)	0
batch_normalization_20 (Batch Normalization)	(None, 1024)	4096
dense_33 (Dense)	(None, 784)	803600
reshape_6 (Reshape)	(None, 28, 28, 1)	0
<hr/>		
Total params:	1493520 (5.78 MB)	
Trainable params:	1489936 (5.68 MB)	
Non-trainable params:	3584 (14.00 KB)	

Layer (type)	Output Shape	Param #
dense_38 (Dense)	(None, 6272)	633472
leaky_re_lu_28 (LeakyReLU)	(None, 6272)	0
reshape_8 (Reshape)	(None, 7, 7, 128)	0
batch_normalization_24 (Batch Normalization)	(None, 7, 7, 128)	512
conv2d_transpose (Conv2DTranspose)	(None, 14, 14, 128)	262272
leaky_re_lu_29 (LeakyReLU)	(None, 14, 14, 128)	0
batch_normalization_25 (Batch Normalization)	(None, 14, 14, 128)	512
conv2d_transpose_1 (Conv2DTranspose)	(None, 28, 28, 64)	131136
leaky_re_lu_30 (LeakyReLU)	(None, 28, 28, 64)	0
batch_normalization_26 (Batch Normalization)	(None, 28, 28, 64)	256
conv2d (Conv2D)	(None, 28, 28, 1)	3137

(a) Generator with Dense Layer

(b) Generator with Convolution Layer

Figure 4.1: Generator Architecture with Dense and Convolutional Layers

Layer (type)	Output Shape	Param #
flatten_1 (Flatten)	(None, 784)	0
dense_23 (Dense)	(None, 512)	401920
leaky_re_lu_17 (LeakyReLU)	(None, 512)	0
dropout_2 (Dropout)	(None, 512)	0
dense_24 (Dense)	(None, 256)	131328
leaky_re_lu_18 (LeakyReLU)	(None, 256)	0
dropout_3 (Dropout)	(None, 256)	0
dense_25 (Dense)	(None, 1)	257
Total params:	533505 (2.04 MB)	
Trainable params:	533505 (2.04 MB)	
Non-trainable params:	0 (0.00 Byte)	

Layer (type)	Output Shape	Param #
conv2d_2 (Conv2D)	(None, 14, 14, 64)	640
leaky_re_lu_39 (LeakyReLU)	(None, 14, 14, 64)	0
dropout_6 (Dropout)	(None, 14, 14, 64)	0
conv2d_3 (Conv2D)	(None, 7, 7, 128)	73856
leaky_re_lu_40 (LeakyReLU)	(None, 7, 7, 128)	0
dropout_7 (Dropout)	(None, 7, 7, 128)	0
flatten_3 (Flatten)	(None, 6272)	0
dense_47 (Dense)	(None, 1)	6273

(a) Discriminator with Dense Layer (b) Discriminator with Convolution Layer

Figure 4.2: Discriminator Architecture with Dense and Convolutional Layers

Notably, the dense-layer models contain significantly more parameters compared to the convolutional models. The generator with dense layers has approximately 1.5 million parameters, whereas the convolutional generator has only about 1 million parameters. Similarly, the dense-layer discriminator has over 500,000 parameters, while the convolutional discriminator has only 80,000. Despite the larger parameter size, the dense-layer architectures were less effective in producing high-quality images, highlighting the advantage of convolutional layers in capturing spatial dependencies in the data.




(a) Images Generated by GAN with Dense Layers




(b) Images Generated by GAN with Convolution Layers

Figure 4.3: Comparison of GAN Performance at 3000 Epochs

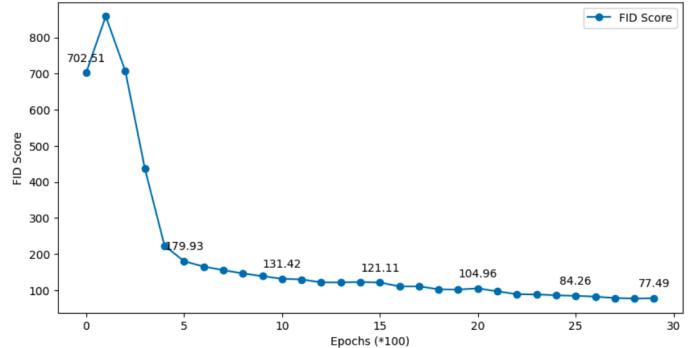

(a) FID Score for Dense Layer

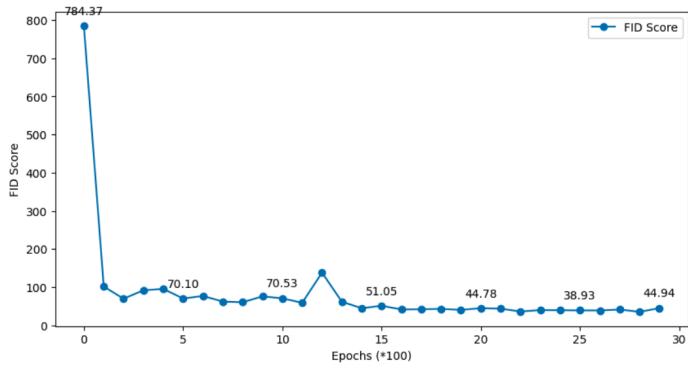

(b) FID Score for Convolutional Layer

Figure 4.4: FID Scores Across 3000 Epochs

Based on the results, the GAN model with convolutional layers demonstrated superior performance in generating high-quality images compared to the dense layer model. As shown in the generated images (Figure 4.3), the convolutional GAN produced more coherent and realistic outputs, whereas the dense layer GAN struggled to generate clear and recognizable digits. Additionally, the FID scores, which measure the dissimilarity between generated and real images, further validate this observation. The FID scores for the convolutional GAN (Figure 4.4b) are consistently lower across training epochs compared to the dense layer model (Figure 4.4a), indicating better quality in the generated images.

Given these results, I selected the standard GAN model with convolutional layers for further experiments, as it not only generated higher-quality

images but also used fewer parameters, making it a more efficient and effective choice.

4.3 Exploring Layer Depth

In this section, I explored the impact of changing convolutional layers in the generator and discriminator of a GAN.

Firstly, I trained the basic convolutional GAN model three times and recorded the FID scores. Secondly, based on the basic structure, I gradually added convolutional layers to the generator, from one to three layers, while keeping the discriminator structure fixed. I trained the model three times for each configuration and recorded the FID scores, as shown in Table 4.1.

Finally, using the base GAN with three additional convolutional layers in the generator, I gradually added convolutional layers to the discriminator, from one to three layers, while keeping the generator structure fixed. I trained the model three times for each configuration and recorded the FID scores.

Table 4.1: Average FID Scores for Different GAN Architectures (Lower is Better)

Layers in G \ Layers in D	3	4	5	6
3	68.03	72.45	78.56	85.67
4	78.95	70.89	74.23	79.45
5	99.17	85.36	37.09	65.54
6	194.66	71.54	55.21	35.78

Note: A FID value below 10 is considered to represent very high-quality generated images, while values between 10 and 50 indicate good quality, and values above 50 suggest average or poor quality.

Upon comparing, I found that increasing the number of layers in either the generator or the discriminator alone worsened the model's performance. This imbalance disrupts the dynamic equilibrium between the generator and discriminator in the GAN framework. However, simultaneously increasing the layers in both the generator and the discriminator improved the model's

performance, as demonstrated by the decreasing FID scores with higher layer counts. For example, Table 4.1 shows that increasing both the generator and discriminator layers to five results in a significantly lower FID score of 37.09 compared to the unbalanced configurations.

This finding aligns with the concept of maintaining a balance between the generator and discriminator during training, as highlighted in the literature [50]. The importance of this balance is crucial for the effective operation of GANs, ensuring stable learning and improved image quality [51].

4.4 Impact of Data Augmentation on Model Performance

The impact of various data augmentation techniques on model performance was evaluated by comparing the average FID scores across different augmentation configurations (Table 4.2). The results indicate that data augmentation generally led to poorer performance in terms of image quality compared to training without any augmentation.

Table 4.2: Average FID Scores for Different Data Augmentation Techniques

Data Augmentation Technique	Average FID Score
Rotation 10° + Shifting 0.1 + Flipping	103.49
Rotation 10° + Shifting 0.1	76.04
Shifting 0.1	70.74
Shifting 0.05	66.06
Without Data Augmentation	58.94

Note: A FID value below 10 is considered to represent very high-quality generated images, while values between 10 and 50 indicate good quality, and values above 50 suggest average or poor quality.

Among the techniques tested, applying a combination of rotation, shifting, and flipping resulted in the highest FID score (103.49), suggesting a significant negative impact on the generated image quality. Rotation and

shifting alone slightly improved the FID score to 76.04, while reducing the shift range to 0.1 and 0.05 further improved performance, yielding FID scores of 70.74 and 66.06, respectively. The best performance was observed with no data augmentation, achieving an FID score of 58.94.

These findings suggest that, while data augmentation is commonly employed to improve model generalization, it can potentially disrupt the data distribution and hinder the optimization process when not carefully selected or overused.

4.5 Applying the Model to the Animal Faces-HQ Dataset

In this section, the Animal Faces-HQ (AFHQ) dataset was used to train a standard GAN focused on generating realistic cat images. The dataset consists of 16,130 high-quality images with a resolution of 512x512 pixels. Due to the high resolution of the original images, I downsampled them to 128x128 pixels to avoid GPU memory issues during training.

The GAN was then trained for 4000 epochs. The following results showcase the images generated by the model’s generator. Figure 4.5 displays the cat faces created by the GAN.

4.5.1 Model Structure and Training

The GAN model consists of two main components: a generator and a discriminator. The generator takes a random noise vector and progressively transforms it into a full-resolution image, while the discriminator is trained to distinguish between real and generated images.

The generator architecture starts by expanding the noise vector (100 dimensions) into a 16x16x256 feature map. Several transpose convolutional layers are then used to upsample this feature map to 128x128 pixels. The discriminator processes these images using convolutional layers, which progressively downsample the input. The final output of the discriminator is a classification (real or fake).

Below is a brief summary of the generator and discriminator models:

```
def build_generator():
    model = Sequential()

    # Expand noise vector and reshape
    model.add(Dense(16*16*256, input_dim=100))
    model.add(LeakyReLU(alpha=0.2))
    model.add(Reshape((16, 16, 256)))
    model.add(BatchNormalization(momentum=0.8))

    # Upsample to 128x128
    model.add(Conv2DTranspose(256, kernel_size=4, strides=2, padding='same'))
    model.add(LeakyReLU(alpha=0.2))
    model.add(BatchNormalization(momentum=0.8))

    model.add(Conv2DTranspose(128, kernel_size=4, strides=2, padding='same'))
    model.add(LeakyReLU(alpha=0.2))
    model.add(BatchNormalization(momentum=0.8))

    model.add(Conv2DTranspose(64, kernel_size=4, strides=2, padding='same'))
    model.add(LeakyReLU(alpha=0.2))
    model.add(BatchNormalization(momentum=0.8))

    model.add(Conv2D(3, kernel_size=7, activation='tanh', padding='same'))

    return model
```

The discriminator processes the generated images through a series of convolutional layers and finally classifies them as real or fake.

```
def build_discriminator():
    model = Sequential()
```

```

model.add(Conv2D(64, kernel_size=3, strides=2,
                input_shape=(128, 128, 3), padding='same'))
model.add(LeakyReLU(alpha=0.2))
model.add(Dropout(0.25))

model.add(Conv2D(128, kernel_size=3, strides=2, padding='same'))
model.add(LeakyReLU(alpha=0.2))
model.add(Dropout(0.25))

model.add(Conv2D(256, kernel_size=3, strides=2, padding='same'))
model.add(LeakyReLU(alpha=0.2))
model.add(Dropout(0.25))

model.add(Conv2D(512, kernel_size=3, strides=2, padding='same'))
model.add(LeakyReLU(alpha=0.2))
model.add(Dropout(0.25))

model.add(Flatten())
model.add(Dense(1, activation='sigmoid'))

return model

```

The training was conducted over 4000 epochs with a batch size of 128. Both real and generated images were used to train the discriminator, while the generator was trained to produce images that could fool the discriminator into classifying them as real.

```

def train(generator, discriminator, gan, x_train, epochs, batch_size=128):
    valid = np.ones((batch_size, 1))
    fake = np.zeros((batch_size, 1))

    for epoch in range(epochs):
        start_time = time.time()

```

```

# Train the discriminator
idx = np.random.randint(0, x_train.shape[0], batch_size)
imgs = x_train[idx]

noise = np.random.normal(0, 1, (batch_size, 100))
gen_imgs = generator.predict(noise)

d_loss_real = discriminator.train_on_batch(imgs, valid)
d_loss_fake = discriminator.train_on_batch(gen_imgs, fake)
d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)

# Train the generator
noise = np.random.normal(0, 1, (batch_size, 100))
g_loss = gan.train_on_batch(noise, valid)

end_time = time.time()
epoch_time = end_time - start_time

print(f"{{epoch}} [D loss: {d_loss[0]} | D accuracy: "
      f"{{100 * d_loss[1]}}] [G loss: {g_loss}] "
      f"[Epoch time: {{epoch_time:.2f}} seconds]")

```

4.5.2 Generated Results

Figure 4.5 shows examples of the cat images generated by the GAN after training for 4000 epochs. While the model was able to capture many of the essential features of cat faces, the generated outputs still show some variation compared to the original dataset.



Figure 4.5: Cat Faces Generated by GAN

The GAN's architecture and training details are included in the appendix. Additionally, the full Python code for this implementation is available to provide a detailed understanding of how the model was trained and evaluated.

4.6 Discussion

In this study, I conducted a series of experiments to evaluate the performance of different GAN architectures and explored various factors influencing the quality of generated images. Specifically, the experiments compared the effects of using dense layers versus convolutional layers in a standard GAN, examined the impact of varying the number of convolutional layers in both the generator and discriminator, analyzed the effects of data augmentation on GAN training, and applied a GAN model to a dataset to generate high-quality cat face images.

The experiments revealed that GAN models utilizing convolutional layers outperformed those using dense layers in terms of image quality, confirming the strength of convolutional layers in capturing spatial features. Additionally, I found that increasing the number of layers in the generator or discriminator independently led to a decline in performance, suggesting that the balance between these two components is critical for stable GAN training. Simultaneously increasing the number of layers in both components improved the model's output.

Regarding data augmentation, the results indicated that certain augmentation techniques negatively impacted GAN training, likely by introducing noise or disrupting the data distribution. This suggests that when applying data augmentation to GANs, careful selection and parameter tuning are necessary to avoid adverse effects on training stability and performance.

When applying the model to the Animal Faces-HQ dataset, I successfully trained the GAN to generate cat images. However, due to hardware constraints, I had to downscale the images from 512x512 to 128x128 pixels, which may have limited the generated images' resolution and quality.

The limitations of this study include computational restrictions, which prevented experiments on higher-resolution images, and a focus on standard GANs rather than more advanced architectures such as StyleGAN or BigGAN. Future work could explore these more complex GAN architectures and improve data augmentation strategies to enhance training performance and image quality. Additionally, training GANs on higher-resolution datasets

and experimenting with advanced GAN models, such as Conditional GANs or Adaptive GANs, could provide further insights into enhancing image diversity and fidelity.

In conclusion, this study demonstrates the effectiveness of GAN models in generating high-quality images, while highlighting areas for future improvements in architecture and training methods.

Appendix A

Appendix

Code

Listing A.1: GAN Model with Dense Layers

```
1 import tensorflow as tf
2 from tensorflow.keras.layers import Dense, Reshape, Flatten,
3     Dropout, LeakyReLU, BatchNormalization
4 from tensorflow.keras.models import Sequential
5 from tensorflow.keras.optimizers import Adam
6 from scipy.linalg import sqrtm
7 import numpy as np
8 import time
9 import matplotlib.pyplot as plt
10
11 np.random.seed(1000)
12 tf.random.set_seed(1000)
13
14 # input 100
15 # output 28*28*1
16
17 def build_generator():
18     model = Sequential()
19
20     # increase the dimension
21     model.add(Dense(256, input_dim=100))
22     model.add(LeakyReLU(alpha=0.2))
```

```

22     model.add(BatchNormalization(momentum=0.8))

23

24     model.add(Dense(512))
25     model.add(LeakyReLU(alpha=0.2))
26     model.add(BatchNormalization(momentum=0.8))

27

28     model.add(Dense(1024))
29     model.add(LeakyReLU(alpha=0.2))
30     model.add(BatchNormalization(momentum=0.8))

31

32     model.add(Dense(28*28, activation='tanh'))
33     model.add(Reshape((28, 28, 1)))

34

35     return model

36

37 # input 28*28*1
38 # output 1

39

40 def build_discriminator():
41     model = Sequential()

42

43     model.add(Flatten(input_shape=(28, 28, 1)))

44

45     model.add(Dense(512))
46     model.add(LeakyReLU(alpha=0.2))
47     model.add(Dropout(0.25))

48

49     model.add(Dense(256))
50     model.add(LeakyReLU(alpha=0.2))
51     model.add(Dropout(0.25))

52

53     model.add(Dense(1, activation='sigmoid'))

54

55     return model

56

57 # Load and preprocess the MNIST dataset
58 (x_train, _), (_, _) = tf.keras.datasets.mnist.load_data()
59 x_train = (x_train - 127.5) / 127.5
60 x_train = np.expand_dims(x_train, axis=3)

```

```

61
62 # Calculate FID function
63 def calculate_fid(real_images, fake_images):
64     act1 = real_images.reshape((real_images.shape[0], -1))
65     mu1, sigma1 = act1.mean(axis=0), np.cov(act1, rowvar=
66                               False)
67
68     act2 = fake_images.reshape((fake_images.shape[0], -1))
69     mu2, sigma2 = act2.mean(axis=0), np.cov(act2, rowvar=
70                               False)
71
72     ssdiff = np.sum((mu1 - mu2)**2.0)
73     covmean = sqrtm(sigma1.dot(sigma2))
74
75     if np.iscomplexobj(covmean):
76         covmean = covmean.real
77
78     fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 * covmean)
79
80     return fid
81
82
83 def train_gan(epochs=1000, batch_size=64, p_epoch=100):
84     generator = build_generator()
85     discriminator = build_discriminator()
86
87     discriminator.compile(loss='binary_crossentropy',
88                           optimizer=Adam(0.0002, 0.5), metrics=['accuracy'])
89     discriminator.trainable = False
90
91     gan_input = tf.keras.Input(shape=(100,))
92     gan_output = discriminator(generator(gan_input))
93     gan = tf.keras.Model(gan_input, gan_output)
94     gan.compile(loss='binary_crossentropy', optimizer=Adam
95                  (0.0002, 0.5))
96
97     half_batch = int(batch_size / 2)
98
99     d_losses = []
100    g_losses = []

```

```

96     d_acc = []
97     fid_scores = [] # List to store FID scores
98
99     start_time = time.time() # Record the start time
100
101    for epoch in range(epochs):
102        # Select a random half batch of real images
103        idx = np.random.randint(0, x_train.shape[0],
104                                half_batch)
105        real_images = x_train[idx]
106
107        # Generate a half batch of new fake images
108        noise = np.random.normal(0, 1, (half_batch, 100))
109        fake_images = generator.predict(noise)
110
111        # Train the discriminator
112        real_labels = np.ones((half_batch, 1))
113        fake_labels = np.zeros((half_batch, 1))
114
115        d_loss_real = discriminator.train_on_batch(
116            real_images, real_labels)
117        d_loss_fake = discriminator.train_on_batch(
118            fake_images, fake_labels)
119        d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
120
121
122        # Train the generator
123        noise = np.random.normal(0, 1, (batch_size, 100))
124        valid_y = np.ones((batch_size, 1))
125
126        g_loss = gan.train_on_batch(noise, valid_y)
127
128        # Record the losses
129        d_losses.append(d_loss[0])
130        g_losses.append(g_loss)
131        d_acc.append(d_loss[1] * 100)

# Calculate and print FID every p_epoch epochs
if epoch % p_epoch == 0:
    noise = np.random.normal(0, 1, (1000, 100))

```

```

132         fake_images = generator.predict(noise)
133         fid = calculate_fid(x_train[:1000], fake_images)
134         fid_scores.append(fid)
135         print(f"Epoch {epoch} [D loss: {d_loss[0]}, acc.: {100 * d_loss[1]}%] [G loss: {g_loss}] [FID: {fid}]")
136
137     end_time = time.time() # Record the end time
138     total_time = end_time - start_time
139     print(f"Total training time: {total_time:.2f} seconds")
140     return generator, d_losses, g_losses, d_acc, fid_scores

```

Listing A.2: GAN Model with Convolutional Layers

```

1 import tensorflow as tf
2 from tensorflow.keras.layers import Dense, Reshape,
3     Flatten, Dropout, LeakyReLU, Conv2D, Conv2DTranspose,
4     BatchNormalization
5 from tensorflow.keras.models import Sequential
6 from tensorflow.keras.optimizers import Adam
7 from scipy.linalg import sqrtm
8 import numpy as np
9 import time
10 import matplotlib.pyplot as plt
11
12 np.random.seed(1000)
13 tf.random.set_seed(1000)
14
15 # input 100
16 # output 28*28*1
17
18 def build_generator():
19     model = Sequential()
20
21     # increase the dimension
22     model.add(Dense(7*7*128, input_dim=100))
23     model.add(LeakyReLU(alpha=0.2))
24     model.add(Reshape((7, 7, 128)))
25     model.add(BatchNormalization(momentum=0.8))
26
27     # add a convolutional layer
28     model.add(Conv2DTranspose(64, (5, 5), strides=(2, 2), padding='same'))
29     model.add(LeakyReLU(alpha=0.2))
30     model.add(Reshape((14, 14, 64)))
31     model.add(BatchNormalization(momentum=0.8))
32
33     # add another convolutional layer
34     model.add(Conv2DTranspose(32, (5, 5), strides=(2, 2), padding='same'))
35     model.add(LeakyReLU(alpha=0.2))
36     model.add(Reshape((28, 28, 32)))
37     model.add(BatchNormalization(momentum=0.8))
38
39     # final output layer
40     model.add(Conv2D(1, (5, 5), activation='tanh'))
41
42     return model
43
44
45 # build the generator
46 generator = build_generator()
47
48 # build the discriminator
49 discriminator = Sequential()
50
51 discriminator.add(Conv2D(32, (5, 5), strides=(2, 2), padding='same'))
52 discriminator.add(LeakyReLU(alpha=0.2))
53 discriminator.add(Reshape((14, 14, 32)))
54 discriminator.add(BatchNormalization(momentum=0.8))
55
56 discriminator.add(Conv2D(64, (5, 5), strides=(2, 2), padding='same'))
57 discriminator.add(LeakyReLU(alpha=0.2))
58 discriminator.add(Reshape((7, 7, 64)))
59 discriminator.add(BatchNormalization(momentum=0.8))
60
61 discriminator.add(Flatten())
62 discriminator.add(Dropout(0.4))
63 discriminator.add(Dense(1, activation='sigmoid'))
64
65 discriminator.compile(optimizer=Adam(), loss='binary_crossentropy')
66
67
68 # build the GAN
69 gan = Sequential()
70
71 gan.add(generator)
72 gan.add(discriminator)
73
74 gan.compile(optimizer=Adam(), loss='binary_crossentropy')
75
76
77 # train the GAN
78 for epoch in range(100):
79     # train the discriminator
80     # ...
81
82     # train the generator
83     # ...
84
85     # calculate the loss
86     # ...
87
88     # save the generator
89     # ...
90
91     # save the discriminator
92     # ...
93
94     # save the GAN
95     # ...
96
97     # save the images
98     # ...
99
100    # save the losses
101    # ...
102
103    # save the accuracy
104    # ...
105
106    # save the FID scores
107    # ...
108
109    # save the total time
110    # ...
111
112    # save the epoch
113    # ...
114
115    # save the total training time
116    # ...
117
118    # save the generator
119    # ...
120
121    # save the d_losses
122    # ...
123
124    # save the g_losses
125    # ...
126
127    # save the d_acc
128    # ...
129
130    # save the fid_scores
131    # ...
132
133    # save the end_time
134    # ...
135
136    # save the total_time
137    # ...
138
139    # save the print statement
140    # ...
141
142    # save the return statement
143    # ...
144
145    # save the generator
146    # ...
147
148    # save the d_losses
149    # ...
150
151    # save the g_losses
152    # ...
153
154    # save the d_acc
155    # ...
156
157    # save the fid_scores
158    # ...
159
160    # save the end_time
161    # ...
162
163    # save the total_time
164    # ...
165
166    # save the print statement
167    # ...
168
169    # save the return statement
170    # ...
171
172    # save the generator
173    # ...
174
175    # save the d_losses
176    # ...
177
178    # save the g_losses
179    # ...
180
181    # save the d_acc
182    # ...
183
184    # save the fid_scores
185    # ...
186
187    # save the end_time
188    # ...
189
190    # save the total_time
191    # ...
192
193    # save the print statement
194    # ...
195
196    # save the return statement
197    # ...
198
199    # save the generator
200    # ...
201
202    # save the d_losses
203    # ...
204
205    # save the g_losses
206    # ...
207
208    # save the d_acc
209    # ...
210
211    # save the fid_scores
212    # ...
213
214    # save the end_time
215    # ...
216
217    # save the total_time
218    # ...
219
220    # save the print statement
221    # ...
222
223    # save the return statement
224    # ...
225
226    # save the generator
227    # ...
228
229    # save the d_losses
230    # ...
231
232    # save the g_losses
233    # ...
234
235    # save the d_acc
236    # ...
237
238    # save the fid_scores
239    # ...
240
241    # save the end_time
242    # ...
243
244    # save the total_time
245    # ...
246
247    # save the print statement
248    # ...
249
250    # save the return statement
251    # ...
252
253    # save the generator
254    # ...
255
256    # save the d_losses
257    # ...
258
259    # save the g_losses
260    # ...
261
262    # save the d_acc
263    # ...
264
265    # save the fid_scores
266    # ...
267
268    # save the end_time
269    # ...
270
271    # save the total_time
272    # ...
273
274    # save the print statement
275    # ...
276
277    # save the return statement
278    # ...
279
280    # save the generator
281    # ...
282
283    # save the d_losses
284    # ...
285
286    # save the g_losses
287    # ...
288
289    # save the d_acc
290    # ...
291
292    # save the fid_scores
293    # ...
294
295    # save the end_time
296    # ...
297
298    # save the total_time
299    # ...
300
301    # save the print statement
302    # ...
303
304    # save the return statement
305    # ...
306
307    # save the generator
308    # ...
309
310    # save the d_losses
311    # ...
312
313    # save the g_losses
314    # ...
315
316    # save the d_acc
317    # ...
318
319    # save the fid_scores
320    # ...
321
322    # save the end_time
323    # ...
324
325    # save the total_time
326    # ...
327
328    # save the print statement
329    # ...
330
331    # save the return statement
332    # ...
333
334    # save the generator
335    # ...
336
337    # save the d_losses
338    # ...
339
340    # save the g_losses
341    # ...
342
343    # save the d_acc
344    # ...
345
346    # save the fid_scores
347    # ...
348
349    # save the end_time
350    # ...
351
352    # save the total_time
353    # ...
354
355    # save the print statement
356    # ...
357
358    # save the return statement
359    # ...
360
361    # save the generator
362    # ...
363
364    # save the d_losses
365    # ...
366
367    # save the g_losses
368    # ...
369
370    # save the d_acc
371    # ...
372
373    # save the fid_scores
374    # ...
375
376    # save the end_time
377    # ...
378
379    # save the total_time
380    # ...
381
382    # save the print statement
383    # ...
384
385    # save the return statement
386    # ...
387
388    # save the generator
389    # ...
390
391    # save the d_losses
392    # ...
393
394    # save the g_losses
395    # ...
396
397    # save the d_acc
398    # ...
399
400    # save the fid_scores
401    # ...
402
403    # save the end_time
404    # ...
405
406    # save the total_time
407    # ...
408
409    # save the print statement
410    # ...
411
412    # save the return statement
413    # ...
414
415    # save the generator
416    # ...
417
418    # save the d_losses
419    # ...
420
421    # save the g_losses
422    # ...
423
424    # save the d_acc
425    # ...
426
427    # save the fid_scores
428    # ...
429
430    # save the end_time
431    # ...
432
433    # save the total_time
434    # ...
435
436    # save the print statement
437    # ...
438
439    # save the return statement
440    # ...
441
442    # save the generator
443    # ...
444
445    # save the d_losses
446    # ...
447
448    # save the g_losses
449    # ...
450
451    # save the d_acc
452    # ...
453
454    # save the fid_scores
455    # ...
456
457    # save the end_time
458    # ...
459
460    # save the total_time
461    # ...
462
463    # save the print statement
464    # ...
465
466    # save the return statement
467    # ...
468
469    # save the generator
470    # ...
471
472    # save the d_losses
473    # ...
474
475    # save the g_losses
476    # ...
477
478    # save the d_acc
479    # ...
480
481    # save the fid_scores
482    # ...
483
484    # save the end_time
485    # ...
486
487    # save the total_time
488    # ...
489
490    # save the print statement
491    # ...
492
493    # save the return statement
494    # ...
495
496    # save the generator
497    # ...
498
499    # save the d_losses
500    # ...
501
502    # save the g_losses
503    # ...
504
505    # save the d_acc
506    # ...
507
508    # save the fid_scores
509    # ...
510
511    # save the end_time
512    # ...
513
514    # save the total_time
515    # ...
516
517    # save the print statement
518    # ...
519
520    # save the return statement
521    # ...
522
523    # save the generator
524    # ...
525
526    # save the d_losses
527    # ...
528
529    # save the g_losses
530    # ...
531
532    # save the d_acc
533    # ...
534
535    # save the fid_scores
536    # ...
537
538    # save the end_time
539    # ...
540
541    # save the total_time
542    # ...
543
544    # save the print statement
545    # ...
546
547    # save the return statement
548    # ...
549
550    # save the generator
551    # ...
552
553    # save the d_losses
554    # ...
555
556    # save the g_losses
557    # ...
558
559    # save the d_acc
560    # ...
561
562    # save the fid_scores
563    # ...
564
565    # save the end_time
566    # ...
567
568    # save the total_time
569    # ...
570
571    # save the print statement
572    # ...
573
574    # save the return statement
575    # ...
576
577    # save the generator
578    # ...
579
580    # save the d_losses
581    # ...
582
583    # save the g_losses
584    # ...
585
586    # save the d_acc
587    # ...
588
589    # save the fid_scores
590    # ...
591
592    # save the end_time
593    # ...
594
595    # save the total_time
596    # ...
597
598    # save the print statement
599    # ...
600
601    # save the return statement
602    # ...
603
604    # save the generator
605    # ...
606
607    # save the d_losses
608    # ...
609
610    # save the g_losses
611    # ...
612
613    # save the d_acc
614    # ...
615
616    # save the fid_scores
617    # ...
618
619    # save the end_time
620    # ...
621
622    # save the total_time
623    # ...
624
625    # save the print statement
626    # ...
627
628    # save the return statement
629    # ...
630
631    # save the generator
632    # ...
633
634    # save the d_losses
635    # ...
636
637    # save the g_losses
638    # ...
639
640    # save the d_acc
641    # ...
642
643    # save the fid_scores
644    # ...
645
646    # save the end_time
647    # ...
648
649    # save the total_time
650    # ...
651
652    # save the print statement
653    # ...
654
655    # save the return statement
656    # ...
657
658    # save the generator
659    # ...
660
661    # save the d_losses
662    # ...
663
664    # save the g_losses
665    # ...
666
667    # save the d_acc
668    # ...
669
670    # save the fid_scores
671    # ...
672
673    # save the end_time
674    # ...
675
676    # save the total_time
677    # ...
678
679    # save the print statement
680    # ...
681
682    # save the return statement
683    # ...
684
685    # save the generator
686    # ...
687
688    # save the d_losses
689    # ...
690
691    # save the g_losses
692    # ...
693
694    # save the d_acc
695    # ...
696
697    # save the fid_scores
698    # ...
699
700    # save the end_time
701    # ...
702
703    # save the total_time
704    # ...
705
706    # save the print statement
707    # ...
708
709    # save the return statement
710    # ...
711
712    # save the generator
713    # ...
714
715    # save the d_losses
716    # ...
717
718    # save the g_losses
719    # ...
720
721    # save the d_acc
722    # ...
723
724    # save the fid_scores
725    # ...
726
727    # save the end_time
728    # ...
729
729    # save the total_time
730    # ...
731
732    # save the print statement
733    # ...
734
735    # save the return statement
736    # ...
737
738    # save the generator
739    # ...
740
741    # save the d_losses
742    # ...
743
744    # save the g_losses
745    # ...
746
747    # save the d_acc
748    # ...
749
749    # save the fid_scores
750    # ...
751
752    # save the end_time
753    # ...
754
755    # save the total_time
756    # ...
757
756    # save the print statement
757    # ...
758
759    # save the return statement
759    # ...
760
761    # save the generator
762    # ...
763
764    # save the d_losses
765    # ...
766
767    # save the g_losses
768    # ...
769
768    # save the d_acc
769    # ...
770
770    # save the fid_scores
771    # ...
772
771    # save the end_time
772    # ...
773
773    # save the total_time
774    # ...
775
774    # save the print statement
775    # ...
776
776    # save the return statement
776    # ...
777
777    # save the generator
778    # ...
779
779    # save the d_losses
780    # ...
781
780    # save the g_losses
781    # ...
782
782    # save the d_acc
783    # ...
784
783    # save the fid_scores
784    # ...
785
785    # save the end_time
786    # ...
787
786    # save the total_time
787    # ...
788
788    # save the print statement
788    # ...
789
789    # save the return statement
789    # ...
790
790    # save the generator
791    # ...
792
792    # save the d_losses
793    # ...
794
793    # save the g_losses
794    # ...
795
795    # save the d_acc
796    # ...
797
796    # save the fid_scores
797    # ...
798
798    # save the end_time
799    # ...
800
800    # save the total_time
801    # ...
802
802    # save the print statement
802    # ...
803
803    # save the return statement
803    # ...
804
804    # save the generator
805    # ...
806
806    # save the d_losses
807    # ...
808
807    # save the g_losses
808    # ...
809
809    # save the d_acc
810    # ...
811
810    # save the fid_scores
811    # ...
812
812    # save the end_time
813    # ...
814
813    # save the total_time
814    # ...
815
815    # save the print statement
815    # ...
816
816    # save the return statement
816    # ...
817
817    # save the generator
818    # ...
819
819    # save the d_losses
820    # ...
821
820    # save the g_losses
821    # ...
822
822    # save the d_acc
823    # ...
824
823    # save the fid_scores
824    # ...
825
825    # save the end_time
826    # ...
827
826    # save the total_time
827    # ...
828
828    # save the print statement
828    # ...
829
829    # save the return statement
829    # ...
830
830    # save the generator
831    # ...
832
832    # save the d_losses
833    # ...
834
833    # save the g_losses
834    # ...
835
835    # save the d_acc
836    # ...
837
836    # save the fid_scores
837    # ...
838
838    # save the end_time
839    # ...
840
839    # save the total_time
840    # ...
841
841    # save the print statement
841    # ...
842
842    # save the return statement
842    # ...
843
843    # save the generator
844    # ...
845
845    # save the d_losses
846    # ...
847
846    # save the g_losses
847    # ...
848
848    # save the d_acc
849    # ...
850
849    # save the fid_scores
850    # ...
851
851    # save the end_time
852    # ...
853
852    # save the total_time
853    # ...
854
854    # save the print statement
854    # ...
855
855    # save the return statement
855    # ...
856
856    # save the generator
857    # ...
858
858    # save the d_losses
859    # ...
860
859    # save the g_losses
860    # ...
861
861    # save the d_acc
862    # ...
863
862    # save the fid_scores
863    # ...
864
864    # save the end_time
865    # ...
866
865    # save the total_time
866    # ...
867
867    # save the print statement
867    # ...
868
868    # save the return statement
868    # ...
869
869    # save the generator
870    # ...
871
871    # save the d_losses
872    # ...
873
872    # save the g_losses
873    # ...
874
874    # save the d_acc
875    # ...
876
875    # save the fid_scores
876    # ...
877
877    # save the end_time
878    # ...
879
878    # save the total_time
879    # ...
880
880    # save the print statement
880    # ...
881
881    # save the return statement
881    # ...
882
882    # save the generator
883    # ...
884
884    # save the d_losses
885    # ...
886
885    # save the g_losses
886    # ...
887
887    # save the d_acc
888    # ...
889
888    # save the fid_scores
889    # ...
890
890    # save the end_time
891    # ...
892
891    # save the total_time
892    # ...
893
893    # save the print statement
893    # ...
894
894    # save the return statement
894    # ...
895
895    # save the generator
896    # ...
897
897    # save the d_losses
898    # ...
899
898    # save the g_losses
899    # ...
900
900    # save the d_acc
901    # ...
902
901    # save the fid_scores
902    # ...
903
903    # save the end_time
904    # ...
905
904    # save the total_time
905    # ...
906
906    # save the print statement
906    # ...
907
907    # save the return statement
907    # ...
908
908    # save the generator
909    # ...
910
910    # save the d_losses
911    # ...
912
911    # save the g_losses
912    # ...
913
913    # save the d_acc
914    # ...
915
914    # save the fid_scores
915    # ...
916
916    # save the end_time
917    # ...
918
915    # save the total_time
916    # ...
919
919    # save the print statement
919    # ...
920
920    # save the return statement
920    # ...
921
921    # save the generator
922    # ...
923
923    # save the d_losses
924    # ...
925
924    # save the g_losses
925    # ...
926
926    # save the d_acc
927    # ...
928
927    # save the fid_scores
928    # ...
929
929    # save the end_time
930    # ...
931
930    # save the total_time
931    # ...
932
932    # save the print statement
932    # ...
933
933    # save the return statement
933    # ...
934
934    # save the generator
935    # ...
936
936    # save the d_losses
937    # ...
938
937    # save the g_losses
938    # ...
939
939    # save the d_acc
940    # ...
941
940    # save the fid_scores
941    # ...
942
942    # save the end_time
943    # ...
944
943    # save the total_time
944    # ...
945
945    # save the print statement
945    # ...
946
946    # save the return statement
946    # ...
947
947    # save the generator
948    # ...
949
949    # save the d_losses
950    # ...
951
950    # save the g_losses
951    # ...
952
952    # save the d_acc
953    # ...
954
953    # save the fid_scores
954    # ...
955
955    # save the end_time
956    # ...
957
954    # save the total_time
955    # ...
958
958    # save the print statement
958    # ...
959
959    # save the return statement
959    # ...
960
960    # save the generator
961    # ...
962
962    # save the d_losses
963    # ...
964
963    # save the g_losses
964    # ...
965
965    # save the d_acc
966    # ...
967
966    # save the fid_scores
967    # ...
968
968    # save the end_time
969    # ...
970
968    # save the total_time
969    # ...
971
971    # save the print statement
971    # ...
972
972    # save the return statement
972    # ...
973
973    # save the generator
974    # ...
975
975    # save the d_losses
976    # ...
977
976    # save the g_losses
977    # ...
978
978    # save the d_acc
979    # ...
980
979    # save the fid_scores
980    # ...
981
981    # save the end_time
982    # ...
983
980    # save the total_time
981    # ...
984
984    # save the print statement
984    # ...
985
985    # save the return statement
985    # ...
986
986    # save the generator
987    # ...
988
988    # save the d_losses
989    # ...
990
989    # save the g_losses
990    # ...
991
991    # save the d_acc
992    # ...
993
992    # save the fid_scores
993    # ...
994
994    # save the end_time
995    # ...
996
994    # save the total_time
995    # ...
997
997    # save the print statement
997    # ...
998
998    # save the return statement
998    # ...
999
999    # save the generator
1000    # ...
1001
1001    # save the d_losses
1002    # ...
1003
1002    # save the g_losses
1003    # ...
1004
1004    # save the d_acc
1005    # ...
1006
1005    # save the fid_scores
1006    # ...
1007
1007    # save the end_time
1008    # ...
1009
1007    # save the total_time
1008    # ...
1010
1010    # save the print statement
1010    # ...
1011
1011    # save the return statement
1011    # ...
1012
1012    # save the generator
1013    # ...
1014
1014    # save the d_losses
1015    # ...
1016
1015    # save the g_losses
1016    # ...
1017
1017    # save the d_acc
1018    # ...
1019
1018    # save the fid_scores
1019    # ...
1020
1020    # save the end_time
1021    # ...
1022
1019    # save the total_time
1020    # ...
1023
1023    # save the print statement
1023    # ...
1024
1024    # save the return statement
1024    # ...
1025
1025    # save the generator
1026    # ...
1027
1027    # save the d_losses
1028    # ...
1029
1028    # save the g_losses
1029    # ...
1030
1030    # save the d_acc
1031    # ...
1032
1031    # save the fid_scores
1032    # ...
1033
1033    # save the end_time
1034    # ...
1035
1032    # save the total_time
1033    # ...
1036
1036    # save the print statement
1036    # ...
1037
1037    # save the return statement
1037    # ...
1038
1038    # save the generator
1039    # ...
1040
1040    # save the d_losses
1041    # ...
1042
1041    # save the g_losses
1042    # ...
1043
1043    # save the d_acc
1044    # ...
1045
1044    # save the fid_scores
1045    # ...
1046
1046    # save the end_time
1047    # ...
1048
1045    # save the total_time
1046    # ...
1049
1049    # save the print statement
1049    # ...
1050
1050    # save the return statement
1050    # ...
1051
1051    # save the generator
1052    # ...
1053
1053    # save the d_losses
1054    # ...
1055
1054    # save the g_losses
1055    # ...
1056
1056    # save the d_acc
1057    # ...
1058
1057    # save the fid_scores
1058    # ...
1059
1059    # save the end_time
1060    # ...
1061
1059    # save the total_time
1060    # ...
1062
1062    # save the print statement
1062    # ...
1063
1063    # save the return statement
1063    # ...
1064
1064    # save the generator
1065    # ...
1066
1066    # save the d_losses
1067    # ...
1068
1067    # save the g_losses
1068    # ...
1069
1069    # save the d_acc
1070    # ...
1071
1070    # save the fid_scores
1071    # ...
1072
1072    # save the end_time
1073    # ...
1074
1071    # save the total_time
1072    # ...
1075
1075    # save the print statement
1075    # ...
1076
1076    # save the return statement
1076    # ...
1077
1077    # save the generator
1078    # ...
1079
1079    # save the d_losses
1080    # ...
1081
1080    # save the g_losses
1081    # ...
1082
1082    # save the d_acc
1083    # ...
1084
1083    # save the fid_scores
1084    # ...
1085
1085    # save the end_time
1086    # ...
1087
1084    # save the total_time
1085    # ...
1088
1088    # save the print statement
1088    # ...
1089
1089    # save the return statement
1089    # ...
1090
1090    # save the generator
1091    # ...
1092
1092    # save the d_losses
1093    # ...
1094
1093    # save the g_losses
1094    # ...
1095
1095    # save the d_acc
1096    # ...
1097
1096    # save the fid_scores
1097    # ...
1098
1098    # save the end_time
1099    # ...
1100
1098    # save the total_time
1099    # ...
1101
1101    # save the print statement
1101    # ...
1102
1102    # save the return statement
1102    # ...
1103
1103    # save the generator
1104    # ...
1105
1105    # save the d_losses
1106    # ...
1107
1106    # save the g_losses
1107    # ...
1108
1108    # save the d_acc
1109    # ...
1110
1109    # save the fid_scores
1110    # ...
1111
1111    # save the end_time
1112    # ...
1113
1110    # save the total_time
1111    # ...
1114
1114    # save the print statement
1114    # ...
1115
1115    # save the return statement
1115    # ...
1116
1116    # save the generator
1117    # ...
1118
1118    # save the d_losses
1119    # ...
1120
1119    # save the g_losses
1120    # ...
1121
1121    # save the d_acc
1122    # ...
1123
1122    # save the fid_scores
1123    # ...
1124
1124    # save the end_time
1125    # ...
1126
1123    # save the total_time
1124    # ...
1127
1127    # save the print statement
1127    # ...
1128
1128    # save the return statement
1128    # ...
1129
1129    # save the generator
1130    # ...
1131
1131    # save the d_losses
1132    # ...
1133
1132    # save the g_losses
1133    # ...
1134
1134    # save the d_acc
1135    # ...
1136
1135    # save the fid_scores
1136    # ...
1137
1137    # save the end_time
1138    # ...
1139
1137    # save the total_time
1138    # ...
1140
1140    # save the print statement
1140    # ...
1141
1141    # save the return statement
1141    # ...
1142
1142    # save the generator
1143    # ...
1144
1144    # save the d_losses
1145    # ...
1146
1145    # save the g_losses
1146    # ...
1147
1147    # save the d_acc
1148    # ...
1149
1148    # save the fid_scores
1149    # ...
1150
11
```

```

25     model.add(Conv2DTranspose(128, kernel_size=4, strides
26         =2, padding='same'))
27     model.add(LeakyReLU(alpha=0.2))
28     model.add(BatchNormalization(momentum=0.8))

29     model.add(Conv2DTranspose(64, kernel_size=4, strides
30         =2, padding='same'))
31     model.add(LeakyReLU(alpha=0.2))
32     model.add(BatchNormalization(momentum=0.8))

33     model.add(Conv2D(1, kernel_size=7, activation='tanh',
34         padding='same'))

35     return model

36

37 # input 28*28*1
38 # output 1

39

40 def build_discriminator():
41     model = Sequential()

42

43     model.add(Conv2D(64, kernel_size=3, strides=2,
44         input_shape=(28, 28, 1), padding='same'))
45     model.add(LeakyReLU(alpha=0.2))
46     model.add(Dropout(0.25))

47     model.add(Conv2D(128, kernel_size=3, strides=2,
48         padding='same'))
49     model.add(LeakyReLU(alpha=0.2))
50     model.add(Dropout(0.25))

51     model.add(Flatten())
52     model.add(Dense(1, activation='sigmoid'))

53

54     return model

55

56 # Load and preprocess the MNIST dataset
57 (x_train, _), (_, _) = tf.keras.datasets.mnist.load_data()

```

```

58     x_train = (x_train - 127.5) / 127.5
59     x_train = np.expand_dims(x_train, axis=3)
60
61     # Calculate FID function
62     def calculate_fid(real_images, fake_images):
63         act1 = real_images.reshape((real_images.shape[0], -1))
64         mu1, sigma1 = act1.mean(axis=0), np.cov(act1, rowvar=False)
65
66         act2 = fake_images.reshape((fake_images.shape[0], -1))
67         mu2, sigma2 = act2.mean(axis=0), np.cov(act2, rowvar=False)
68
69         ssdiff = np.sum((mu1 - mu2)**2.0)
70         covmean = sqrtm(sigma1.dot(sigma2))
71
72         if np.iscomplexobj(covmean):
73             covmean = covmean.real
74
75         fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 * covmean)
76
77     return fid
78
79     def train_gan(epochs=1000, batch_size=64, p_epoch=100):
80         generator = build_generator()
81         discriminator = build_discriminator()
82
83         discriminator.compile(loss='binary_crossentropy',
84                                optimizer=Adam(0.0002, 0.5), metrics=['accuracy'])
85         discriminator.trainable = False
86
87         gan_input = tf.keras.Input(shape=(100,))
88         gan_output = discriminator(generator(gan_input))
89         gan = tf.keras.Model(gan_input, gan_output)
90         gan.compile(loss='binary_crossentropy', optimizer=
91                     Adam(0.0002, 0.5))

```

```

90
91     # using half batches for the discriminator ensures
92     # balanced and efficient training,
93     # better memory management, and more stable training
94     # dynamics in GANs.
95     half_batch = int(batch_size / 2)
96
97
98     d_losses = []
99     g_losses = []
100    d_acc = []
101    fid_scores = [] # List to store FID scores
102
103    start_time = time.time() # Record the start time
104
105    for epoch in range(epochs):
106        # Select a random half batch of real images
107        idx = np.random.randint(0, x_train.shape[0],
108                               half_batch)
109        real_images = x_train[idx]
110
111        # Generate a half batch of new fake images
112        noise = np.random.normal(0, 1, (half_batch, 100))
113        fake_images = generator.predict(noise)
114
115        # Train the discriminator
116        real_labels = np.ones((half_batch, 1))
117        fake_labels = np.zeros((half_batch, 1))
118
119        d_loss_real = discriminator.train_on_batch(
120            real_images, real_labels)
121        d_loss_fake = discriminator.train_on_batch(
122            fake_images, fake_labels)
123        d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
124
125        # Train the generator
126        noise = np.random.normal(0, 1, (batch_size, 100))
127        valid_y = np.ones((batch_size, 1))
128
129        g_loss = gan.train_on_batch(noise, valid_y)

```

```

124
125     # Record the losses
126     d_losses.append(d_loss[0])
127     g_losses.append(g_loss)
128     d_acc.append(d_loss[1] * 100)

129
130     # Calculate FID every p_epoch epochs
131     if epoch % p_epoch == 0:
132         noise = np.random.normal(0, 1, (1000, 100))
133         fake_images = generator.predict(noise)
134         fid = calculate_fid(x_train[:1000],
135                               fake_images)
136         fid_scores.append(fid)
137         print(f"epoch:[D_loss:{d_loss[0]},acc.:"
138               f"{100*d_loss[1]}%][G_loss:{g_loss}]"
139               f" FID:{fid}]")
140
141         end_time = time.time() # Record the end time
142         total_time = end_time - start_time
143         print(f"Total training time:{total_time:.2f} seconds"
144               ")
145
146         return generator, d_losses, g_losses, d_acc,
147               fid_scores

```

Listing A.3: Explore Data Augmentation (rotation 10, width and height shift 0.1

and horizontal flip)

```

1 import tensorflow as tf
2 from tensorflow.keras.layers import Dense, Reshape,
3     Flatten, Dropout, LeakyReLU, Conv2D, Conv2DTranspose,
4     BatchNormalization
5 from tensorflow.keras.models import Sequential
6 from tensorflow.keras.optimizers import Adam
7 from scipy.linalg import sqrtm
8 import numpy as np
9 import time
10 import matplotlib.pyplot as plt
11
12 np.random.seed(1000)

```

```

11  tf.random.set_seed(1000)
12
13  # input 100
14  # output 28*28*1
15
16  def build_generator():
17      model = Sequential()
18
19      # increase the dimension
20      model.add(Dense(7*7*128, input_dim=100))
21      model.add(LeakyReLU(alpha=0.2))
22      model.add(Reshape((7, 7, 128)))
23      model.add(BatchNormalization(momentum=0.8))
24
25      model.add(Conv2DTranspose(128, kernel_size=4, strides
26          =2, padding='same'))
27      model.add(LeakyReLU(alpha=0.2))
28      model.add(BatchNormalization(momentum=0.8))
29
30      model.add(Conv2DTranspose(64, kernel_size=4, strides
31          =2, padding='same'))
32      model.add(LeakyReLU(alpha=0.2))
33      model.add(BatchNormalization(momentum=0.8))
34
35      model.add(Conv2D(1, kernel_size=7, activation='tanh',
36          padding='same'))
37
38      return model
39
40  # input 28*28*1
41  # output 1
42
43  def build_discriminator():
44      model = Sequential()
45
46      model.add(Conv2D(64, kernel_size=3, strides=2,
47          input_shape=(28, 28, 1), padding='same'))
48      model.add(LeakyReLU(alpha=0.2))
49      model.add(Dropout(0.25))

```

```

46
47     model.add(Conv2D(128, kernel_size=3, strides=2,
48                     padding='same'))
49     model.add(LeakyReLU(alpha=0.2))
50     model.add(Dropout(0.25))

51     model.add(Flatten())
52     model.add(Dense(1, activation='sigmoid'))

53
54     return model

55
56 (x_train, _), (_, _) = tf.keras.datasets.mnist.load_data()
57
58 x_train = (x_train - 127.5) / 127.5
59 x_train = np.expand_dims(x_train, axis=3)

60 datagen = tf.keras.preprocessing.image.ImageDataGenerator(
61
62     rotation_range=10,
63     width_shift_range=0.1,
64     height_shift_range=0.1,
65     horizontal_flip=True
66 )

67 def calculate_fid(real_images, fake_images):
68     act1 = real_images.reshape((real_images.shape[0], -1))
69     mu1, sigma1 = act1.mean(axis=0), np.cov(act1, rowvar=False)

70     act2 = fake_images.reshape((fake_images.shape[0], -1))
71     mu2, sigma2 = act2.mean(axis=0), np.cov(act2, rowvar=False)

72     ssdiff = np.sum((mu1 - mu2)**2.0)
73     covmean = sqrtm(sigma1.dot(sigma2))

74     if np.iscomplexobj(covmean):
75
76
77

```

```

78         covmean = covmean.real
79
80     fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 *
81                             covmean)
82
83     return fid
84
85
86 def train_gan(epochs=1000, batch_size=64, p_epoch=100):
87     generator = build_generator()
88     discriminator = build_discriminator()
89
90     discriminator.compile(loss='binary_crossentropy',
91                           optimizer=Adam(0.0002, 0.5), metrics=['accuracy'])
92     discriminator.trainable = False
93
94     gan_input = tf.keras.Input(shape=(100,))
95     gan_output = discriminator(generator(gan_input))
96     gan = tf.keras.Model(gan_input, gan_output)
97     gan.compile(loss='binary_crossentropy', optimizer=
98                 Adam(0.0002, 0.5))
99
100    half_batch = int(batch_size / 2)
101
102    d_losses = []
103    g_losses = []
104    d_acc = []
105    fid_scores = []
106
107    start_time = time.time() # Record the start time
108
109    for epoch in range(epochs):
110        # Select a random half batch of real images
111        idx = np.random.randint(0, x_train.shape[0],
112                               half_batch)
113        real_images = x_train[idx]
114
115        real_images_augmented = next(datagen.flow(
116                                      real_images, batch_size=half_batch))

```

```

112     # Generate a half batch of new fake images
113     noise = np.random.normal(0, 1, (half_batch, 100))
114     fake_images = generator.predict(noise)
115
116     # Train the discriminator
117     real_labels = np.ones((half_batch, 1))
118     fake_labels = np.zeros((half_batch, 1))
119
120     d_loss_real = discriminator.train_on_batch(
121         real_images_augmented, real_labels)
122     d_loss_fake = discriminator.train_on_batch(
123         fake_images, fake_labels)
124     d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
125
126     # Train the generator
127     noise = np.random.normal(0, 1, (batch_size, 100))
128     valid_y = np.ones((batch_size, 1))
129
130     g_loss = gan.train_on_batch(noise, valid_y)
131
132     # Record the losses
133     d_losses.append(d_loss[0])
134     g_losses.append(g_loss)
135     d_acc.append(d_loss[1] * 100)
136
137     # Calculate FID every p_epoch epochs
138     if epoch % p_epoch == 0:
139         noise = np.random.normal(0, 1, (1000, 100))
140         fake_images = generator.predict(noise)
141         fid = calculate_fid(x_train[:1000],
142                             fake_images)
143         fid_scores.append(fid)
144         print(f'{epoch}[Dloss:{d_loss[0]},acc.:{100*d_loss[1]}%][Gloss:{g_loss}][FID:{fid}]')
145
146     end_time = time.time()    # Record the end time
147     total_time = end_time - start_time
148     print(f'Total training time:{total_time:.2f} seconds')

```

```

        ")
146     return generator, d_losses, g_losses, d_acc,
           fid_scores
147
148     # Training the GAN with data augmentation and FID
149     # calculation
150     generator, d_losses, g_losses, d_acc, fid_scores =
151         train_gan(epochs=1000, batch_size=64, p_epoch=100)

```

Listing A.4: Explore Data Augmentation (rotation 10, width and height shift 0.1)

```

1      import tensorflow as tf
2      from tensorflow.keras.layers import Dense, Reshape,
3          Flatten, Dropout, LeakyReLU, Conv2D, Conv2DTranspose,
4          BatchNormalization
5      from tensorflow.keras.models import Sequential
6      from tensorflow.keras.optimizers import Adam
7      from scipy.linalg import sqrtm
8      import numpy as np
9      import time
10     import matplotlib.pyplot as plt
11
12
13     np.random.seed(1000)
14     tf.random.set_seed(1000)
15
16     # input 100
17     # output 28*28*1
18
19     def build_generator():
20         model = Sequential()
21
22         # increase the dimension
23         model.add(Dense(7*7*128, input_dim=100))
24         model.add(LeakyReLU(alpha=0.2))
25         model.add(Reshape((7, 7, 128)))
26         model.add(BatchNormalization(momentum=0.8))
27
28         model.add(Conv2DTranspose(128, kernel_size=4, strides
29             =2, padding='same'))

```

```

26     model.add(LeakyReLU(alpha=0.2))
27     model.add(BatchNormalization(momentum=0.8))

28
29     model.add(Conv2DTranspose(64, kernel_size=4, strides
30         =2, padding='same'))
31     model.add(LeakyReLU(alpha=0.2))
32     model.add(BatchNormalization(momentum=0.8))

33     model.add(Conv2D(1, kernel_size=7, activation='tanh',
34         padding='same'))

35     return model

36
37 # input 28*28*1
38 # output 1

39
40 def build_discriminator():
41     model = Sequential()

42
43     model.add(Conv2D(64, kernel_size=3, strides=2,
44         input_shape=(28, 28, 1), padding='same'))
45     model.add(LeakyReLU(alpha=0.2))
46     model.add(Dropout(0.25))

47     model.add(Conv2D(128, kernel_size=3, strides=2,
48         padding='same'))
49     model.add(LeakyReLU(alpha=0.2))
50     model.add(Dropout(0.25))

51     model.add(Flatten())
52     model.add(Dense(1, activation='sigmoid'))

53
54     return model

55
56 (x_train, _), (_, _) = tf.keras.datasets.mnist.load_data()
57
58 x_train = (x_train - 127.5) / 127.5
59 x_train = np.expand_dims(x_train, axis=3)

```

```

60      datagen = tf.keras.preprocessing.image.ImageDataGenerator(
61          (
62              rotation_range=10,
63              width_shift_range=0.1,
64              height_shift_range=0.1,
65          )
66
66      def calculate_fid(real_images, fake_images):
67          act1 = real_images.reshape((real_images.shape[0], -1)
68                                      )
69          mu1, sigma1 = act1.mean(axis=0), np.cov(act1, rowvar=
70                                          False)
71
70          act2 = fake_images.reshape((fake_images.shape[0], -1)
71                                      )
71          mu2, sigma2 = act2.mean(axis=0), np.cov(act2, rowvar=
72                                          False)
72
73          ssdiff = np.sum((mu1 - mu2)**2.0)
74          covmean = sqrtm(sigma1.dot(sigma2))
75
76          if np.iscomplexobj(covmean):
77              covmean = covmean.real
78
79          fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 *
80                                  covmean)
81
81      return fid
82
83
83      def train_gan(epochs=1000, batch_size=64, p_epoch=100):
84          generator = build_generator()
85          discriminator = build_discriminator()
86
87          discriminator.compile(loss='binary_crossentropy',
88                                 optimizer=Adam(0.0002, 0.5), metrics=['accuracy'])
89          discriminator.trainable = False
90
90          gan_input = tf.keras.Input(shape=(100,))
91          gan_output = discriminator(generator(gan_input))

```

```

92     gan = tf.keras.Model(gan_input, gan_output)
93     gan.compile(loss='binary_crossentropy', optimizer=
94                 Adam(0.0002, 0.5))
95
96
97     half_batch = int(batch_size / 2)
98
99
100    d_losses = []
101   g_losses = []
102   d_acc = []
103   fid_scores = []
104
105   start_time = time.time() # Record the start time
106
107   for epoch in range(epochs):
108       # Select a random half batch of real images
109       idx = np.random.randint(0, x_train.shape[0],
110                               half_batch)
111       real_images = x_train[idx]
112
113       real_images_augmented = next(datagen.flow(
114                                     real_images, batch_size=half_batch))
115
116       # Generate a half batch of new fake images
117       noise = np.random.normal(0, 1, (half_batch, 100))
118       fake_images = generator.predict(noise)
119
120       # Train the discriminator
121       real_labels = np.ones((half_batch, 1))
122       fake_labels = np.zeros((half_batch, 1))
123
124       d_loss_real = discriminator.train_on_batch(
125           real_images_augmented, real_labels)
126       d_loss_fake = discriminator.train_on_batch(
127           fake_images, fake_labels)
128       d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
129
130       # Train the generator
131       noise = np.random.normal(0, 1, (batch_size, 100))
132       valid_y = np.ones((batch_size, 1))

```

```

126
127     g_loss = gan.train_on_batch(noise, valid_y)
128
129     # Record the losses
130     d_losses.append(d_loss[0])
131     g_losses.append(g_loss)
132     d_acc.append(d_loss[1] * 100)
133
134     # Calculate FID every p_epoch epochs
135     if epoch % p_epoch == 0:
136         noise = np.random.normal(0, 1, (1000, 100))
137         fake_images = generator.predict(noise)
138         fid = calculate_fid(x_train[:1000],
139                               fake_images)
140         fid_scores.append(fid)
141         print(f"Epoch [{epoch}][D loss: {d_loss[0]}], acc.: {100*d_loss[1]}% [G loss: {g_loss}] [FID: {fid}]")
142
143     end_time = time.time() # Record the end time
144     total_time = end_time - start_time
145     print(f"Total training time: {total_time:.2f} seconds")
146
147     return generator, d_losses, g_losses, d_acc,
148           fid_scores
149
150
151     # Training the GAN with data augmentation and FID
152     # calculation
153     generator, d_losses, g_losses, d_acc, fid_scores =
154         train_gan(epochs=1000, batch_size=64, p_epoch=100)

```

Listing A.5: Explore Data Augmentation (width and height shift 0.1)

```

1 import tensorflow as tf
2 from tensorflow.keras.layers import Dense, Reshape,
3     Flatten, Dropout, LeakyReLU, Conv2D, Conv2DTranspose,
4     BatchNormalization
5 from tensorflow.keras.models import Sequential
6 from tensorflow.keras.optimizers import Adam
7 from scipy.linalg import sqrtm

```

```

6      import numpy as np
7      import time
8      import matplotlib.pyplot as plt
9
10     np.random.seed(1000)
11     tf.random.set_seed(1000)
12
13     # input 100
14     # output 28*28*1
15
16     def build_generator():
17         model = Sequential()
18
19         # increase the dimension
20         model.add(Dense(7*7*128, input_dim=100))
21         model.add(LeakyReLU(alpha=0.2))
22         model.add(Reshape((7, 7, 128)))
23         model.add(BatchNormalization(momentum=0.8))
24
25         model.add(Conv2DTranspose(128, kernel_size=4, strides
26             =2, padding='same'))
27         model.add(LeakyReLU(alpha=0.2))
28         model.add(BatchNormalization(momentum=0.8))
29
30         model.add(Conv2DTranspose(64, kernel_size=4, strides
31             =2, padding='same'))
32         model.add(LeakyReLU(alpha=0.2))
33         model.add(BatchNormalization(momentum=0.8))
34
35         model.add(Conv2D(1, kernel_size=7, activation='tanh',
36             padding='same'))
37
38         return model
39
40     # input 28*28*1
41     # output 1
42
43     def build_discriminator():
44         model = Sequential()

```

```

42
43     model.add(Conv2D(64, kernel_size=3, strides=2,
44                     input_shape=(28, 28, 1), padding='same'))
45     model.add(LeakyReLU(alpha=0.2))
46     model.add(Dropout(0.25))

47     model.add(Conv2D(128, kernel_size=3, strides=2,
48                     padding='same'))
49     model.add(LeakyReLU(alpha=0.2))
50     model.add(Dropout(0.25))

51     model.add(Flatten())
52     model.add(Dense(1, activation='sigmoid'))

53
54     return model

55

56 (x_train, _), (_, _) = tf.keras.datasets.mnist.load_data()
57
58 x_train = (x_train - 127.5) / 127.5
59 x_train = np.expand_dims(x_train, axis=3)

60 datagen = tf.keras.preprocessing.image.ImageDataGenerator(
61
62     width_shift_range=0.1,
63     height_shift_range=0.1,
64 )
65
66 def calculate_fid(real_images, fake_images):
67     act1 = real_images.reshape((real_images.shape[0], -1)
68                               )
69     mu1, sigma1 = act1.mean(axis=0), np.cov(act1, rowvar=
70                                     False)
71
72     act2 = fake_images.reshape((fake_images.shape[0], -1)
73                               )
74     mu2, sigma2 = act2.mean(axis=0), np.cov(act2, rowvar=
75                                     False)
76
77     ssdiff = np.sum((mu1 - mu2)**2.0)

```

```

73     covmean = sqrtm(sigma1.dot(sigma2))
74
75     if np.iscomplexobj(covmean):
76         covmean = covmean.real
77
78     fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 *
79                             covmean)
80
81     return fid
82
83
84     def train_gan(epochs=1000, batch_size=64, p_epoch=100):
85         generator = build_generator()
86         discriminator = build_discriminator()
87
88         discriminator.compile(loss='binary_crossentropy',
89                               optimizer=Adam(0.0002, 0.5), metrics=['accuracy'])
90         discriminator.trainable = False
91
92         gan_input = tf.keras.Input(shape=(100,))
93         gan_output = discriminator(generator(gan_input))
94         gan = tf.keras.Model(gan_input, gan_output)
95         gan.compile(loss='binary_crossentropy', optimizer=
96                     Adam(0.0002, 0.5))
97
98
99         half_batch = int(batch_size / 2)
100
101        start_time = time.time() # Record the start time
102
103        for epoch in range(epochs):
104            # Select a random half batch of real images
105            idx = np.random.randint(0, x_train.shape[0],
106                                   half_batch)
107            real_images = x_train[idx]

```

```

108     real_images_augmented = next(datagen.flow(
109         real_images, batch_size=half_batch))
110
110     # Generate a half batch of new fake images
111     noise = np.random.normal(0, 1, (half_batch, 100))
112     fake_images = generator.predict(noise)
113
114     # Train the discriminator
115     real_labels = np.ones((half_batch, 1))
116     fake_labels = np.zeros((half_batch, 1))
117
118     d_loss_real = discriminator.train_on_batch(
119         real_images_augmented, real_labels)
120     d_loss_fake = discriminator.train_on_batch(
121         fake_images, fake_labels)
122     d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
123
124     # Train the generator
125     noise = np.random.normal(0, 1, (batch_size, 100))
126     valid_y = np.ones((batch_size, 1))
127
128     g_loss = gan.train_on_batch(noise, valid_y)
129
130     # Record the losses
131     d_losses.append(d_loss[0])
132     g_losses.append(g_loss)
133     d_acc.append(d_loss[1] * 100)
134
135     # Calculate FID every p_epoch epochs
136     if epoch % p_epoch == 0:
137         noise = np.random.normal(0, 1, (1000, 100))
138         fake_images = generator.predict(noise)
139         fid = calculate_fid(x_train[:1000],
140                             fake_images)
141         fid_scores.append(fid)
142         print(f"epoch:[D_loss:{d_loss[0]},acc.:"
143               f"{100*d_loss[1]}%][G_loss:{g_loss}]"
144               f"FID:{fid}]")

```

```
141         end_time = time.time() # Record the end time
142
143         total_time = end_time - start_time
144         print(f"Total training time: {total_time:.2f} seconds")
145
146         return generator, d_losses, g_losses, d_acc,
147               fid_scores
148
149     # Training the GAN with data augmentation and FID
150     # calculation
151
152     generator, d_losses, g_losses, d_acc, fid_scores =
153       train_gan(epochs=1000, batch_size=64, p_epoch=100)
```

Listing A.6: Explore Data Augmentation (width and height shift 0.05)

```
1 import tensorflow as tf
2 from tensorflow.keras.layers import Dense, Reshape,
3     Flatten, Dropout, LeakyReLU, Conv2D, Conv2DTranspose,
4     BatchNormalization
5
6 from tensorflow.keras.models import Sequential
7 from tensorflow.keras.optimizers import Adam
8 from scipy.linalg import sqrtm
9
10 import numpy as np
11 import time
12 import matplotlib.pyplot as plt
13
14 np.random.seed(1000)
15 tf.random.set_seed(1000)
16
17 # input 100
18 # output 28*28*1
19
20 def build_generator():
21     model = Sequential()
22
23         # increase the dimension
24     model.add(Dense(7*7*128, input_dim=100))
25     model.add(LeakyReLU(alpha=0.2))
26     model.add(Reshape((7, 7, 128)))
27     model.add(BatchNormalization(momentum=0.8))
```

```

25     model.add(Conv2DTranspose(128, kernel_size=4, strides
26         =2, padding='same'))
27     model.add(LeakyReLU(alpha=0.2))
28     model.add(BatchNormalization(momentum=0.8))

29     model.add(Conv2DTranspose(64, kernel_size=4, strides
30         =2, padding='same'))
31     model.add(LeakyReLU(alpha=0.2))
32     model.add(BatchNormalization(momentum=0.8))

33     model.add(Conv2D(1, kernel_size=7, activation='tanh',
34         padding='same'))

35     return model

36

37 # input 28*28*1
38 # output 1

39

40 def build_discriminator():
41     model = Sequential()

42

43     model.add(Conv2D(64, kernel_size=3, strides=2,
44         input_shape=(28, 28, 1), padding='same'))
45     model.add(LeakyReLU(alpha=0.2))
46     model.add(Dropout(0.25))

47     model.add(Conv2D(128, kernel_size=3, strides=2,
48         padding='same'))
49     model.add(LeakyReLU(alpha=0.2))
50     model.add(Dropout(0.25))

51     model.add(Flatten())
52     model.add(Dense(1, activation='sigmoid'))

53

54     return model

55

56 (x_train, _), (_, _) = tf.keras.datasets.mnist.load_data()
57     ()
58 x_train = (x_train - 127.5) / 127.5

```

```

58     x_train = np.expand_dims(x_train, axis=3)
59
60     datagen = tf.keras.preprocessing.image.ImageDataGenerator(
61         (
62             width_shift_range=0.05,
63             height_shift_range=0.05,
64         )
65
66     def calculate_fid(real_images, fake_images):
67         act1 = real_images.reshape((real_images.shape[0], -1)
68             )
69         mu1, sigma1 = act1.mean(axis=0), np.cov(act1, rowvar=
70             False)
71
72         act2 = fake_images.reshape((fake_images.shape[0], -1)
73             )
74         mu2, sigma2 = act2.mean(axis=0), np.cov(act2, rowvar=
75             False)
76
77         ssdiff = np.sum((mu1 - mu2)**2.0)
78         covmean = sqrtm(sigma1.dot(sigma2))
79
80         if np.iscomplexobj(covmean):
81             covmean = covmean.real
82
83         fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 *
84             covmean)
85
86         return fid
87
88
89     def train_gan(epochs=1000, batch_size=64, p_epoch=100):
90         generator = build_generator()
91         discriminator = build_discriminator()
92
93         discriminator.compile(loss='binary_crossentropy',
94             optimizer=Adam(0.0002, 0.5), metrics=['accuracy'])
95         discriminator.trainable = False
96
97         gan_input = tf.keras.Input(shape=(100,))

```

```

90     gan_output = discriminator(generator(gan_input))
91     gan = tf.keras.Model(gan_input, gan_output)
92     gan.compile(loss='binary_crossentropy', optimizer=
93                   Adam(0.0002, 0.5))
94
95     half_batch = int(batch_size / 2)
96
97     d_losses = []
98     g_losses = []
99     d_acc = []
100    fid_scores = []
101
102    start_time = time.time() # Record the start time
103
104    for epoch in range(epochs):
105        # Select a random half batch of real images
106        idx = np.random.randint(0, x_train.shape[0],
107                               half_batch)
108        real_images = x_train[idx]
109
110        real_images_augmented = next(datagen.flow(
111            real_images, batch_size=half_batch))
112
113        # Generate a half batch of new fake images
114        noise = np.random.normal(0, 1, (half_batch, 100))
115        fake_images = generator.predict(noise)
116
117        # Train the discriminator
118        real_labels = np.ones((half_batch, 1))
119        fake_labels = np.zeros((half_batch, 1))
120
121        d_loss_real = discriminator.train_on_batch(
122            real_images_augmented, real_labels)
123        d_loss_fake = discriminator.train_on_batch(
124            fake_images, fake_labels)
125        d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
126
127        # Train the generator
128        noise = np.random.normal(0, 1, (batch_size, 100))

```

```

124     valid_y = np.ones((batch_size, 1))
125
126     g_loss = gan.train_on_batch(noise, valid_y)
127
128     # Record the losses
129     d_losses.append(d_loss[0])
130     g_losses.append(g_loss)
131     d_acc.append(d_loss[1] * 100)
132
133     # Calculate FID every p_epoch epochs
134     if epoch % p_epoch == 0:
135         noise = np.random.normal(0, 1, (1000, 100))
136         fake_images = generator.predict(noise)
137         fid = calculate_fid(x_train[:1000],
138                             fake_images)
139         fid_scores.append(fid)
140         print(f"epoch:[Dloss:{d_loss[0]},acc.:{100*d_loss[1]}%][Gloss:{g_loss}][FID:{fid}]")
141
142         end_time = time.time() # Record the end time
143         total_time = end_time - start_time
144         print(f"Total training time:{total_time:.2f} seconds")
145
146     # Training the GAN with data augmentation and FID
147     # calculation
148     generator, d_losses, g_losses, d_acc,
149     fid_scores =
150     train_gan(epochs=1000, batch_size=64, p_epoch=100)

```

Listing A.7: Explore GAN with 4 Convolutional Layers in Generator and 3 Convolutional Layers in Discriminator

```

1 import tensorflow as tf
2 from tensorflow.keras.layers import Dense, Reshape,
3     Flatten, Dropout, LeakyReLU, Conv2D, Conv2DTranspose,
4     BatchNormalization
5 from tensorflow.keras.models import Sequential

```

```

4   from tensorflow.keras.optimizers import Adam
5   from scipy.linalg import sqrtm
6   import numpy as np
7   import time
8   import matplotlib.pyplot as plt
9
10  np.random.seed(1000)
11  tf.random.set_seed(1000)
12
13  # input 100
14  # output 28*28*1
15
16  def build_generator():
17      model = Sequential()
18
19      model.add(Dense(7*7*128, input_dim=100))
20      model.add(LeakyReLU(alpha=0.2))
21      model.add(Reshape((7, 7, 128)))
22      model.add(BatchNormalization(momentum=0.8))
23
24      # add 1 convolution layer
25      model.add(Conv2D(128, kernel_size=3, strides=1,
26                      padding='same'))
27      model.add(LeakyReLU(alpha=0.2))
28      model.add(BatchNormalization(momentum=0.8))
29
30      model.add(Conv2DTranspose(128, kernel_size=4, strides
31                             =2, padding='same'))
32      model.add(LeakyReLU(alpha=0.2))
33      model.add(BatchNormalization(momentum=0.8))
34
35      model.add(Conv2DTranspose(64, kernel_size=4, strides
36                             =2, padding='same'))
37      model.add(LeakyReLU(alpha=0.2))
38      model.add(BatchNormalization(momentum=0.8))
39
40      model.add(Conv2D(1, kernel_size=7, activation='tanh',
41                      padding='same'))

```

```
39         return model
40
41     # input 28*28*1
42     # output 1
43
44     def build_discriminator():
45         model = Sequential()
46
47         model.add(Conv2D(64, kernel_size=3, strides=2,
48                         input_shape=(28, 28, 1), padding='same'))
49         model.add(LeakyReLU(alpha=0.2))
50         model.add(Dropout(0.25))
51
52         model.add(Conv2D(128, kernel_size=3, strides=2,
53                         padding='same'))
54         model.add(LeakyReLU(alpha=0.2))
55         model.add(Dropout(0.25))
56
57         model.add(Flatten())
58         model.add(Dense(1, activation='sigmoid'))
59
60         return model
61
62     (x_train, _), (_, _) = tf.keras.datasets.mnist.load_data()
63     x_train = (x_train - 127.5) / 127.5
64     x_train = np.expand_dims(x_train, axis=3)
65
66     def calculate_fid(real_images, fake_images):
67         act1 = real_images.reshape((real_images.shape[0], -1))
68         mu1, sigma1 = act1.mean(axis=0), np.cov(act1, rowvar=False)
69
70         act2 = fake_images.reshape((fake_images.shape[0], -1))
71         mu2, sigma2 = act2.mean(axis=0), np.cov(act2, rowvar=False)
```

```

71         ssdiff = np.sum((mu1 - mu2)**2.0)
72         covmean = sqrtm(sigma1.dot(sigma2))
73
74     if np.iscomplexobj(covmean):
75         covmean = covmean.real
76
77     fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 *
78                             covmean)
79
80     return fid
81
82
83     def train_gan(epochs=1000, batch_size=64, p_epoch=100):
84         generator = build_generator()
85         discriminator = build_discriminator()
86
87         discriminator.compile(loss='binary_crossentropy',
88                                optimizer=Adam(0.0002, 0.5), metrics=['accuracy'])
89         discriminator.trainable = False
90
91         gan_input = tf.keras.Input(shape=(100,))
92         gan_output = discriminator(generator(gan_input))
93         gan = tf.keras.Model(gan_input, gan_output)
94         gan.compile(loss='binary_crossentropy', optimizer=
95                     Adam(0.0002, 0.5))
96
97         half_batch = int(batch_size / 2)
98
99         d_losses = []
100        g_losses = []
101        d_acc = []
102        fid_scores = []
103
104        start_time = time.time() # Record the start time
105
106        for epoch in range(epochs):
107            # Select a random half batch of real images
108            idx = np.random.randint(0, x_train.shape[0],
109                                  half_batch)
110            real_images = x_train[idx]

```

```

106
107     # Generate a half batch of new fake images
108     noise = np.random.normal(0, 1, (half_batch, 100))
109     fake_images = generator.predict(noise)
110
111     # Train the discriminator
112     real_labels = np.ones((half_batch, 1))
113     fake_labels = np.zeros((half_batch, 1))
114
115     d_loss_real = discriminator.train_on_batch(
116         real_images, real_labels)
117     d_loss_fake = discriminator.train_on_batch(
118         fake_images, fake_labels)
119     d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
120
121     # Train the generator
122     noise = np.random.normal(0, 1, (batch_size, 100))
123     valid_y = np.ones((batch_size, 1))
124
125     g_loss = gan.train_on_batch(noise, valid_y)
126
127     # Record the losses
128     d_losses.append(d_loss[0])
129     g_losses.append(g_loss)
130     d_acc.append(d_loss[1] * 100)
131
132     # Calculate FID every p_epoch epochs
133     if epoch % p_epoch == 0:
134         noise = np.random.normal(0, 1, (1000, 100))
135         fake_images = generator.predict(noise)
136         fid = calculate_fid(x_train[:1000],
137                             fake_images)
138         fid_scores.append(fid)
139         print(f"epoch:{d_loss[0]},acc.:{100*d_loss[1]}%[Gloss:{g_loss}]"
2022-05-10 10:45:43.547 [INFO]fid:{fid})
```

```

140     print(f"Total training time: {total_time:.2f} seconds")
141
142     return generator, d_losses, g_losses, d_acc,
143         fid_scores

```

Listing A.8: Explore GAN with 5 Convolutional Layers in Generator and 3 Convolutional Layers in Discriminator

```

1 import tensorflow as tf
2 from tensorflow.keras.layers import Dense, Reshape,
3     Flatten, Dropout, LeakyReLU, Conv2D, Conv2DTranspose,
4     BatchNormalization
5 from tensorflow.keras.models import Sequential
6 from tensorflow.keras.optimizers import Adam
7 from scipy.linalg import sqrtm
8 import numpy as np
9 import time
10 import matplotlib.pyplot as plt
11
12 np.random.seed(1000)
13 tf.random.set_seed(1000)
14
15 # input 100
16 # output 28*28*1
17
18 def build_generator():
19     model = Sequential()
20
21     model.add(Dense(7*7*128, input_dim=100))
22     model.add(LeakyReLU(alpha=0.2))
23     model.add(Reshape((7, 7, 128)))
24     model.add(BatchNormalization(momentum=0.8))
25
26     # add the first convolution layer
27     model.add(Conv2D(128, kernel_size=3, strides=1,
28                     padding='same'))
29     model.add(LeakyReLU(alpha=0.2))
30     model.add(BatchNormalization(momentum=0.8))
31
32     # add the 2nd convolution layer

```

```

30     model.add(Conv2D(128, kernel_size=3, strides=1,
31                     padding='same'))
32     model.add(LeakyReLU(alpha=0.2))
33     model.add(BatchNormalization(momentum=0.8))

34     model.add(Conv2DTranspose(128, kernel_size=4, strides
35                             =2, padding='same'))
36     model.add(LeakyReLU(alpha=0.2))
37     model.add(BatchNormalization(momentum=0.8))

38     model.add(Conv2DTranspose(64, kernel_size=4, strides
39                             =2, padding='same'))
40     model.add(LeakyReLU(alpha=0.2))
41     model.add(BatchNormalization(momentum=0.8))

42     model.add(Conv2D(1, kernel_size=7, activation='tanh',
43                      padding='same'))

44     return model

45

46 # input 28*28*1
47 # output 1

48

49 def build_discriminator():
50     model = Sequential()

51

52     model.add(Conv2D(64, kernel_size=3, strides=2,
53                      input_shape=(28, 28, 1), padding='same'))
54     model.add(LeakyReLU(alpha=0.2))
55     model.add(Dropout(0.25))

56     model.add(Conv2D(128, kernel_size=3, strides=2,
57                      padding='same'))
58     model.add(LeakyReLU(alpha=0.2))
59     model.add(Dropout(0.25))

60     model.add(Flatten())
61     model.add(Dense(1, activation='sigmoid'))

62

```

```

63     return model
64
65 (x_train, _), (_, _) = tf.keras.datasets.mnist.load_data()
66     ()
67 x_train = (x_train - 127.5) / 127.5
68 x_train = np.expand_dims(x_train, axis=3)
69
70 def calculate_fid(real_images, fake_images):
71     act1 = real_images.reshape((real_images.shape[0], -1))
72         )
73     mu1, sigma1 = act1.mean(axis=0), np.cov(act1, rowvar=
74     False)
75
76     act2 = fake_images.reshape((fake_images.shape[0], -1))
77         )
78     mu2, sigma2 = act2.mean(axis=0), np.cov(act2, rowvar=
79     False)
80
81     ssdiff = np.sum((mu1 - mu2)**2.0)
82     covmean = sqrtm(sigma1.dot(sigma2))
83
84     if np.iscomplexobj(covmean):
85         covmean = covmean.real
86
87     fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 *
88     covmean)
89
90     return fid
91
92
93 def train_gan(epochs=1000, batch_size=64, p_epoch=100):
94     generator = build_generator()
95     discriminator = build_discriminator()
96
97     discriminator.compile(loss='binary_crossentropy',
98         optimizer=Adam(0.0002, 0.5), metrics=['accuracy'])
99     discriminator.trainable = False
100
101     gan_input = tf.keras.Input(shape=(100,))
102     gan_output = discriminator(generator(gan_input))

```

```

95     gan = tf.keras.Model(gan_input, gan_output)
96     gan.compile(loss='binary_crossentropy', optimizer=
97                   Adam(0.0002, 0.5))
98
99
100    half_batch = int(batch_size / 2)
101
102    d_losses = []
103    g_losses = []
104    d_acc = []
105    fid_scores = []
106
107    start_time = time.time() # Record the start time
108
109    for epoch in range(epochs):
110        # Select a random half batch of real images
111        idx = np.random.randint(0, x_train.shape[0],
112                               half_batch)
113        real_images = x_train[idx]
114
115        # Generate a half batch of new fake images
116        noise = np.random.normal(0, 1, (half_batch, 100))
117        fake_images = generator.predict(noise)
118
119        # Train the discriminator
120        real_labels = np.ones((half_batch, 1))
121        fake_labels = np.zeros((half_batch, 1))
122
123        d_loss_real = discriminator.train_on_batch(
124            real_images, real_labels)
125        d_loss_fake = discriminator.train_on_batch(
126            fake_images, fake_labels)
127        d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
128
129        # Train the generator
130        noise = np.random.normal(0, 1, (batch_size, 100))
131        valid_y = np.ones((batch_size, 1))
132
133        g_loss = gan.train_on_batch(noise, valid_y)

```

```

130     # Record the losses
131     d_losses.append(d_loss[0])
132     g_losses.append(g_loss)
133     d_acc.append(d_loss[1] * 100)
134
135     # Calculate FID every p_epoch epochs
136     if epoch % p_epoch == 0:
137         noise = np.random.normal(0, 1, (1000, 100))
138         fake_images = generator.predict(noise)
139         fid = calculate_fid(x_train[:1000],
140                             fake_images)
141         fid_scores.append(fid)
142         print(f'{epoch}[D_loss:{d_loss[0]}, acc.: {100*d_loss[1]}%][G_loss:{g_loss}][FID:{fid}]')
143
144     end_time = time.time() # Record the end time
145     total_time = end_time - start_time
146     print(f'Total training time:{total_time:.2f} seconds')
147
148     return generator, d_losses, g_losses, d_acc,
149             fid_scores

```

Listing A.9: Explore GAN with 6 Convolutional Layers in Generator and 3 Convolutional Layers in Discriminator

```

1 import tensorflow as tf
2 from tensorflow.keras.layers import Dense, Reshape,
3     Flatten, Dropout, LeakyReLU, Conv2D, Conv2DTranspose,
4     BatchNormalization
5 from tensorflow.keras.models import Sequential
6 from tensorflow.keras.optimizers import Adam
7 from scipy.linalg import sqrtm
8 import numpy as np
9 import time
10 import matplotlib.pyplot as plt
11
12 np.random.seed(1000)
13 tf.random.set_seed(1000)

```

```

13 # input 100
14 # output 28*28*1
15
16 def build_generator():
17     model = Sequential()
18
19     model.add(Dense(7*7*128, input_dim=100))
20     model.add(LeakyReLU(alpha=0.2))
21     model.add(Reshape((7, 7, 128)))
22     model.add(BatchNormalization(momentum=0.8))
23
24     # add the 1st convolution layer
25     model.add(Conv2D(128, kernel_size=3, strides=1,
26                      padding='same'))
27     model.add(LeakyReLU(alpha=0.2))
28     model.add(BatchNormalization(momentum=0.8))
29
30     # add the 2nd convolution layer
31     model.add(Conv2D(128, kernel_size=3, strides=1,
32                      padding='same'))
33     model.add(LeakyReLU(alpha=0.2))
34     model.add(BatchNormalization(momentum=0.8))
35
36     # add the 3rd convolution layer
37     model.add(Conv2D(128, kernel_size=3, strides=1,
38                      padding='same'))
39     model.add(LeakyReLU(alpha=0.2))
40     model.add(BatchNormalization(momentum=0.8))
41
42     model.add(Conv2DTranspose(128, kernel_size=4, strides
43                             =2, padding='same'))
44     model.add(LeakyReLU(alpha=0.2))
45     model.add(BatchNormalization(momentum=0.8))
46
47     model.add(Conv2DTranspose(64, kernel_size=4, strides
48                             =2, padding='same'))
49     model.add(LeakyReLU(alpha=0.2))
50     model.add(BatchNormalization(momentum=0.8))

```

```

47     model.add(Conv2D(1, kernel_size=7, activation='tanh',
48                      padding='same'))
49
50     return model
51
52 # input 28*28*1
53 # output 1
54
55 def build_discriminator():
56     model = Sequential()
57
58     model.add(Conv2D(64, kernel_size=3, strides=2,
59                      input_shape=(28, 28, 1), padding='same'))
60     model.add(LeakyReLU(alpha=0.2))
61     model.add(Dropout(0.25))
62
63     model.add(Conv2D(128, kernel_size=3, strides=2,
64                      padding='same'))
65     model.add(LeakyReLU(alpha=0.2))
66     model.add(Dropout(0.25))
67
68     model.add(Flatten())
69     model.add(Dense(1, activation='sigmoid'))
70
71     return model
72
73
74 (x_train, _), (_, _) = tf.keras.datasets.mnist.load_data()
75
76 x_train = (x_train - 127.5) / 127.5
77 x_train = np.expand_dims(x_train, axis=3)
78
79
80 def calculate_fid(real_images, fake_images):
81     act1 = real_images.reshape((real_images.shape[0], -1))
82
83     mu1, sigma1 = act1.mean(axis=0), np.cov(act1, rowvar=False)
84
85     act2 = fake_images.reshape((fake_images.shape[0], -1))

```

```

79     mu2, sigma2 = act2.mean(axis=0), np.cov(act2, rowvar=False)
80
81     ssdiff = np.sum((mu1 - mu2)**2.0)
82     covmean = sqrtm(sigma1.dot(sigma2))
83
84     if np.iscomplexobj(covmean):
85         covmean = covmean.real
86
87     fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 * covmean)
88
89     return fid
90
91 def train_gan(epochs=1000, batch_size=64, p_epoch=100):
92     generator = build_generator()
93     discriminator = build_discriminator()
94
95     discriminator.compile(loss='binary_crossentropy',
96                           optimizer=Adam(0.0002, 0.5), metrics=['accuracy'])
96     discriminator.trainable = False
97
98     gan_input = tf.keras.Input(shape=(100,))
99     gan_output = discriminator(generator(gan_input))
100    gan = tf.keras.Model(gan_input, gan_output)
101    gan.compile(loss='binary_crossentropy', optimizer=
102                  Adam(0.0002, 0.5))
103
103    half_batch = int(batch_size / 2)
104
105    d_losses = []
106    g_losses = []
107    d_acc = []
108    fid_scores = []
109
110    start_time = time.time() # Record the start time
111
112    for epoch in range(epochs):
113        # Select a random half batch of real images

```

```

114     idx = np.random.randint(0, x_train.shape[0] ,
115                             half_batch)
116     real_images = x_train[idx]
117
118     # Generate a half batch of new fake images
119     noise = np.random.normal(0, 1, (half_batch, 100))
120     fake_images = generator.predict(noise)
121
122     # Train the discriminator
123     real_labels = np.ones((half_batch, 1))
124     fake_labels = np.zeros((half_batch, 1))
125
126     d_loss_real = discriminator.train_on_batch(
127         real_images, real_labels)
128     d_loss_fake = discriminator.train_on_batch(
129         fake_images, fake_labels)
130     d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
131
132     # Train the generator
133     noise = np.random.normal(0, 1, (batch_size, 100))
134     valid_y = np.ones((batch_size, 1))
135
136     g_loss = gan.train_on_batch(noise, valid_y)
137
138     # Record the losses
139     d_losses.append(d_loss[0])
140     g_losses.append(g_loss)
141     d_acc.append(d_loss[1] * 100)
142
143     # Calculate FID every p_epoch epochs
144     if epoch % p_epoch == 0:
145         noise = np.random.normal(0, 1, (1000, 100))
146         fake_images = generator.predict(noise)
147         fid = calculate_fid(x_train[:1000],
148                             fake_images)
149         fid_scores.append(fid)
150         print(f"epoch:{d_loss[0]}, acc.: {100*d_loss[1]}% [G loss:{g_loss}] [FID:{fid}]")

```

```

147
148     end_time = time.time() # Record the end time
149     total_time = end_time - start_time
150     print(f"Total training time: {total_time:.2f} seconds")
151
152     return generator, d_losses, g_losses, d_acc,
153         fid_scores

```

Listing A.10: Explore GAN with 6 Convolutional Layers in Generator and 4 Convolutional Layers in Discriminator

```

1 import tensorflow as tf
2 from tensorflow.keras.layers import Dense, Reshape,
3     Flatten, Dropout, LeakyReLU, Conv2D, Conv2DTranspose,
4     BatchNormalization
5 from tensorflow.keras.models import Sequential
6 from tensorflow.keras.optimizers import Adam
7 from scipy.linalg import sqrtm
8 import numpy as np
9 import time
10 import matplotlib.pyplot as plt
11
12 np.random.seed(1000)
13 tf.random.set_seed(1000)
14
15 # input 100
16 # output 28*28*1
17
18 def build_generator():
19     model = Sequential()
20
21     model.add(Dense(7*7*128, input_dim=100))
22     model.add(LeakyReLU(alpha=0.2))
23     model.add(Reshape((7, 7, 128)))
24     model.add(BatchNormalization(momentum=0.8))
25
26     # add the 1st convolution layer
27     model.add(Conv2D(128, kernel_size=3, strides=1,
28                     padding='same'))
29     model.add(LeakyReLU(alpha=0.2))

```

```

27     model.add(BatchNormalization(momentum=0.8))

28
29     # add the 2nd convolution layer
30     model.add(Conv2D(128, kernel_size=3, strides=1,
31                     padding='same'))
32     model.add(LeakyReLU(alpha=0.2))
33     model.add(BatchNormalization(momentum=0.8))

34
35     # add the 3rd convolution layer
36     model.add(Conv2D(128, kernel_size=3, strides=1,
37                     padding='same'))
38     model.add(LeakyReLU(alpha=0.2))
39     model.add(BatchNormalization(momentum=0.8))

40
41     model.add(Conv2DTranspose(128, kernel_size=4, strides
42                             =2, padding='same'))
43     model.add(LeakyReLU(alpha=0.2))
44     model.add(BatchNormalization(momentum=0.8))

45
46     model.add(Conv2DTranspose(64, kernel_size=4, strides
47                             =2, padding='same'))
48     model.add(LeakyReLU(alpha=0.2))
49     model.add(BatchNormalization(momentum=0.8))

50
51     model.add(Conv2D(1, kernel_size=7, activation='tanh',
52                     padding='same'))

53
54     return model

55
56
57
58
59

```

```

60
61     model.add(Conv2D(128, kernel_size=3, strides=2,
62                     padding='same'))
63     model.add(LeakyReLU(alpha=0.2))
64     model.add(Dropout(0.25))

65     # add the 1st convolution layer
66     model.add(Conv2D(256, kernel_size=3, strides=2,
67                     padding='same'))
68     model.add(LeakyReLU(alpha=0.2))
69     model.add(Dropout(0.25))

70     model.add(Flatten())
71     model.add(Dense(1, activation='sigmoid'))

72
73     return model

74

75 (x_train, _), (_, _) = tf.keras.datasets.mnist.load_data()
76
77 x_train = (x_train - 127.5) / 127.5
78 x_train = np.expand_dims(x_train, axis=3)

79 def calculate_fid(real_images, fake_images):
80     act1 = real_images.reshape((real_images.shape[0], -1))
81
82     mu1, sigma1 = act1.mean(axis=0), np.cov(act1, rowvar=False)

83     act2 = fake_images.reshape((fake_images.shape[0], -1))
84
85     mu2, sigma2 = act2.mean(axis=0), np.cov(act2, rowvar=False)

86     ssdiff = np.sum((mu1 - mu2)**2.0)
87     covmean = sqrtm(sigma1.dot(sigma2))

88     if np.iscomplexobj(covmean):
89         covmean = covmean.real

```

```

92         fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 *
93             covmean)
94
95     return fid
96
97
98     def train_gan(epochs=1000, batch_size=64, p_epoch=100):
99         generator = build_generator()
100        discriminator = build_discriminator()
101
102        discriminator.compile(loss='binary_crossentropy',
103            optimizer=Adam(0.0002, 0.5), metrics=['accuracy'])
104        discriminator.trainable = False
105
106        gan_input = tf.keras.Input(shape=(100,))
107        gan_output = discriminator(generator(gan_input))
108        gan = tf.keras.Model(gan_input, gan_output)
109        gan.compile(loss='binary_crossentropy', optimizer=
110            Adam(0.0002, 0.5))
111
112        half_batch = int(batch_size / 2)
113
114        d_losses = []
115        g_losses = []
116        d_acc = []
117        fid_scores = []
118
119        start_time = time.time() # Record the start time
120
121        for epoch in range(epochs):
122            # Select a random half batch of real images
123            idx = np.random.randint(0, x_train.shape[0],
124                half_batch)
125            real_images = x_train[idx]
126
127            # Generate a half batch of new fake images
128            noise = np.random.normal(0, 1, (half_batch, 100))
129            fake_images = generator.predict(noise)
130
131            # Train the discriminator

```

```

127     real_labels = np.ones((half_batch, 1))
128     fake_labels = np.zeros((half_batch, 1))
129
130     d_loss_real = discriminator.train_on_batch(
131         real_images, real_labels)
132     d_loss_fake = discriminator.train_on_batch(
133         fake_images, fake_labels)
134     d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
135
136     # Train the generator
137     noise = np.random.normal(0, 1, (batch_size, 100))
138     valid_y = np.ones((batch_size, 1))
139
140     g_loss = gan.train_on_batch(noise, valid_y)
141
142     # Record the losses
143     d_losses.append(d_loss[0])
144     g_losses.append(g_loss)
145     d_acc.append(d_loss[1] * 100)
146
147     # Calculate FID every p_epoch epochs
148     if epoch % p_epoch == 0:
149         noise = np.random.normal(0, 1, (1000, 100))
150         fake_images = generator.predict(noise)
151         fid = calculate_fid(x_train[:1000],
152                             fake_images)
153         fid_scores.append(fid)
154         print(f"Epoch [{epoch}][D loss: {d_loss[0]}, acc.: {100*d_loss[1]}%][G loss: {g_loss}][FID: {fid}]")
155
156     end_time = time.time() # Record the end time
157     total_time = end_time - start_time
158     print(f"Total training time: {total_time:.2f} seconds")
159
160     return generator, d_losses, g_losses, d_acc,
161           fid_scores

```

Listing A.11: Explore GAN with 6 Convolutional Layers in Generator and 5 Convolutional Layers in Discriminator

```
1 import tensorflow as tf
2 from tensorflow.keras.layers import Dense, Reshape,
3     Flatten, Dropout, LeakyReLU, Conv2D, Conv2DTranspose,
4     BatchNormalization
5 from tensorflow.keras.models import Sequential
6 from tensorflow.keras.optimizers import Adam
7 from scipy.linalg import sqrtm
8 import numpy as np
9 import time
10 import matplotlib.pyplot as plt
11
12 np.random.seed(1000)
13 tf.random.set_seed(1000)
14
15 # input 100
16 # output 28*28*1
17
18 def build_generator():
19     model = Sequential()
20
21     model.add(Dense(7*7*128, input_dim=100))
22     model.add(LeakyReLU(alpha=0.2))
23     model.add(Reshape((7, 7, 128)))
24     model.add(BatchNormalization(momentum=0.8))
25
26     # add the 1st convolution layer
27     model.add(Conv2D(128, kernel_size=3, strides=1,
28                     padding='same'))
29     model.add(LeakyReLU(alpha=0.2))
30     model.add(BatchNormalization(momentum=0.8))
31
32     # add the 2nd convolution layer
33     model.add(Conv2D(128, kernel_size=3, strides=1,
34                     padding='same'))
35     model.add(LeakyReLU(alpha=0.2))
36     model.add(BatchNormalization(momentum=0.8))
```

```

34     # add the 3rd convolution layer
35     model.add(Conv2D(128, kernel_size=3, strides=1,
36                     padding='same'))
37     model.add(LeakyReLU(alpha=0.2))
38     model.add(BatchNormalization(momentum=0.8))

39     model.add(Conv2DTranspose(128, kernel_size=4, strides
40                             =2, padding='same'))
41     model.add(LeakyReLU(alpha=0.2))
42     model.add(BatchNormalization(momentum=0.8))

43     model.add(Conv2DTranspose(64, kernel_size=4, strides
44                             =2, padding='same'))
45     model.add(LeakyReLU(alpha=0.2))
46     model.add(BatchNormalization(momentum=0.8))

47     model.add(Conv2D(1, kernel_size=7, activation='tanh',
48                      padding='same'))

49     return model

50

51 # input 28*28*1
52 # output 1

53

54 def build_discriminator():
55     model = Sequential()

56

57     model.add(Conv2D(64, kernel_size=3, strides=2,
58                      input_shape=(28, 28, 1), padding='same'))
59     model.add(LeakyReLU(alpha=0.2))
60     model.add(Dropout(0.25))

61     model.add(Conv2D(128, kernel_size=3, strides=2,
62                      padding='same'))
63     model.add(LeakyReLU(alpha=0.2))
64     model.add(Dropout(0.25))

65     model.add(Conv2D(256, kernel_size=3, strides=2,
66                      padding='same'))

```

```

66     model.add(LeakyReLU(alpha=0.2))
67     model.add(Dropout(0.25))

68
69     # add the 1st convolution layer
70     model.add(Conv2D(512, kernel_size=3, strides=2,
71                      padding='same'))
72     model.add(LeakyReLU(alpha=0.2))
73     model.add(Dropout(0.25))

74
75     # add the 2nd convolution layer
76     model.add(Conv2D(1024, kernel_size=3, strides=2,
77                      padding='same'))
78     model.add(LeakyReLU(alpha=0.2))
79     model.add(Dropout(0.25))

80
81     model.add(Flatten())
82     model.add(Dense(1, activation='sigmoid'))

83
84     return model

85
86     (x_train, _), (_, _) = tf.keras.datasets.mnist.load_data()
87     ()
88     x_train = (x_train - 127.5) / 127.5
89     x_train = np.expand_dims(x_train, axis=3)

90
91     def calculate_fid(real_images, fake_images):
92         act1 = real_images.reshape((real_images.shape[0], -1))
93         )
94         mu1, sigma1 = act1.mean(axis=0), np.cov(act1, rowvar=
95             False)

96         act2 = fake_images.reshape((fake_images.shape[0], -1))
97         )
98         mu2, sigma2 = act2.mean(axis=0), np.cov(act2, rowvar=
99             False)

100
101         ssdiff = np.sum((mu1 - mu2)**2.0)
102         covmean = sqrtm(sigma1.dot(sigma2))

```

```

98     if np.iscomplexobj(covmean):
99         covmean = covmean.real
100
101    fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 *
102        covmean)
103
104    return fid
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132

```

`if np.iscomplexobj(covmean):
 covmean = covmean.real

fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 *
covmean)

return fid

def train_gan(epochs=1000, batch_size=64, p_epoch=100):
 generator = build_generator()
 discriminator = build_discriminator()

 discriminator.compile(loss='binary_crossentropy',
 optimizer=Adam(0.0002, 0.5), metrics=['accuracy'])
 discriminator.trainable = False

 gan_input = tf.keras.Input(shape=(100,))
 gan_output = discriminator(generator(gan_input))
 gan = tf.keras.Model(gan_input, gan_output)
 gan.compile(loss='binary_crossentropy', optimizer=
 Adam(0.0002, 0.5))

 half_batch = int(batch_size / 2)

 d_losses = []
 g_losses = []
 d_acc = []
 fid_scores = []

 start_time = time.time() # Record the start time

 for epoch in range(epochs):
 # Select a random half batch of real images
 idx = np.random.randint(0, x_train.shape[0],
 half_batch)
 real_images = x_train[idx]

 # Generate a half batch of new fake images
 noise = np.random.normal(0, 1, (half_batch, 100))`

```

133     fake_images = generator.predict(noise)
134
135     # Train the discriminator
136     real_labels = np.ones((half_batch, 1))
137     fake_labels = np.zeros((half_batch, 1))
138
139     d_loss_real = discriminator.train_on_batch(
140         real_images, real_labels)
141     d_loss_fake = discriminator.train_on_batch(
142         fake_images, fake_labels)
143     d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
144
145     # Train the generator
146     noise = np.random.normal(0, 1, (batch_size, 100))
147     valid_y = np.ones((batch_size, 1))
148
149     g_loss = gan.train_on_batch(noise, valid_y)
150
151     # Record the losses
152     d_losses.append(d_loss[0])
153     g_losses.append(g_loss)
154     d_acc.append(d_loss[1] * 100)
155
156     # Calculate FID every p_epoch epochs
157     if epoch % p_epoch == 0:
158         noise = np.random.normal(0, 1, (1000, 100))
159         fake_images = generator.predict(noise)
160         fid = calculate_fid(x_train[:1000],
161                             fake_images)
162         fid_scores.append(fid)
163         print(f"epoch:[D_loss:{d_loss[0]},acc.:"
164               f"{100*d_loss[1]}%][G_loss:{g_loss}]"
165               f" FID:{fid}]")
166
167         end_time = time.time() # Record the end time
168         total_time = end_time - start_time
169         print(f"Total training time:{total_time:.2f} seconds"
170             "")
171
172     return generator, d_losses, g_losses, d_acc,

```

fid_scores

Listing A.12: Explore GAN with 6 Convolutional Layers in Generator and 6 Convolutional Layers in Discriminator

```
1 def build_generator():
2     model = Sequential()
3
4     model.add(Dense(7*7*128, input_dim=100))
5     model.add(LeakyReLU(alpha=0.2))
6     model.add(Reshape((7, 7, 128)))
7     model.add(BatchNormalization(momentum=0.8))
8
9     # add the 1st convolution layer
10    model.add(Conv2D(128, kernel_size=3, strides=1, padding='same'))
11    model.add(LeakyReLU(alpha=0.2))
12    model.add(BatchNormalization(momentum=0.8))
13
14    # add the 2nd convolution layer
15    model.add(Conv2D(128, kernel_size=3, strides=1, padding='same'))
16    model.add(LeakyReLU(alpha=0.2))
17    model.add(BatchNormalization(momentum=0.8))
18
19    # add the 3rd convolution layer
20    model.add(Conv2D(128, kernel_size=3, strides=1, padding='same'))
21    model.add(LeakyReLU(alpha=0.2))
22    model.add(BatchNormalization(momentum=0.8))
23
24    model.add(Conv2DTranspose(128, kernel_size=4, strides=2,
25                           padding='same'))
26    model.add(LeakyReLU(alpha=0.2))
27    model.add(BatchNormalization(momentum=0.8))
28
29    model.add(Conv2DTranspose(64, kernel_size=4, strides=2,
30                           padding='same'))
31    model.add(LeakyReLU(alpha=0.2))
32    model.add(BatchNormalization(momentum=0.8))
```

```

31
32     model.add(Conv2D(1, kernel_size=7, activation='tanh',
33                     padding='same'))
34
35
36 def build_discriminator():
37     model = Sequential()
38
39     model.add(Conv2D(64, kernel_size=3, strides=2,
40                      input_shape=(28, 28, 1), padding='same'))
41     model.add(LeakyReLU(alpha=0.2))
42     model.add(Dropout(0.25))
43
44     model.add(Conv2D(128, kernel_size=3, strides=2, padding='
45                     same'))
46     model.add(LeakyReLU(alpha=0.2))
47     model.add(Dropout(0.25))
48
49     model.add(Conv2D(256, kernel_size=3, strides=2, padding='
50                     same'))
51     model.add(LeakyReLU(alpha=0.2))
52     model.add(Dropout(0.25))
53
54     # add the 1st convolution layer
55     model.add(Conv2D(512, kernel_size=3, strides=2, padding='
56                     same'))
57     model.add(LeakyReLU(alpha=0.2))
58     model.add(Dropout(0.25))
59
60     # add the 2nd convolution layer
61     model.add(Conv2D(1024, kernel_size=3, strides=2, padding='
62                     same'))
63     model.add(LeakyReLU(alpha=0.2))
64     model.add(Dropout(0.25))
65
66     # add the 3rd convolution layer
67     model.add(Conv2D(2048, kernel_size=3, strides=2, padding='
68                     same'))

```

```

63     model.add(LeakyReLU(alpha=0.2))
64     model.add(Dropout(0.25))
65
66     model.add(Flatten())
67     model.add(Dense(1, activation='sigmoid'))
68
69     return model
70
71
72
73
74 import tensorflow as tf
75 from tensorflow.keras.layers import Dense, Reshape, Flatten,
76     Dropout, LeakyReLU, Conv2D, Conv2DTranspose,
77     BatchNormalization
78 from tensorflow.keras.models import Sequential
79 from tensorflow.keras.optimizers import Adam
80 from scipy.linalg import sqrtm
81 import numpy as np
82 import time
83 import matplotlib.pyplot as plt
84
85
86 np.random.seed(1000)
87 tf.random.set_seed(1000)
88
89
90 (x_train, _), (_, _) = tf.keras.datasets.mnist.load_data()
91 x_train = (x_train - 127.5) / 127.5
92 x_train = np.expand_dims(x_train, axis=3)
93
94
95 def calculate_fid(real_images, fake_images):
96     act1 = real_images.reshape((real_images.shape[0], -1))
97     mu1, sigma1 = act1.mean(axis=0), np.cov(act1, rowvar=
98         False)
99
100
101    act2 = fake_images.reshape((fake_images.shape[0], -1))
102    mu2, sigma2 = act2.mean(axis=0), np.cov(act2, rowvar=
103        False)
104
105
106    ssdiff = np.sum((mu1 - mu2)**2.0)

```

```

98 covmean = sqrtm(sigma1.dot(sigma2))
99
100 if np.iscomplexobj(covmean):
101     covmean = covmean.real
102
103 fid = ssdiff + np.trace(sigma1 + sigma2 - 2.0 * covmean)
104
105 return fid
106
107 def train_gan(epochs=1000, batch_size=64, p_epoch=100):
108     generator = build_generator()
109     discriminator = build_discriminator()
110
111     discriminator.compile(loss='binary_crossentropy',
112                           optimizer=Adam(0.0002, 0.5), metrics=['accuracy'])
113     discriminator.trainable = False
114
115     gan_input = tf.keras.Input(shape=(100,))
116     gan_output = discriminator(generator(gan_input))
117     gan = tf.keras.Model(gan_input, gan_output)
118     gan.compile(loss='binary_crossentropy', optimizer=Adam
119                  (0.0002, 0.5))
120
121     half_batch = int(batch_size / 2)
122
123     d_losses = []
124     g_losses = []
125     d_acc = []
126     fid_scores = []
127
128     start_time = time.time() # Record the start time
129
130     for epoch in range(epochs):
131         # Select a random half batch of real images
132         idx = np.random.randint(0, x_train.shape[0],
133                               half_batch)
134         real_images = x_train[idx]
135
136         # Generate a half batch of new fake images

```

```

134     noise = np.random.normal(0, 1, (half_batch, 100))
135     fake_images = generator.predict(noise)
136
137     # Train the discriminator
138     real_labels = np.ones((half_batch, 1))
139     fake_labels = np.zeros((half_batch, 1))
140
141     d_loss_real = discriminator.train_on_batch(
142         real_images, real_labels)
143     d_loss_fake = discriminator.train_on_batch(
144         fake_images, fake_labels)
145     d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
146
147     # Train the generator
148     noise = np.random.normal(0, 1, (batch_size, 100))
149     valid_y = np.ones((batch_size, 1))
150
151     g_loss = gan.train_on_batch(noise, valid_y)
152
153     # Record the losses
154     d_losses.append(d_loss[0])
155     g_losses.append(g_loss)
156     d_acc.append(d_loss[1] * 100)
157
158     # Calculate FID every p_epoch epochs
159     if epoch % p_epoch == 0:
160         noise = np.random.normal(0, 1, (1000, 100))
161         fake_images = generator.predict(noise)
162         fid = calculate_fid(x_train[:1000], fake_images)
163         fid_scores.append(fid)
164         print(f"Epoch [{epoch}][D loss: {d_loss[0]}, acc.: {100 * d_loss[1]}%][G loss: {g_loss}][FID: {fid}]")
165
166     end_time = time.time() # Record the end time
167     total_time = end_time - start_time
168     print(f"Total training time: {total_time:.2f} seconds")
169     return generator, d_losses, g_losses, d_acc, fid_scores

```

Listing A.13: Apply Animal Faces-HQ Dataset

```
1      import os
2      import time
3      import numpy as np
4      import tensorflow as tf
5      import matplotlib.pyplot as plt
6      from tensorflow.keras.models import Sequential, Model
7      from tensorflow.keras.layers import Dense, Reshape,
8          BatchNormalization, LeakyReLU, Conv2D, Conv2DTranspose
9          , Flatten, Dropout, Input
10     from tensorflow.keras.optimizers import Adam
11     from tensorflow.keras.preprocessing.image import load_img
12     , img_to_array
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
```

```
import os
import time
import numpy as np
import tensorflow as tf
import matplotlib.pyplot as plt
from tensorflow.keras.models import Sequential, Model
from tensorflow.keras.layers import Dense, Reshape,
    BatchNormalization, LeakyReLU, Conv2D, Conv2DTranspose
    , Flatten, Dropout, Input
from tensorflow.keras.optimizers import Adam
from tensorflow.keras.preprocessing.image import load_img
, img_to_array

def load_images_as_rgb_matrices(path, size):
images = []
for img_name in os.listdir(path):
    img_path = os.path.join(path, img_name)
    img = load_img(img_path, target_size=size)
    img_array = img_to_array(img)
    images.append(img_array)
images = np.array(images)
images = (images - 127.5) / 127.5 # Normalize images to
[-1, 1]
return images

from google.colab import drive

# mount Google Drive
drive.mount('/content/drive')

cat_path = "/content/drive/MyDrive/gan/afhq/train/cat"
size = (128, 128)
x_train = load_images_as_rgb_matrices(cat_path, size)

# generator
# input 100
# output 128*128*3
```

```

35
36     def build_generator():
37         model = Sequential()
38
39         # Increase the dimension
40         model.add(Dense(16*16*256, input_dim=100))
41         model.add(LeakyReLU(alpha=0.2))
42         model.add(Reshape((16, 16, 256)))
43         model.add(BatchNormalization(momentum=0.8))
44
45         model.add(Conv2DTranspose(256, kernel_size=4, strides
46             =2, padding='same')) # 32x32
47         model.add(LeakyReLU(alpha=0.2))
48         model.add(BatchNormalization(momentum=0.8))
49
50         model.add(Conv2DTranspose(128, kernel_size=4, strides
51             =2, padding='same')) # 64x64
52         model.add(LeakyReLU(alpha=0.2))
53         model.add(BatchNormalization(momentum=0.8))
54
55         model.add(Conv2DTranspose(64, kernel_size=4, strides
56             =2, padding='same')) # 128x128
57         model.add(LeakyReLU(alpha=0.2))
58         model.add(BatchNormalization(momentum=0.8))
59
60         model.add(Conv2D(3, kernel_size=7, activation='tanh',
61             padding='same')) # 128x128x3
62
63     return model
64
65     # discriminator
66     # input 128*128*3
67     # output 1
68
69     def build_discriminator():
70         model = Sequential()
71
72         model.add(Conv2D(64, kernel_size=3, strides=2,
73             input_shape=(128, 128, 3), padding='same'))

```

```

69         model.add(LeakyReLU(alpha=0.2))
70         model.add(Dropout(0.25))

71
72         model.add(Conv2D(128, kernel_size=3, strides=2,
73                           padding='same'))
73         model.add(LeakyReLU(alpha=0.2))
74         model.add(Dropout(0.25))

75
76         model.add(Conv2D(256, kernel_size=3, strides=2,
77                           padding='same'))
77         model.add(LeakyReLU(alpha=0.2))
78         model.add(Dropout(0.25))

79
80         model.add(Conv2D(512, kernel_size=3, strides=2,
81                           padding='same'))
81         model.add(LeakyReLU(alpha=0.2))
82         model.add(Dropout(0.25))

83
84         model.add(Flatten())
85         model.add(Dense(1, activation='sigmoid'))

86
87     return model

88
89 # initial GAN
90 def build_gan(generator, discriminator):
91     discriminator.trainable = False
92     gan_input = Input(shape=(100,))
93     x = generator(gan_input)
94     gan_output = discriminator(x)
95     gan = Model(gan_input, gan_output)
96     gan.compile(loss='binary_crossentropy', optimizer=tf.
97                 keras.optimizers.legacy.Adam(0.0002, 0.5))
98
99     return gan

100
101 # define training step
102 def train(generator, discriminator, gan, x_train, epochs,
103           batch_size=128):
104     valid = np.ones((batch_size, 1))
105     fake = np.zeros((batch_size, 1))

```

```

103
104     for epoch in range(epochs):
105         start_time = time.time()
106
107
108         idx = np.random.randint(0, x_train.shape[0],
109                                batch_size)
110         imgs = x_train[idx]
111
112         noise = np.random.normal(0, 1, (batch_size, 100))
113         gen_imgs = generator.predict(noise)
114
115         d_loss_real = discriminator.train_on_batch(imgs,
116                                                     valid)
117         d_loss_fake = discriminator.train_on_batch(
118             gen_imgs, fake)
119         d_loss = 0.5 * np.add(d_loss_real, d_loss_fake)
120
121
122         noise = np.random.normal(0, 1, (batch_size, 100))
123         g_loss = gan.train_on_batch(noise, valid)
124
125         end_time = time.time()
126         epoch_time = end_time - start_time
127
128         print(f"epoch:[D_loss:{d_loss[0]}] | D_accuracy
129               :{100*d_loss[1]}][G_loss:{g_loss}][Epoch
130               time:{epoch_time:.2f} seconds]")
131
132
133         generator = build_generator()
134         discriminator = build_discriminator()
135         discriminator.compile(loss='binary_crossentropy',
136                               optimizer=tf.keras.optimizers.legacy.Adam(0.0002, 0.5),
137                               metrics=['accuracy'])
138         gan = build_gan(generator, discriminator)
139
140         train(generator, discriminator, gan, x_train, epochs
141               =4000, batch_size=64)

```

```
134
135 # gen images
136 def show_generated_images(generator, num_images=25, dim
137     =(5, 5), figsize=(10, 10)):
138     noise = np.random.normal(0, 1, (num_images, 100))
139     gen_imgs = generator.predict(noise)
140     gen_imgs = 0.5 * gen_imgs + 0.5
141
142     plt.figure(figsize=figsize)
143     for i in range(num_images):
144         plt.subplot(dim[0], dim[1], i+1)
145         plt.imshow(gen_imgs[i])
146         plt.axis('off')
147     plt.tight_layout()
148     plt.show()
149
show_generated_images(generator)
```

Bibliography

- [1] I. Gulrajani, F. Ahmed, M. Arjovsky, V. Dumoulin, and A. Courville. Improved training of wasserstein gans. 2017.
- [2] Y. Jiang. Applications of generative adversarial networks in materials science. *Materials Genome Engineering Advances*, 2, 2024.
- [3] Y. Xin, E. Walia, and P. Babyn. Generative adversarial network in medical imaging: a review. *Medical Image Analysis*, 58:101552, 2019.
- [4] S. Kazeminia, C. Baur, A. Kuijper, B. Ginneken, N. Navab, S. Albarqouni, and A. Mukhopadhyay. Gans for medical image analysis. *Artificial Intelligence in Medicine*, 109:101938, 2020.
- [5] M. Frid-Adar, I. Diamant, E. Klang, M. M. Amitai, J. Goldberger, and H. Greenspan. Gan-based synthetic medical image augmentation for increased cnn performance in liver lesion classification. *Neurocomputing*, 321:321–331, 2018.
- [6] R. Abdal, Y. Qin, and P. Wonka. Image2stylegan: how to embed images into the stylegan latent space? *2019 IEEE/CVF International Conference on Computer Vision (ICCV)*, 2019.
- [7] L. Han, Y. Huang, and T. Zhang. Candidates vs. noises estimation for large multi-class classification problem. 2017.
- [8] B. Liu, E. Rosenfeld, P. Ravikumar, and A. Risteski. Analyzing and improving the optimization landscape of noise-contrastive estimation. 2021.

- [9] M. Labeau and A. Allauzen. An experimental analysis of noise-contrastive estimation: the noise distribution matters. 2017.
- [10] B. Damavandi, S. Kumar, N. Shazeer, and A. Bruguier. Nn-grams: unifying neural network and n-gram language models for speech recognition. 2016.
- [11] Y. Song. How to train your energy-based models. 2021.
- [12] D. Kingma and M. Welling. An introduction to variational autoencoders. *Foundations and Trends® in Machine Learning*, 12:307–392, 2019.
- [13] B. Kiran, D. Thomas, and R. Parakkal. An overview of deep learning based methods for unsupervised and semi-supervised anomaly detection in videos. *Journal of Imaging*, 4:36, 2018.
- [14] Y. Varolgunes, T. Bereau, and J. Rudzinski. Interpretable embeddings from molecular simulations using gaussian mixture variational autoencoders. *Machine Learning Science and Technology*, 1:015012, 2020.
- [15] S. Portillo. Dimensionality reduction of sdss spectra with variational autoencoders. 2020.
- [16] C. Guo, J. Zhou, H. Chen, N. Ying, J. Zhang, and D. Zhou. Variational autoencoder with optimizing gaussian mixture model priors. *Ieee Access*, 8:43992–44005, 2020.
- [17] P. Munjal, A. Paul, and N. Krishnan. Implicit discriminator in variational autoencoder. 2019.
- [18] X. Bie, L. Girin, S. Leglaive, T. Hueber, and X. Alameda-Pineda. A benchmark of dynamical variational autoencoders applied to speech spectrogram modeling. 2021.
- [19] P. Dhariwal. Diffusion models beat gans on image synthesis. 2021.
- [20] Z. Kong. Diffwave: a versatile diffusion model for audio synthesis. 2020.

- [21] Q. Zhang, M. Tao, and Y. Chen. Gddim: generalized denoising diffusion implicit models. 2022.
- [22] S. Liu, D. Su, and D. Yu. Diffgan-tts: high-fidelity and efficient text-to-speech with denoising diffusion gans. 2022.
- [23] J. Wu, H. Fang, Y. Yang, and Y. Xu. Medsegdiff: medical image segmentation with diffusion probabilistic model. 2022.
- [24] K. Pandey, A. Mukherjee, P. Rai, and A. Kumar. Diffusevae: efficient, controllable and high-fidelity generation from low-dimensional latents. 2022.
- [25] M. Fathallah, M. Sakr, and S. El-etriby. Stabilizing and improving training of generative adversarial networks through identity blocks and modified loss function. *Ieee Access*, 11:43276–43285, 2023.
- [26] J. Mu, C. Chen, W. Zhu, S. Li, and Y. Zhou. Taming mode collapse in generative adversarial networks using cooperative realness discriminators. *Iet Image Processing*, 16:2240–2262, 2022.
- [27] Y. Zou. Auto-encoding generative adversarial networks towards mode collapse reduction and feature representation enhancement. *Entropy*, 25:1657, 2023.
- [28] Y. Gong, Z. Ming, J. Yang, M. Xie, and X. Ma. Distribution constraining for combating mode collapse in generative adversarial networks. *Journal of Electronic Imaging*, 32, 2023.
- [29] A. Dieng. Prescribed generative adversarial networks. 2019.
- [30] J. Dubinski, K. Deja, S. Wenzel, P. Rokita, and T. Trzciński. Selectively increasing the diversity of gan-generated samples. 2022.
- [31] Y. Chen, Q. Gao, and W. Xiao. Inferential wasserstein generative adversarial networks. *Journal of the Royal Statistical Society Series B (Statistical Methodology)*, 84:83–113, 2021.

- [32] H. Zhu. Comparison of deep convolutional gan and progressive gan for facial image generation. *Applied and Computational Engineering*, 18:165–171, 2023.
- [33] H. Zhao, T. Li, Y. Xiao, and Y. Wang. Improving multi-agent generative adversarial nets with variational latent representation. *Entropy*, 22:1055, 2020.
- [34] J. Ho and T. Salimans. Classifier-free diffusion guidance. 2022.
- [35] J. Song, C. Meng, and S. Ermon. Denoising diffusion implicit models. 2020.
- [36] K. Preechakul, N. Chatthee, S. Wizadwongsa, and S. Suwajanakorn. Diffusion autoencoders: toward a meaningful and decodable representation. 2021.
- [37] E. Luhman. Knowledge distillation in iterative generative models for improved sampling speed. 2021.
- [38] A. Creswell, T. White, V. Dumoulin, K. Arulkumaran, B. Sengupta, and A. A. Bharath. Generative adversarial networks: an overview. *IEEE Signal Processing Magazine*, 35:53–65, 2018.
- [39] I. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, D. Warde-Farley, S. Ozair, A. Courville, and Y. Bengio. Generative adversarial networks. *Communications of the ACM*, 63:139–144, 2020.
- [40] A. Kazerouni, E. Aghdam, M. Heidari, R. Azad, M. Fayyaz, I. Haci-haliloglu, and D. Merhof. Diffusion models for medical image analysis: a comprehensive survey. 2022.
- [41] Y. Song. Score-based generative modeling through stochastic differential equations. 2020.
- [42] A. Lugmayr, M. Danelljan, A. Romero, F. Yu, R. Timofte, and L. Gool. Repaint: inpainting using denoising diffusion probabilistic models. 2022.

- [43] Y. Saito, S. Takamichi, and H. Saruwatari. Statistical parametric speech synthesis incorporating generative adversarial networks. *Ieee/Acm Transactions on Audio Speech and Language Processing*, 26:84–96, 2018.
- [44] J. Parikh, T. Rumbell, X. Butova, T. Myachina, J. Acero, S. Khamzin, O. Solovyova, J. Kozloski, A. Khokhlova, and V. Gurev. Generative adversarial networks for construction of virtual populations of mechanistic models: simulations to study omecamtiv mecarbil action. *Journal of Pharmacokinetics and Pharmacodynamics*, 49:51–64, 2021.
- [45] T. Miyato. Cgans with projection discriminator. 2018.
- [46] Ian J. Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. Generative adversarial networks. 2014.
- [47] T. Kynkäanniemi, T. Karras, M. Aittala, T. Aila, and J. Lehtinen. The role of imagenet classes in fréchet inception distance. 2022.
- [48] Y. Xu, T. Wu, J. Charlton, and K. Bennett. Gan training acceleration using fréchet descriptor-based coreset. *Applied Sciences*, 12:7599, 2022.
- [49] R. Xu, J. Wang, J. Liu, F. Ni, and B. Cao. Thermal infrared face image data enhancement method based on deep learning. 2023.
- [50] D. Berthelot, T. Schumm, and L. Metz.Began: boundary equilibrium generative adversarial networks. 2017.
- [51] H. Hyungrok, T. Jun, and D. Kim. Unbalanced gans: pre-training the generator of generative adversarial network using variational autoencoder. 2020.