1. Design Deterministic Finite Automata using simulator to accept odd number of a's

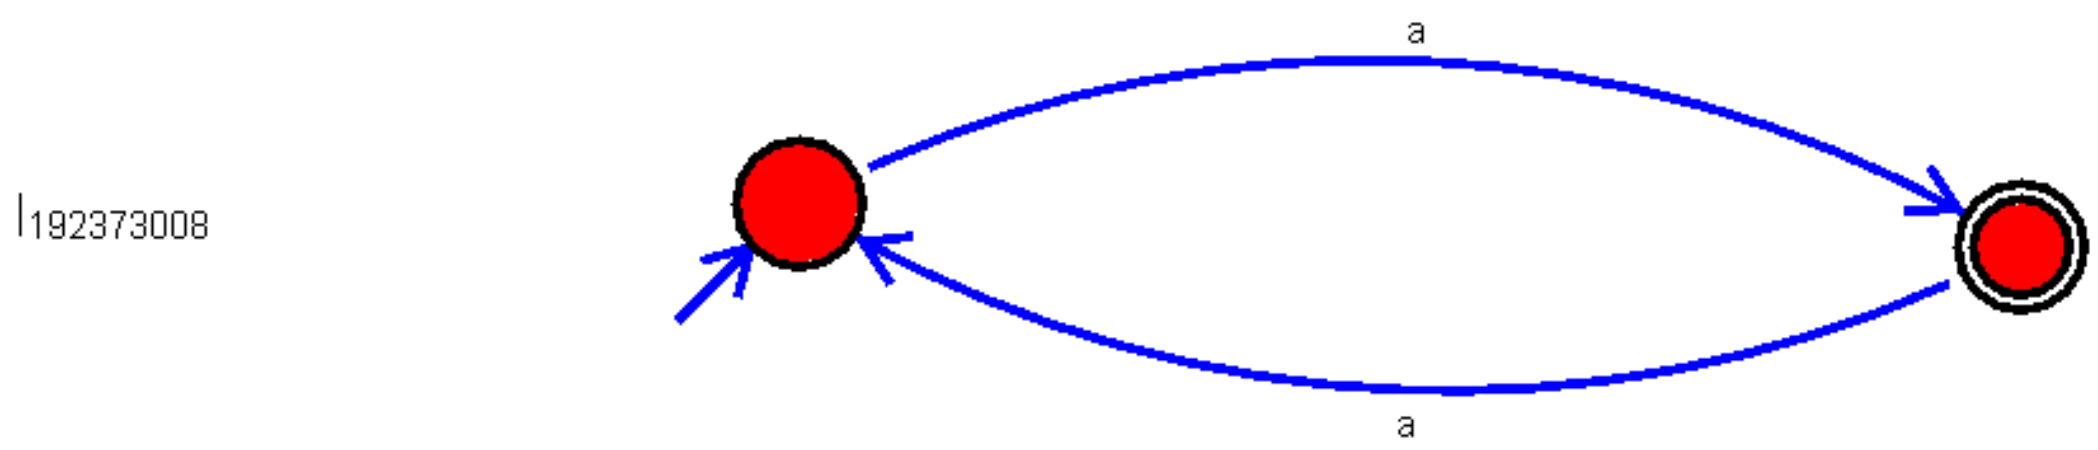

2. Design Deterministic Finite Automata using simulator to accept the string the end with ab over set {a,b}

   W=aaabab

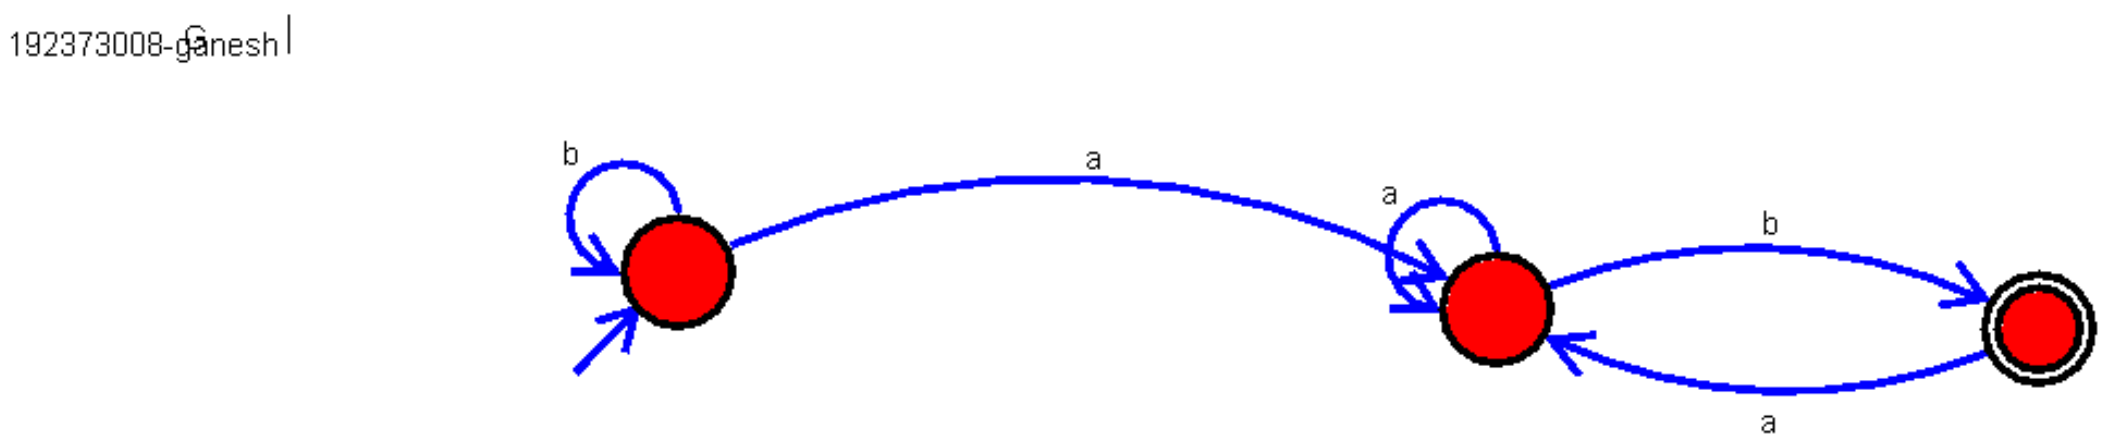

3. Design Deterministic Finite Automata using simulator to accept the string having 'ab' as substring over the set {a,b}

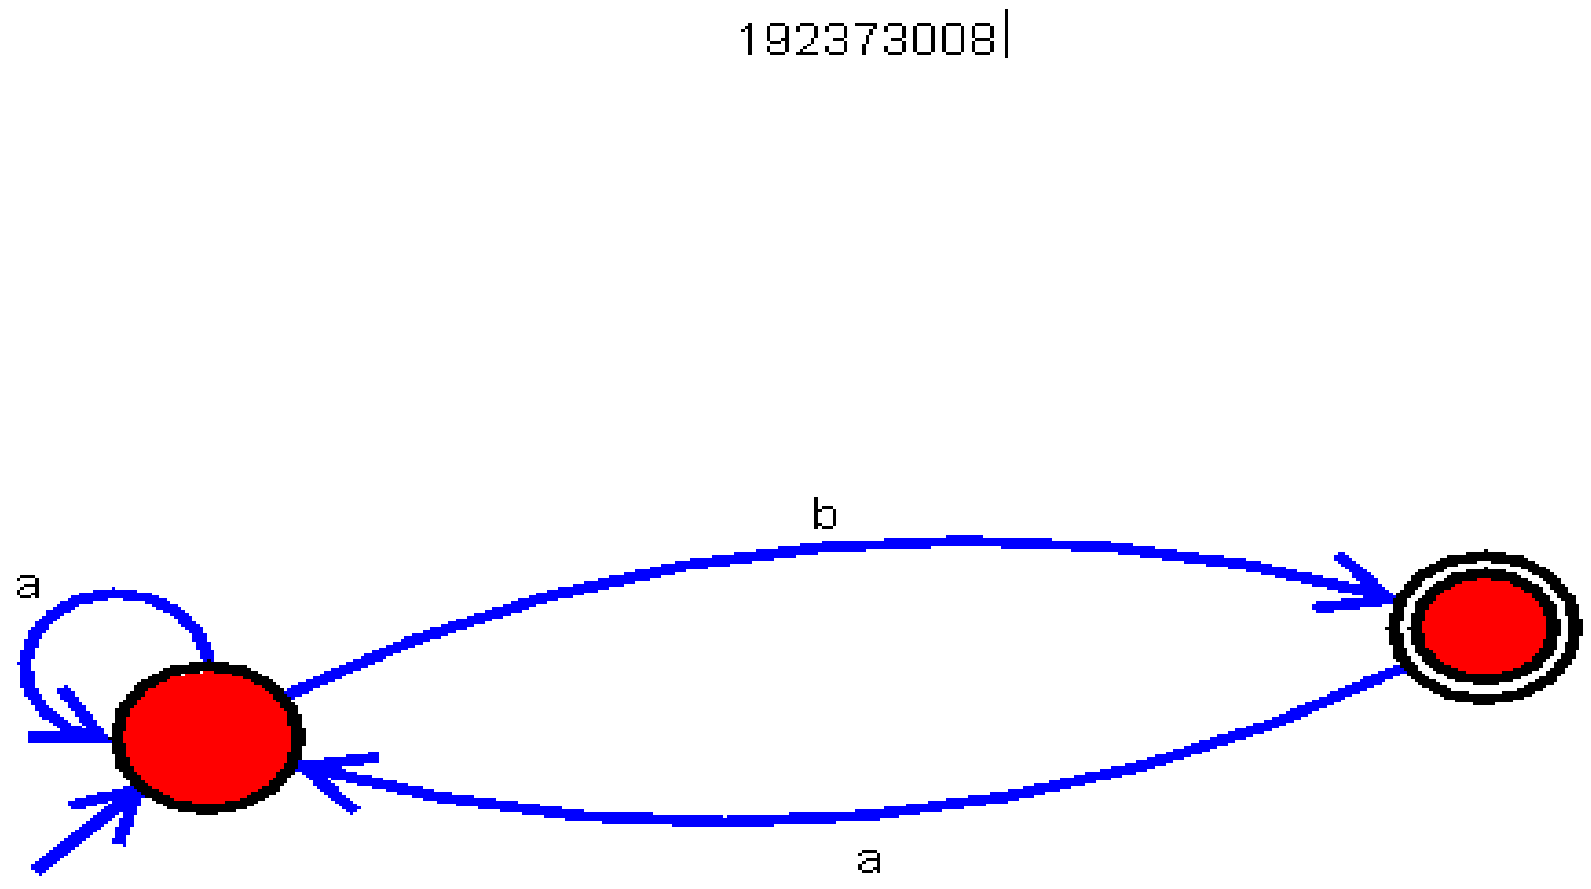

4. Draw a Deterministic Finite Automata for the language accepting strings ending with 'abba' over input alphabets ∑ = {a, b}

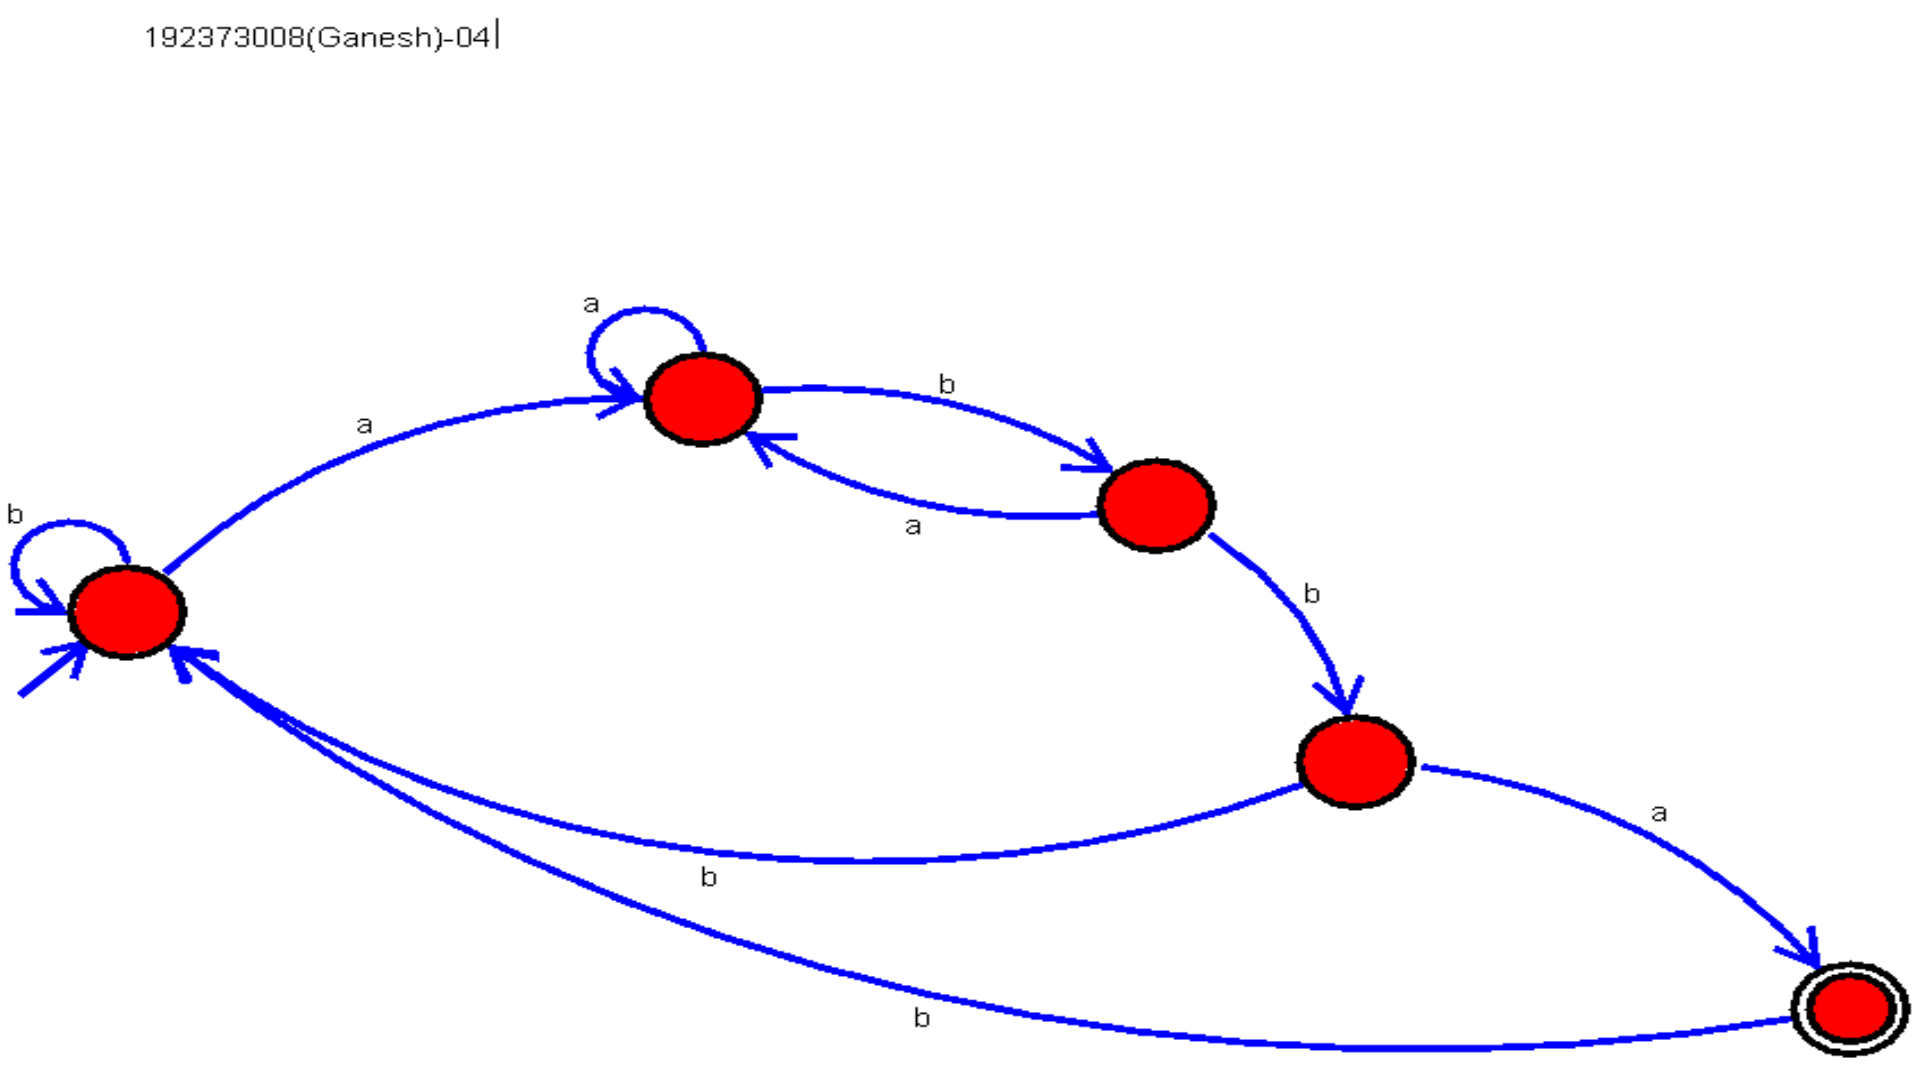

5. Design Deterministic Finite Automata using simulator to accept even number of a’s.

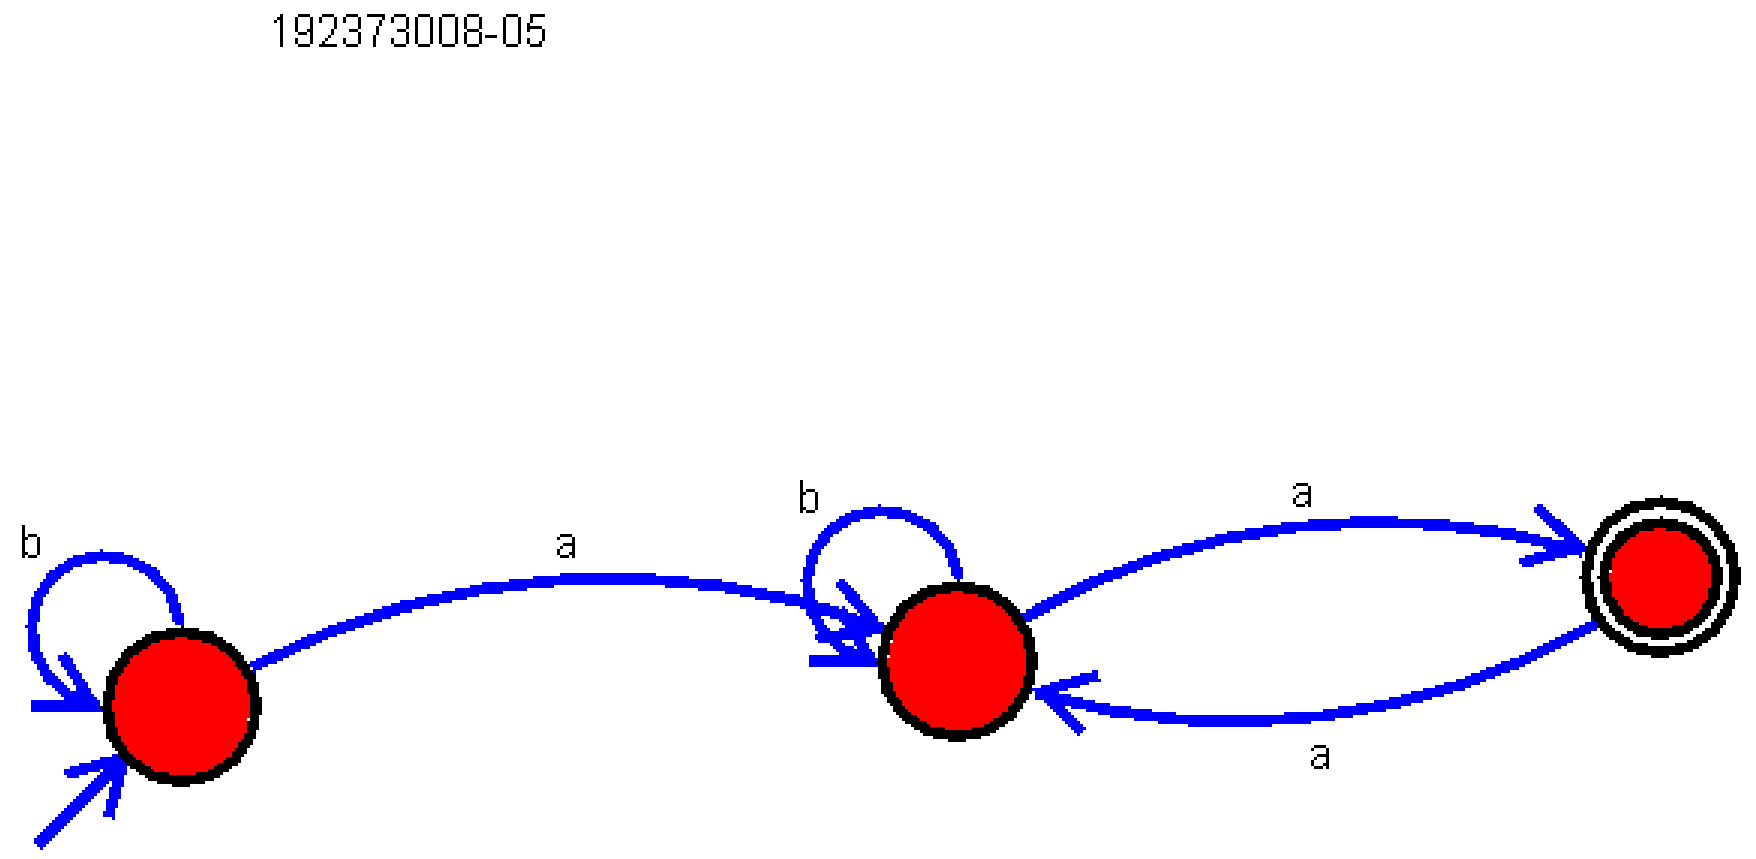

6. Draw a Deterministic Finite Automata that accepts a language L over input alphabets $\sum = \{0, 1\}$ such that L is the set of all strings starting with ’aa’.

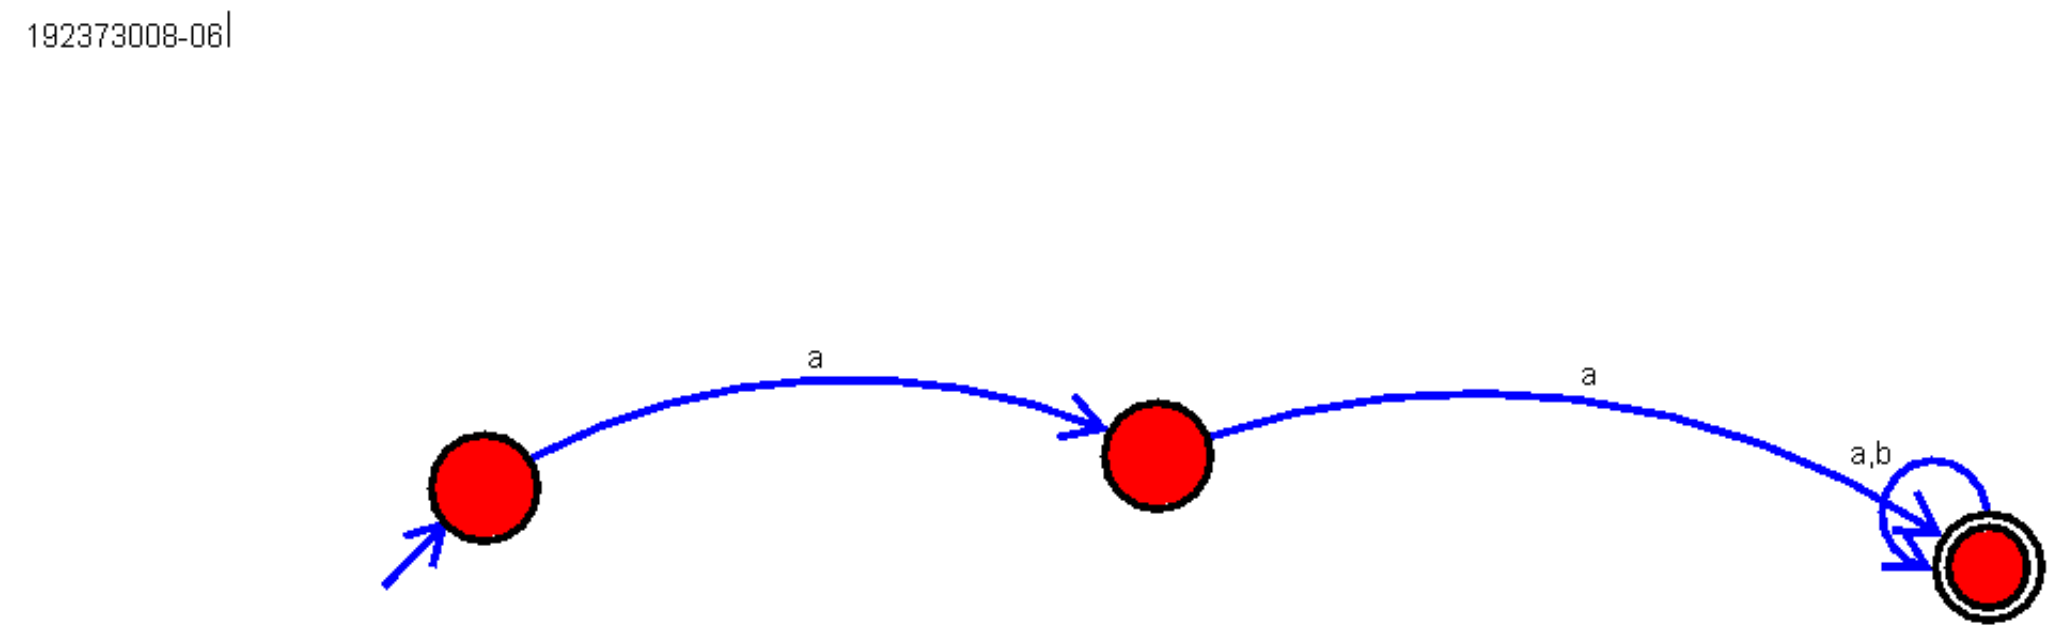

7. Design Deterministic Finite Automata using simulator to accept strings in which a's always appear tripled over input {a,b}

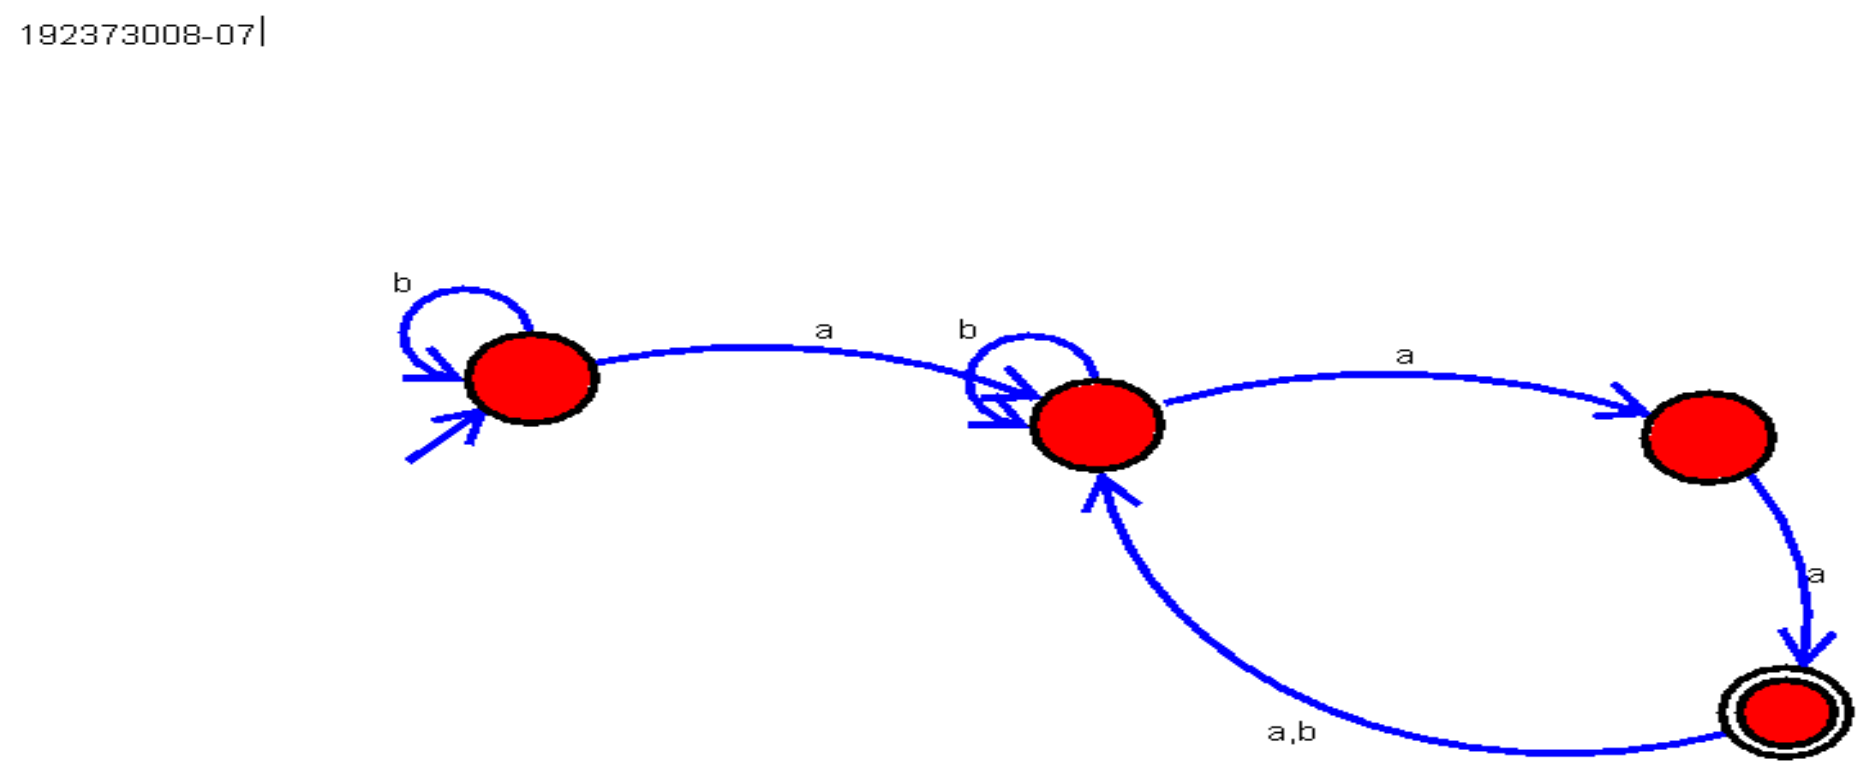

8. Design Deterministic Finite Automata using simulator to accept strings in which b's always appear tripled over input {a,b}

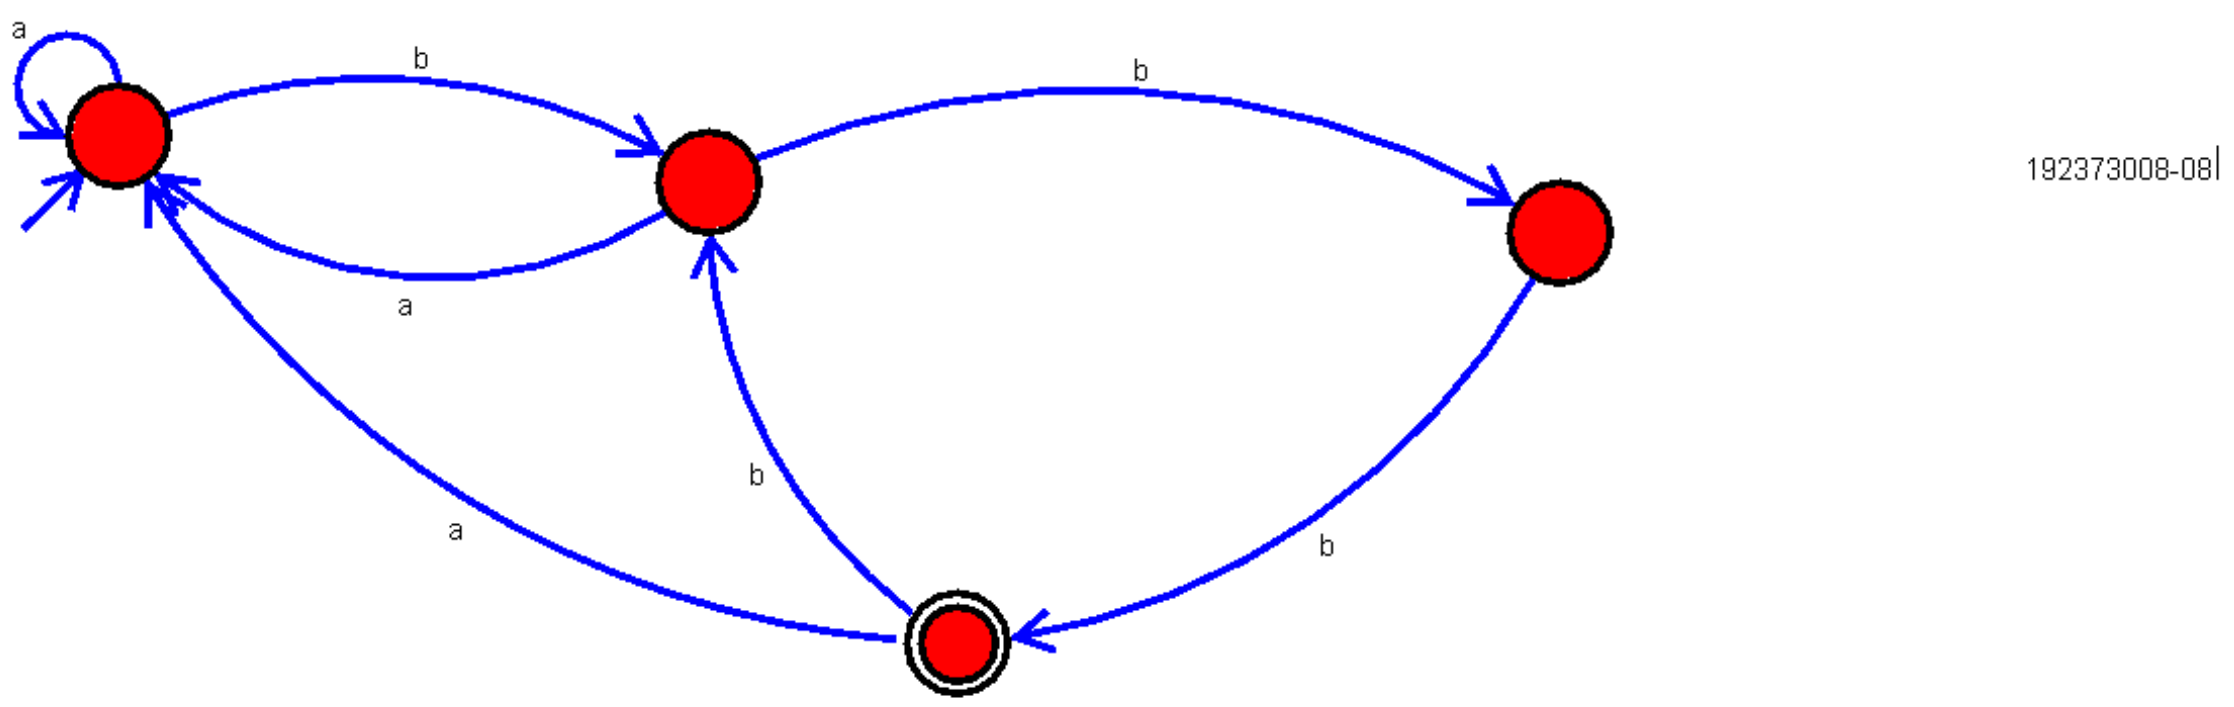

9. Design Non Deterministic Finite Automata using simulator to accept the string the start with a and end with b over set {a,b} and check W= abaab is accepted or not.

192373008-09

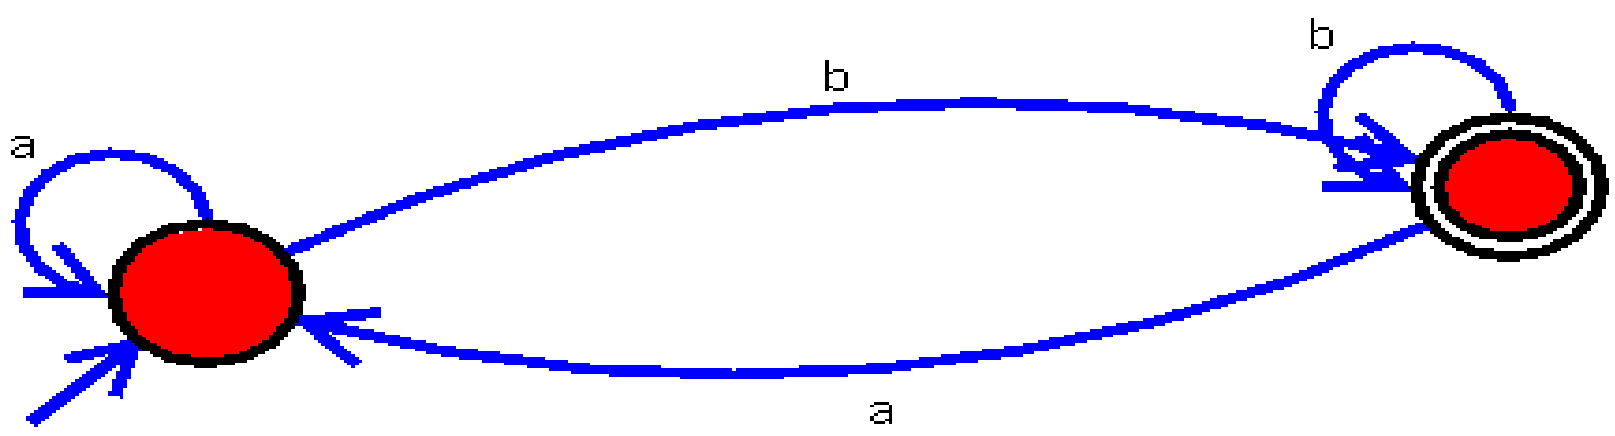

10. Design Non Deterministic Finite Automata using simulator to accept the string that start and end with different symbols over the input {a,b}.

192373008-10

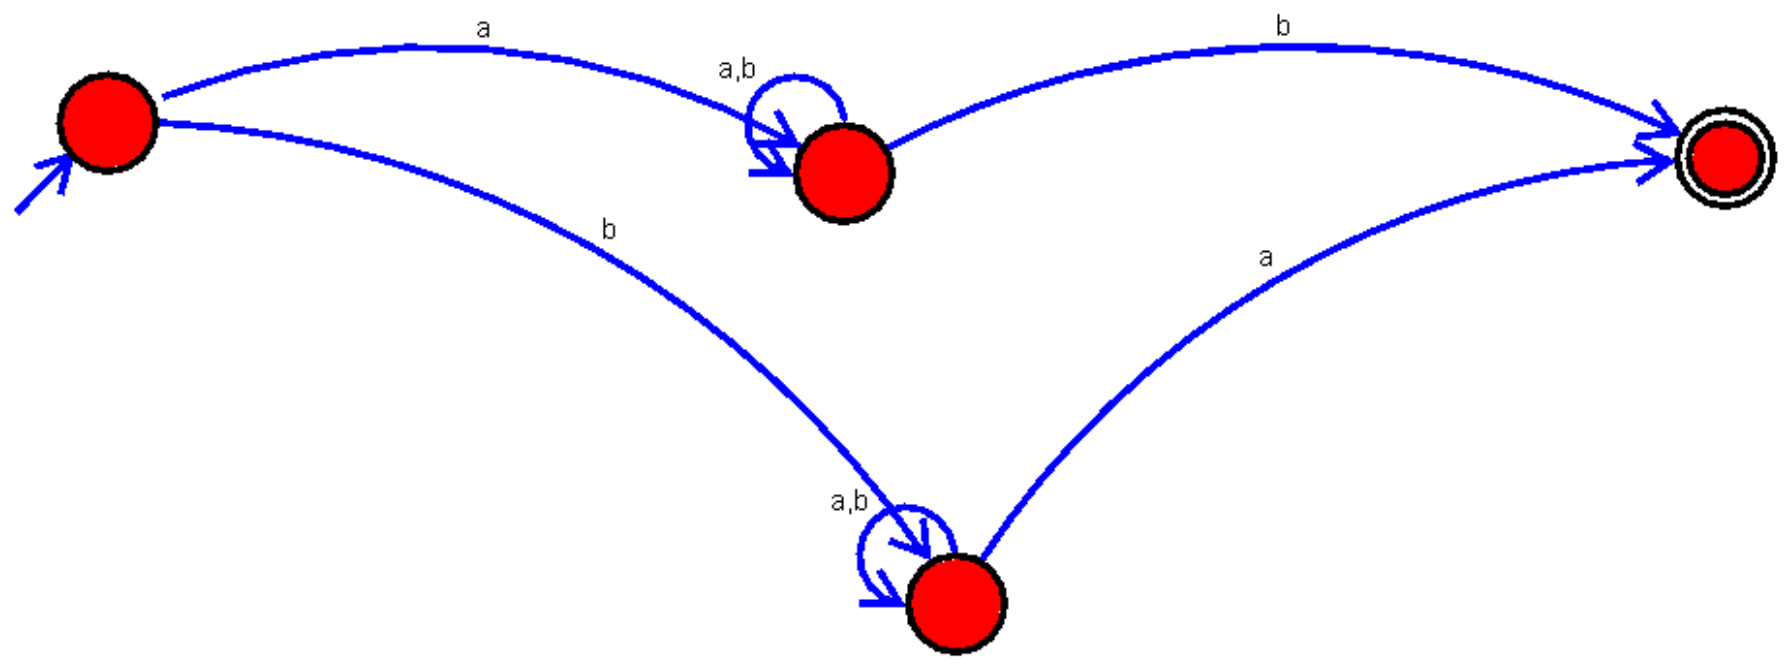

11. Design DFA using simulator to accept the string the end with abc over set {a,b,c) W= abbaababc

192373008-11

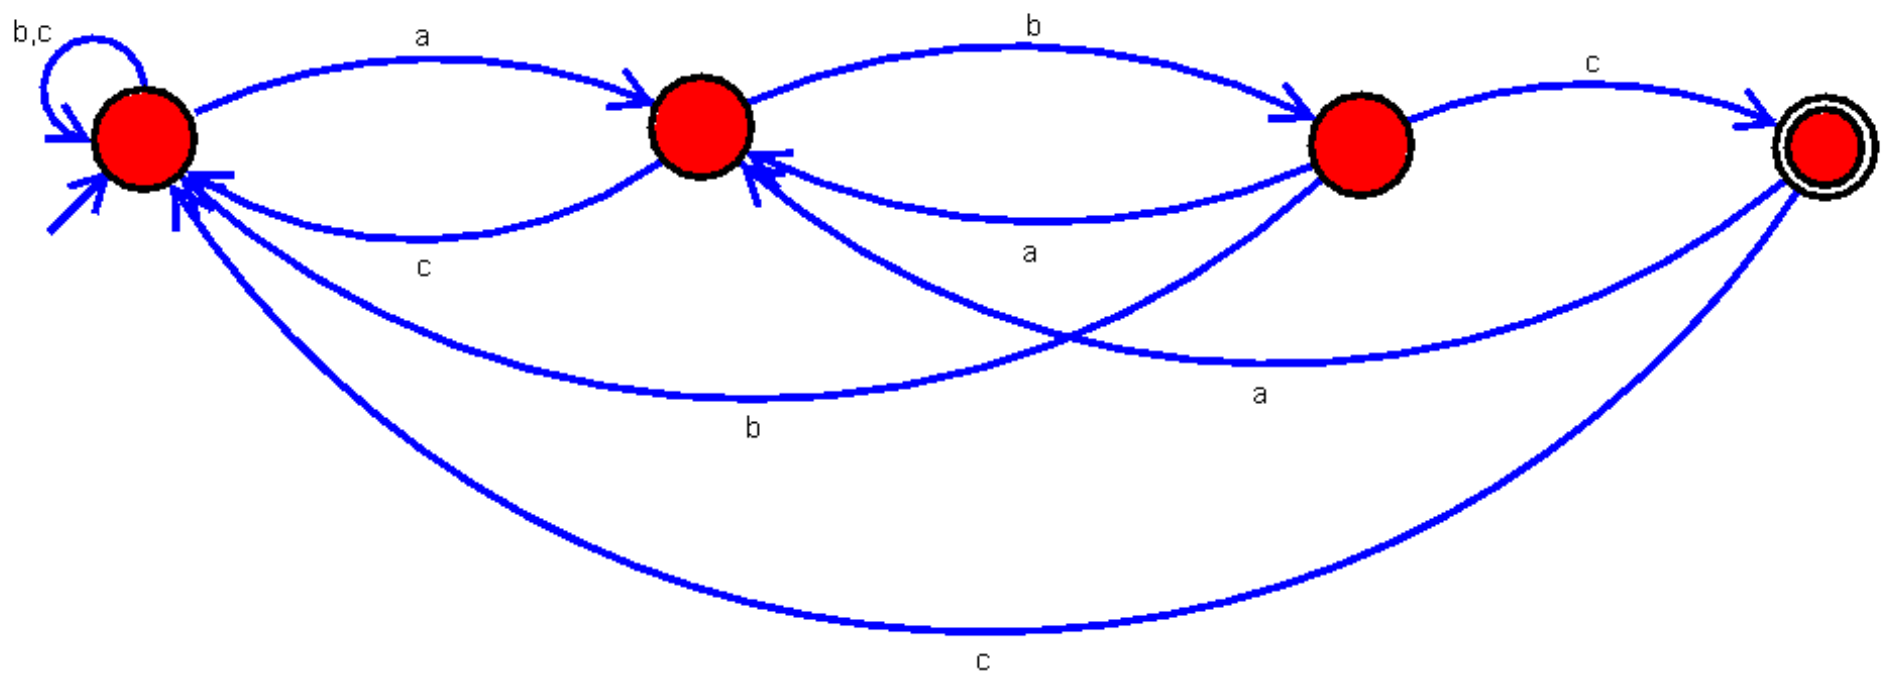

12. Design Deterministic Finite Automata using simulator to accept string which start and end with different symbols .

192373008-12

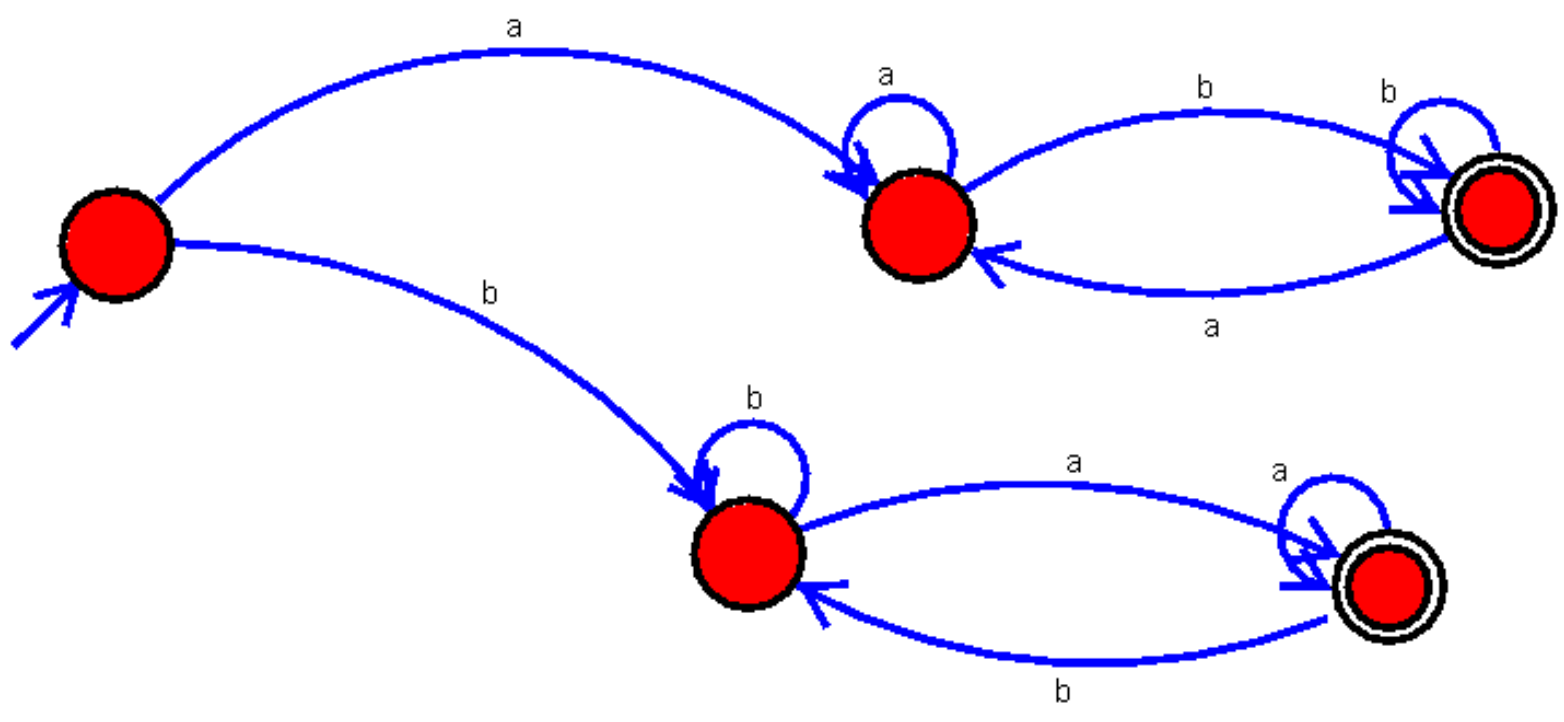

13. Design DFA using simulator to accept the string the end with cb over set {a,b,c) W= abbaabacb

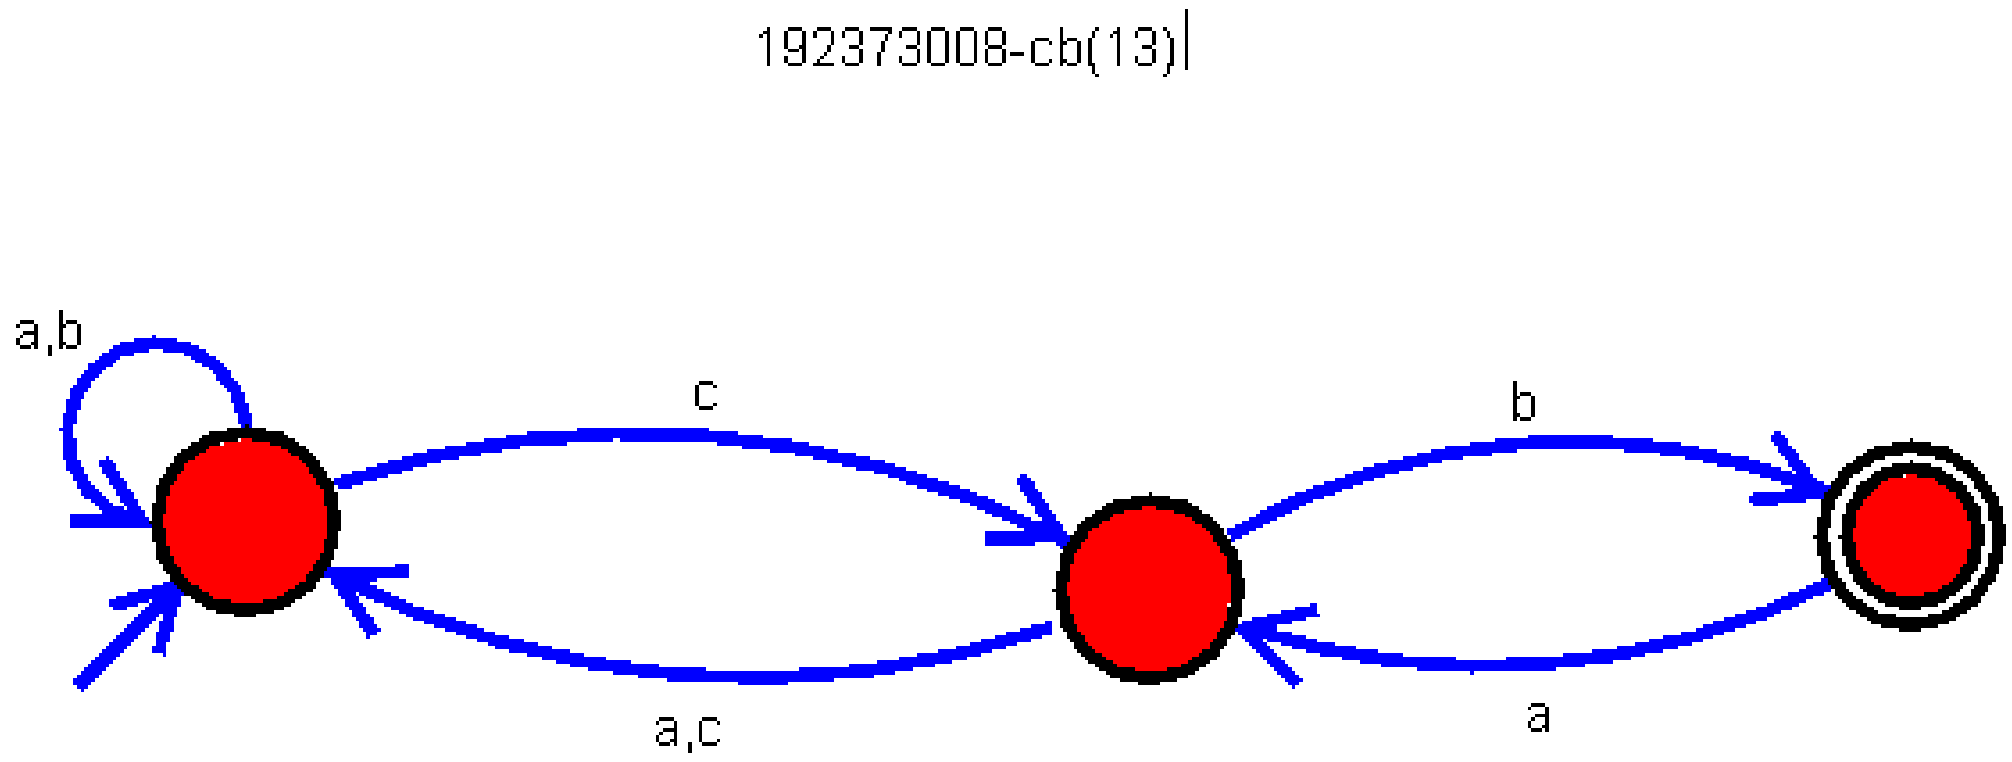

14. Design Deterministic Finite Automata using simulator to accept string which consist of even number of a’s or even number b’s

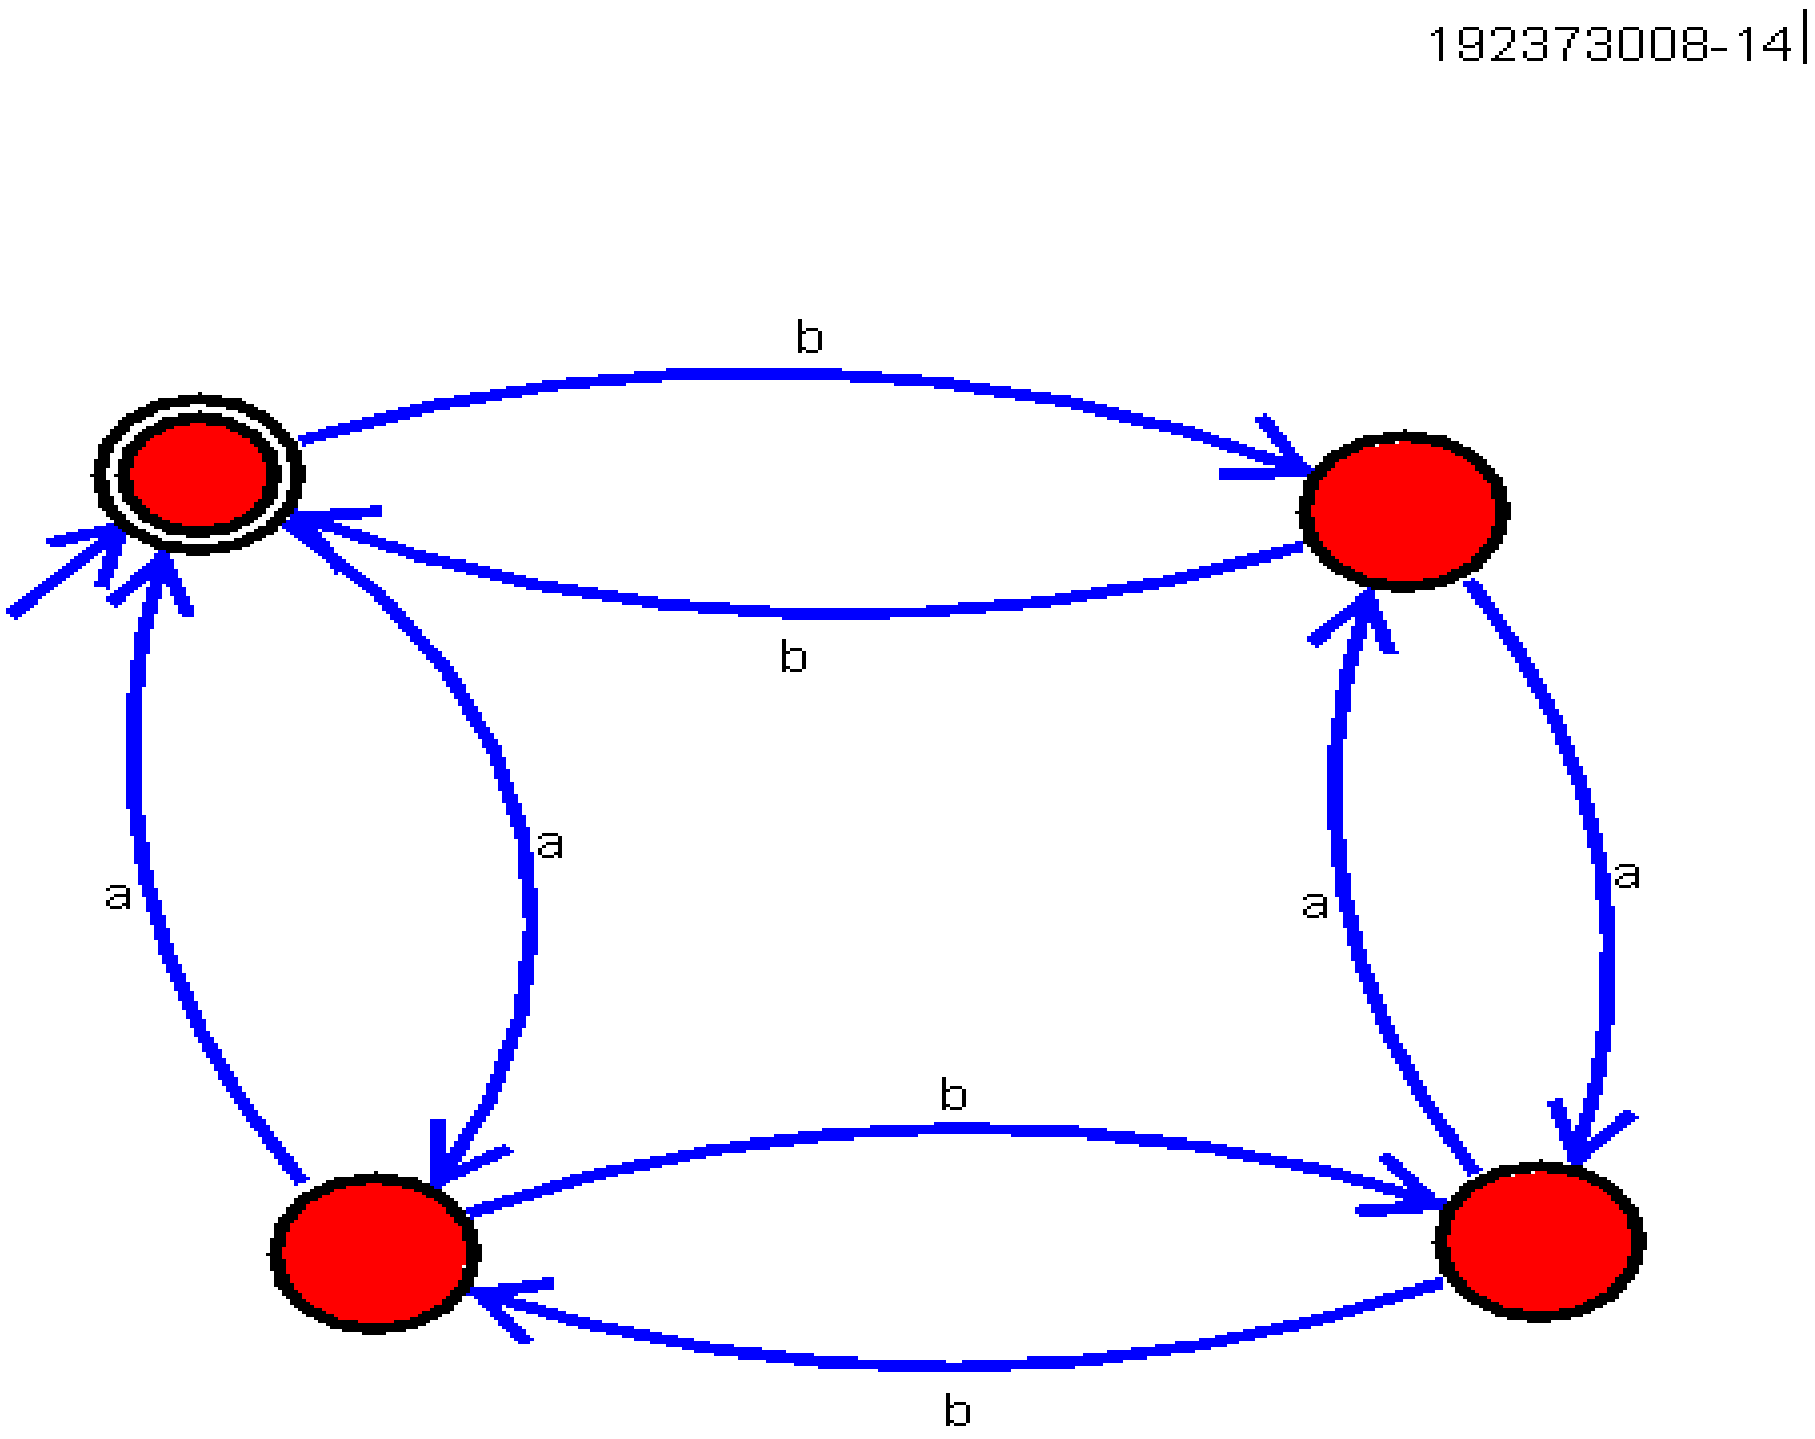

15. Design DFA which checks whether the given unary number is divisible by 3.

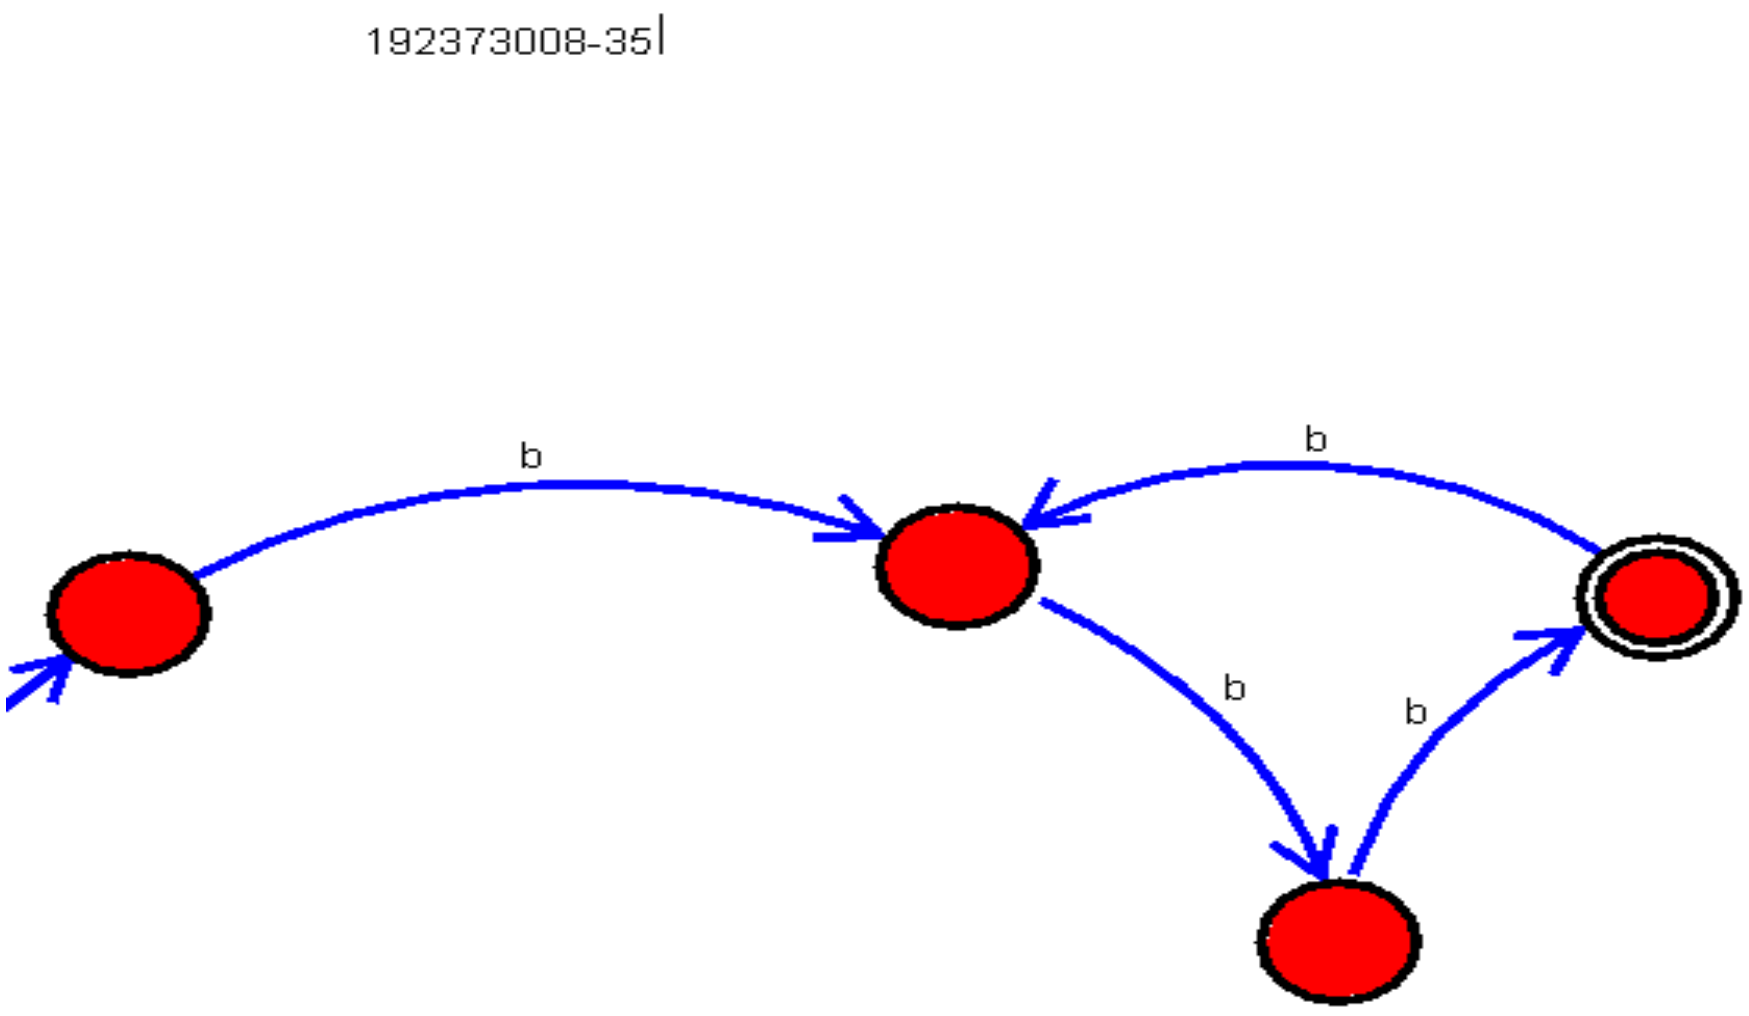

16. Design DFA for accepting all the strings of L={$a^m b^n$ / m>=a and n>=b}

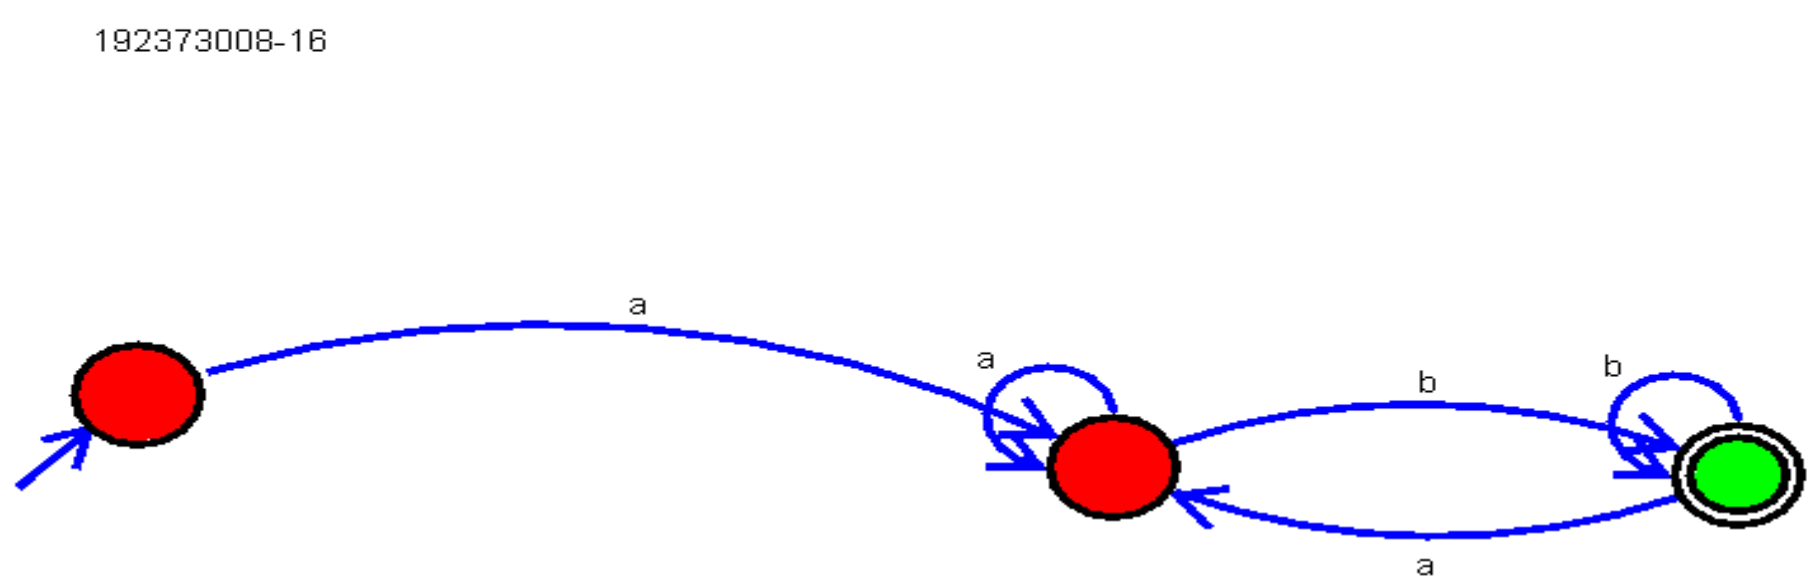

17. Design NFA which accept a language consisting the strings of any no.of a's followed by any no.of b's followed by any no.of c's

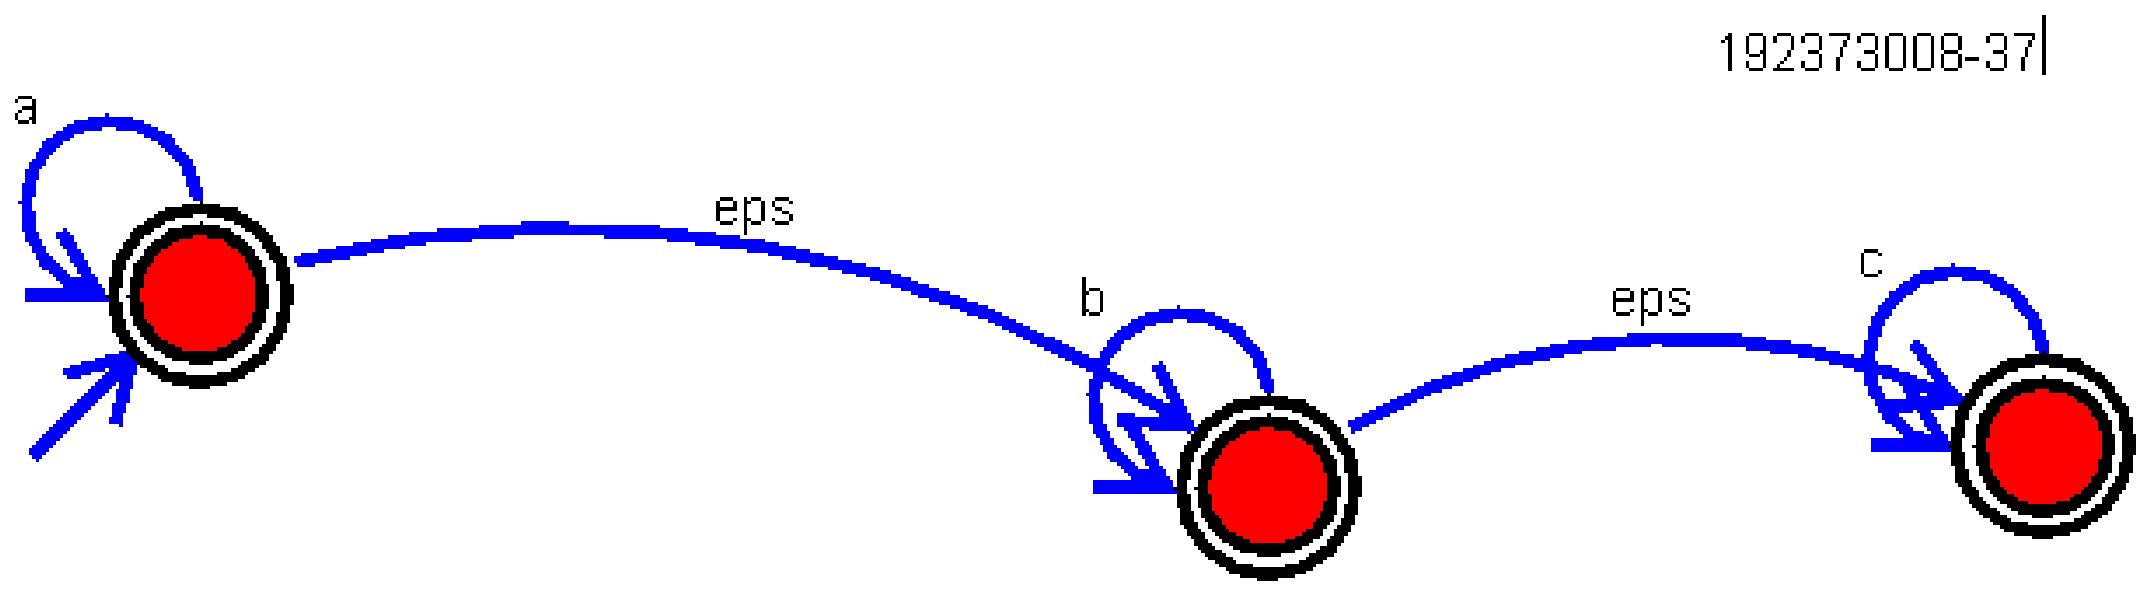

18. Draw a Deterministic Finite Automata for the language accepting strings staring with ’aa’ and ending with ‘bb’over input alphabets ∑ = {a, b}.

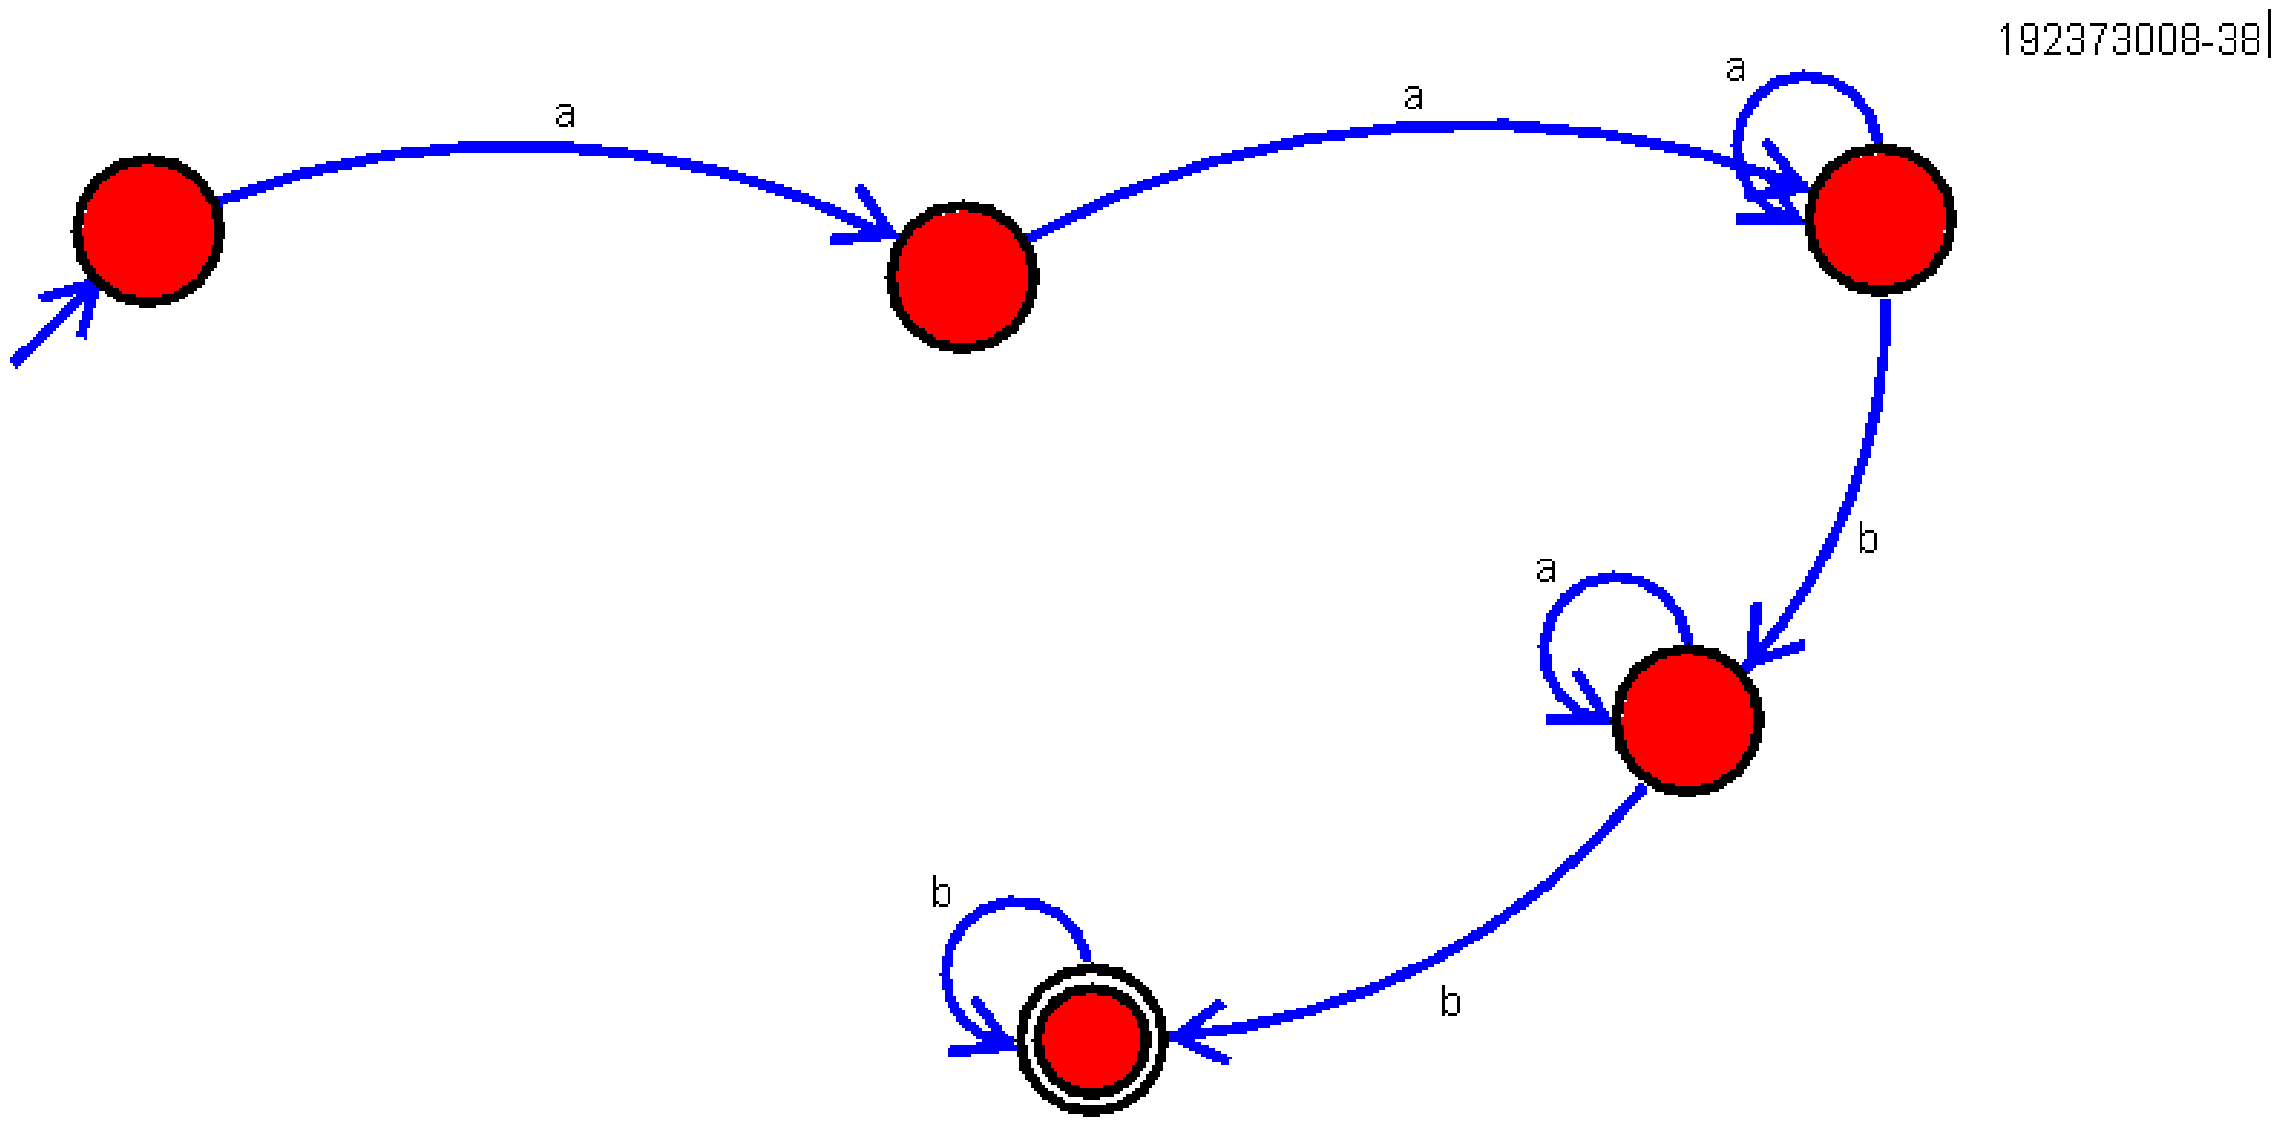

19.Design Deterministic Finite Automata using simulator to accept the input string “a” ,”ac”,and ”bac”.

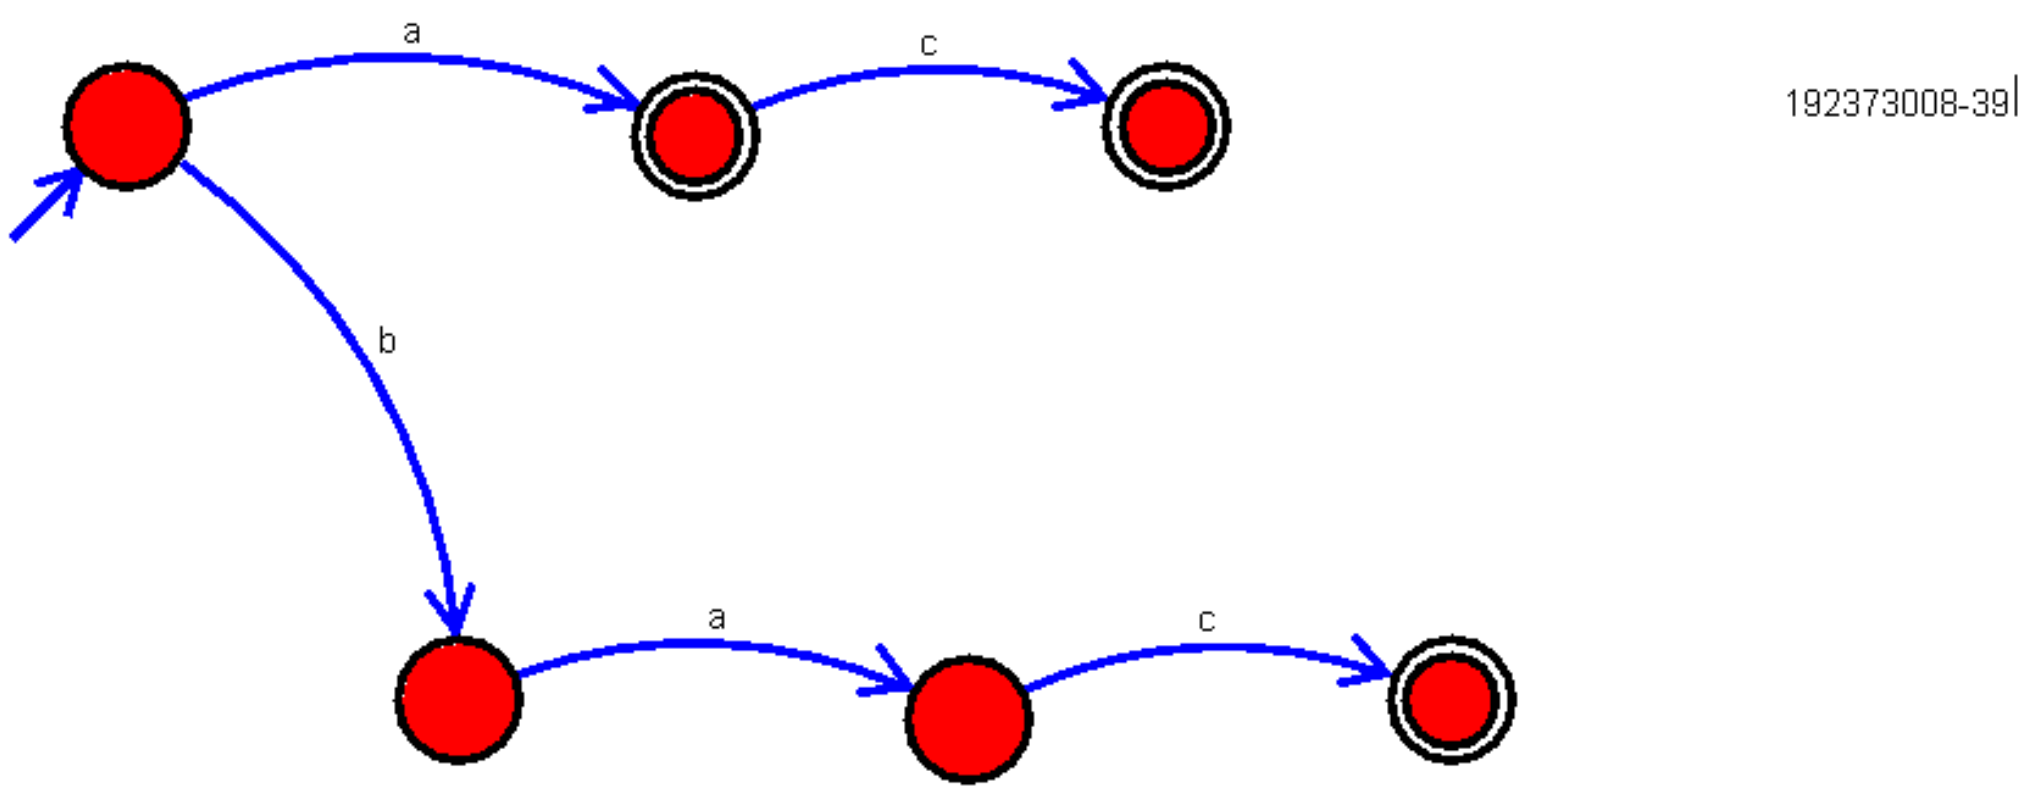

20.Design a Deterministic Finite Automaton (DFA) that accepts the union of languages L1 and L2, where L1 accepts the string "0" and L2 accepts the string "1", we need to create a DFA that accepts strings "0" or "1".

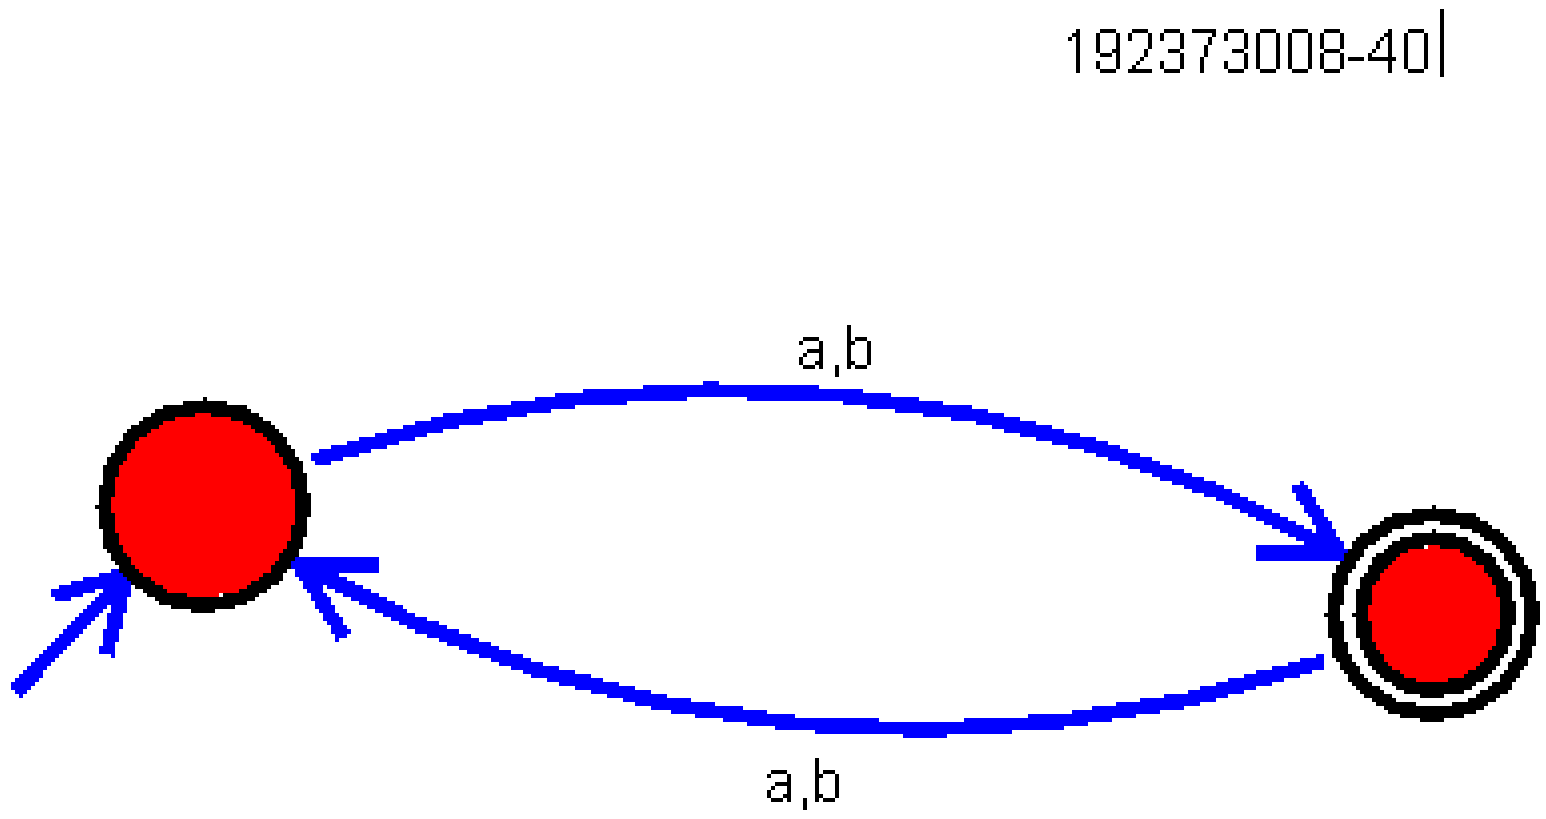

21.Design DFA for accepting all the strings of L={a* / number of a >=0 }