

<script> console.log ("_____")

var x;


var y = 100;


console.log(z)

var z = 200;

</script>

(1) parse & (hoist)

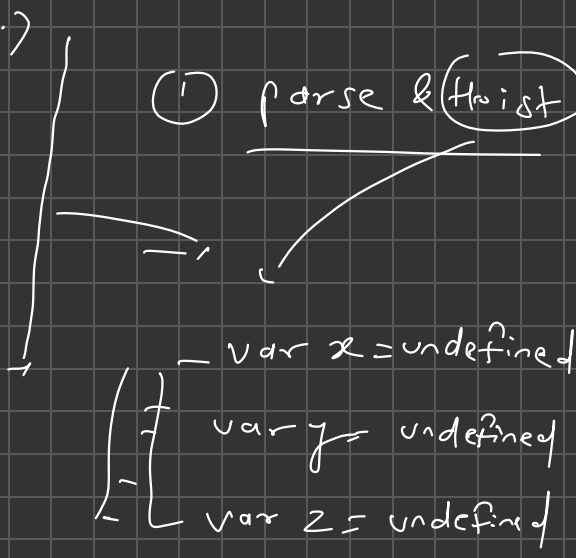

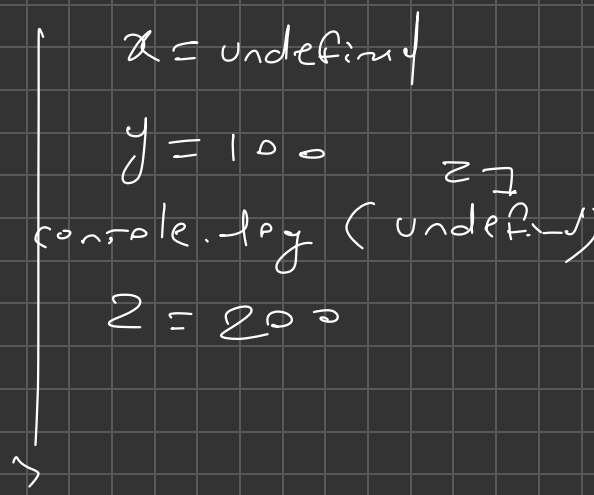

qqd client

Server

No = 1 # Name = abc # age = 45

JS

String

Java
PHP

there way
no standard
for format

logic
to split
& use
strs

Client

Server

C++, Java, or

* anybody

anybody

" <?xml?>

<emp>

<No> 1 </No>

<Name> abc </Name>

<Age> 45 </Age>

</emp>

"


{ No : 1 , Name : 'Alec' , Age : 45 }"

Javascript

- ↳ datatypes
- ↳ how to declare variables
- ↳ where to write javascript.
- ↳ variations when we use operator like '+'
- ↳ writing functions |
- ↳ functional programming
 - ↳ Every JS function returns
 - ↳ variable can hold function
 - ↳ Hoisting.
 - ↳ A function can be passed as parameter
 - ↳ A function can be returned as output
 - ↳ A class / object creation has 3 ways in JS
 - ↳ literal syntax
 - ↳ constructor function
 - ↳ class syntax (ECMA 6)



① --proto--

② Babel JS

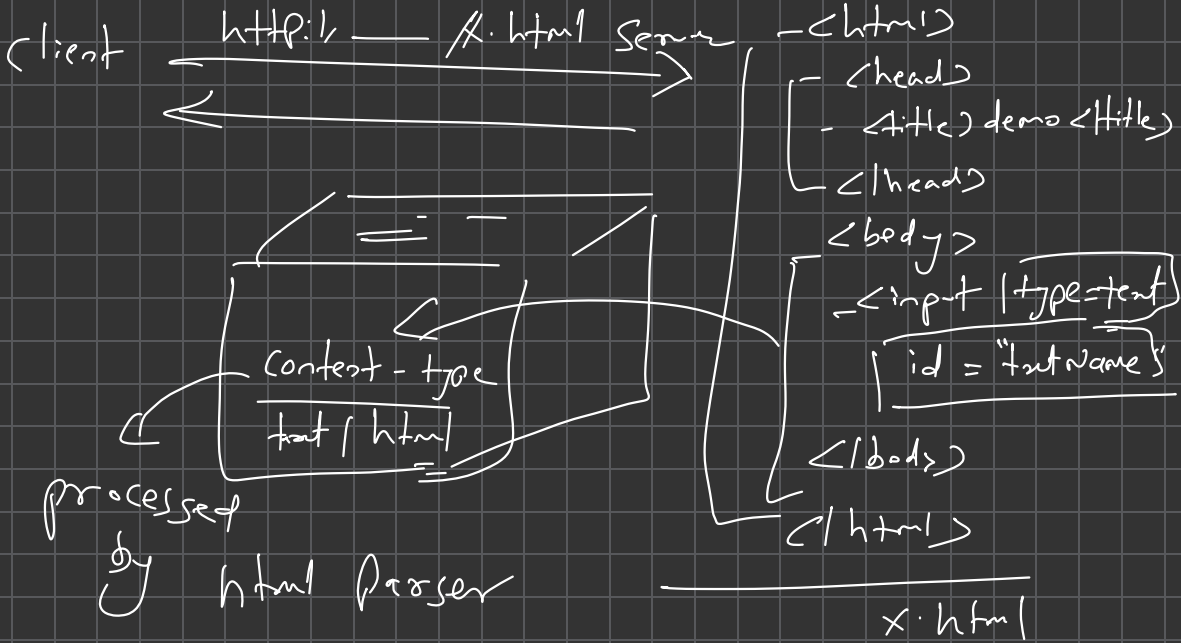


Browser

JS Engine

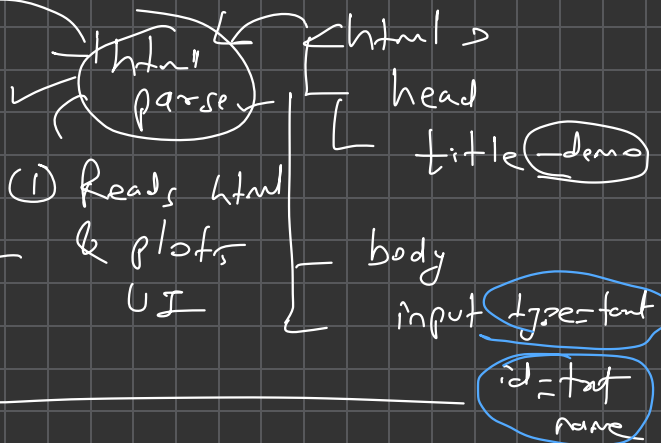

```
var o1 = new HTMLElement('HTML')
var o2 = new HTMLElement('HEAD')
var o3 = new HTMLElement('TITLE')
o3.InnerText = "demo"
```

html

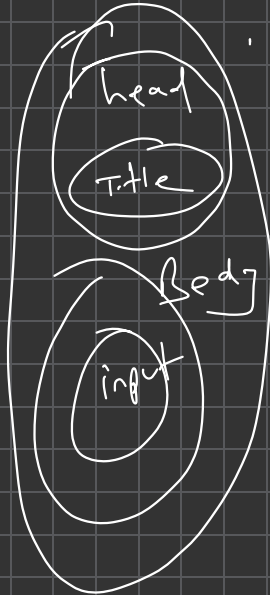

```
var o4 = new HTMLElement('BODY')
var o5 = new HTMLElement('INPUT')
o5.id = "txtname"
o5.type = "text"
```

$o4.children = [o5]$

$o2.children = [o3]$


$o1.children = [o2, o4]$

Javascript ← (document) →

Document
object model
DOM

Tree

↓

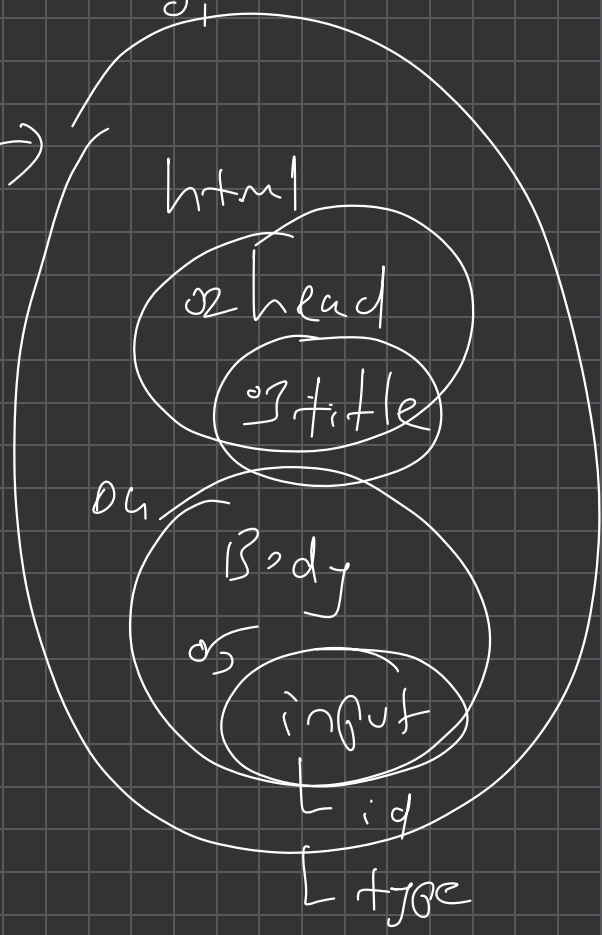

Javascript.
Engine

document

<script>

var v = document.getElementById("txt")

v.value = "abc"

D

"

name

T

R

S

S

L o₁

L 2 o₂

L o₃

L o₄

L o₅

↳ id = txt

↳ type = text

L value

L class

L style

