# Experiment No 2

## Step 1: Choose pipeline settings

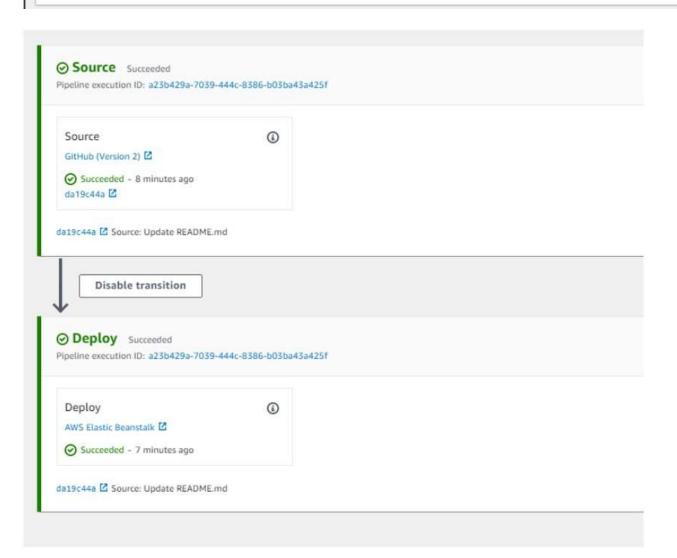### Pipeline settings

Pipeline name
ganeshpipeline

Pipeline type
V2

Execution mode
QUEUED

Artifact location
codepipeline-us-east-1-602624750893

Service role name
AWSCodePipelineServiceRole-us-east-1-ganeshpipeline

---

⊘ **Source** Succeeded
Pipeline execution ID: a23b429a-7039-444c-8386-b03ba43a425f

Source                                    ⓘ
GitHub (Version 2) ⧉

⊘ Succeeded - 8 minutes ago
da19c44a ⧉

da19c44a ⧉ Source: Update README.md

**Disable transition**

⊘ **Deploy** Succeeded
Pipeline execution ID: a23b429a-7039-444c-8386-b03ba43a425f

Deploy                                    ⓘ
AWS Elastic Beanstalk ⧉

⊘ Succeeded - 7 minutes ago

da19c44a ⧉ Source: Update README.md

# Congratulations!

You have successfully created a pipeline that retrieved this source application from an Amazon S3 bucket and deployed it to three Amazon EC2 instances using AWS CodeDeploy.

For next steps, read the AWS CodePipeline Documentation.