


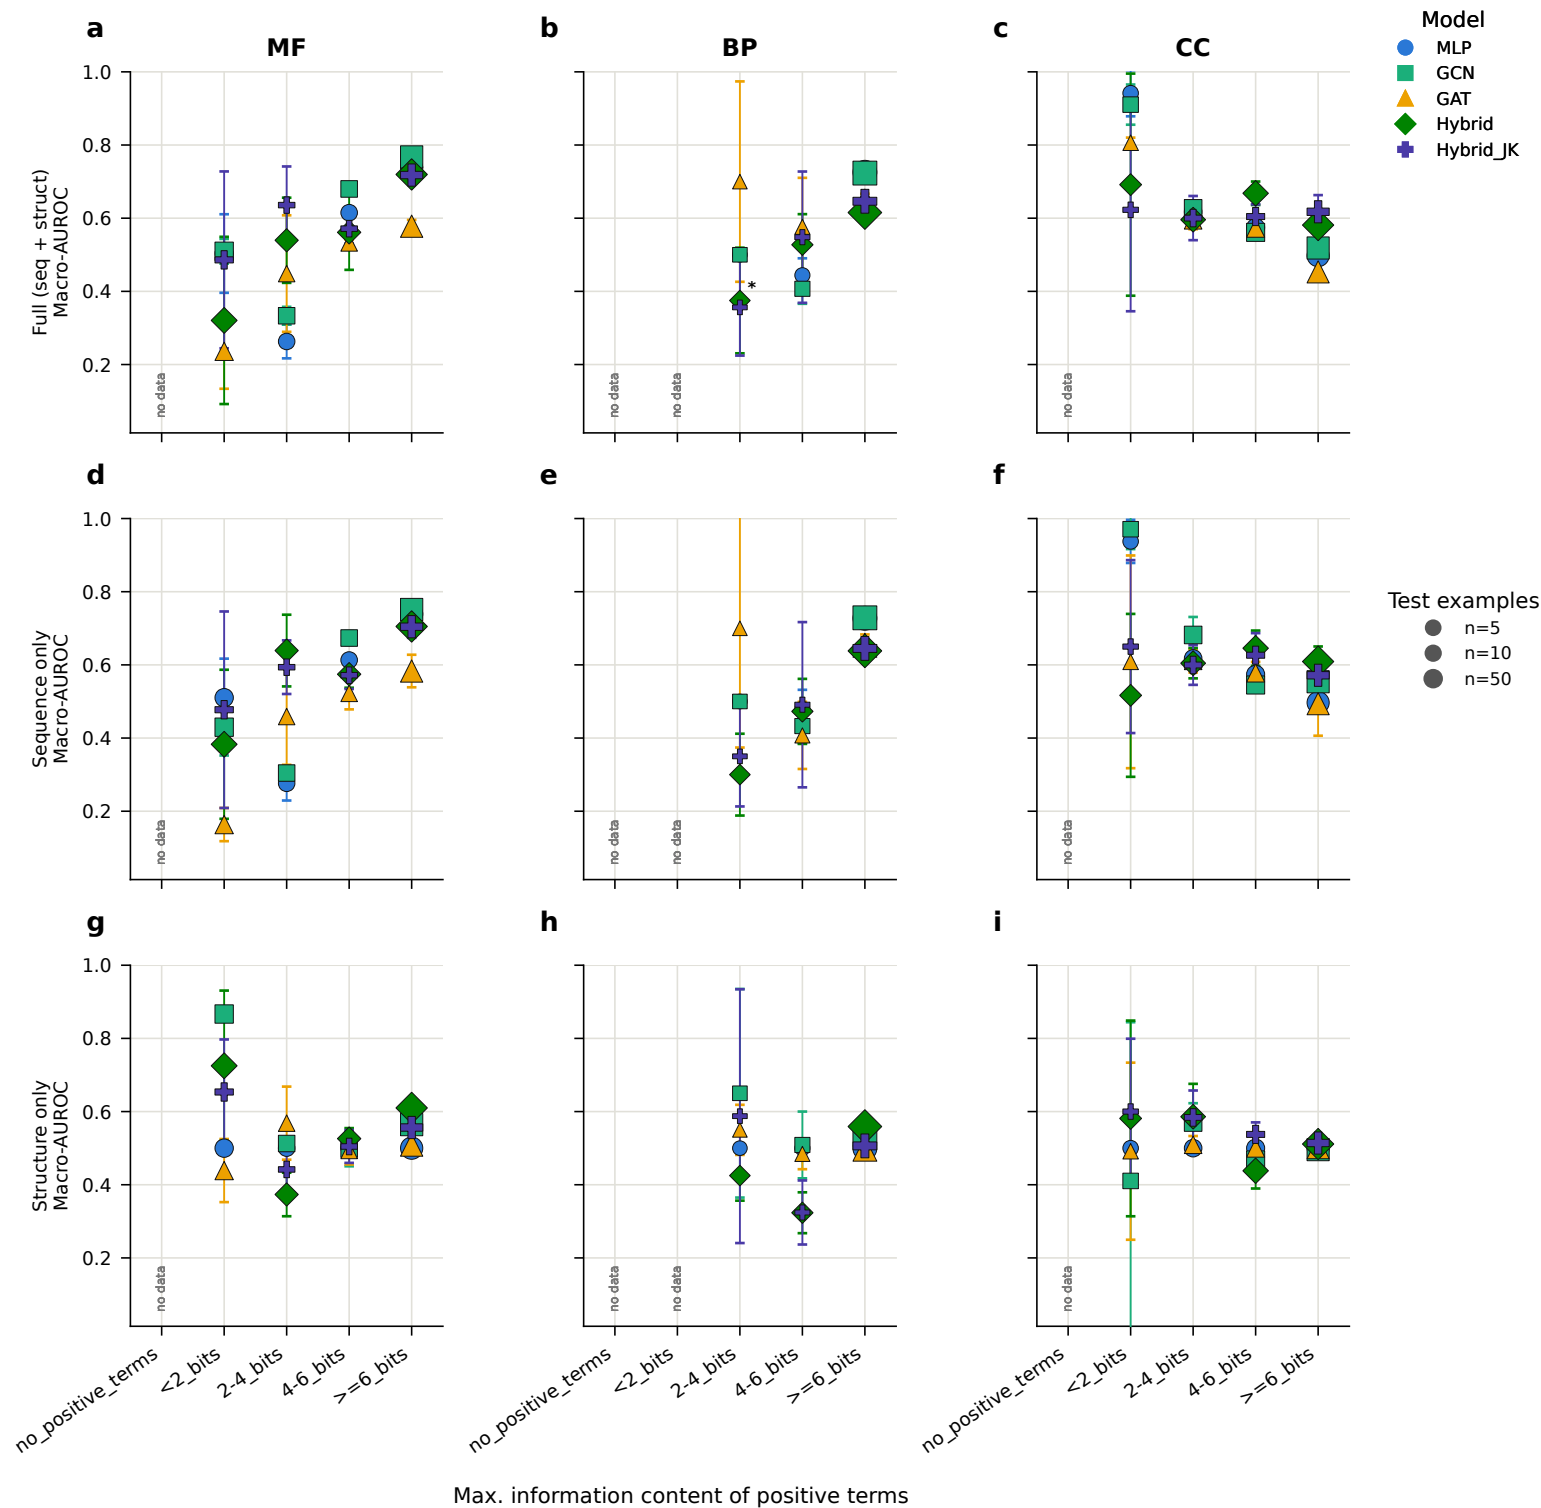

Error bars = mean $\pm$ SD across five seed checkpoints; marker area $\propto \sqrt{\text{test examples}}$; no connecting lines; '*' = $n < 10$ or archived one-class-AUROC evaluator artifact; empty bins are explicit no-data gaps; higher is better.