



Setting up Google Workspace connectors in Gemini Enterprise

Prerequisites

#	Prerequisite	Where	Who
P1	discoveryengine.googleapis.com API enabled	Google Cloud console	Cloud admin
P2	roles/discoveryengine.admin (or editor) on the project	Cloud IAM	Cloud admin
P3	Signed in with a managed Workspace account on the same tenant – personal@gmail.com will not work	Both consoles	Builder
P4	Gemini Enterprise licences assigned to builders and end users	Admin console	Workspace admin
P5	Workspace service access and smart features enabled for the org unit	Admin → Apps → Google Workspace → Generative AI	Workspace admin
P6	Billing enabled on the Cloud project	Cloud console	Cloud admin

Step 1 — Cloud project setup

Action	Detail
Enable the API	discoveryengine.googleapis.com
Grant IAM	roles/discoveryengine.admin to the builder, or editor for a narrower grant
Note the project number	Needed for the Workspace allowlist in Step 2 and for DWD if used
Service agent	service-<PROJECT_NUMBER>@gcp-sa-discoveryengine.iam.gserviceaccount.com is created automatically

Step 2 — Workspace Admin console

****Required when your tenant restricts third-party API access****

Setting	Path	Value
Trusted app access	Security → Access and data control → API controls → Manage third-party app access	Add the OAuth client ID from Step 3, mark Trusted
Generative AI settings	Apps → Google Workspace → Generative AI	Enable for the relevant org units
Domain-wide delegation (only if needed)*	Security → Access and data control → API controls → Domain-wide delegation	Authorise the service account client ID with the minimum scopes

If DWD is used, also grant the Discovery Engine service agent roles/iam.serviceAccountTokenCreator on the service account so it can impersonate it.

Step 3 — OAuth client

Some connectors — Gmail and Calendar in particular — require an OAuth client of your own rather than using the platform default.

Field	Value
Type	OAuth 2.0 client ID → Web application
Created in	Cloud console → APIs & Services → Credentials
Scopes / Auth URI	https://vertexaisearch.cloud.google.com/oauth-redirect
Used in	The Actions / auth section of the connector setup flow — then click Verify auth
Also needed for	The trusted-app allowlist in Step 2



Creating an OAuth client ID in the Google Cloud Console for connector authentication.

Google Cloud

ge-dt-proj

Search (l) for resources, docs, products, and more

Search

Google Auth Platform / Clients / Create client

Google Auth Platf...

Overview

Branding

Audience

Clients

Data Access

Verification Center

Settings

Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information. [Learn more](#) about OAuth client types.

Application type *
Web application

Name *
Web client 3

The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.

The domains of the URIs you add below will be automatically added to your [OAuth consent screen](#) as [authorized domains](#).

Authorized JavaScript origins

For use with requests from a browser

+ Add URI

Authorized redirect URIs

For use with requests from a web server

URIs 1 *
https://vertexaisearch.cloud.google.com/oauth-redirect

+ Add URI


Note: It may take 5 minutes to a few hours for settings to take effect

CreateCancel


Step 4 — Create data stores

Gemini Enterprise → Data Stores → Create data store, then pick the Workspace source. One data store per source.

Source	Scoping options	Notes
Drive	All drives / specific shared drives / folder IDs	Folder filters are the safest starting point. Folder IDs, not names.
Gmail	Tenant mailboxes, subject to org unit policy	Requires its own OAuth client. Clear with security before enabling.
Calendar	Tenant calendars	Requires its own OAuth client.
Chat	Spaces the user belongs to	Useful for decision history; noisy as a grounding source.
Sites	Published internal sites	Good proxy for a wiki where one exists.

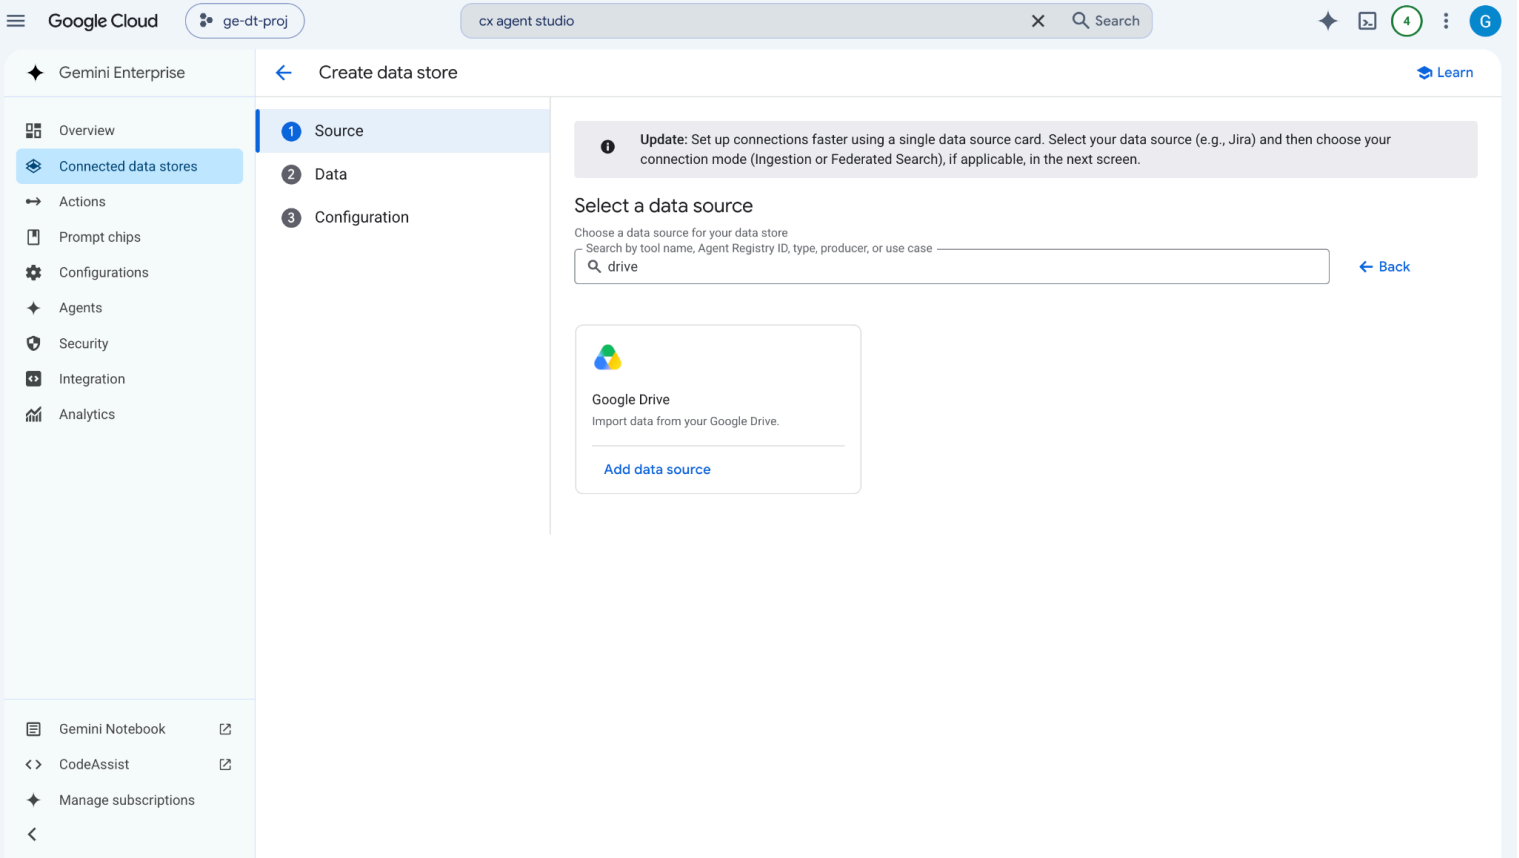

Selecting Google Drive as the data source when creating a new data store.

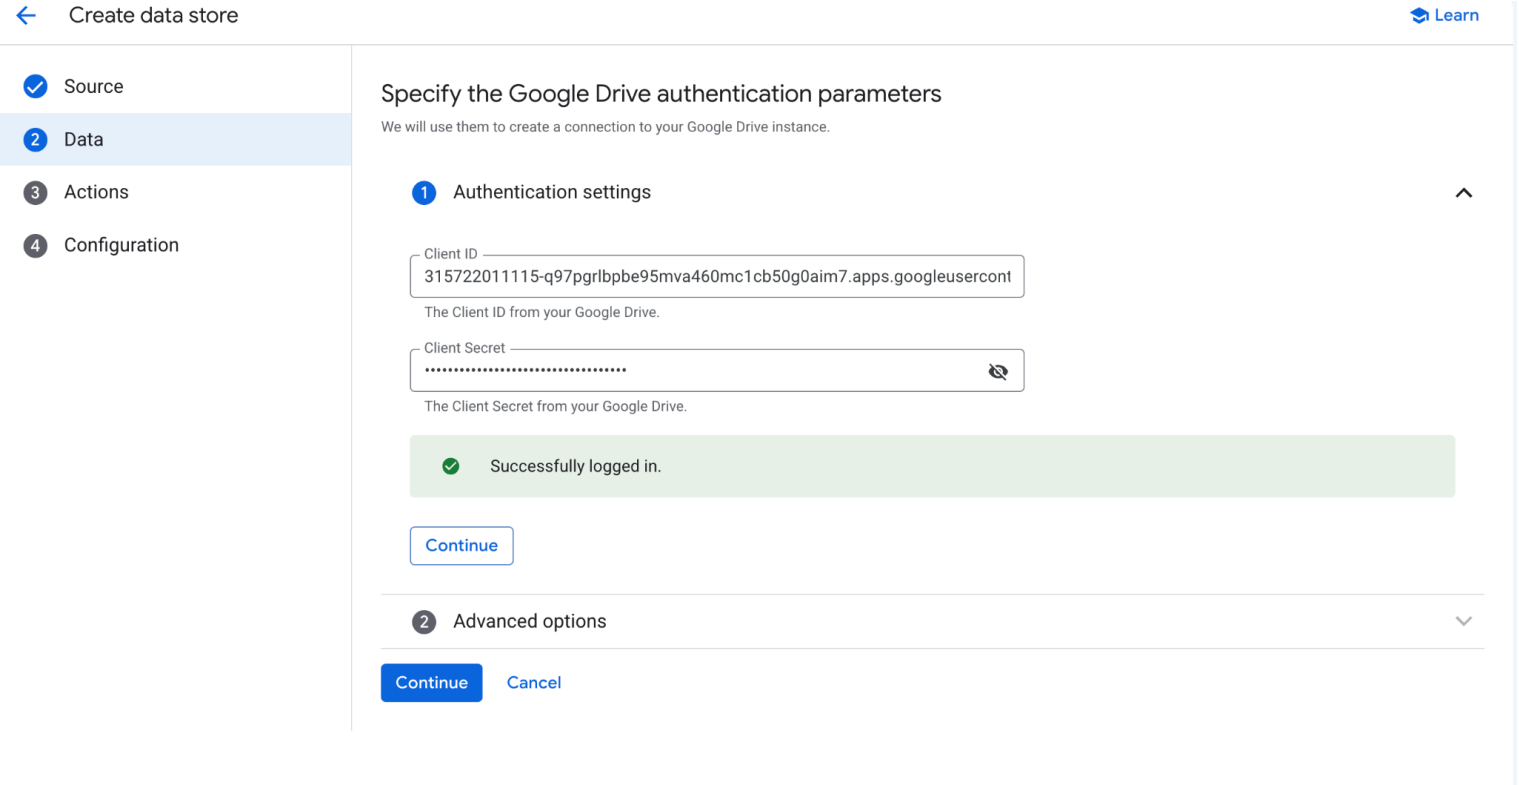

Configuring the authentication settings with the OAuth Client ID and Secret.



← Create data store

✓ Source

2 Data

3 Actions

4 Configuration

Specify the Google Drive authentication parameters

We will use them to create a connection to your Google Drive instance.

✓ Authentication settings

2 Advanced options

✓ Supports All Drives

If enabled, search and actions can be performed on all drives. Otherwise, only My Drive is supported.

Filters

● Include in search

○ Exclude from search

Shared Drive IDs

You can find the shared drive and folder ID in the URL e.g.
https://drive.google.com/corp/drive/folders/[id]

● Include in search

○ Exclude from search

Folder IDs

You can find the shared drive and folder ID in the URL e.g.
https://drive.google.com/corp/drive/folders/[id]

Back

Continue

Cancel

Specifying scoping filters to include or exclude specific shared drives or folders.

Docs, Sheets and Slides are not separate connectors — they are indexed **through Drive**. To make a Sheet searchable, include its folder in the Drive data store.

Step 5 — Configure actions

Gemini Enterprise → Data Stores → Actions. Enable only the actions an agent actually needs; every mutative action is a way for an agent to do something irreversible.

App	Representative read actions	Representative write actions
Drive	List files in folder, read / download file, search	Upload, move, copy, rename, share
Docs	Read document	Create, insert text, replace text
Sheets	Read range	Append row, update range, create sheet
Gmail	Search, read message	Create draft, send message
Chat	List spaces, read messages	Post message
Calendar	List events, check availability	Create, update, delete event



←

Create data store

Learn

✓ Source

✓ Data

3 Actions

4 Configuration

Select Google Drive actions to enable

Choose the actions you want to enable for Google Drive.

🔍 Search actions

✓ Select all actions

✓ Copy file
Copies a file in Google Drive.

✓ Create Folder
Create a new folder in Google Drive.

✓ Download File
Download a file from Google Drive.

✓ Upload File
Upload a file to Google Drive.

Continue

Skip

Cancel

Selecting the specific API read and write actions to enable for the connector.

←

Create data store

Learn

✓ Source

✓ Data

✓ Actions

4 Configuration

Configure your data connector

Configure additional settings for your data connector

Location of your data connector

Multi-region

global (Global)

Your data connector name

Data connector name *

ge-drive

ID: ge-drive_1787599325517. It cannot be changed later. Edit

Sensitive data protection policy

Provide a full resource name of a Sensitive Data Protection policy.

Sensitive data protection policy

Format: projects/{project}/locations/{location}/contentPolicies/{policy}

📘

Google Identity will be used for the access control. Learn more.

⚠️

The "Smart features in other Google products" setting in Google Workspace must be enabled to search on Workspace data. Learn more

Create

Cancel

Finalizing data connector configuration settings and name before creation.



Connected data stores [+ New data store](#)

Filter

Enter property name or value

Name	Type	Status ?	Last data sync ?	Last update ?	Date created	
ge-dt-bucket-cymbal	Unstructured data		-	-	Aug 8, 2026	
ge-drive	Google Drive	Creating		Aug 24, 2026, 3:22:22 PM	Aug 24, 2026	

Monitoring the creation and initial data synchronization status of connected data stores.(approx ~ 5-10 mins)

Gemini Enterprise

Data

Actions

New

ge-drive

Details

Entity

Collection ID

ge-drive_1787599325517

Type

Drive

Region

global

Connected apps

gemini-enterprise-1786239808645

Connector state

Active

Action state

Active

Content policy ?

N/A

Verifying active connector and action state details within the data store dashboard.

Gemini Enterprise

Overview

Connected data stores

Actions

Prompt chips

Configurations

Agents

Skills

Security

Integration

Analytics

Apps

gemini-enterprise-1786239808645

Data stores

Connected data stores

[+ New data store](#)

Filter

Enter property name or value

Name	Type	Status ?	Last data sync ?	Last update ?	Date created	
ge-dt-bucket-cymbal	Unstructured data		-	-	Aug 8, 2026	
ge-chat	Google Chat	Active		Aug 24, 2026, 3:31:21 PM	Aug 24, 2026	
google_chat	Chat		-	-	Aug 24, 2026	
ge-drive	Google Drive	Active		Aug 24, 2026, 3:31:06 PM	Aug 24, 2026	
google_drive	Drive		-	-	Aug 24, 2026	
ge-gmail	Google Mail	Active		Aug 24, 2026, 3:38:25 PM	Aug 24, 2026	
google_mail	Google Gmail		-	-	Aug 24, 2026	


Similarly, additional Google Workspace applications can be set up using the same OAuth credentials generated previously for Google Drive.

Step 6 — Attach to an agent


In Agent Designer, under **Data & Tools**:

Attach	As	Effect
Data stores	Knowledge	The agent can search and ground answers on the indexed content
Reference files	Knowledge	Small config or policy documents the agent should follow closely

Attach	As	Effect
Actions	Tools	The agent can call the live API

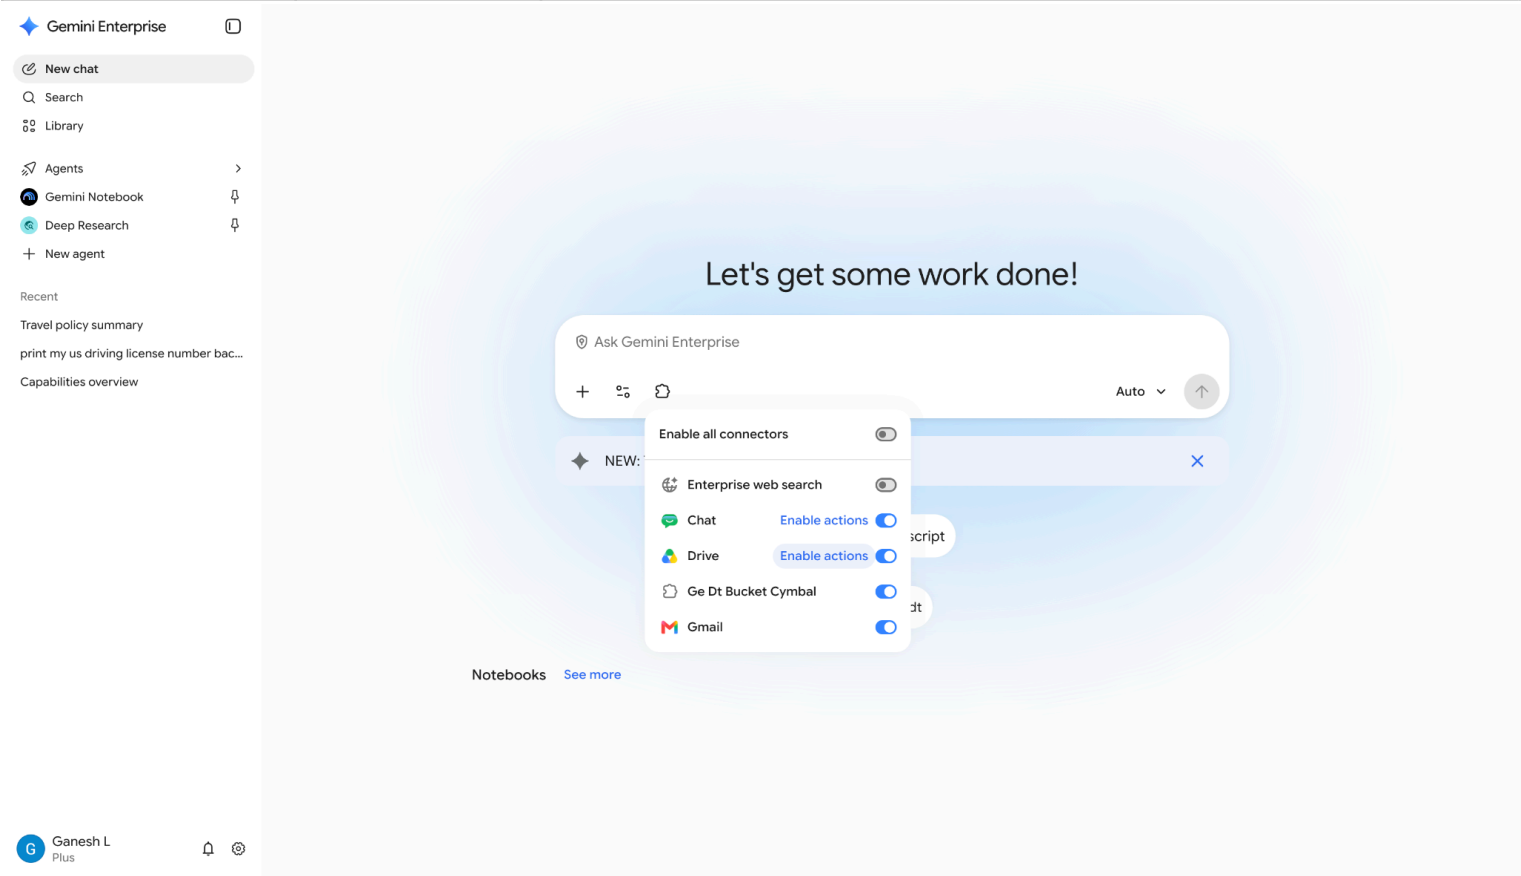

Enabling data store tools and actions directly within the Gemini Enterprise chat interface. Clicking "Enable actions" redirects the user to authenticate with Gmail; upon successful login, the action is enabled.

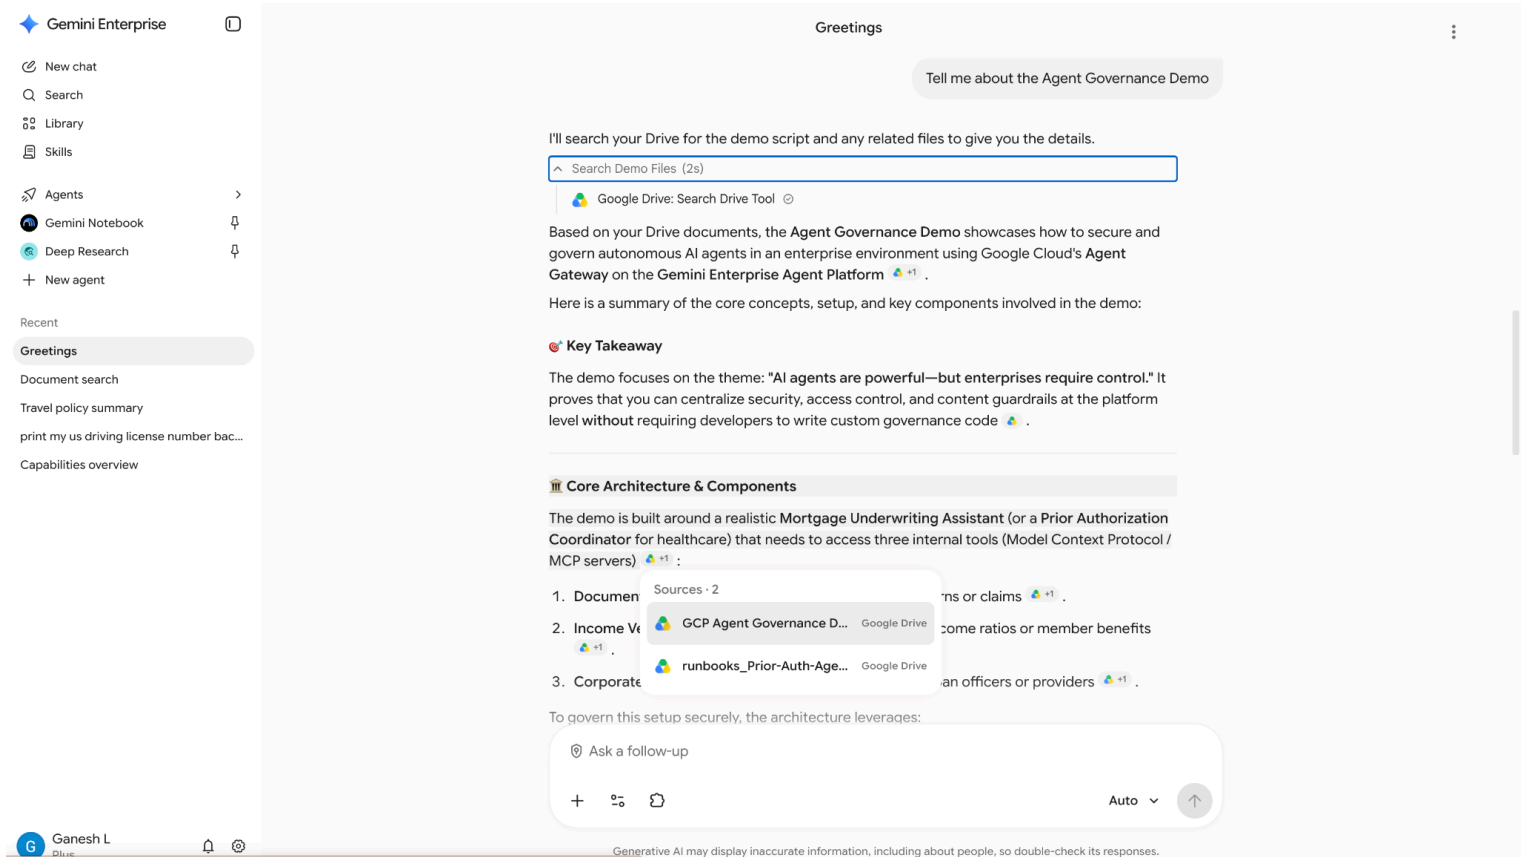

Interacting with an agent as it searches Drive and grounds answers using connected tools.

Keep configuration that changes often – rules, taxonomies, thresholds – in a **Google Doc attached as Knowledge** rather than in the agent instructions. Business owners can then change agent behaviour by editing a document, with no rebuild and no prompt engineering.