

Contents

Request Access to Databricks.....	2
Elevate Me Request	2
ODBC Connections	4

Steps Required to set up Spark Server


Request Access to Databricks

1. Use link to submit Databricks Access Request (Need to request for the correct roles):
https://amat.service-now.com/help?id=sc_cat_item2&sys_id=63b351481bbc9e94604b11361a4bcb5a&table=sc_cat_item

Proceed with the next steps only if all the access requests mentioned above have been approved. Otherwise, the ODBC connection will not work.

Elevate Me Request

2. Elevateme first to get administration rights to install drivers.
 - a. Open the link [Elevate Me - Home](#) or type elevateme/ in your browser
 - b. Press 'Submit Temporary Request' to get 24hrs access.
 - c. Press 'I need to install a business related application'

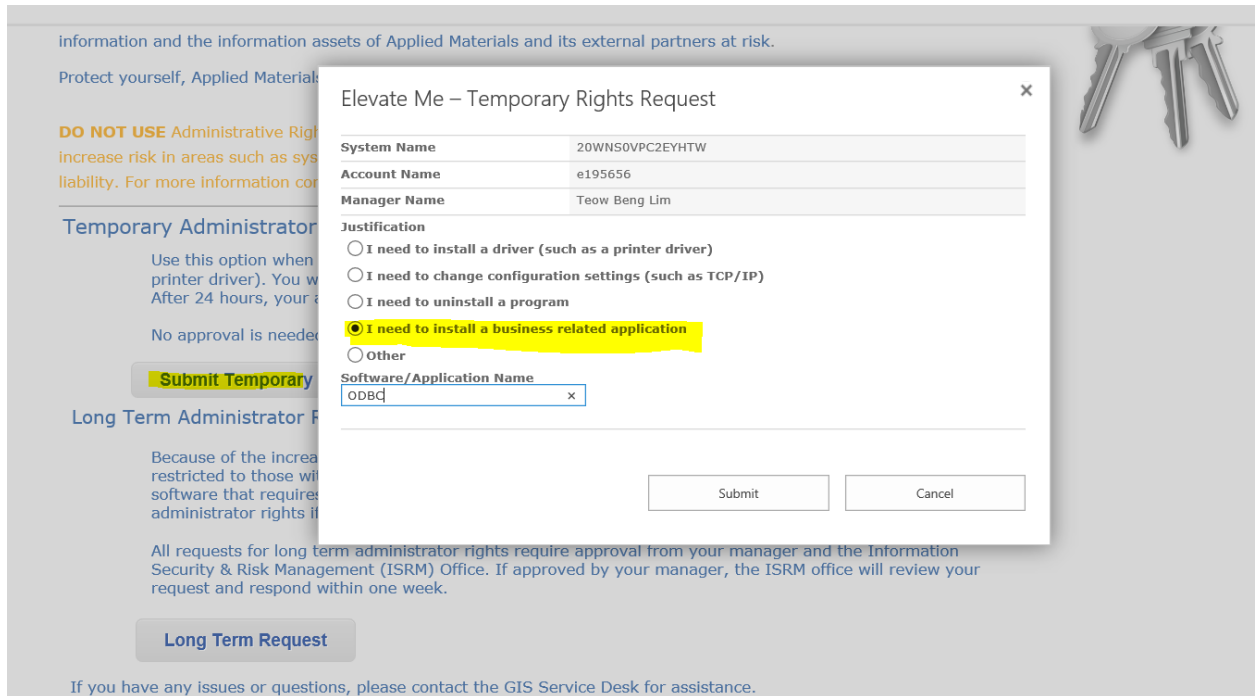

information and the information assets of Applied Materials and its external partners at risk.

Protect yourself, Applied Materials

DO NOT USE Administrative Rights to install software. This increases risk in areas such as system security and data integrity. For more information contact your manager.

Temporary Administrator

Use this option when you need to install a printer driver. You will have 24 hours of access. After 24 hours, your access will expire. No approval is needed.

Submit Temporary

Long Term Administrator

Because of the increased risk, long term administrator rights are restricted to those who need to install software that requires administrator rights if you are not an administrator.

All requests for long term administrator rights require approval from your manager and the Information Security & Risk Management (ISRM) Office. If approved by your manager, the ISRM office will review your request and respond within one week.

Long Term Request

If you have any issues or questions, please contact the GIS Service Desk for assistance.

Elevate Me – Temporary Rights Request

System Name	20WNS0VPC2EYHTW
Account Name	e195656
Manager Name	Teow Beng Lim

Justification

☐ I need to install a driver (such as a printer driver)

☐ I need to change configuration settings (such as TCP/IP)

☐ I need to uninstall a program

☒ I need to install a business related application


☐ Other

Software/Application Name

ODBC

Submit Cancel

- d. Head to Software Centre app in your desktop and search for 'Elevate Me'.

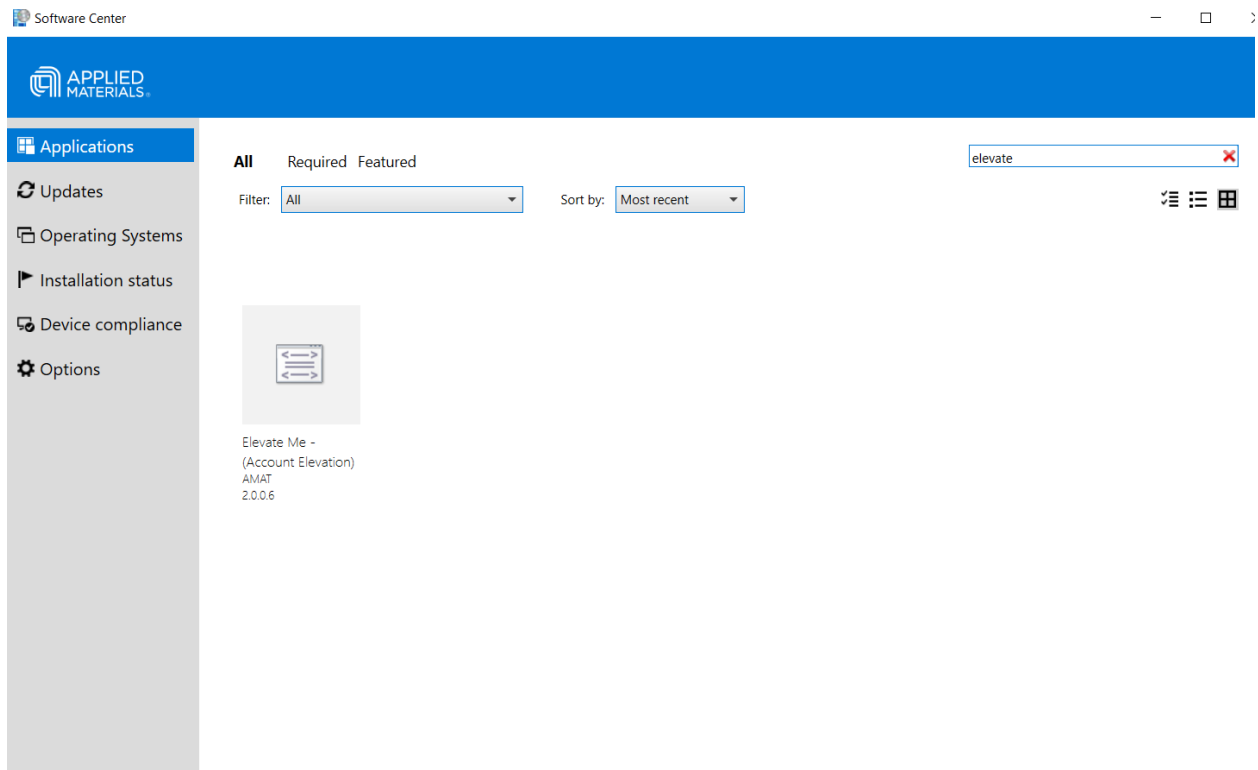


- e. Reinstall/Install Elevate Me and restart computer as instructed.

ODBC Connections

3. ODBC Connections

- a. Go to search menu and see if you have ODBC Data Sources (64 bit). If not, head to this website <https://learn.microsoft.com/en-us/sql/connect/odbc/download-odbc-driver-for-sql-server?view=sql-server-ver16> and download 64-bit Microsoft ODBC Driver for SQL server (x64)
- b. For ODBC Databricks Spark Driver installation, click on the link below to download and install the Spark driver.
 - Spark drivers → <https://www.databricks.com/spark/odbc-drivers-download>
^Download 64 bits for Windows
- c. After installation of ODBC drivers, configure the ODBC drivers. Go to the start menu and search for ODBC.
- d. Open 'ODBC Data Sources (64 Bit)'
- e. Under 'User DSN' in 'ODBC Data Source' app, click 'Add' and select the driver needs to be installed. (Spark)

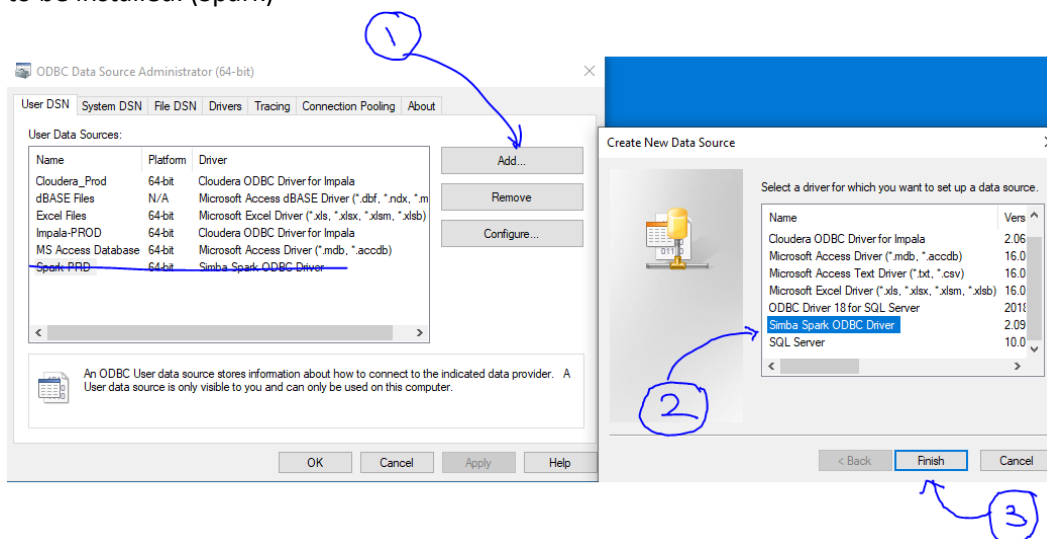

- f. Update the below parameters in the ODBC Config page as seen in the screenshots below: Note that Data Source Name will not affect the connectivity to the server.

For Simba Spark ODBC Driver,

A pop-up like this will appear.

Use the table below to fill up the pop up. For this example, I will be using the PRD environment.

PRD	QA	DEV
Data Source Name: Spark-PRD Port: 443 Database: PRD Mechanism: User Name and Password User Name: (your amat email in lowercase) Password Options: 'All Users of this Machine' Thrift Transport: 'HTTP' SSL Options: Tick 'Enable SSL' only	Data Source Name: Spark- QA Port: 443 Database: QA Mechanism: User Name and Password User Name: (your amat email in lowercase) Password Options: 'All Users of this Machine' Thrift Transport: 'HTTP' SSL Options: Tick 'Enable SSL' only	Data Source Name: Spark- DEV Port: 443 Database: DEV Mechanism: User Name and Password User Name: (your amat email in lowercase) Password Options: 'All Users of this Machine' Thrift Transport: 'HTTP' SSL Options: Tick 'Enable SSL' only

It should look something like this after filling up the pop up with the info from the table above.

Simba Spark ODBC Driver DSN Setup

Data Source Name: Spark-PRD

Description:

Spark Server Type: SparkThriftServer (Spark 1.1 and later) ▾

DFI Options...

Service Discovery Mode: No Service Discovery ▾

Service Discovery Options...

Host(s):

Port: 443

Database: PRD

Authentication

Mechanism: User Name and Password ▾

Realm:

Host FQDN: _HOST

Service Name: spark

☒ Canonicalize Principal FQDN

☐ Delegate Kerberos Credentials

User Name: junweijeff_ng@amat.com

Password:

Password Options...

Delegation UID:

OAuth Options...

Thrift Transport: HTTP ▾

Proxy Options... HTTP Options... SSL Options...

Advanced Options... Logging Options...


v2.9.1.1001 (64 bit)

Test OK Cancel


Complete the remaining fields (Host(s), Password and HTTP Path) in the setup by following the instructions below.

For PRD:

1. Head to Databricks website.
 - a. [lhudprd/](#) - PRD
 - b. [lhudqa/](#) - QA
 - c. [lhuddev/](#) - DEV
2. Click on 'SQL Warehouses'

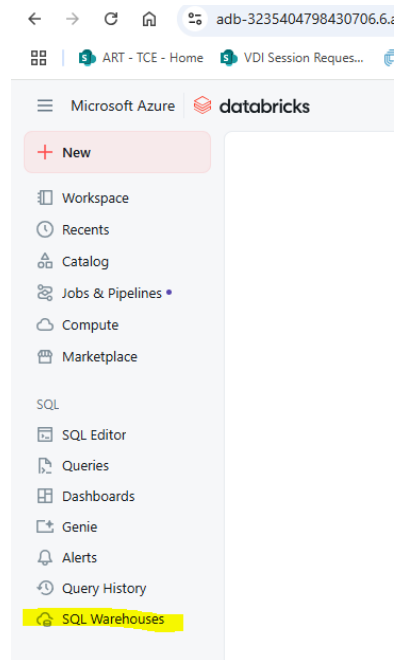

3. Open the specific warehouse you intend to connect to.

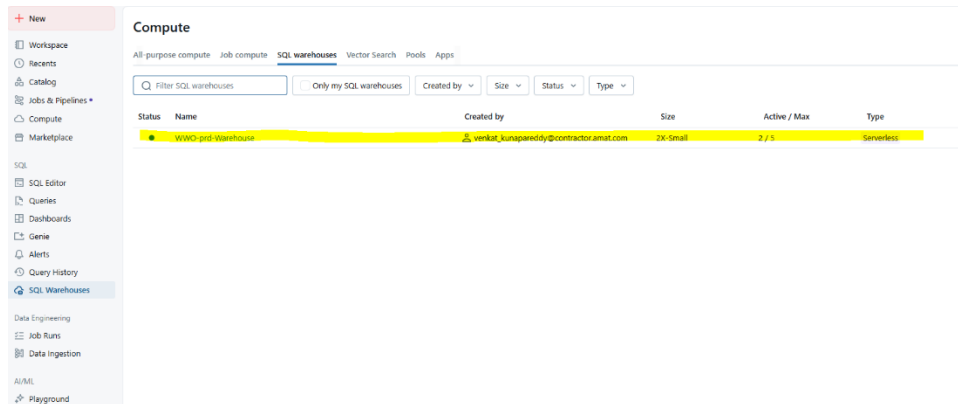

4. Press 'Connection details'.

SQL Warehouses >

WWO-prd-Warehouse ●

Overview **Connection details**

Status	● Running
Name	WWO-prd-Warehouse (ID: ebf569281143f33f)
Type	Serverless
Cluster size	2X-Small
Auto stop	After 10 minutes of inactivity
Scaling	Cluster count: Active 2 Min 1 Max 5
Channel	Current (v 2025.16)
Tags	warehouse_name WWO-prd-Warehouse
Created by	venkat_kunapareddy@contractor.amat.com

5. Under 'Connection Details', you should be able to see the following:
- a. Server hostname
 - b. HTTP path

SQL Warehouses >

WWO-prd-Warehouse ●

Overview **Connection details**

Use these details to connect to this warehouse

 Tableau  Power BI  dbt  Python  Java  Node.js  Go  More tools

Server hostname

 adb-3235404798430706.6.azuredatabricks.net 

HTTP path

 /sql/1.0/warehouses/ebf569281143f33f 

JDBC URL 2.6.25 or later ▼


 jdbc:databricks://adb-3235404798430706.6.azuredatabricks.net:443/default;transportMode=http;ssl=1;AuthMech=3;httpPath=/sql/1.0/warehouses/ebf569281143f33f; 

Databricks supports drivers released within the last two years. [Download drivers here](#)


OAuth URL

 https://adb-3235404798430706.6.azuredatabricks.net/oidc 


- Copy the details above into the ODBC Driver setup page. Use the Server Hostname for the 'Host(s)' field, and place the HTTP Path under 'HTTP Options'. Refer to the screenshot below for guidance. Once done, click 'OK' to close the HTTP Properties dialog box.

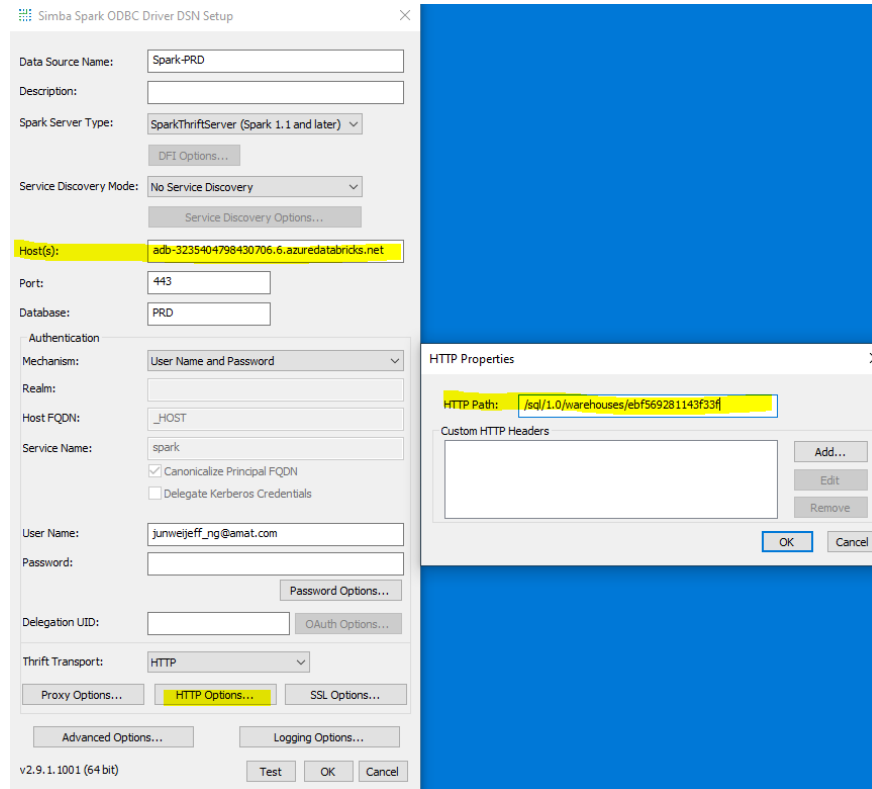

- To retrieve the password, return to the Databricks SQL Warehouse connection details page and click on 'Create a personal access token'

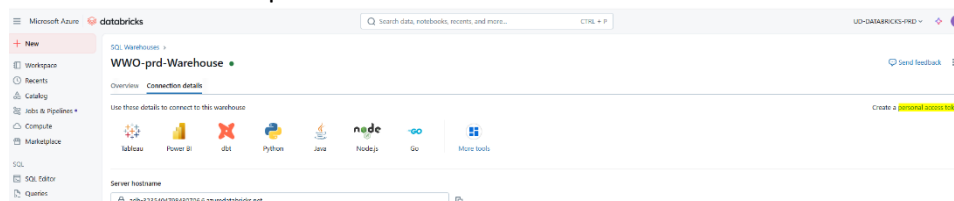

- Inside the page, click 'Generate New Token'.

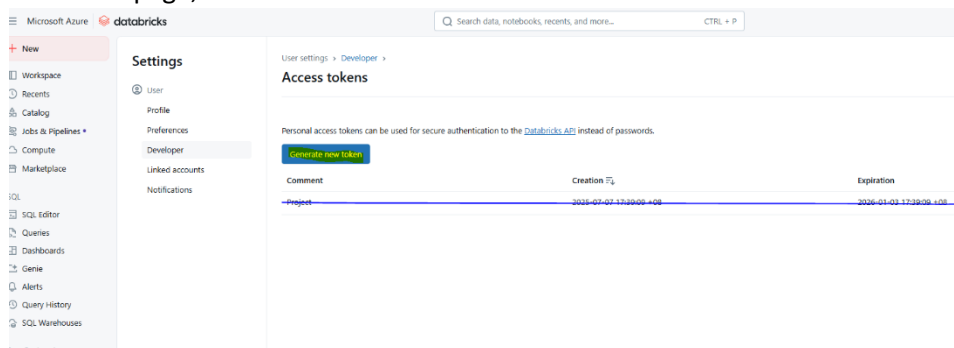

- Fill in the comment and set the token lifetime according to your preference. Please note that the access token may expire earlier than the configured duration. If it becomes invalid,

simply return to this page and generate a new token

Generate new token



Comment

Project

Lifetime (days)

90

Cancel

Generate

10. Save your password in a text file for future reference. Then, copy the password and paste it into the ODBC Driver under the 'Password' field located below the 'User Name'.

Generate new token



Your token has been created successfully.

[Redacted token]



⚠ Make sure to copy the token now. You won't be able to see it again.

Done

Simba Spark ODBC Driver DSN Setup

Data Source Name: Spark-PRD

Description:

Spark Server Type: SparkThriftServer (Spark 1.1 and later)

DFI Options...

Service Discovery Mode: No Service Discovery

Service Discovery Options...

Host(s): adb-3235404798430706.6.azuredatabricks.net

Port: 443

Database: PRD

Authentication

Mechanism: User Name and Password

Realm:

Host FQDN: _HOST

Service Name: spark

☒ Canonicalize Principal FQDN

☐ Delegate Kerberos Credentials

User Name: junweijeff_ng@amat.com

Password: [Redacted]

Password Options...

Delegation UID:

OAuth Options...

Thrift Transport: HTTP

Proxy Options... HTTP Options... SSL Options...

Advanced Options... Logging Options...

v2.9.1.1001 (64 bit)

Test OK Cancel

Once completed, click 'Test'. You should see the expected screenshot. If not, it may indicate incorrect parameter configuration—such as extra spaces or an email address not in lowercase. Additionally, ensure that SSL is enabled under the SSL options.

