ENTERPRISE UX DESIGN SYSTEM · OCTOBER 20, 2026

One architecture. Three design languages.

Enterprise UX Design System & Architecture Lab. The same enterprise UI architecture evaluated across Atlassian-inspired, Fluent-inspired and Apple-inspired visual languages, for ERP, CRM, admin, workflow and data-heavy applications.

ATLASSIAN Dense · Productive

High information density · 32px · r3–4 · 14px

FLUENT Structured · Layered

Structured enterprise hierarchy · 32px · r4/8 · 14px

APPLE Minimal · Refined

Clarity and refinement · 36px · r10/14 · 15px

CONTENTS

98 pages

OVERVIEW

Overview
Decision Framework
Comparison

FOUNDATIONS

Colors
Typography
Spacing
Elevation
Radius
Icons
Motion

COMPONENTS

Button
Icon Button
Button Group
Split Button
Link
Text Field
Text Area
Search
Select
Multi Select
Combobox
Checkbox
Radio
Switch
Slider
Date Picker
Date Range
Time Picker
File Upload
Color Picker
Header
Sidebar
Breadcrumb
Tabs
Pagination
Stepper
Menu
Dropdown
Context Menu
Tree
Table
Data Grid
Card
List
Badge
Tag
Chip
Avatar
Timeline
Accordion
Statistic
Alert
Toast
Snackbar
Banner
Progress
Spinner
Skeleton
Modal
Confirmation Dialog
Drawer
Popover
Tooltip
Command Palette
Container
Grid
Stack
Split Pane
Divider
Toolbar
Page Header
Rich Text Editor
Code Editor
JSON Viewer
Formula Editor
Markdown Editor

PATTERNS

CRUD
Search
Filtering
Tables
Forms
Dashboards
Workflow
Authentication
Notifications
Master Detail

GUIDELINES

Accessibility
Responsive
Content
Interaction
Keyboard
Do / Don’t

ARCHITECTURE

Principles
Tokens
Components
Patterns
Theming
Implementation

ENTERPRISE UX DESIGN SYSTEM

One architecture. Three design languages.

Evaluate the same enterprise UI architecture across Atlassian-inspired, Fluent-inspired and Apple-inspired visual languages.

Designed for ERP, CRM, admin, workflow, operations and data-heavy enterprise applications.

ATLASSIAN Dense · Productive

Approve | Request changes

PENDING PO-2291 $86,400 · 48 laptops

FLUENT Structured · Layered

Approve | Request changes

Pending PO-2291 $86,400 · 48 laptops

APPLE Minimal · Refined

Approve | Request changes

Pending PO-2291 $86,400 · 48 laptops

01
WHY

Why a design system

Enterprise suites grow screen by screen. Without a shared system, every team rebuilds tables, forms and dialogs, and the product drifts.

WITHOUT IT

Each module ships its own table, date picker and dialog, with different keyboard behaviour and focus handling.

THE COST

Duplicated effort, inconsistent states, accessibility gaps found late, and slow onboarding for new teams.

WITH IT

One component architecture, one token foundation, and patterns that teams compose instead of reinventing.

02
ARCHITECTURE

What is common across the system

01
Foundations
Colour, type, spacing, elevation, radius, icons, motion · Colors, Typography, Spacing, Elevation

02
Design tokens
--a-* / --f-* / --p-* mapped to semantic aliases · Tokens

03
Core components
Button, Text field, Checkbox, Badge, Avatar… · Button, Text Field, Checkbox, Badge

04
Composed components
Select, Date picker, Data grid, Command palette… · Select, Date Picker, Data Grid, Command Palette

05
Patterns
CRUD, Search, Filtering, Tables, Forms… · CRUD, Filtering, Tables

06
Enterprise workflows
Approval, master–detail, notifications · Workflow, Master Detail, Notifications

07
ERP / CRM application
Finance, Procurement, Sales, Customers, Service · Implementation

The architecture remains consistent. The visual language changes.

COMMON TO ALL THREE

- Component architecture
- Interaction model
- Accessibility principles
- Keyboard behavior
- Component states
- Responsive structure
- Design token architecture
- Application workflows

CHANGES PER LANGUAGE

- Typography character
- Density
- Spacing expression
- Surface treatment
- Elevation
- Selection treatment
- Control sizing
- Visual hierarchy
- Brand personality

03
DESIGN LANGUAGES

Three options, one set of components

Atlassian-inspired

Dense · Productive

HIGH INFORMATION DENSITY

BEST FOR

- Operations
- Admin consoles
- Data-heavy tables
- Power-user workflows
- Issue and task management

SPECIFICATION

Control height	`32 / 24 / 40`
Radius	`3–4px`
Body type	`14 / 20`
Elevation	`Flat → Modal (4)`
Focus	`2px offset outline`

Fluent-inspired

Structured · Layered

STRUCTURED ENTERPRISE HIERARCHY

BEST FOR

- ERP
- CRM
- Finance
- Configuration
- Enterprise workflows

SPECIFICATION

Control height	`32 / 24 / 40`
Radius	`4px · 8px surfaces`
Body type	`14 / 20`
Elevation	`Shadow 2 → 64 (6)`
Focus	`2px inset ring`

SAME SCREEN, THREE LANGUAGES Issue detail built from Breadcrumb, Badge, Button, Tabs, Text field and Select. The tabs and select are live.

ATLASSIAN-INSPIRED Dense · productive

32px · r3-4 · 14px

Ledger Migration / Backlog / DS-142

Migrate billing tables to new schema

IN PROGRESS Updated 2h ago by Maya Ruiz

Save changes | Assign | ···

Details | Activity 12 | Linked

Move invoices, line items and tax tables to the v2 schema without downtime.

Summary *

Migrate billing tables

Assignee

Maya Ruiz

FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

Ledger Migration > Backlog > DS-142

Migrate billing tables to new schema

In progress Updated 2h ago by Maya Ruiz

Save changes | Assign | ···

Details | Activity 12 | Linked

Move invoices, line items and tax tables to the v2 schema without downtime.

Summary *

Migrate billing tables

Assignee

Maya Ruiz

APPLE-INSPIRED Minimal · refined

36px · r10/14 · 15px

Ledger Migration > Backlog > DS-142

Migrate billing tables to new schema

In progress Updated 2h ago by Maya Ruiz

Save changes | Assign | ···

Details | Activity 12 | Linked

Move invoices, line items and tax tables to the v2 schema without downtime.

Summary *

Migrate billing tables

Assignee

Maya Ruiz

04
COMPARISON

How they differ

Same principles, different expression. The full property comparison is on the Comparison page.

PRINCIPLE	ATLASSIAN	FLUENT	APPLE
Core idea	Fit the most information on screen without losing hierarchy	Make structure and state obvious through layers and clear feedback	Let type and space carry hierarchy; remove the rest
Selection	Tint fill + primary text	Indicator bar + bold label	Solid fill or segmented thumb
Inputs	Filled field, frame turns primary	White field, accent bar grows from centre	No box; hairline under the value
Overlays	Crisp shadow, dark blanket	Elevation 16–64, beaks on popovers	Translucent material with blur
Notifications	Bottom-left	Bottom-right	Top-centre

05
DECISION

Architect's decision

RECOMMENDED DEFAULT FOR ERP / CRM

Fluent-inspired

- Strong enterprise hierarchy
- Good support for complex workflows
- Strong interaction states
- Good accessibility foundation
- Suitable for ERP and CRM
- Works well with forms, tables, panels and dialogs

USE ATLASSIAN-INSPIRED WHEN

Information density and operational speed are the highest priorities.

USE FLUENT-INSPIRED WHEN

The application contains complex enterprise workflows and configuration.

USE APPLE-INSPIRED WHEN

Clarity, touch interaction and premium presentation are the priority.

Different visual languages for different enterprise contexts. No language is better in general; each fits a different kind of work.

Scorecard and full decision matrix: Decision Framework.

06–08
BUILD

How the system is built

06 · Foundations

The visual rules every component reads.

Colors Typography Spacing Icons Elevation Radius Motion

07 · Components

66 reusable UI elements, each documented the same way.

Actions Forms Navigation Data Display Feedback Overlays Layout Editors

08 · Patterns

10 ways components combine into workflows.

Forms CRUD Search Filtering Master Detail Tables Dashboards Workflow Authentication Notifications

09
ENTERPRISE

Enterprise application coverage

Each ERP and CRM area maps to patterns and components already in this lab. No separate application is needed to prove coverage.

AREA	REPRESENTATIVE SCREENS	PATTERNS AND COMPONENTS USED
ERP **Finance**	Invoice lists, journal entries, period close	Tables · Formula Editor · Data Grid · Confirmation Dialog
ERP **Procurement**	Purchase orders and approvals	Workflow · Stepper · Timeline
ERP **Sales**	Orders, quotes, price changes	CRUD · Forms · Date Picker
ERP **Inventory**	Stock levels, transfers, low-stock alerts	Tables · Filtering · Badge
ERP **HR**	Employee directory, leave requests	Master Detail · Avatar · Workflow
ERP **Projects**	Backlogs, sprints, milestones	Table · Tabs · Stepper

AREA	REPRESENTATIVE SCREENS	PATTERNS AND COMPONENTS USED
ERP **Administration**	Users, roles, settings, sign-in	CRUD · Switch · Tree · Authentication
CRM **Customers**	Account lists and customer profiles	Master Detail · Search · List
CRM **Leads**	Lead queues with quick filters	Filtering · Tag · Chip
CRM **Opportunities**	Pipeline KPIs and drill-down	Dashboards · Statistic
CRM **Activities**	Calls, meetings and history	Timeline · Notifications
CRM **Communication**	Emails, notes, templates	Rich Text Editor · Markdown Editor · Toast
CRM **Service**	Cases, SLAs, escalations	Search · Workflow · Alert

10
SCALE

From UI kit to application-wide system

Level 01
Foundations
Visual rules

Level 02
Tokens
Named, themeable values

Level 03
Components
Reusable UI elements

Level 04
Composed components
Built from core parts

Level 05
Patterns
Repeatable solutions

Level 06
Enterprise flows
End-to-end tasks

Level 07
Application experience
Whole products

DESIGN PRINCIPLES

01 Consistency over customization

A screen should look like the rest of the product before it looks unique.

02 Reuse before recreation

Compose existing components; add new ones only when a pattern repeats.

03 Accessibility by default

Keyboard, focus, ARIA and text alternatives are built into every component.

04 Responsive by design

Layouts reflow from three columns to a single focused column.

05 Keyboard-first enterprise interaction

Every action is reachable without a mouse; menus, grids and dialogs follow ARIA patterns.

06 Data density without visual overload

Density is a token decision, not a reason to remove hierarchy.

07 Clear hierarchy

One primary action per area; type and spacing do the ranking.

08 Predictable component behavior

The same component behaves the same way in every language.

09 Token-driven styling

Components read semantic tokens only; no hard-coded values.

10 Visual language separated from component architecture

Switching a scope class changes the look, never the markup.

SUMMARY

Architect summary

ONE

Component architecture

Reusable component structure across the application.

THREE

Visual languages

Atlassian-inspired, Fluent-inspired and Apple-inspired.

ONE

Design token foundation

Colour, typography, spacing, radius, elevation and motion.

ENTERPRISE READY

Built for real products

ERP, CRM, admin, workflow, data-heavy, responsive, accessible.

~~Select the visual language based on the application's~~ workflow and user context, not personal preference.

OVERVIEW

Decision framework

How to choose a design language for an enterprise application, and why Fluent-inspired is the recommended default for ERP and CRM.

01 ARCHITECT'S DECISION

RECOMMENDED DEFAULT FOR ERP / CRM

Fluent-inspired

- Strong enterprise hierarchy
- Good support for complex workflows
- Strong interaction states
- Good accessibility foundation
- Suitable for ERP and CRM
- Works well with forms, tables, panels and dialogs

USE ATLASSIAN-INSPIRED WHEN

Information density and operational speed are the highest priorities.

USE FLUENT-INSPIRED WHEN

The application contains complex enterprise workflows and configuration.

USE APPLE-INSPIRED WHEN

Clarity, touch interaction and premium presentation are the priority.

Different visual languages for different enterprise contexts. No language is better in general; each fits a different kind of work.

02 ENTERPRISE FIT

Compare each language across seven needs. Read across a row; the highest score is marked.

Need	Atlassian Dense · Productive	Fluent Structured · Layered	Apple Minimal · Refined
Data density Backlogs, admin tables, ops consoles	5/5 BEST FIT	4/5	2/5
Keyboard productivity Power users, shortcuts, focus visibility	4/5	5/5 BEST FIT	3/5

Ratings are the team's assessment from building these components, not measured research. "Best fit" marks the highest score in each row.

Need	Atlassian Dense · Productive	Fluent Structured · Layered	Apple Minimal · Refined
Touch interaction Tablets, field work, 44px targets	2/5	3/5	5/5 BEST FIT
Accessibility Focus, states and contrast out of the box	4/5	5/5 BEST FIT	4/5
Brand character Calm, premium presentation	2/5	3/5	5/5 BEST FIT
Learning curve How fast new users feel at home	3/5	4/5	5/5 BEST FIT
Long-form configuration Settings, multi-section forms	4/5	5/5 BEST FIT	3/5

Ratings are the team's assessment from building these components, not measured research. "Best fit" marks the highest score in each row.

03 DECISION MATRIX

DESIGN LANGUAGE	BEST FOR	STRENGTHS	TRADE-OFFS	ENTERPRISE USE CASES
Atlassian-inspired	• Operations • Admin consoles • Data-heavy tables • Power-user workflows • Issue and task management	• About a third more rows per screen • Fast tint-based feedback • Compact 32px controls, 24px compact	• Weakest on touch targets • Least brand warmth	Issue trackers, ops consoles, admin tables
Fluent-inspired	• ERP • CRM • Finance • Configuration • Enterprise workflows	• Strongest focus visibility • Clear pressed and selected states • Six-step elevation for panels and dialogs	• Heavier visual weight from shadows	Configuration, CRM, finance back office
Apple-inspired	• Executive experiences • Approval workflows • Tablet applications • Touch-first experiences	• 44px touch targets • Generous whitespace, type-led hierarchy • Calm translucent overlays	• Needs more scrolling for dense data	Approvals, executive views, field and tablet apps

04 HOW TO APPLY IT

1. List the two or three dominant workflows of the application (for example, invoice review, configuration, approvals).
2. Score those workflows against the seven needs above, not the whole product.
3. Pick the language that wins the dominant workflows. Mixed suites keep one language and adjust density tokens per module.
4. Record the decision and its reasons, so later teams don't reopen it on taste.

OVERVIEW

Comparison

Every property that differs between the three languages, in one place. Everything not listed here is shared.

01 SPECIFICATION

Atlassian-inspired

Dense · Productive

HIGH INFORMATION DENSITY

BEST FOR

- Operations
- Admin consoles
- Data-heavy tables
- Power-user workflows
- Issue and task management

SPECIFICATION

Control height	`32 / 24 / 40`
Radius	`3-4px`
Body type	`14 / 20`
Elevation	`Flat → Modal (4)`
Focus	`2px offset outline`

Fluent-inspired

Structured · Layered

STRUCTURED ENTERPRISE HIERARCHY

BEST FOR

- ERP
- CRM
- Finance
- Configuration
- Enterprise workflows

SPECIFICATION

Control height	`32 / 24 / 40`
Radius	`4px · 8px surfaces`
Body type	`14 / 20`
Elevation	`Shadow 2 → 64 (6)`
Focus	`2px inset ring`

Apple-inspired

Minimal · Refined

CLARITY AND REFINEMENT

BEST FOR

- Executive experiences
- Approval workflows
- Tablet applications
- Touch-first experiences

SPECIFICATION

Control height	`36 / 28 / 44`
Radius	`10px · 14–20px`
Body type	`15 / 22`
Elevation	`Flat → Sheet (4)`
Focus	`4px soft halo`

02 SAME SCREEN

Identical markup and content.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Ledger Migration / Backlog / DS-142

Migrate billing tables to new schema

IN PROGRESS Updated 2h ago by Maya Ruiz

Save changes | Assign | ···

Details | Activity 12 | Linked

Move invoices, line items and tax tables to the v2 schema without downtime.

Summary * Migrate billing tables

Assignee Maya Ruiz

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Ledger Migration › Backlog › DS-142

Migrate billing tables to new schema

In progress Updated 2h ago by Maya Ruiz

Save changes | Assign | ···

Details | Activity 12 | Linked

Move invoices, line items and tax tables to the v2 schema without downtime.

Summary * Migrate billing tables

Assignee Maya Ruiz

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Ledger Migration › Backlog › DS-142

Migrate billing tables to new schema

In progress Updated 2h ago by Maya Ruiz

Save changes | Assign | ···

Details | Activity 12 | Linked

Move invoices, line items and tax tables to the v2 schema without downtime.

Summary * Migrate billing tables

Assignee Maya Ruiz

03 DESIGN PHILOSOPHY

PRINCIPLE	ATLASSIAN	FLUENT	APPLE
Core idea	Fit the most information on screen without losing hierarchy	Make structure and state obvious through layers and clear feedback	Let type and space carry hierarchy; remove the rest
Selection	Tint fill + primary text	Indicator bar + bold label	Solid fill or segmented thumb
Inputs	Filled field, frame turns primary	White field, accent bar grows from centre	No box; hairline under the value
Overlays	Crisp shadow, dark blanket	Elevation 16–64, beaks on popovers	Translucent material with blur
Notifications	Bottom-left	Bottom-right	Top-centre

04 PROPERTY COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Density	Compact	Medium	Spacious
Control height (S / M / L)	24 / 32 / 40px	24 / 32 / 40px	28 / 36 / 44px
Table row height	36px	44px	48px

PROPERTY	ATLASSIAN	FLUENT	APPLE
Default gap	8px	12px	16px
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Elevation	Flat / Raised / Overlay / Modal	Shadow 2 / 4 / 8 / 16 / 28 / 64	Flat / Soft / Float / Sheet
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale
Typeface	Public Sans	Segoe UI / Open Sans	SF Pro / Inter
Icons	16px, 2px stroke	18px, 1.5px stroke	17px, 1.7px stroke

FOUNDATIONS

Colors

Each language owns a prefixed token set (`--a-*`, `--f-*`, `--p-*`). Values below are read live from the stylesheet, so they follow the light or dark theme.

PURPOSE

Colour communicates brand, hierarchy and state. Each language owns a palette; components only read semantic aliases such as `--pri`, `--fg` and `--err`.

PRINCIPLES

- One accent per language, used for action and selection
- Status colours are separate from the accent and always paired with text or an icon
- Neutrals carry most of the interface
- Every colour has a light and a dark value

PALETTE TOKENS

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

Primary	Primary hover	Primary pressed	Primary subtle	Text	Text subtle	Text subtlest	Surface	Surface sunken	Neutral fill
`--a-color-primary` `#1D5BD6`	`--a-color-primary-hover` `#1849B0`	`--a-color-primary-pressed` `#123A8E`	`--a-color-primary-subtle` `#E9F0FD`	`--a-text` `#172033`	`--a-text-subtle` `#44536B`	`--a-text-subtlest` `#67748A`	`--a-surface` `#FFFFFF`	`--a-surface-sunken` `#F4F5F7`	`--a-neutral` `#EEF0F3`

Border	Input border	Success	Warning	Warning bold	Danger	Discovery	Inverse
`--a-border` `#DCDFE4`	`--a-border-input` `#B8C0CC`	`--a-success` `#1F7A4F`	`--a-warning` `#9E4A00`	`--a-warning-bold` `#F5B73B`	`--a-danger` `#C2321F`	`--a-discovery` `#6A4FC8`	`--a-inverse` `#22324A`

FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

Brand	Brand hover	Brand pressed	Brand subtle	Foreground 1	Foreground 2	Foreground 3	Background 1	Canvas	Subtle hover
--f-color-primary #1760B8	--f-color-primary-hover #11519E	--f-color-primary-pressed #0C4182	--f-color-primary-subtle #EBF3FC	--f-text #242424	--f-text-2 #5B5B5B	--f-text-3 #707070	--f-surface #FFFFFF	--f-canvas #FAFAFA	--f-subtle-hover #F5F5F5

Stroke	Stroke accessible	Success	Warning	Danger	Discovery	Inverse	Divider
--f-stroke #D1D1D1	--f-stroke-accessible #616161	--f-success #107C10	--f-warning #A84B08	--f-danger #C42B1C	--f-discovery #5B5FC7	--f-inverse #2E2E2E	--f-divider #E0E0E0

APPLE-INSPIRED Minimal · refined

36px · r10/14 · 15px

Tint	Tint hover	Tint pressed	Tint subtle	Label	Secondary label	Tertiary label	Surface	Grouped background	Fill
--p-color-primary #2470E8	--p-color-primary-hover #3B80EE	--p-color-primary-pressed #1A5CC6	--p-color-primary-subtle rgba(36,112,232,.12)	--p-label #1B1B1F	--p-label-2 #6C6C74	--p-label-3 #9C9CA3	--p-surface #FFFFFF	--p-canvas #F4F4F7	--p-fill rgba(120,120,128,.12)

Separator	Material	Green	Orange	Red	Purple	Inverse	Border strong
--p-separator rgba(60,60,67,.14)	--p-material rgba(250,250,252,.8)	--p-green #2AA54A	--p-orange #C77100	--p-red #E0352B	--p-purple #8A4FD8	--p-inverse rgba(30,30,34,.92)	--p-border-strong rgba(60,60,67,.28)

SEMANTIC COLOUR IN USE

The same four messages, coloured by each system's semantic tokens.


ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`



FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`



APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

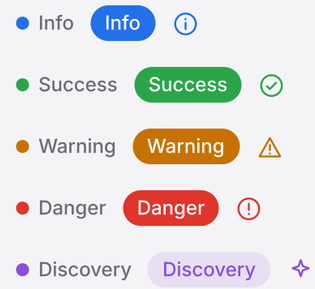

USAGE

- Use the primary colour for the main action and the selected state
- Use semantic tokens (`--ok`, `--warn`, `--err`) for status
- Read colours through aliases, never hex values in components

DO / DON'T

DO

- Pair status colour with a word or icon
- Test both themes

DON'T

- Use the accent for decoration
- Hard-code hex values in component CSS

COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Primary hue	Royal blue, strong	Deep cobalt, structured	Bright tint, used sparingly
Neutrals	Cool slate with blue bias	True greys	Translucent greys over surfaces
Surfaces	White on white, sunken greys	White cards on #FAFAFA canvas	White groups on grey grouped background
Status colour use	Bold lozenges, warning yellow	Tinted backgrounds + 1px stroke	Coloured dots and icons, little fill

FOUNDATIONS

Typography

Atlassian-inspired type is compact and functional; Fluent-inspired type uses a wide, regular ramp; Apple-inspired type leans on weight and tight tracking to create hierarchy without colour.

PURPOSE

Type sets reading comfort and hierarchy. Each language has its own ramp; components use role classes rather than font sizes.

PRINCIPLES

- A small, fixed set of roles
- Hierarchy through size and weight, not colour alone
- Body text stays at 14–15px for long working sessions

TYPE RAMP

Measured values are read from the rendered text.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Display · 29px / 32px · 650

Ship faster, together

Heading 1 · 24px / 28px · 650

Quarterly planning

Heading 2 · 20px / 24px · 600

Billing migration

Heading 3 · 16px / 20px · 600

Acceptance criteria

Body · 14px / 20px · 400

Move invoices, line items and tax tables to the v2 schema without downtime. Rollback stays available for 14 days.

Small · 12px / 20px · 400

Updated 2 hours ago by Maya Ruiz

Caption · 11px / 20px · 400

DS-142 · 8 story points

Eyebrow · 11px / 20px · 700

PROJECT SETTINGS

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Display · 40px / 52px · 600

Ship faster, together

Heading 1 · 28px / 36px · 600

Quarterly planning

Heading 2 · 20px / 28px · 600

Billing migration

Heading 3 · 16px / 22px · 600

Acceptance criteria

Body · 14px / 20px · 400

Move invoices, line items and tax tables to the v2 schema without downtime. Rollback stays available for 14 days.

Small · 12px / 20px · 400

Updated 2 hours ago by Maya Ruiz

Caption · 11px / 20px · 400

DS-142 · 8 story points

Eyebrow · 12px / 20px · 600

Project settings

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Display · 40px / 44px · 700

Ship faster, together

Heading 1 · 28px / 34px · 700

Quarterly planning

Heading 2 · 22px / 28px · 600

Billing migration

Heading 3 · 17px / 22px · 600

Acceptance criteria

Body · 15px / 22px · 400

Move invoices, line items and tax tables to the v2 schema without downtime. Rollback stays available for 14 days.

Small · 13px / 22px · 400

Updated 2 hours ago by Maya Ruiz

Caption · 12px / 22px · 400

DS-142 · 8 story points

Eyebrow · 13px / 22px · 500

Project settings

USAGE

- Use one heading level per region
- Keep labels short and in sentence case
- Use tabular numbers in tables and statistics

DO / DON’T

DO

- Use role classes (.ds-t-h2, .ds-t-body)
- Keep lines near 70 characters

DON'T

- Set ad-hoc font sizes
- Use all caps for long text

COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Typeface	Public Sans (system fallback)	Segoe UI Variable / Open Sans	SF Pro / system, Inter fallback
Body	14 / 20, regular	14 / 20, regular	15 / 22, regular, −0.01em
Display	29px, 650 weight	40px, semibold	40px, bold, −0.025em
Hierarchy carried by	Size + weight steps	Size ramp, consistent weight	Weight + tracking + space
Labels	12px bold, subtle colour	14px semibold	13px medium, secondary

FOUNDATIONS

Spacing & density

All three use an 8px base grid. The difference is which steps each language reaches for by default: Atlassian-inspired gaps sit at 8px, Fluent-inspired at 12px, Apple-inspired at 16px and above.

PURPOSE

Spacing expresses density. All three languages share an 8px grid; they differ in which steps they reach for.

PRINCIPLES

- 8px base grid
- Gap tokens between siblings, not margins
- Density is a token choice

SCALE

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

- --a-space-050 · 4px
- --a-space-100 · 8px
- --a-space-150 · 12px
- --a-space-200 · 16px
- --a-space-300 · 24px
- --a-space-400 · 32px

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

- --f-space-xs · 4px
- --f-space-s · 8px
- --f-space-m · 12px
- --f-space-l · 16px
- --f-space-xl · 20px
- --f-space-xxl · 24px

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

- --p-space-1 · 4px
- --p-space-2 · 8px
- --p-space-3 · 12px
- --p-space-4 · 16px
- --p-space-5 · 20px
- --p-space-6 · 28px
- --p-space-7 · 40px

DENSITY IN PRACTICE

The same five rows and controls. Compare how much fits in the column.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Create | Filter | Export

Migrate billing tables to new schema DS-142 · Maya Ruiz	8 pts
Audit focus rings across admin console DS-139 · Jonas Ortiz	3 pts
Invoices API returns stale currency codes DS-137 · Aiko Kato	5 pts
Add bulk export to reports view DS-131 · Liam Shah	2 pts
Rename workspace roles in settings DS-128 · Priya Nair	1 pts

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Create | Filter | Export

Migrate billing tables to new schema DS-142 · Maya Ruiz	8 pts
Audit focus rings across admin console DS-139 · Jonas Ortiz	3 pts
Invoices API returns stale currency codes DS-137 · Aiko Kato	5 pts
Add bulk export to reports view DS-131 · Liam Shah	2 pts
Rename workspace roles in settings DS-128 · Priya Nair	1 pts

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Create | Filter | Export

Migrate billing tables to new schema DS-142 · Maya Ruiz	8 pts
Audit focus rings across admin console DS-139 · Jonas Ortiz	3 pts
Invoices API returns stale currency codes DS-137 · Aiko Kato	5 pts
Add bulk export to reports view DS-131 · Liam Shah	2 pts
Rename workspace roles in settings DS-128 · Priya Nair	1 pts

USAGE

- Use `--gap` inside groups and `--gap-l` between sections
- Change density by switching token values, not layouts

DO / DON'T

DO

- Lay out siblings with flex or grid gap

DON'T

- Mix arbitrary pixel values
- Remove whitespace to fit more data; use a denser language instead

COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Base unit	8px	8px	8px

PROPERTY	ATLASSIAN	FLUENT	APPLE
Default gap	8px	12px	16px
Section gap	16px	20px	28px
Card padding	12px	16px	22px
List row height	40px	52px	56px
Table row height	36px	44px	48px

FOUNDATIONS

Elevation & shape

Fluent-inspired depth is a deliberate six-step ramp. Atlassian-inspired depth stays crisp and close to the surface. Apple-inspired depth is rare, wide and soft, and often replaced by translucent materials.

PURPOSE

Elevation separates layers. Each language expresses depth differently on purpose, so the ramps are not normalised.

PRINCIPLES

- Atlassian-inspired: Flat, Raised, Overlay, Modal
- Fluent-inspired: a structured shadow ramp, 2 to 64
- Apple-inspired: Flat, Soft, Float, Sheet, plus blur materials

SHADOW LEVELS

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

- **Flat** `none`
- **Raised** `--a-shadow-raised`
- **Overlay** `--a-shadow-overlay`
- **Modal** `--a-shadow-modal`

FLUENT-INSPIRED Structured · layered — `32px · r4/8 · 14px`

- **Shadow 2** `--f-shadow-2`
- **Shadow 4** `--f-shadow-4`
- **Shadow 8** `--f-shadow-8`
- **Shadow 16** `--f-shadow-16`
- **Shadow 28** `--f-shadow-28`
- **Shadow 64** `--f-shadow-64`

APPLE-INSPIRED Minimal · refined — `36px · r10/14 · 15px`


- **Flat** `none`
- **Soft** `--p-shadow-soft`
- **Float** `--p-shadow-float`
- **Sheet** `--p-shadow-sheet`

CORNER RADIUS

ATLASSIAN-INSPIRED Dense · productive 32px · r3-4 · 14px



FLUENT-INSPIRED Structured · layered 32px · r4/8 · 14px

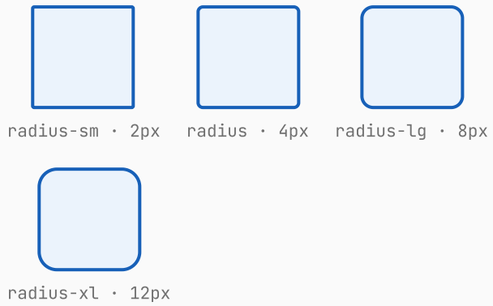

APPLE-INSPIRED Minimal · refined 36px · r10/14 · 15px




MATERIALS

A popover over busy content shows how each language separates layers.


ATLASSIAN-INSPIRED Dense · productive 32px · r3-4 · 14px



FLUENT-INSPIRED Structured · layered 32px · r4/8 · 14px

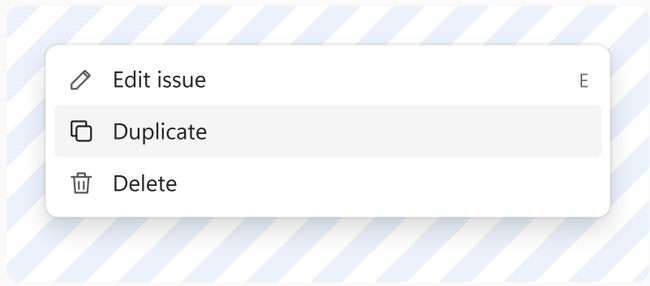

APPLE-INSPIRED Minimal · refined 36px · r10/14 · 15px

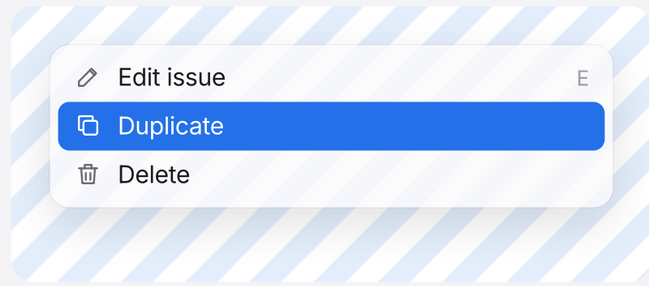

USAGE

- Raise only what floats above the page: menus, popovers, dialogs
- Keep cards flat or lowest level unless they are interactive

DO / DON'T

DO

- Use the language's own levels

DON'T

- Borrow another language's shadows
- Stack several shadows to create emphasis

COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Levels	4 (flat → modal)	6 (2 → 64)	4 (flat → sheet)
Card treatment	Hairline + 1px shadow	Shadow 4, no border	No shadow; contrast with grouped background
Overlays	Crisp shadow + dark blanket	Shadow 16–64	Blur material + light blanket
Radius	3 / 4 / 6px	2 / 4 / 8 / 12px	6 / 10 / 14 / 20px

FOUNDATIONS

Radius

How rounded each language's controls and surfaces are.

PURPOSE

Corner radius sets the personality of a surface. Small radii read as precise and dense; large radii read as soft and touch-friendly.

PRINCIPLES

- Controls use a smaller radius than the surfaces that contain them
- Nested corners get smaller inward
- Capsules only for chips, tags and switches

TOKENS

Values read from the live stylesheet.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3–4 · 14px



radius-sm · 3px radius · 4px radius-lg · 6px

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px



radius-sm · 2px radius · 4px radius-lg · 8px



radius-xl · 12px

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px



radius-sm · 6px radius · 10px radius-lg · 14px




radius-xl · 20px


EXAMPLES

The same elements, rounded by each language.


ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

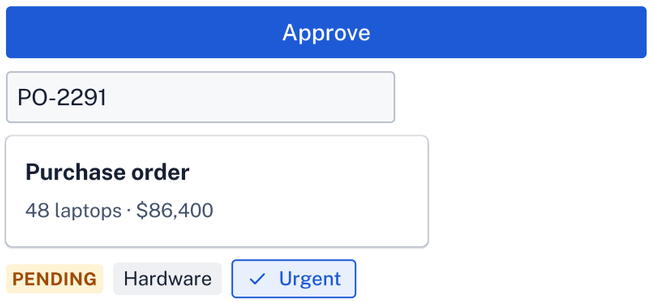

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

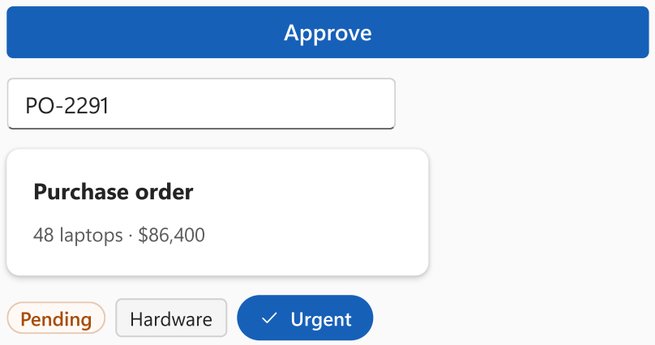

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

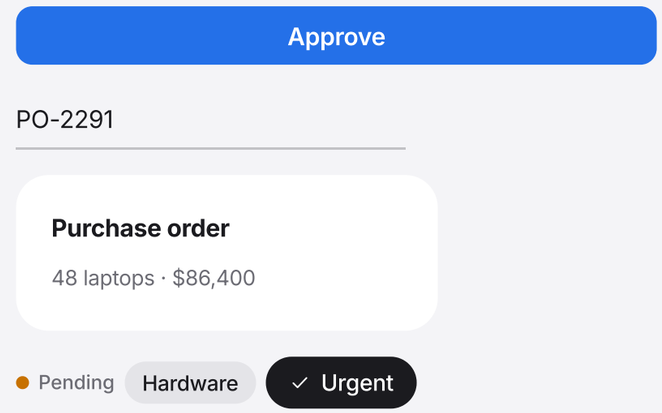

USAGE

- Use `--r` for controls and `--r-l` for cards, menus and dialogs

DO / DON'T

DO

- Keep one radius per element type

DON'T

- Round tables and full-bleed banners
- Mix radii inside one control group

COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Scale	3 / 4 / 6px	2 / 4 / 8 / 12px	6 / 10 / 14 / 20px
Controls	3px	4px	10px
Cards and menus	4–6px	8px	14–20px
Chips and tags	3px	Pill	Capsule

FOUNDATIONS

Icons

One outline icon set, drawn three ways. Size and stroke weight come from each language's tokens: 16px at 2px stroke, 18px at 1.5px, and 17px at 1.7px.

PURPOSE

Icons support labels and save space in dense toolbars. One outline set is drawn with each language’s size and stroke.

PRINCIPLES

- One icon set, three renderings
- Icons support text; icon-only buttons need a name and tooltip

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

plus search edit trash copy
filter sliders bell user users
home folder file calendar clock
upload download star info warn
ok err link share eye
refresh lock mail globe chart
tag flag bolt layers inbox
grid list code image cloud
branch sparkle

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`


plus search edit trash copy
filter sliders bell user users
home folder file calendar clock
upload download star info warn
ok err link share eye
refresh lock mail globe chart
tag flag bolt layers inbox
grid list code image cloud
branch sparkle

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

plus search edit trash copy
filter sliders bell user users
home folder file calendar clock
upload download star info warn
ok err link share eye
refresh lock mail globe chart
tag flag bolt layers inbox
grid list code image cloud
branch sparkle

IN CONTEXT


ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`



FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`



APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

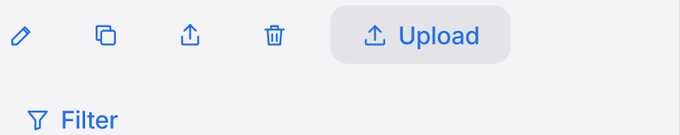

USAGE

- Use 16–18px in controls
- Inherit colour from text

DO / DON'T

DO

- Give icon-only buttons an aria-label

DON'T

- Use an icon as the only signal of status

COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Size (default)	16px	18–20px	17px
Stroke	2px	1.5px	1.7px
Colour	Subtle text colour	Primary colour in subtle buttons	Tint colour, matches text weight
Pairing with text	Icon optional on buttons	Icon + label encouraged	Text first, icon rarely

FOUNDATIONS

Motion

Duration and easing for each language. Press Play to feel the difference.

PURPOSE

Motion explains change: where something came from and where it went. Each language moves at its own speed.

PRINCIPLES

- Motion confirms an action; it never delays it
- Shorter for small elements, longer for large surfaces
- Respect reduced-motion settings

EXAMPLES The square uses each language's base duration and easing.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Play Notifications

Day Week Month

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Play Notifications

Day Week Month

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Play Notifications

Day Week Month

TOKENS Read from the live stylesheet.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

--dur	.1s
--ease	cubic-bezier(.15,1,.3,1)
--tab-dur	.15s
--sw-dur	.15s
--sw-ease	ease-out
--ovl-dur	.15s
--to-dur	.2s

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

--dur	.15s
--ease	cubic-bezier(.1,.9,.2,1)
--tab-dur	.25s
--sw-dur	.2s
--sw-ease	cubic-bezier(.1,.9,.2,1)
--ovl-dur	.25s
--to-dur	.3s

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

--dur	.32s
--ease	cubic-bezier(.32,.72,0,1)
--tab-dur	.32s
--sw-dur	.32s
--sw-ease	cubic-bezier(.34,1.3,.5,1)
--ovl-dur	.3s
--to-dur	.45s

USAGE

- Use `--dur` and `--ease` for state changes
- Use component tokens for indicators, switches and overlays

DO / DON'T

DO

- Animate opacity and transform

DON'T

- Animate layout properties on large lists
- Add motion that plays on every page load

COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Base duration	100ms	150ms	250ms
Easing	Quick ease-out	Decelerate (0.1, 0.9, 0.2, 1)	Spring-like (0.32, 0.72, 0, 1)
Indicators	150ms	250ms	320ms
Overlays	150ms slide	250ms scale	300ms scale + blur
Reduced motion	Respected	Respected	Respected

COMPONENTS · ACTIONS

Button

Triggers an action. Primary for the main action on a surface, default for secondary, subtle for low-emphasis and toolbar actions, danger for destructive ones.

7 states **3** sizes **3** languages `.ds-btn`

01 PURPOSE

Triggers an action. Primary for the main action on a surface, default for secondary, subtle for low-emphasis and toolbar actions, danger for destructive ones.

It is part of the **Actions** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container `.ds-btn`
2. Leading icon `.ds-btn__lead`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3–4 · 14px

Create Share Watch Delete Learn more

Following Unavailable

Click Create to see loading, then success feedback. “Following” is a toggle button.

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

+ Create Share Watch Delete

Learn more

✓ Following Unavailable

Click Create to see loading, then success feedback. “Following” is a toggle button.

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Create Share Watch Delete

Learn more

Following Unavailable

Click Create to see loading, then success feedback. “Following” is a toggle button.

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	Create Cancel Edit	+ Create Cancel Edit	Create Cancel Edit

STATE	ATLASSIAN	FLUENT	APPLE
Hover `:hover`	Create Cancel Edit	+ Create Cancel Edit	Create Cancel Edit
Focus `:focus-visible`	Create Cancel Edit	+ Create Cancel Edit	Create Cancel Edit
Active / pressed `:active`	Create Cancel Edit	+ Create Cancel Edit	Create Cancel Edit
Selected `aria-selected`	Create Cancel Edit	+ Create Cancel Edit	Create Cancel Edit
Disabled `:disabled`	Create Cancel Edit	+ Create Cancel Edit	Create Cancel Edit
Loading `aria-busy`			

05 SIZES

Small, medium and large use each language's height scale.

SIZE	ATLASSIAN	FLUENT	APPLE
Small `--h-s`	Create Cancel Edit	+ Create Cancel Edit	Create Cancel Edit
Medium `--h-m`	Create Cancel Edit	+ Create Cancel Edit	Create Cancel Edit
Large `--h-l`	Create Cancel Edit	+ Create Cancel Edit	Create Cancel Edit

06 BEHAVIOUR

Identical in all three languages.

Activates on click, Enter or Space. Long-running actions switch to a loading state and keep their width; results are confirmed with a toast.

07 ACCESSIBILITY

KEYBOARD

`Tab` Move focus to the button

`Enter / Space` Activate

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Uses a native `button`. Toggle buttons expose `aria-pressed`; loading buttons set `aria-busy` and keep their width so the layout does not jump.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

08 RESPONSIVE

Desktop `≥ 1180px`

Full labels; icon + label where the language uses icons

Tablet `700–1179px`

Same; group overflow moves into a More menu

Mobile `< 700px`

Full-width primary action at the bottom of forms; use Large size for touch

09 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Height (S / M / L)	24 / 32 / 40px	24 / 32 / 40px	28 / 36 / 44px
Radius	3px	4px	10px (14px large)
Default button	Grey fill, no border	White, 1px stroke	Tinted grey fill, tint-coloured text
Primary emphasis	Strong	Strong	Moderate, semibold text
Leading icon	Hidden by default	Shown	Hidden; text carries meaning
Pressed feedback	Darker fill	Darker fill + stroke	Scale to 97%
Disabled	Grey fill, grey text	Grey fill + divider stroke	35% opacity
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces

PROPERTY	ATLASSIAN	FLUENT	APPLE
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

10 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-link --a-color-on-primary --a-color-primary --a-color-primary-hover --a-color-primary-pressed --a-color-primary-subtle --a-danger --a-focus --a-hover --a-neutral --a-neutral-hover --a-neutral-pressed --a-pressed --a-surface --a-text-disabled --a-text-subtle`	`--f-color-link --f-color-on-primary --f-color-primary --f-color-primary-hover --f-color-primary-pressed --f-color-primary-subtle --f-danger --f-divider --f-focus-inner --f-focus-outer --f-neutral-hover --f-neutral-pressed --f-stroke --f-stroke-hover --f-subtle-hover --f-subtle-pressed --f-surface --f-surface-sunken --f-text --f-text-disabled`	`--p-color-link --p-color-on-primary --p-color-primary --p-color-primary-hover --p-color-primary-pressed --p-fill --p-fill-hover --p-fill-pressed --p-focus-halo --p-hover --p-label --p-label-disabled --p-pressed --p-red --p-surface`
Typography	`--a-font`	`--f-font`	`--p-font`
Radius	`--a-radius-sm`	`--f-radius`	`--p-radius --p-radius-lg`
Sizing	`--a-height-lg --a-height-md --a-height-sm`	`--f-height-lg --f-height-md --f-height-sm`	`--p-height-lg --p-height-md --p-height-sm`

COMPONENTS · ACTIONS

Icon Button

A square button with only an icon, for dense toolbars and row actions. Always carries an accessible name and a tooltip.

6 states **3** sizes **3** languages `.ds-ibtn .ds-tip`

01 PURPOSE

A square button with only an icon, for dense toolbars and row actions. Always carries an accessible name and a tooltip.

It is part of the **Actions** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-ibtn`
2. Tooltip bubble — `.ds-tip`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3–4 · 14px`

Hover or focus to see tooltips. The star is a toggle.

FLUENT-INSPIRED Structured · layered — `32px · r4/8 · 14px`

Hover or focus to see tooltips. The star is a toggle.

APPLE-INSPIRED Minimal · refined — `36px · r10/14 · 15px`

Hover or focus to see tooltips. The star is a toggle.



04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`			
Hover `:hover`			

STATE	ATLASSIAN	FLUENT	APPLE
Focus `:focus-visible`			
Active / pressed `:active`			
Selected `aria-selected`			
Disabled `:disabled`			

05 SIZES

Small, medium and large use each language's height scale.

SIZE	ATLASSIAN	FLUENT	APPLE
Small `--h-s`			
Medium `--h-m`			
Large `--h-l`			

06 BEHAVIOUR

Identical in all three languages.

Activates on click, Enter or Space. Long-running actions switch to a loading state and keep their width; results are confirmed with a toast.

07 ACCESSIBILITY

KEYBOARD

`Tab` Move focus to the button

`Enter / Space` Activate

`Esc` Hide the tooltip

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Every icon button has an `aria-label`. Tooltips are linked with `aria-describedby`, appear on focus as well as hover, and close with Esc.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

08 RESPONSIVE

Desktop `≥ 1180px`

Full labels; icon + label where the language uses icons

Tablet `700–1179px`

Same; group overflow moves into a More menu

Mobile `< 700px`

Full-width primary action at the bottom of forms; use Large size for touch

09 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shape	Square, 3px radius	Square, 4px radius	Circle
Icon size	16px	18px	17px
Default style	Transparent until hover	Transparent; icon in brand colour	Transparent; tint colour
Tooltip	Dark, fast (300ms)	Light with beak (250ms)	Material, delayed (600ms)
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely

PROPERTY	ATLASSIAN	FLUENT	APPLE
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

10 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-inverse --a-on-inverse`	`--f-surface-overlay --f-text`	`--p-hover --p-label --p-material --p-pressed`
Radius	`--a-radius-sm`	`--f-radius`	–
Elevation	–	`--f-shadow-8`	`--p-shadow-float`
Sizing	`--a-height-lg --a-height-md --a-height-sm`	`--f-height-lg --f-height-md --f-height-sm`	`--p-height-lg --p-height-md --p-height-sm`

COMPONENTS · ACTIONS

Button Group

Groups related buttons. As a single-choice group it switches a view or time range.

4 states **3** sizes **3** languages `.ds-bgroup`

01 PURPOSE

Groups related buttons. As a single-choice group it switches a view or time range.

It is part of the **Actions** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container `.ds-bgroup`
2. Label `.ds-label`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Time range

Day | Week | Month | Quarter

View

List | Board | Timeline

Edit | Assign | Archive

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Time range

Day | Week | Month | Quarter

View

List | Board | Timeline

Edit | Assign | Archive

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Time range

Day | Week | Month | Quarter

View

List | Board | Timeline

Edit | Assign | Archive

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	Day | Week | Month	Day | Week | Month	Day | Week | Month
Hover `:hover`	Day | Week | Month	Day | Week | Month	Day | Week | Month

STATE	ATLASSIAN	FLUENT	APPLE
Focus `:focus-visible`	Day Week Month	Day Week Month	Day Week Month
Disabled `:disabled`	Day Week Month	Day Week Month	Day Week Month

05 SIZES

Small, medium and large use each language's height scale.

SIZE	ATLASSIAN	FLUENT	APPLE
Small `--h-s`	Day Week Month	Day Week Month	Day Week Month
Medium `--h-m`	Day Week Month	Day Week Month	Day Week Month
Large `--h-l`	Day Week Month	Day Week Month	Day Week Month

06 BEHAVIOUR

Identical in all three languages.

Activates on click, Enter or Space. Long-running actions switch to a loading state and keep their width; results are confirmed with a toast.

07 ACCESSIBILITY

KEYBOARD

`Tab` Move focus to the button

`Enter / Space` Activate

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The wrapper is `role="group"` with a label. Single-choice groups use `aria-pressed` on each button so screen readers announce the current choice.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

08 RESPONSIVE

Desktop ≥ 1180px

Full labels; icon + label where the language uses icons

Tablet 700–1179px

Same; group overflow moves into a More menu

Mobile < 700px

Full-width primary action at the bottom of forms; use Large size for touch

09 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Composition	Separate buttons, 4px apart	Joined, shared 1px borders	Segmented control in a fill track
Selected	Blue tint + blue text	Brand subtle fill + brand stroke	White thumb with soft shadow
Best for	Toolbars with many actions	View switchers in forms and panels	2–5 mutually exclusive options
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

10 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	–	`--f-color-link --f-color-primary --f-color-primary-subtle`	`--p-fill --p-label --p-surface`
Radius	–	`--f-radius`	–
Sizing	–	–	`--p-height-md`

COMPONENTS · ACTIONS

Split Button

A primary action with a menu of related alternatives attached to the same control.

4 states **3** sizes **3** languages `.ds-split .ds-pop`

01 PURPOSE

A primary action with a menu of related alternatives attached to the same control.

It is part of the **Actions** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-split`
2. Popup surface — `.ds-pop`
3. Option / item — `.ds-opt`
4. Label — `.ds-opt__label`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Publish | Export

The main segment runs the default; the chevron opens alternatives.

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Publish | Export

The main segment runs the default; the chevron opens alternatives.

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Publish | Export

The main segment runs the default; the chevron opens alternatives.

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	Publish	Publish	Publish
Hover `:hover`	Publish	Publish	Publish
Focus `:focus-visible`	Publish	Publish	Publish

STATE	ATLASSIAN	FLUENT	APPLE
Disabled `:disabled`	Publish	Publish	Publish

05 SIZES

Small, medium and large use each language's height scale.

SIZE	ATLASSIAN	FLUENT	APPLE
Small `--h-s`	Publish	Publish	Publish
Medium `--h-m`	Publish	Publish	Publish
Large `--h-l`	Publish	Publish	Publish

06 BEHAVIOUR

Identical in all three languages.

Activates on click, Enter or Space. Long-running actions switch to a loading state and keep their width; results are confirmed with a toast.

07 ACCESSIBILITY

KEYBOARD

`Enter / ↓` Open the menu and focus the first item

`↑ / ↓ · Home / End` Move between items

`Esc` Close and return focus

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The chevron is a separate `button` with `aria-haspopup="menu"` and `aria-expanded`. Opening the menu moves focus to the first item.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

08 RESPONSIVE

Desktop ≥ 1180px

Full labels; icon + label where the language uses icons

Tablet 700–1179px

Same; group overflow moves into a More menu

Mobile < 700px

Full-width primary action at the bottom of forms; use Large size for touch

09 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Divider	1px gap between halves	Inset hairline on primary	Inset hairline
Menu surface	Flat, 4px radius	8px radius, shadow 16	Blur material, 12px radius
Hover in menu	Grey tint	Grey rounded tint	Solid tint with white text
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

10 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border --a-color-primary --a-color-primary-subtle --a-danger --a-hover --a-separator --a-surface --a-surface-overlay --a-text --a-text-disabled --a-text-subtle --a-text-subtlest`	`--f-canvas --f-color-primary --f-danger --f-stroke-accessible --f-subtle-hover --f-subtle-pressed --f-surface --f-surface-overlay --f-text --f-text-2 --f-text-3 --f-text-disabled`	`--p-color-primary --p-label --p-label-2 --p-label-3 --p-label-disabled --p-material --p-red --p-separator --p-surface`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`
Radius	`--a-radius --a-radius-lg`	`--f-radius --f-radius-lg`	`--p-radius-lg`
Elevation	`--a-shadow-overlay`	`--f-shadow-16 --f-shadow-4`	`--p-shadow-float`

COMPONENTS · ACTIONS

Link

Navigates to another page or resource. Use inline within text or standalone for “learn more” style navigation.

4 states — sizes **3** languages `.ds-link`

01 PURPOSE

Navigates to another page or resource. Use inline within text or standalone for “learn more” style navigation.

It is part of the **Actions** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container
`.ds-link`

2 Arrow
`.ds-link__arrow`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

This issue blocks DS-137 and is tracked in the Q3 billing roadmap.

View all activity Open runbook Archived report

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

This issue blocks DS-137 and is tracked in the Q3 billing roadmap.

View all activity Open runbook Archived report

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

This issue blocks DS-137 and is tracked in the Q3 billing roadmap.

View all activity › Open runbook Archived report

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	View all activity	View all activity	View all activity ›
Hover `:hover`	View all activity	View all activity	View all activity ›
Focus `:focus-visible`	View all activity	View all activity	View all activity ›
Disabled `:disabled`	View all activity	View all activity	View all activity ›

05 BEHAVIOUR Identical in all three languages.

Activates on click, Enter or Space. Long-running actions switch to a loading state and keep their width; results are confirmed with a toast.

06 ACCESSIBILITY

KEYBOARD

`Tab` Move focus

`Enter` Follow the link

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Links use real a elements with descriptive text. Disabled links drop their `href` and set `aria-disabled`.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

Full labels; icon + label where the language uses icons

Tablet `700–1179px`

Same; group overflow moves into a More menu

Mobile `< 700px`

Full-width primary action at the bottom of forms; use Large size for touch

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Underline	On hover	On hover, offset 3px	Never; opacity on hover
Visited	Purple	Unchanged	Unchanged
Trailing affordance	None	None	Chevron “›” on standalone links
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-link` `--a-color-primary-hover` `--a-discovery` `--a-focus` `--a-surface` `--a-text-disabled`	`--f-color-link` `--f-color-primary-hover` `--f-focus-inner` `--f-focus-outer` `--f-text-disabled`	`--p-color-link` `--p-focus-halo` `--p-label-disabled`

COMPONENTS · FORMS

Text Field

Single-line text input with label, helper text and validation. Supports leading icons and suffixes.

8 states **3** sizes **3** languages `.ds-field .ds-label`

01 PURPOSE

Single-line text input with label, helper text and validation. Supports leading icons and suffixes.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Field wrapper — `.ds-field`
2. Label — `.ds-label`
3. Control frame — `.ds-control`
4. Helper / error text — `.ds-help`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Summary *
What needs to be done?
Shown on the board card

Reporter email
maya.ruiz@ledger.examp

Budget
12500 USD

Issue key
DS-142
Generated automatically

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Summary *
What needs to be done?
Shown on the board card

Reporter email
maya.ruiz@ledger.exam

Budget
12500 USD

Issue key
DS-142
Generated automatically

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Summary *
What needs to be done?
Shown on the board card

Reporter email
maya.ruiz@ledger.exam

Budget
12500 USD

Issue key
DS-142
Generated automatically

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	Summary Migrate billing tables Shown on the board card	Summary Migrate billing tables Shown on the board card	Summary Migrate billing tables Shown on the board card

STATE	ATLASSIAN	FLUENT	APPLE
Hover `:hover`	Summary Migrate billing tables Shown on the board card	Summary Migrate billing tables Shown on the board card	Summary Migrate billing tables Shown on the board card
Focus `:focus-visible`	Summary Migrate billing tables Shown on the board card	Summary Migrate billing tables Shown on the board card	Summary Migrate billing tables Shown on the board card
Disabled `:disabled`	Summary Migrate billing tables Locked while the sprint is active	Summary Migrate billing tables Locked while the sprint is active	Summary Migrate billing tables Locked while the sprint is active
Loading `aria-busy`	Summary Migrate billing tables Checking for duplicates...	Summary Migrate billing tables Checking for duplicates...	Summary Migrate billing tables Checking for duplicates...
Error `.is-error`	Summary * What needs to be done? Summary is required	Summary * What needs to be done? Summary is required	Summary * What needs to be done? Summary is required
Success `.is-success`	Summary Migrate billing tables Name is available	Summary Migrate billing tables Name is available	Summary Migrate billing tables Name is available
Warning `.is-warning`	Summary Migrate billing tables Similar issue DS-131 exists	Summary Migrate billing tables Similar issue DS-131 exists	Summary Migrate billing tables Similar issue DS-131 exists

05 SIZES

Small, medium and large use each language's height scale.

SIZE	ATLASSIAN	FLUENT	APPLE
Small `--h-s`	Summary What needs to be done?	Summary What needs to be done?	Summary What needs to be done?

SIZE	ATLASSIAN	FLUENT	APPLE
Medium `--h-m`	Summary What needs to be done?	Summary What needs to be done?	Summary What needs to be done?
Large `--h-l`	Summary What needs to be done?	Summary What needs to be done?	Summary What needs to be done?

06 BEHAVIOUR

Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

07 ACCESSIBILITY

KEYBOARD

`Tab` Move between fields

`Type` Edit the value

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Each input has a visible `label`. Helper and error text are linked via `aria-describedby`; invalid inputs set `aria-invalid="true"`. Required fields use the native `required` attribute plus a visual asterisk.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

08 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

09 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Field shape	Filled grey box, 1px frame	White box, darker bottom stroke	No box, hairline underline
Focus	Frame turns primary (2px)	Accent bar grows from centre	Underline thickens in tint
Label	12px bold, above	14px semibold, above	13px medium, secondary
Height (M)	32px	32px	36px
Error	Red frame + icon message	Red bar + icon message	Red underline + small text
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

10 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border-input --a-color-primary --a-danger --a-focus --a-hover --a-neutral --a-success --a-surface --a-surface-field --a-surface-sunken --a-text --a-text-disabled --a-text-subtle --a-text-subtlest --a-warning`	`--f-color-primary --f-danger --f-divider --f-focus-inner --f-focus-outer --f-stroke --f-stroke-accessible --f-stroke-hover --f-subtle-hover --f-success --f-surface --f-surface-sunken --f-text --f-text-2 --f-text-3 --f-text-disabled --f-warning`	`--p-border-strong --p-color-primary --p-fill --p-focus-halo --p-green --p-hover --p-label --p-label-2 --p-label-3 --p-label-disabled --p-orange --p-red --p-separator`
Typography	`--a-font`	`--f-font`	`--p-font`
Radius	`--a-radius --a-radius-sm`	`--f-radius`	`--p-radius`
Sizing	`--a-height-lg --a-height-md --a-height-sm`	`--f-height-lg --f-height-md --f-height-sm`	`--p-height-lg --p-height-md --p-height-sm`

COMPONENTS · FORMS

Text Area

Multi-line text input for descriptions and comments, with an optional live character count.

4 states — sizes **3** languages `.ds-control--area .ds-cnt`

01 PURPOSE

Multi-line text input for descriptions and comments, with an optional live character count.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-control--area`
2. Container — `.ds-cnt`
3. Field wrapper — `.ds-field`
4. Label — `.ds-label`
5. Helper / error text — `.ds-help`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

Description

Move invoices, line items and tax tables to the v2 schema. Keep the read replica in sync until cut-over.

Supports plain text 104/280

Rejection reason

Add a reason so the reporter knows what to change

FLUENT-INSPIRED Structured · layered — `32px · r4/8 · 14px`

Description

Move invoices, line items and tax tables to the v2 schema. Keep the read replica in sync until cut-over.

Supports plain text 104/280

Rejection reason

Add a reason so the reporter knows what to change

APPLE-INSPIRED Minimal · refined — `36px · r10/14 · 15px`

Description

Move invoices, line items and tax tables to the v2 schema. Keep the read replica in sync until cut-over.

Supports plain text 104/280

Rejection reason

Add a reason so the reporter knows what to change

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	Comment Looks good, ship it.	Comment Looks good, ship it.	Comment Looks good, ship it.
Focus `:focus-visible`	Comment Looks good, ship it.	Comment Looks good, ship it.	Comment Looks good, ship it.
Disabled `:disabled`	Comment Looks good, ship it.	Comment Looks good, ship it.	Comment Looks good, ship it.
Error `.is-error`	Comment Comment cannot be empty	Comment Comment cannot be empty	Comment Comment cannot be empty

05 BEHAVIOUR

Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

06 ACCESSIBILITY

KEYBOARD

`Tab` Move between fields

`Type` Edit the value

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The counter is in an `aria-live="polite"` region so assistive tech hears it without interrupting typing.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Frame	Same as text field	Same as text field	Rounded 10px box (not underline)
Resize	Vertical	Vertical	Vertical
Counter	Right, small	Right, small	Right, small
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	–	–	`--p-border-strong --p-color-primary --p-focus-halo`
Radius	–	–	`--p-radius`

COMPONENTS · FORMS

Search

A search input with a leading icon, clear button and keyboard hint.

5 states **3** sizes **3** languages `.ds-control--search .ds-x`

01 PURPOSE

A search input with a leading icon, clear button and keyboard hint.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-control--search`
2. Clear button — `.ds-x`
3. Container — `.ds-cmd-hint`
4. Label — `.ds-label`
5. Helper / error text — `.ds-help`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

Search issues

billing

Press Enter to search

Recent: billing · focus ring · DS-13

FLUENT-INSPIRED Structured · layered — `32px · r4/8 · 14px`

Search issues

billing

Press Enter to search

Recent: billing · focus ring · DS-13

APPLE-INSPIRED Minimal · refined — `36px · r10/14 · 15px`

Search issues

billing

Press Enter to search

Recent: billing · focus ring · DS-13

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	Search issues	Search issues	Search issues
Hover `:hover`	billing	billing	billing
Focus `:focus-visible`	billing	billing	billing

STATE	ATLASSIAN	FLUENT	APPLE
Disabled `:disabled`	Search issues	Search issues	Search issues
Loading `aria-busy`	billing	billing	billing

05 SIZES

Small, medium and large use each language's height scale.

SIZE	ATLASSIAN	FLUENT	APPLE
Small `--h-s`	Search issues	Search issues	Search issues
Medium `--h-m`	Search issues	Search issues	Search issues
Large `--h-l`	Search issues	Search issues	Search issues

06 BEHAVIOUR

Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

07 ACCESSIBILITY

KEYBOARD

`/` Focus search (app-level)

`Enter` Run search

`Esc` Clear (native)

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Uses `type="search"` with a visible label. The clear button has its own accessible name and returns focus to the input.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

08 RESPONSIVE

Desktop ≥ 1180px

Two-column form grids where fields are short

Tablet 700–1179px

Two columns collapse to one below ~720px

Mobile < 700px

Single column; Large controls for touch; popups stay anchored to the field

09 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shape	Same box as text fields	Same box as text fields	Filled rounded field (differs from text fields)
Clear button	Circular, appears with text	Circular, appears with text	Circular, appears with text
Shortcut hint	“/” key chip	“/” key chip	“/” key chip
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

10 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-focus` `--a-hover` `--a-surface` `--a-text` `--a-text-subtlest`	`--f-focus-inner` `--f-focus-outer` `--f-subtle-hover` `--f-text` `--f-text-3`	`--p-fill` `--p-focus-halo` `--p-hover` `--p-label` `--p-label-3`
Radius	`--a-radius`	`--f-radius`	—

COMPONENTS · FORMS

Select

Pick one value from a short list. Opens a listbox; the trigger shows the current value.

5 states **3** sizes **3** languages `.ds-select .ds-pop`

01 PURPOSE

Pick one value from a short list. Opens a listbox; the trigger shows the current value.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-select`	2 Popup surface `.ds-pop`	3 Option / item `.ds-opt`	4 Chevron `.ds-chev`	5 Label `.ds-label`
6 Current value `.ds-val`	7 Primary text `.ds-opt__main`	8 Label `.ds-opt__label`	9 Selection tick `.ds-opt__tick`	10 Description `.ds-opt__desc`
11 Helper / error text `.ds-help`				

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

Status: In progress
Assignee: Unassigned
Sprint: Sprint 41
Sprint is locked

FLUENT-INSPIRED Structured · layered — `32px · r4/8 · 14px`

Status: In progress
Assignee: Unassigned
Sprint: Sprint 41
Sprint is locked

APPLE-INSPIRED Minimal · refined — `36px · r10/14 · 15px`

Status: In progress
Assignee: Unassigned
Sprint: Sprint 41
Sprint is locked

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	Priority Medium	Priority Medium	Priority Medium
Hover `:hover`	Priority Medium	Priority Medium	Priority Medium
Focus `:focus-visible`	Priority Medium	Priority Medium	Priority Medium
Disabled `:disabled`	Priority Medium	Priority Medium	Priority Medium
Error `.is-error`	Priority Choose a priority Priority is required	Priority Choose a priority Priority is required	Priority Choose a priority Priority is required

05 SIZES

Small, medium and large use each language's height scale.

SIZE	ATLASSIAN	FLUENT	APPLE
Small `--h-s`	Priority Medium	Priority Medium	Priority Medium
Medium `--h-m`	Priority Medium	Priority Medium	Priority Medium
Large `--h-l`	Priority Medium	Priority Medium	Priority Medium

06 BEHAVIOUR

Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

07 ACCESSIBILITY

KEYBOARD

`↓ / ↑` Open and move through options

`Enter` Choose the highlighted option

`Esc` Close without choosing

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Follows the ARIA select-only combobox pattern: a `button` with `aria-haspopup="listbox"` controls a `role="listbox"`; the highlighted option is exposed with `aria-activedescendant` while focus stays on the trigger.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

08 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

09 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Trigger	Field-style box + chevron	Field-style box + chevron	Underlined value + chevron
Selected option	Tint row + left bar	Bold text + left indicator	Checkmark; hover is solid tint
Menu radius	4px	8px	12px, blurred material
Option height	32px	32px	30px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

10 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-color-primary-subtle` `--a-danger` `--a-hover` `--a-surface-overlay` `--a-text` `--a-text-disabled` `--a-text-subtle` `--a-text-subtlest`	`--f-color-primary` `--f-danger` `--f-subtle-hover` `--f-subtle-pressed` `--f-surface-overlay` `--f-text` `--f-text-2` `--f-text-3` `--f-text-disabled`	`--p-color-primary` `--p-label` `--p-label-2` `--p-label-3` `--p-label-disabled` `--p-material` `--p-red`
Radius	`--a-radius`	`--f-radius` `--f-radius-lg`	—
Elevation	`--a-shadow-overlay`	`--f-shadow-16`	`--p-shadow-float`

COMPONENTS · FORMS

Multi Select

Choose several values. Selections appear as removable tags inside the field.

— states — sizes 3 languages `.ds-control--multi .ds-tag`

01 PURPOSE

Choose several values. Selections appear as removable tags inside the field.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-control--multi`
2. Option / item — `.ds-opt`
3. Label — `.ds-label`
4. Chevron — `.ds-chev`
5. Label — `.ds-opt__label`
6. Helper / error text — `.ds-help`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3–4 · 14px

Labels

Accessibility × Billing × Add labels...

Type to filter. Backspace removes the last label.

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Labels

Accessibility × Billing × Add labels...

Type to filter. Backspace removes the last label.

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Labels

Accessibility × Billing × Add labels...

Type to filter. Backspace removes the last label.

04 BEHAVIOUR Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

05 ACCESSIBILITY

KEYBOARD

`↓ / ↑` Open and move through options

`Enter` Choose the highlighted option

`Esc` Close without choosing

`Backspace` Remove the last tag when the input is empty

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

An editable combobox controls a `listbox` with `aria-multiselectable="true"`. Each tag has a remove button named “Remove <label>”.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Tags in field	Square 3px, grey	Rounded 4px with stroke	Capsules
Options	Checkbox + label	Checkbox + label	Checkbox; whole row tints on hover
Field growth	Wraps to new lines	Wraps to new lines	Wraps to new lines
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary --a-color-primary-subtle --a-danger --a-discovery --a-discovery-bg --a-focus --a-hover --a-info-bg --a-neutral --a-success --a-success-bg --a-surface --a-text --a-text-disabled --a-text-subtle --a-text-subtlest --a-warning --a-warning-bg`	`--f-color-primary --f-danger --f-discovery --f-discovery-bg --f-focus-inner --f-focus-outer --f-info-bg --f-stroke --f-subtle-hover --f-subtle-pressed --f-success --f-success-bg --f-surface-sunken --f-text --f-text-2 --f-text-3 --f-text-disabled --f-warning --f-warning-bg`	`--p-color-primary --p-fill --p-focus-halo --p-green --p-green-bg --p-hover --p-info-bg --p-label --p-label-2 --p-label-3 --p-label-disabled --p-orange --p-orange-bg --p-purple --p-purple-bg --p-red`
Radius	`--a-radius-sm`	`--f-radius`	—
Sizing	`--a-height-md`	`--f-height-md`	`--p-height-md`

COMPONENTS · FORMS

Combobox

A text input that filters a list of suggestions. Use when the list is long or the user knows what they are looking for.

— states — sizes **3** languages `.ds-anchor .ds-opt`

01 PURPOSE

A text input that filters a list of suggestions. Use when the list is long or the user knows what they are looking for.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Positioning anchor `.ds-anchor`	2 Option / item `.ds-opt`	3 Container `.ds-combo-toggle`	4 Label `.ds-label`	5 Clear button `.ds-x`
6 Primary text `.ds-opt__main`	7 Label `.ds-opt__label`	8 Description `.ds-opt__desc`	9 Selection tick `.ds-opt__tick`	10 Helper / error text `.ds-help`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

Reviewer

Search people

Try “ka” or “eng”.

FLUENT-INSPIRED Structured · layered — `32px · r4/8 · 14px`

Reviewer

Search people

Try “ka” or “eng”.

APPLE-INSPIRED Minimal · refined — `36px · r10/14 · 15px`

Reviewer

Search people

Try “ka” or “eng”.

04 BEHAVIOUR Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

05 ACCESSIBILITY

KEYBOARD

`↓ / ↑` Open and move through options

`Enter` Choose the highlighted option

`Esc` Close without choosing

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Uses `role="combobox"` with `aria-autocomplete="list"`, `aria-expanded` and `aria-activedescendant`. Filtering does not move focus out of the input.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Match highlight	Bold match	Bold match	Bold match on tinted row
Empty result	Inline message	Inline message	Inline message
Option content	Avatar, name, role	Avatar, name, role	Avatar, name, role
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces

PROPERTY	ATLASSIAN	FLUENT	APPLE
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-color-primary-subtle` `--a-danger` `--a-hover` `--a-text` `--a-text-disabled` `--a-text-subtle` `--a-text-subtlest`	`--f-color-primary` `--f-danger` `--f-subtle-hover` `--f-subtle-pressed` `--f-text` `--f-text-2` `--f-text-3` `--f-text-disabled`	`--p-color-primary` `--p-label` `--p-label-2` `--p-label-3` `--p-label-disabled` `--p-red`
Radius	–	`--f-radius`	–

COMPONENTS · FORMS

Checkbox

Select any number of options. Supports a mixed (indeterminate) parent state.

7 states — sizes **3** languages `.ds-check .ds-check__box`

01 PURPOSE

Select any number of options. Supports a mixed (indeterminate) parent state.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-check`	2 Box `.ds-check__box`	3 Container `.ds-choices`	4 Label `.ds-label`	5 Label text `.ds-check__txt`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Notify me when

- [ ] All events
- [x] An issue is assigned to me
- [x] Someone mentions me
  Includes comments and descriptions
- [ ] Sprint scope changes
- [ ] Weekly digest (admin only)

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Notify me when

- [ ] All events
- [x] An issue is assigned to me
- [x] Someone mentions me
  Includes comments and descriptions
- [ ] Sprint scope changes
- [ ] Weekly digest (admin only)

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Notify me when

- [ ] All events
- [x] An issue is assigned to me
- [x] Someone mentions me
  Includes comments and descriptions
- [ ] Sprint scope changes
- [ ] Weekly digest (admin only)

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	Someone mentions me	Someone mentions me	Someone mentions me
Hover `:hover`	Someone mentions me	Someone mentions me	Someone mentions me
Focus `:focus-visible`	Someone mentions me	Someone mentions me	Someone mentions me

STATE	ATLASSIAN	FLUENT	APPLE
Active / pressed `:active`	Someone mentions me	Someone mentions me	Someone mentions me
Selected `aria-selected`	Someone mentions me	Someone mentions me	Someone mentions me
Disabled `:disabled`	Someone mentions me	Someone mentions me	Someone mentions me
Error `.is-error`	Someone mentions me	Someone mentions me	Someone mentions me

05 BEHAVIOUR

Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

06 ACCESSIBILITY

KEYBOARD

`Tab` Move to the control

`Space` Toggle

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Native `input type="checkbox"` inside a `label`, grouped in a `fieldset` with a `legend`. The parent uses the native `indeterminate` property.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Box size	14px, 2px border	16px, 1px accessible stroke	18px, hairline + soft shadow
Radius	2px	2px	5px
Checked	Primary fill	Brand fill	Tint fill
Pressed	Darker border	Shrinks to 94%	Shrinks to 90%
Row gap	4px	8px	12px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border-input --a-color-on-primary --a-color-primary --a-danger --a-focus --a-separator --a-surface --a-surface-field --a-surface-sunken --a-text --a-text-disabled --a-text-subtlest`	`--f-color-on-primary --f-color-primary --f-danger --f-divider --f-focus-inner --f-focus-outer --f-stroke-accessible --f-surface-sunken --f-text --f-text-3 --f-text-disabled`	`--p-border-strong --p-canvas --p-color-on-primary --p-color-primary --p-focus-halo --p-label --p-label-3 --p-label-disabled --p-red --p-separator --p-surface`

COMPONENTS · FORMS

Radio

Select exactly one option from a small set. Show all options at once.

7 states — sizes **3** languages `.ds-radio .ds-check__box`

01 PURPOSE

Select exactly one option from a small set. Show all options at once.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-radio`
2. Box — `.ds-check__box`
3. Container — `.ds-choices`
4. Label — `.ds-label`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

Priority

- ○ Highest — Wakes up on-call
- ◉ High — Next in queue
- ○ Medium
- ○ Low
- ○ Trivial — Retired in this project

FLUENT-INSPIRED Structured · layered — `32px · r4/8 · 14px`

Priority

- ○ Highest — Wakes up on-call
- ◉ High — Next in queue
- ○ Medium
- ○ Low
- ○ Trivial — Retired in this project

APPLE-INSPIRED Minimal · refined — `36px · r10/14 · 15px`

Priority

- ○ Highest — Wakes up on-call
- ◉ High — Next in queue
- ○ Medium
- ○ Low
- ○ Trivial — Retired in this project

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	◉ High priority	◉ High priority	◉ High priority
Hover `:hover`	◉ High priority	◉ High priority	◉ High priority
Focus `:focus-visible`	◉ High priority	◉ High priority	◉ High priority

STATE	ATLASSIAN	FLUENT	APPLE
Active / pressed `:active`	High priority	High priority	High priority
Selected `aria-selected`	High priority	High priority	High priority
Disabled `:disabled`	High priority	High priority	High priority
Error `.is-error`	High priority	High priority	High priority

05 BEHAVIOUR

Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

06 ACCESSIBILITY

KEYBOARD

`Tab` Enter the group at the selected option

`↑ / ↓` Select previous / next option

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Native radios that share a `name`, inside a `fieldset`. Arrow keys move the selection within the group (native behaviour).

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Size	14px	16px	18px
Checked	Filled + white dot	Brand ring + brand dot	Filled + white dot
Option spacing	4px	8px	12px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border-input` `--a-color-on-primary` `--a-color-primary` `--a-danger` `--a-focus` `--a-separator` `--a-surface` `--a-surface-field` `--a-surface-sunken` `--a-text-subtlest`	`--f-color-on-primary` `--f-color-primary` `--f-danger` `--f-divider` `--f-focus-inner` `--f-focus-outer` `--f-stroke-accessible` `--f-surface-sunken` `--f-text`	`--p-border-strong` `--p-canvas` `--p-color-on-primary` `--p-color-primary` `--p-focus-halo` `--p-label-3` `--p-red` `--p-separator` `--p-surface`

COMPONENTS · FORMS

Switch

Turns a setting on or off immediately, without a save step.

6 states — sizes 3 languages `.ds-switch` `.ds-switch__track`

01 PURPOSE

Turns a setting on or off immediately, without a save step.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-switch`
2. Container — `.ds-switch__track`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

- Email notifications
- Auto-assign reviewers
- Show story points on cards
- Maintenance mode

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

- Email notifications
- Auto-assign reviewers
- Show story points on cards
- Maintenance mode

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

- Email notifications
- Auto-assign reviewers
- Show story points on cards
- Maintenance mode

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	Email notifications	Email notifications	Email notifications
Hover `:hover`	Email notifications	Email notifications	Email notifications
Focus `:focus-visible`	Email notifications	Email notifications	Email notifications
Active / pressed `:active`	Email notifications	Email notifications	Email notifications

STATE	ATLASSIAN	FLUENT	APPLE
Selected `aria-selected`	Email notifications	Email notifications	Email notifications
Disabled `:disabled`	Email notifications	Email notifications	Email notifications

05 BEHAVIOUR

Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

06 ACCESSIBILITY

KEYBOARD

`Tab` Move to the control

`Space` Toggle

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Native checkbox with `role="switch"`, so screen readers announce “on/off”. The label text is part of the click target.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Track	32 × 16, solid grey	40 × 20, outlined when off	46 × 28, soft fill
On colour	Success green	Brand blue	Success green
Thumb	12px white	14px, dark when off	24px white with shadow
Motion	150ms ease-out	200ms decelerate, stretches when pressed	320ms spring, stretches when pressed
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-focus --a-neutral-pressed --a-success --a-surface --a-text --a-text-disabled --a-toggle-off`	`--f-color-primary --f-divider --f-focus-inner --f-focus-outer --f-stroke-accessible --f-text --f-text-2 --f-text-disabled`	`--p-focus-halo --p-green --p-label --p-label-disabled`

COMPONENTS · FORMS

Slider

Choose a value from a continuous or stepped range.

3 states — sizes **3** languages `.ds-range .ds-slider-head`

01 PURPOSE

Choose a value from a continuous or stepped range.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container `.ds-range`
2. Container `.ds-slider-head`
3. Container `.ds-ticks`
4. Label `.ds-label`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Sprint capacity 34 pts

0 15 30 45 60

Alert threshold 80%

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Sprint capacity 34 pts

0 15 30 45 60

Alert threshold 80%

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Sprint capacity 34 pts

0 15 30 45 60

Alert threshold 80%

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`			
Focus `:focus-visible`			
Disabled `:disabled`			

05 BEHAVIOUR Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

06 ACCESSIBILITY

KEYBOARD

`← / →` Decrease / increase by one step

`Home / End` Minimum / maximum

`Page Up / Down` Larger steps

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Native `input type="range"` with a label. The current value is mirrored as text next to the label.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Track	4px, grey	4px, accessible stroke	4px, translucent fill
Thumb	16px white disc	20px ring with brand centre	24px white disc with shadow
Hover	None	Thumb grows 8%	None
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces

PROPERTY	ATLASSIAN	FLUENT	APPLE
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-focus` `--a-neutral-pressed` `--a-surface` `--a-text-subtlest`	`--f-color-primary` `--f-focus-inner` `--f-focus-outer` `--f-stroke` `--f-stroke-accessible` `--f-surface` `--f-text-3`	`--p-color-primary` `--p-focus-halo` `--p-label-3`

COMPONENTS · FORMS

Date Picker

Pick a single date from a calendar popover. The field shows the formatted date.

5 states — sizes **3** languages `.ds-cal .ds-day`

01 PURPOSE

Pick a single date from a calendar popover. The field shows the formatted date.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-cal`
2. Label — `.ds-label`
3. Current value — `.ds-val`
4. Helper / error text — `.ds-help`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Due date

Oct 25, 2026

Format: Oct 25, 2026

Inline calendar

October 2026

MO	TU	WE	TH	FR	SA	SU
28	29	30	1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	1
2	3	4	5	6	7	8

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Due date

Oct 25, 2026

Format: Oct 25, 2026

Inline calendar

October 2026

Mo	Tu	We	Th	Fr	Sa	Su
28	29	30	1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	1
2	3	4	5	6	7	8

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Due date

Oct 25, 2026

Format: Oct 25, 2026

Inline calendar

October 2026

MO	TU	WE	TH	FR	SA	SU
28	29	30	1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	1
2	3	4	5	6	7	8

04 STATES

Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	Due date Oct 25, 2026	Due date Oct 25, 2026	Due date Oct 25, 2026
Hover `:hover`	Due date Oct 25, 2026	Due date Oct 25, 2026	Due date Oct 25, 2026
Focus `:focus-visible`	Due date Oct 25, 2026	Due date Oct 25, 2026	Due date Oct 25, 2026
Disabled `:disabled`	Due date Oct 25, 2026	Due date Oct 25, 2026	Due date Oct 25, 2026
Error `.is-error`	Due date Select a date Pick a due date	Due date Select a date Pick a due date	Due date Select a date Pick a due date

05 BEHAVIOUR

Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

06 ACCESSIBILITY

KEYBOARD

`← → ↑ ↓` Move by day / week

`Page Up / Down` Previous / next month

`Enter` Pick the focused day

`Esc` Close the calendar

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The trigger opens a `role="dialog"` popover; focus moves to the selected or first day. Days are buttons with full spoken dates in `aria-label`.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Day cell	32px square, 3px radius	32px, 4px radius	38px circle
Today	Underlined primary	Filled brand circle	Red text
Selected	Primary fill	Brand outline + subtle fill	Tint-filled circle
Week header	Uppercase, bold	Regular	Uppercase, semibold
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-on-primary` `--a-color-primary` `--a-color-primary-subtle` `--a-focus` `--a-hover` `--a-separator` `--a-surface` `--a-text` `--a-text-disabled` `--a-text-subtlest`	`--f-color-on-primary` `--f-color-primary` `--f-color-primary-subtle` `--f-divider` `--f-focus-inner` `--f-focus-outer` `--f-subtle-hover` `--f-text` `--f-text-3` `--f-text-disabled`	`--p-color-on-primary` `--p-color-primary` `--p-color-primary-subtle` `--p-focus-halo` `--p-hover` `--p-label` `--p-label-3` `--p-label-disabled` `--p-red` `--p-separator`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`
Radius	–	`--f-radius`	–

COMPONENTS · FORMS

Date Range

Pick a start and end date. The first click sets the start, the second sets the end.

— states — sizes **3** languages `.ds-cal .ds-day`

01 PURPOSE

Pick a start and end date. The first click sets the start, the second sets the end.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-cal`
2. Label — `.ds-label`
3. Current value — `.ds-val`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Release window

Oct 20, 2026 – Oct 29, 2026

Next 7 days | Next 14 days | This month

October 2026

MO	TU	WE	TH	FR	SA	SU
28	29	30	1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	1
2	3	4	5	6	7	8

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Release window

Oct 20, 2026 – Oct 29, 2026

Next 7 days | Next 14 days | This month

October 2026

Mo	Tu	We	Th	Fr	Sa	Su
28	29	30	1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	1
2	3	4	5	6	7	8

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Release window

Oct 20, 2026 – Oct 29, 2026

Next 7 days | Next 14 days | This month

October 2026

MO	TU	WE	TH	FR	SA	SU
28	29	30	1	2	3	4
5	6	7	8	9	10	11
12	13	14	15	16	17	18
19	20	21	22	23	24	25
26	27	28	29	30	31	1
2	3	4	5	6	7	8

04 BEHAVIOUR Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

05 ACCESSIBILITY

KEYBOARD

`← → ↑ ↓` Move by day / week

`Enter` Set start, then end

`Esc` Close

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Same keyboard model as the date picker. The trigger text reads “start – end”, and announces “Select end date” after the first pick.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
In-range days	Square tint band	Square tint band	Soft tint band
End points	Primary fill	Brand outline	Tint-filled circles
Presets	Chips	Chips	Chips
Density	Compact	Medium	Spacious

PROPERTY	ATLASSIAN	FLUENT	APPLE
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-on-primary` `--a-color-primary` `--a-color-primary-subtle` `--a-focus` `--a-hover` `--a-separator` `--a-surface` `--a-text` `--a-text-disabled` `--a-text-subtlest`	`--f-color-on-primary` `--f-color-primary` `--f-color-primary-subtle` `--f-divider` `--f-focus-inner` `--f-focus-outer` `--f-subtle-hover` `--f-text` `--f-text-3` `--f-text-disabled`	`--p-color-on-primary` `--p-color-primary` `--p-color-primary-subtle` `--p-focus-halo` `--p-hover` `--p-label` `--p-label-3` `--p-label-disabled` `--p-red` `--p-separator`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`
Radius	–	`--f-radius`	–

COMPONENTS · FORMS

Time Picker

Choose a time from fixed intervals. Uses the same listbox model as Select.

4 states — sizes **3** languages `.ds-times` `.ds-select`

01 PURPOSE

Choose a time from fixed intervals. Uses the same listbox model as Select.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-times`	2 Container `.ds-select`	3 Option / item `.ds-opt`	4 Label `.ds-label`	5 Current value `.ds-val`
6 Chevron `.ds-chev`	7 Primary text `.ds-opt__main`	8 Label `.ds-opt__label`	9 Selection tick `.ds-opt__tick`	

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Stand-up time: 9:30 AM

End time: Choose a time

8:00 AM, 8:30 AM, 9:00 AM, 9:30 AM, 10:00 AM, 10:30 AM, 11:00 AM

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Stand-up time: 9:30 AM

End time: Choose a time

8:00 AM, 8:30 AM, 9:00 AM, 9:30 AM ✓, 10:00 AM, 10:30 AM, 11:00 AM


APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Stand-up time: 9:30 AM

End time: Choose a time

8:00 AM, 8:30 AM, 9:00 AM, 9:30 AM ✓, 10:00 AM, 10:30 AM

04 STATES Forced with state classes so every state is visible at once.

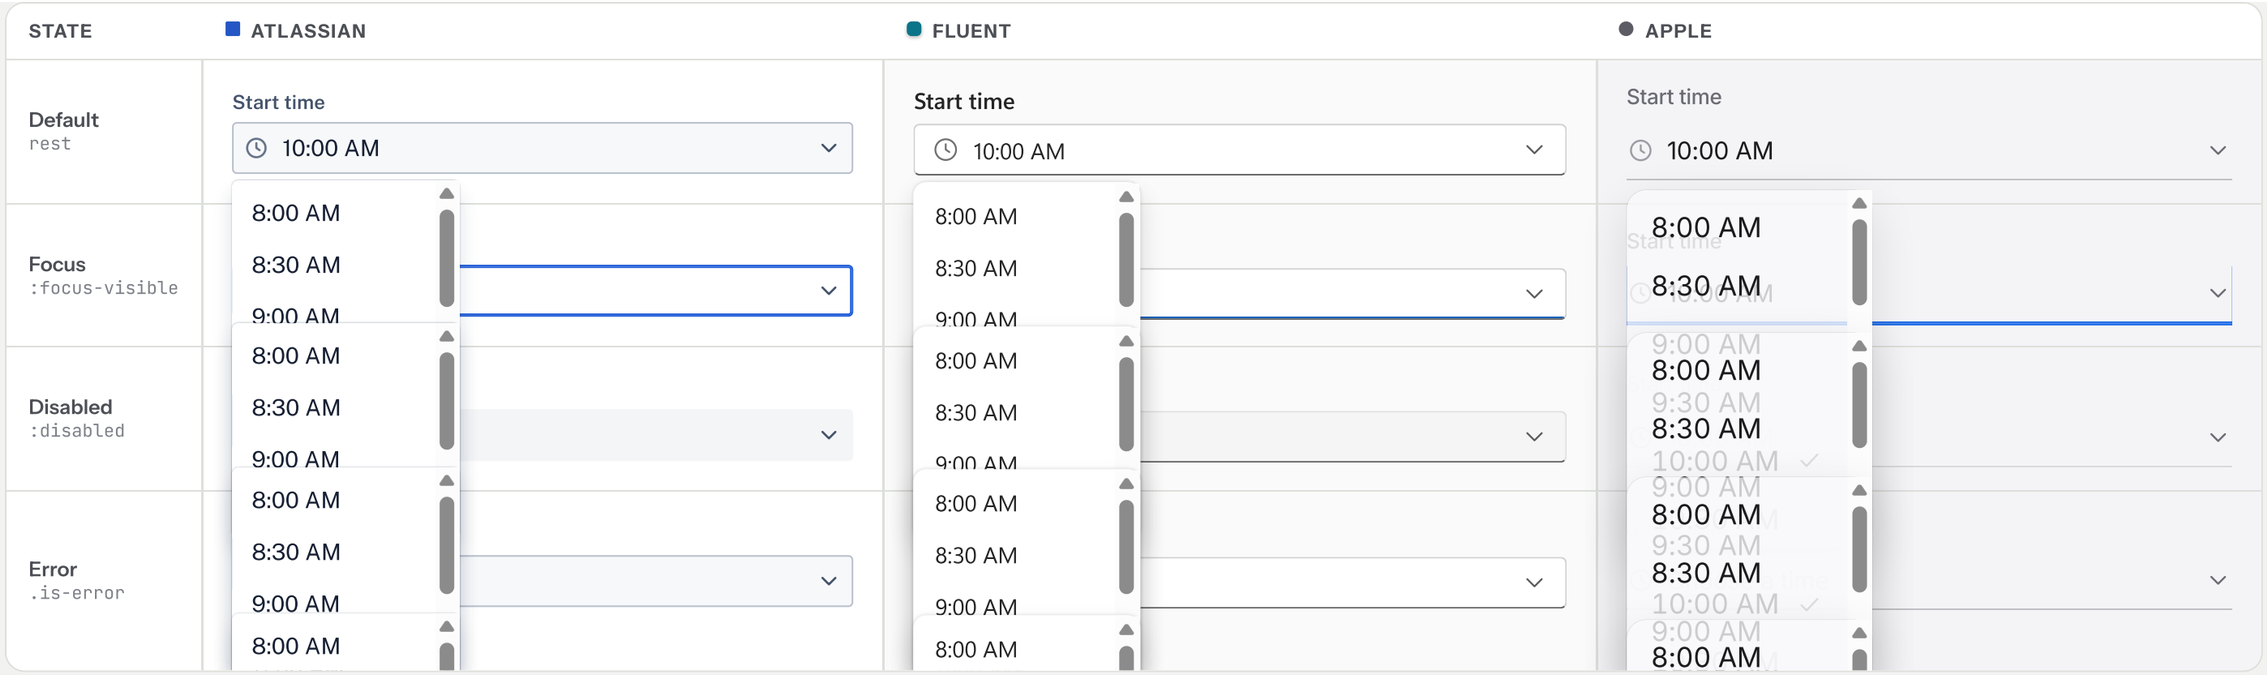

05 BEHAVIOUR Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

06 ACCESSIBILITY

KEYBOARD

`↓ / ↑` Open and move through options

`Enter` Choose the highlighted option

`Esc` Close without choosing

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

A select-only combobox with a scrollable `listbox`; the selected time scrolls into view when opened.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop ≥ 1180px

Two-column form grids where fields are short

Tablet 700–1179px

Two columns collapse to one below ~720px

Mobile < 700px

Single column; Large controls for touch; popups stay anchored to the field

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Interval	30 minutes	30 minutes	30 minutes
List style	Left-aligned rows	Left-aligned rows	Centred, larger numerals (wheel feel)
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-color-primary-subtle` `--a-danger` `--a-hover` `--a-text` `--a-text-disabled` `--a-text-subtle` `--a-text-subtlest`	`--f-color-primary` `--f-danger` `--f-subtle-hover` `--f-subtle-pressed` `--f-text` `--f-text-2` `--f-text-3` `--f-text-disabled`	`--p-color-primary` `--p-label` `--p-label-2` `--p-label-3` `--p-label-disabled` `--p-red`
Radius	–	`--f-radius`	–

COMPONENTS · FORMS

File Upload

Drop files or browse to attach them. Shows per-file progress and lets the user remove files.

4 states — sizes **3** languages `.ds-drop` `.ds-files`

01 PURPOSE

Drop files or browse to attach them. Shows per-file progress and lets the user remove files.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-drop`	2 Container `.ds-files`	3 Container `.ds-file`	4 Label `.ds-label`	5 Icon `.ds-drop__ic`
6 T `.ds-drop__t`	7 Metadata `.ds-file__meta`	8 File name `.ds-file__name`	9 Secondary text `.ds-file__sub`	

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Attachments

Drop files here or browse

PDF, PNG or CSV · up to 25 MB each

rollback-plan.pdf
822 KB · Uploaded

schema-diff-v2.csv
2.2 MB · Uploaded

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Attachments

Drop files here or browse

PDF, PNG or CSV · up to 25 MB each

rollback-plan.pdf
822 KB · Uploaded

schema-diff-v2.csv
2.2 MB · Uploaded

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Attachments











Drop files here or browse

PDF, PNG or CSV · up to 25 MB each

rollback-plan.pdf
822 KB · Uploaded

schema-diff-v2.csv
2.2 MB · Uploaded

04 STATES Forced with state classes so every state is visible at once.

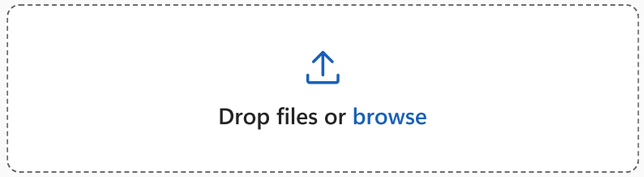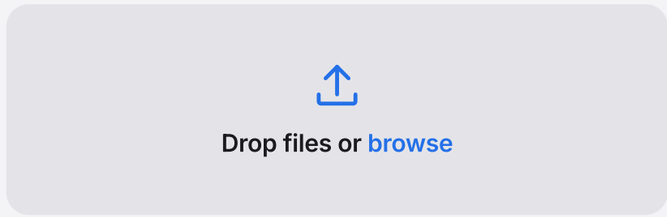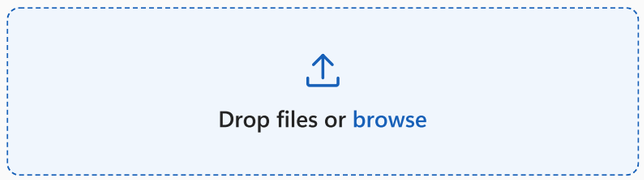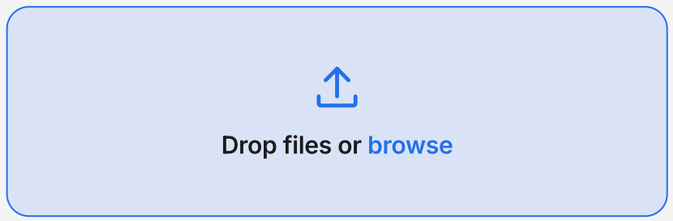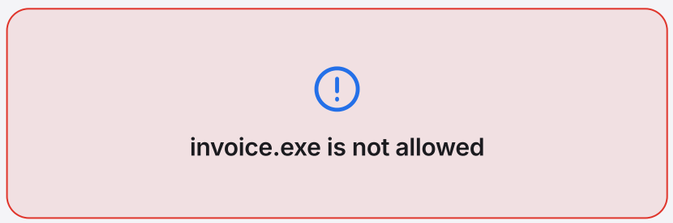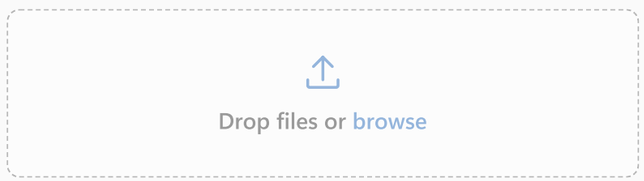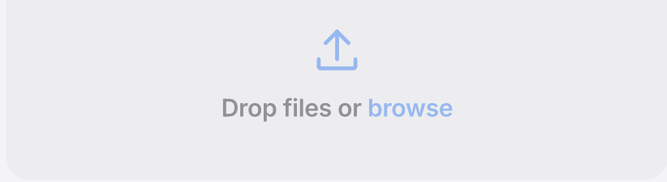STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`			
Hover `:hover`			
Error `.is-error`			
Disabled `:disabled`			

05 BEHAVIOUR

Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

06 ACCESSIBILITY

KEYBOARD

`Tab` Focus the drop zone

`Enter / Space` Open the file dialog

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

A real `input type="file"` covers the drop zone, so it works by keyboard and screen reader. Each upload has a `progressbar` with a label.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Drop zone	2px dashed frame, compact	1px dashed, 8px radius	Soft fill, no dashes, 14px radius
File rows	Bordered rows	Raised cards (shadow 2)	Plain rows with separators
Progress	6px bar	2px bar	4px bar
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border` `--a-border-input` `--a-color-link` `--a-color-primary` `--a-color-primary-subtle` `--a-danger` `--a-danger-bg` `--a-focus` `--a-surface` `--a-surface-field` `--a-text-subtlest`	`--f-color-link` `--f-color-primary` `--f-danger` `--f-danger-bg` `--f-focus-inner` `--f-focus-outer` `--f-info-bg` `--f-stroke-accessible` `--f-surface` `--f-text-3`	`--p-color-link` `--p-color-primary` `--p-color-primary-subtle` `--p-fill` `--p-focus-halo` `--p-label-3` `--p-red` `--p-red-bg` `--p-separator`
Radius	`--a-radius`	`--f-radius` `--f-radius-lg`	`--p-radius` `--p-radius-lg`
Elevation	–	`--f-shadow-2`	–

COMPONENTS · FORMS

Color Picker

Pick a colour from a curated palette, or enter a hex value.

— states — sizes 3 languages `.ds-swatches` `.ds-swatch`

01 PURPOSE

Pick a colour from a curated palette, or enter a hex value.

It is part of the **Forms** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-swatches`	2 Container `.ds-swatch`	3 Container `.ds-color-preview`	4 Label `.ds-label`	5 Helper / error text `.ds-help`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Project colour

Hex

#2F7D6A

Hex value, 6 digits

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Project colour

Hex

#2F7D6A

Hex value, 6 digits

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Project colour

Hex

#2F7D6A

Hex value, 6 digits

04 BEHAVIOUR Identical in all three languages.

Values change on input; validation runs on change or submit, never on the first keystroke. Popups open from the keyboard and return focus to their trigger.

05 ACCESSIBILITY

KEYBOARD

`← → ↑ ↓` Move between swatches

`Tab` Move to the hex field

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Swatches form a `radiogroup` with roving focus; arrow keys move and select. The hex field validates on change and explains the expected format.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Two-column form grids where fields are short

Tablet `700–1179px`

Two columns collapse to one below ~720px

Mobile `< 700px`

Single column; Large controls for touch; popups stay anchored to the field

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Swatch	24px square	28px, 4px radius	28px circle, grows on hover
Selected	Ring + check	Ring + check	Ring + check
Gap	4px	8px	12px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-focus` `--a-surface`	`--f-canvas` `--f-focus-inner` `--f-focus-outer`	`--p-canvas` `--p-focus-halo`
Radius	`--a-radius-sm`	`--f-radius`	—
Sizing	`--a-height-md`	`--f-height-md`	`--p-height-md`

COMPONENTS · NAVIGATION

Header

The application bar: product mark, primary navigation, search and account actions.

— states — sizes 3 languages `.ds-header` `.ds-hnav`

01 PURPOSE

The application bar: product mark, primary navigation, search and account actions.

It is part of the **Navigation** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-header`
2. Container — `.ds-hnav`
3. Container — `.ds-logo`
4. Trailing content — `.ds-header__end`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.


ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px



FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px



APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px



04 BEHAVIOUR Identical in all three languages.

Selection updates immediately and is reflected with aria-current or aria-selected. Composite widgets use roving focus and arrow keys.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Primary navigation is a labelled `nav`; the current page uses `aria-current="page"`. Icon buttons carry names and tooltips.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Full header and sidebar

Tablet `700–1179px`

Sidebar collapses to a menu button; tabs scroll sideways

Mobile `< 700px`

Menu button + drawer; breadcrumbs truncate the middle levels

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Height	48px	48px	52px
Surface	White, bottom border	White card, shadow 4, rounded	Translucent blur material, hairline
Current page	3px bar at bottom edge	Bold label + bar	Bold label only
Nav item spacing	Tight, hover fills	4px, rounded hover	20px, text only
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely

PROPERTY	ATLASSIAN	FLUENT	APPLE
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-focus` `--a-hover` `--a-separator` `--a-surface` `--a-text` `--a-text-subtle`	`--f-color-primary` `--f-focus-inner` `--f-focus-outer` `--f-subtle-hover` `--f-surface` `--f-text` `--f-text-2`	`--p-color-primary` `--p-focus-halo` `--p-label` `--p-label-2` `--p-material` `--p-separator` `--p-surface`
Radius	–	`--f-radius` `--f-radius-lg`	`--p-radius-lg`
Elevation	–	`--f-shadow-4`	–

COMPONENTS · NAVIGATION

Sidebar

Vertical product navigation with sections, nesting, counters and a clear current item.

— states — sizes 3 languages `.ds-side .ds-side__item`

01 PURPOSE

Vertical product navigation with sections, nesting, counters and a clear current item.

It is part of the **Navigation** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-side`
2. Container — `.ds-side__item`
3. Container — `.ds-side__head`
4. Container — `.ds-side__sub`
5. Badge — `.ds-side__badge`
6. Chevron — `.ds-side__chev`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

WORKSPACE
- Home
- Inbox 12
- Projects
  - Ledger Migration
  - Design System
  - Mobile App

INSIGHTS
- Reports
- Settings

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Workspace
- Home
- Inbox 12
- Projects
  - Ledger Migration
  - Design System
  - Mobile App

Insights
- Reports
- Settings

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Workspace
- Home
- Inbox 12
- Projects
  - Ledger Migration
  - Design System
  - Mobile App

Insights
- Reports
- Settings

04 BEHAVIOUR Identical in all three languages.

Selection updates immediately and is reflected with aria-current or aria-selected. Composite widgets use roving focus and arrow keys.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move between items

`Enter` Open the item or toggle a section

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Wrapped in a labelled `nav`. Expandable sections use `aria-expanded` and `aria-controls`; the current destination has `aria-current`.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Full header and sidebar

Tablet `700–1179px`

Sidebar collapses to a menu button; tabs scroll sideways

Mobile `< 700px`

Menu button + drawer; breadcrumbs truncate the middle levels

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Width	240px	260px	250px
Surface	Sunken grey	White, shadow 4	Translucent material
Current item	Tint fill + primary text	Grey fill + 3px brand bar	Grey fill, tint icon
Section headers	11px uppercase	12px semibold	12px semibold, grey
Row height	32px	36px	32px

PROPERTY	ATLASSIAN	FLUENT	APPLE
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary --a-color-primary-subtle --a-focus --a-hover --a-surface --a-surface-sunken --a-text --a-text-subtle --a-text-subtlest`	`--f-color-primary --f-focus-inner --f-focus-outer --f-subtle-hover --f-surface --f-text --f-text-2 --f-text-3`	`--p-color-primary --p-fill --p-focus-halo --p-hover --p-label --p-label-3 --p-material`
Radius	`--a-radius --a-radius-sm`	`--f-radius --f-radius-lg`	`--p-radius-lg`
Elevation	–	`--f-shadow-4`	–

COMPONENTS · NAVIGATION

Breadcrumb

Shows where the current page sits in the hierarchy and links to each parent.

— states — sizes 3 languages `.ds-crumbs .ds-crumb`

01 PURPOSE

Shows where the current page sits in the hierarchy and links to each parent.

It is part of the **Navigation** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container `.ds-crumbs`
2. Container `.ds-crumb`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Projects / Ledger Migration / Backlog / DS-142

Projects / ··· / Epics / Billing v2

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Projects › Ledger Migration › Backlog › DS-142

Projects › ··· › Epics › Billing v2

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Projects › Ledger Migration › Backlog › DS-142

Projects › ··· › Epics › Billing v2

04 BEHAVIOUR Identical in all three languages.

Selection updates immediately and is reflected with aria-current or aria-selected. Composite widgets use roving focus and arrow keys.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

An ordered list inside `nav aria-label="Breadcrumb"`. The last item is plain text with `aria-current="page"`; separators are generated in CSS so they are not read aloud.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Full header and sidebar

Tablet `700–1179px`

Sidebar collapses to a menu button; tabs scroll sideways

Mobile `< 700px`

Menu button + drawer; breadcrumbs truncate the middle levels

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Separator	Slash “/”	Chevron icon	Thin “›”
Parent links	Grey, underline on hover	Grey, hover fills	Tint-coloured
Current page	Regular text	Semibold	Medium weight
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-focus` `--a-surface` `--a-text` `--a-text-subtle` `--a-text-subtlest`	`--f-focus-inner` `--f-focus-outer` `--f-subtle-hover` `--f-text` `--f-text-2` `--f-text-3`	`--p-color-link` `--p-focus-halo` `--p-label` `--p-label-3`
Radius	`--a-radius-sm`	`--f-radius-sm`	`--p-radius-sm`

COMPONENTS · NAVIGATION

Tabs

Switch between related views of the same object without leaving the page.

5 states — sizes **3** languages `.ds-tabs` `.ds-tablist`

01 PURPOSE

Switch between related views of the same object without leaving the page.

It is part of the **Navigation** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Tabs container `.ds-tabs`	2 Tab list `.ds-tablist`	3 Tab `.ds-tab`	4 Selection indicator `.ds-tabind`	5 Tab panel `.ds-tabpanel`
6 Icon `.ds-tab__ic`	7 Counter `.ds-tab__count`			

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Overview Details Activity 12 Settings

Move invoices, line items and tax tables to the v2 schema without downtime.

Day Week Month

17 issues due this week.

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Overview Details Activity 12 Setti

Move invoices, line items and tax tables to the v2 schema without downtime.

Day Week Month

17 issues due this week.

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Overview Details Activity 12 Settings

Move invoices, line items and tax tables to the v2 schema without downtime.

Day Week Month

17 issues due this week.

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	Overview Details Activity 12	Overview Details Activity 12	Overview Details Activity 12

STATE	ATLASSIAN	FLUENT	APPLE
Hover `:hover`	Overview Details Activity 12	Overview Details Activity 12	Overview Details Activity 12
Focus `:focus-visible`	Overview Details Activity 12	Overview Details Activity 12	Overview Details Activity 12
Active / pressed `:active`	Overview Details Activity 12	Overview Details Activity 12	Overview Details Activity 12
Disabled `:disabled`	Overview Details Activity 12	Overview Details Activity 12	Overview Details Activity 12

05 BEHAVIOUR

Identical in all three languages.

Selection updates immediately and is reflected with aria-current or aria-selected. Composite widgets use roving focus and arrow keys.

06 ACCESSIBILITY

KEYBOARD

`← / →` Previous / next tab (selects automatically)

`Home / End` First / last tab

`Tab` Move into the panel

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Implements the ARIA tabs pattern: `tablist`, `tab` with `aria-selected` and `aria-controls`, and `tabpanel`. Only the selected tab is in the tab order (roving tabindex).

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop ≥ 1180px

Full header and sidebar

Tablet 700–1179px

Sidebar collapses to a menu button; tabs scroll sideways

Mobile < 700px

Menu button + drawer; breadcrumbs truncate the middle levels

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Indicator	2px bar on a 2px track	3px rounded bar, inset under the label	Sliding white thumb in a grey track
Selected label	Primary colour, semibold	Body colour, semibold, icon in brand	Semibold
Hover	Grey bar preview	Grey bar preview + pressed fill	Label dims
Height	36px	44px	30px segmented
Icons	Hidden	Shown	Hidden
Indicator motion	150ms	250ms	320ms
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border-input` `--a-color-primary` `--a-focus` `--a-hover` `--a-neutral` `--a-separator` `--a-surface` `--a-text` `--a-text-disabled` `--a-text-subtle`	`--f-color-primary` `--f-focus-inner` `--f-focus-outer` `--f-stroke` `--f-stroke-accessible` `--f-subtle-hover` `--f-surface` `--f-text` `--f-text-2` `--f-text-disabled`	`--p-fill` `--p-focus-halo` `--p-label` `--p-label-2` `--p-label-3` `--p-label-disabled` `--p-separator` `--p-surface`
Radius	`--a-radius-sm`	`--f-radius` `--f-radius-sm`	`--p-radius-sm`

COMPONENTS · NAVIGATION

Pagination

Move through large result sets one page at a time.

— states — sizes 3 languages `.ds-pager .ds-pg`

01 PURPOSE

Move through large result sets one page at a time.

It is part of the **Navigation** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container
   `.ds-pager`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

‹ 1 2 3 4 … 12 ›

Showing 21–30 of 118

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

‹ 1 2 3 4 … 12 ›

Showing 21–30 of 118

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

‹ 1 2 3 4 … 12 ›

Showing 21–30 of 118

04 BEHAVIOUR Identical in all three languages.

Selection updates immediately and is reflected with aria-current or aria-selected. Composite widgets use roving focus and arrow keys.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move between pages

`Enter` Go to page

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

A labelled `nav`; the current page uses `aria-current="page"`. Previous / next are disabled at the ends. A live region announces the visible range.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Full header and sidebar

Tablet `700–1179px`

Sidebar collapses to a menu button; tabs scroll sideways

Mobile `< 700px`

Menu button + drawer; breadcrumbs truncate the middle levels

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Page button	32px, 3px radius	32px, 4px radius	34px circle
Current page	Tint + primary text	Solid brand fill	Inverted (dark) circle
Prev / next	Subtle icon buttons	Outlined buttons	Tint-coloured chevrons
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-color-primary-subtle` `--a-focus` `--a-hover` `--a-surface` `--a-text-disabled` `--a-text-subtle` `--a-text-subtlest`	`--f-color-on-primary` `--f-color-primary` `--f-focus-inner` `--f-focus-outer` `--f-stroke` `--f-subtle-hover` `--f-text` `--f-text-3` `--f-text-disabled`	`--p-color-primary` `--p-focus-halo` `--p-hover` `--p-label` `--p-label-2` `--p-label-3` `--p-label-disabled` `--p-surface`
Radius	`--a-radius-sm`	`--f-radius`	—

COMPONENTS · NAVIGATION

Stepper

Shows progress through a multi-step flow and where the user is now.

— states — sizes 3 languages `.ds-steps .ds-step`

01 PURPOSE

Shows progress through a multi-step flow and where the user is now.

It is part of the **Navigation** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-steps`
2. Container — `.ds-step`
3. Container — `.ds-step__dot`
4. Container — `.ds-step__label`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Account — 2 Workspace — 3 Invite team — 4 Review

Step 2 of 4: Workspace

Back Continue

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Account — Name and email

2 Workspace — Choose a URL

3 Invite team — Optional

4 Review — Confirm details

Step 2 of 4: Workspace

Back Continue

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Account — Name and email

Workspace — Choose a URL

Invite team — Optional

Review — Confirm details

Step 2 of 4: Workspace

Back Continue

04 BEHAVIOUR Identical in all three languages.

Selection updates immediately and is reflected with aria-current or aria-selected. Composite widgets use roving focus and arrow keys.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move focus to the button

`Enter / Space` Activate

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

An ordered list; the current step has `aria-current="step"`. Step changes are announced through a polite live region.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Full header and sidebar

Tablet `700–1179px`

Sidebar collapses to a menu button; tabs scroll sideways

Mobile `< 700px`

Menu button + drawer; breadcrumbs truncate the middle levels

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Layout	Inline: disc + label on one row	Discs above labels, centred	Segmented progress bar, no discs
Completed	Primary disc with check	Brand disc with check	Filled segment
Current	Ring	Ring + shadow	Half-filled segment, bold label
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-on-primary` `--a-color-primary` `--a-neutral` `--a-separator` `--a-surface` `--a-text` `--a-text-subtle`	`--f-color-on-primary` `--f-color-primary` `--f-stroke` `--f-stroke-accessible` `--f-surface` `--f-text` `--f-text-2`	`--p-color-primary` `--p-fill` `--p-label` `--p-label-2` `--p-label-3`
Elevation	–	`--f-shadow-4`	–

COMPONENTS · NAVIGATION

Menu

A list of actions with icons, shortcuts, toggles, a submenu hint and destructive items.

— states — sizes **3** languages `.ds-menu__head` `.ds-menu__sep`

01 PURPOSE

A list of actions with icons, shortcuts, toggles, a submenu hint and destructive items.

It is part of the **Navigation** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Section header `.ds-menu__head`	2 Separator `.ds-menu__sep`	3 Option / item `.ds-opt`	4 Popup surface `.ds-pop`	5 Label `.ds-opt__label`
6 Secondary text `.ds-opt__sub`	7 Selection tick `.ds-opt__tick`			

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

ISSUE
Edit issue E
Duplicate Ctrl D
Move to...
Watch issue
Export as CSV
Delete Del

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Issue
Edit issue E
Duplicate Ctrl D
Move to...
Watch issue
Export as CSV
Delete Del

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Issue
Edit issue E
Duplicate Ctrl D
Move to...
Watch issue
Export as CSV
Delete Del

04 BEHAVIOUR Identical in all three languages.

Selection updates immediately and is reflected with aria-current or aria-selected. Composite widgets use roving focus and arrow keys.

05 ACCESSIBILITY

KEYBOARD

`Enter / ↓` Open the menu and focus the first item

`↑ / ↓ · Home / End` Move between items

`Esc` Close and return focus

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

`role="menu"` with `menuitem` and `menuitemcheckbox` children. Disabled items stay focusable-off and announce as unavailable via `aria-disabled`.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Full header and sidebar

Tablet `700–1179px`

Sidebar collapses to a menu button; tabs scroll sideways

Mobile `< 700px`

Menu button + drawer; breadcrumbs truncate the middle levels

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Item height	32px	32px	30px
Hover	Grey row	Grey rounded row	Solid tint, white text
Section header	11px uppercase	12px semibold	12px semibold
Surface	Flat white, 4px radius	White, 8px radius, shadow 16	Blur material, 12px radius
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely

PROPERTY	ATLASSIAN	FLUENT	APPLE
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-color-primary-subtle` `--a-danger` `--a-hover` `--a-separator` `--a-surface-overlay` `--a-text` `--a-text-disabled` `--a-text-subtle` `--a-text-subtlest`	`--f-color-primary` `--f-danger` `--f-divider` `--f-subtle-hover` `--f-subtle-pressed` `--f-surface-overlay` `--f-text` `--f-text-2` `--f-text-3` `--f-text-disabled`	`--p-color-primary` `--p-label` `--p-label-2` `--p-label-3` `--p-label-disabled` `--p-material` `--p-red` `--p-separator`
Radius	`--a-radius`	`--f-radius` `--f-radius-lg`	—
Elevation	`--a-shadow-overlay`	`--f-shadow-16`	`--p-shadow-float`

COMPONENTS · NAVIGATION

Dropdown

A button that opens a menu of actions. Use for overflow and secondary actions.

— states — sizes 3 languages `.ds-anchor .ds-pop`

01 PURPOSE

A button that opens a menu of actions. Use for overflow and secondary actions.

It is part of the **Navigation** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Positioning anchor — `.ds-anchor`
2. Popup surface — `.ds-pop`
3. Option / item — `.ds-opt`
4. Section header — `.ds-menu__head`
5. Label — `.ds-opt__label`
6. Secondary text — `.ds-opt__sub`
7. Separator — `.ds-menu__sep`
8. Selection tick — `.ds-opt__tick`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3–4 · 14px

Actions MR

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Actions MR

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Actions MR

04 BEHAVIOUR Identical in all three languages.

Selection updates immediately and is reflected with aria-current or aria-selected. Composite widgets use roving focus and arrow keys.

05 ACCESSIBILITY

KEYBOARD

`Enter / ↓` Open the menu and focus the first item

`↑ / ↓ · Home / End` Move between items

`Esc` Close and return focus

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Trigger has `aria-haspopup="menu"` and `aria-expanded`. Focus moves into the menu on open and returns to the trigger on Esc.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Full header and sidebar

Tablet `700–1179px`

Sidebar collapses to a menu button; tabs scroll sideways

Mobile `< 700px`

Menu button + drawer; breadcrumbs truncate the middle levels

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Trigger	Default button + chevron	Default button + chevron	Tinted button + chevron
Open motion	120ms fade	200ms fade + slide	220ms fade + scale
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo

PROPERTY	ATLASSIAN	FLUENT	APPLE
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-color-primary-subtle` `--a-danger` `--a-hover` `--a-surface-overlay` `--a-text` `--a-text-disabled` `--a-text-subtle` `--a-text-subtlest`	`--f-color-primary` `--f-danger` `--f-subtle-hover` `--f-subtle-pressed` `--f-surface-overlay` `--f-text` `--f-text-2` `--f-text-3` `--f-text-disabled`	`--p-color-primary` `--p-label` `--p-label-2` `--p-label-3` `--p-label-disabled` `--p-material` `--p-red`
Radius	`--a-radius`	`--f-radius` `--f-radius-lg`	—
Elevation	`--a-shadow-overlay`	`--f-shadow-16`	`--p-shadow-float`

COMPONENTS · NAVIGATION

Context Menu

Actions for an object, opened with right-click or the keyboard context-menu key.

— states — sizes **3** languages `.ds-pop--ctx .ds-ctx-area`

01 PURPOSE

Actions for an object, opened with right-click or the keyboard context-menu key.

It is part of the **Navigation** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-pop--ctx`
2. Container — `.ds-ctx-area`
3. Separator — `.ds-menu__sep`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

rollback-plan.pdf

schema-diff-v2.csv

ADR-012 billing.md

Right-click anywhere here, or focus and press Shift+F10.

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

rollback-plan.pdf

schema-diff-v2.csv

ADR-012 billing.md

Right-click anywhere here, or focus and press Shift+F10.

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

rollback-plan.pdf

schema-diff-v2.csv

ADR-012 billing.md

Right-click anywhere here, or focus and press Shift+F10.

04 BEHAVIOUR Identical in all three languages.

Selection updates immediately and is reflected with aria-current or aria-selected. Composite widgets use roving focus and arrow keys.

05 ACCESSIBILITY

KEYBOARD

`Shift + F10` Open the context menu

`↑ / ↓ · Home / End` Move between items

`Esc` Close and return focus

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The area is focusable and opens the menu with Shift+F10 or the ContextMenu key, so it does not depend on a mouse.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Full header and sidebar

Tablet `700–1179px`

Sidebar collapses to a menu button; tabs scroll sideways

Mobile `< 700px`

Menu button + drawer; breadcrumbs truncate the middle levels

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Position	At pointer	At pointer	At pointer
Surface	Same as menu	Same as menu	Same as menu (blur material)
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

This component reads only semantic aliases shared with its children.

COMPONENTS · NAVIGATION

Tree

Hierarchical navigation that expands and collapses. Used for project files, epics and folder structures.

— states — sizes 3 languages `.ds-tree .ds-tree__row`

01 PURPOSE

Hierarchical navigation that expands and collapses. Used for project files, epics and folder structures.

It is part of the **Navigation** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-tree`	2 Container `.ds-tree__row`	3 Container `.ds-tree__tw`	4 Leaf `.ds-tree__leaf`	5 Metadata `.ds-tree__meta`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

- Ledger Migration
  - Epics
    - Billing tables 8
    - Invoices API 5
  - Docs
  - Releases 4
- Design System

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

- Ledger Migration
  - Epics
    - Billing tables 8
    - Invoices API 5
  - Docs
  - Releases 4
- Design System

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

- Ledger Migration
  - Epics
    - Billing tables 8
    - Invoices API 5
  - Docs
  - Releases 4
- Design System

04 BEHAVIOUR Identical in all three languages.

Selection updates immediately and is reflected with aria-current or aria-selected. Composite widgets use roving focus and arrow keys.

05 ACCESSIBILITY

KEYBOARD

`↑ / ↓` Previous / next visible row

`→` Expand, then move to first child

`←` Collapse, then move to parent

`Enter` Select

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

ARIA tree: `role="tree"`, `treeitem` with `aria-expanded` and `aria-selected`, nested `groups`. One row is tabbable at a time.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Full header and sidebar

Tablet `700–1179px`

Sidebar collapses to a menu button; tabs scroll sideways

Mobile `< 700px`

Menu button + drawer; breadcrumbs truncate the middle levels

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Row height	28px	32px	30px
Indent	16px	20px	18px
Selected	Tint + primary text	Grey fill + 3px brand bar, bold	Solid tint, white text
Folder icons	Grey	Brand colour	Tint colour
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-color-primary-subtle` `--a-hover` `--a-text` `--a-text-subtle` `--a-text-subtlest`	`--f-color-primary` `--f-subtle-hover` `--f-text` `--f-text-3`	`--p-color-primary` `--p-hover` `--p-label` `--p-label-3`
Radius	`--a-radius-sm`	`--f-radius`	–

COMPONENTS · DATA DISPLAY

Table

Displays records in rows and columns. Columns sort on click.

— states — sizes 3 languages `.ds-tablewrap .ds-table`

01 PURPOSE

Displays records in rows and columns. Columns sort on click.

It is part of the **Data Display** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-tablewrap`
2. Container — `.ds-table`
3. Sort button — `.ds-sort`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3–4 · 14px`

Backlog · Sprint 42

6 issues

Key	Summary	Status	Assignee	Points	Updated ↑
DS-142	Migrate billing tables to new schema	IN PROGRESS	MR Maya Ruiz	8	2h ago
DS-139	Audit focus rings across admin console	IN REVIEW	JO Jonas Ortiz	3	5h ago
DS-137	Invoices API returns stale currency codes	BLOCKED	AK Aiko Kato	5	Yesterday
DS-131	Add bulk export to reports view	TO DO	LS Liam Shah	2	2d ago
DS-128	Rename workspace roles in settings	DONE	PN Priya Nair	1	4d ago
DS-125	Reduce dashboard first paint below 1.5s	IN PROGRESS	MR Maya Ruiz	13	5d ago

FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

Backlog · Sprint 42

6 issues

Key	Summary	Status	Assignee	Points	Updated ↑
DS-142	Migrate billing tables to new schema	In progress	MR Maya Ruiz	8	2h ago
DS-139	Audit focus rings across admin console	In review	JO Jonas Ortiz	3	5h ago
DS-137	Invoices API returns stale currency codes	Blocked	AK Aiko Kato	5	Yesterday
DS-131	Add bulk export to reports view	To do	LS Liam Shah	2	2d ago
DS-128	Rename workspace roles in settings	Done	PN Priya Nair	1	4d ago
DS-125	Reduce dashboard first paint below 1.5s	In progress	MR Maya Ruiz	13	5d ago

APPLE-INSPIRED Minimal · refined

36px · r10/14 · 15px

Backlog · Sprint 42

6 issues

Key	Summary	Status	Assignee	Points	Updated ↑
DS-142	Migrate billing tables to new schema	In progress	MR Maya Ruiz	8	2h ago
DS-139	Audit focus rings across admin console	In review	JO Jonas Ortiz	3	5h ago
DS-137	Invoices API returns stale currency codes	Blocked	AK Aiko Kato	5	Yesterday
DS-131	Add bulk export to reports view	To do	LS Liam Shah	2	2d ago
DS-128	Rename workspace roles in settings	Done	PN Priya Nair	1	4d ago
DS-125	Reduce dashboard first paint below 1.5s	In progress	MR Maya Ruiz	13	5d ago

04 BEHAVIOUR

Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move to a sortable header

`Enter` Sort / reverse sort

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

A native `table` with a caption and `th scope="col"`. Sortable headers are buttons; `aria-sort` sits on the `th`. Sort changes are announced in a live region.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Row height	36px	44px	48px
Header	12px bold, grey, 2px rule	14px semibold, 1px rule	12px regular, tertiary grey
Row separation	1px lines	1px lines	Zebra stripes, no lines
Container	None (sits on page)	Card with shadow 4	Rounded, borderless
Sorted column	Bold header + arrow	Arrow	Tint-coloured header
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary-subtle` `--a-focus` `--a-separator` `--a-surface` `--a-surface-sunken` `--a-text` `--a-text-subtle`	`--f-color-primary` `--f-color-primary-subtle` `--f-divider` `--f-focus-inner` `--f-focus-outer` `--f-subtle-hover` `--f-subtle-pressed` `--f-surface` `--f-text`	`--p-color-primary` `--p-fill` `--p-focus-halo` `--p-hover` `--p-label` `--p-label-3` `--p-separator` `--p-surface`
Radius	`--a-radius-sm`	`--f-radius-lg` `--f-radius-sm`	`--p-radius-lg` `--p-radius-sm`
Elevation	–	`--f-shadow-4`	–

COMPONENTS · DATA DISPLAY

Data Grid

A table with row selection, bulk actions and inline editing.

— states — sizes 3 languages `.ds-table .ds-tbar`

01 PURPOSE

A table with row selection, bulk actions and inline editing.

It is part of the **Data Display** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-table`	2 Container `.ds-tbar`	3 Container `.ds-editable`	4 Selection count `.ds-tbar__sel`	5 Sort button `.ds-sort`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

No issues selected — Assign | Move | Delete

Key	Summary	Status	Assignee	Points	Updated ↑
DS-142	Migrate billing tables to new schema	IN PROGRESS	MR Maya Ruiz	8	2h ago
DS-139	Audit focus rings across admin console	IN REVIEW	JO Jonas Ortiz	3	5h ago
DS-137	Invoices API returns stale currency codes	BLOCKED	AK Aiko Kato	5	Yesterday
DS-131	Add bulk export to reports view	TO DO	LS Liam Shah	2	2d ago
DS-128	Rename workspace roles in settings	DONE	PN Priya Nair	1	4d ago
DS-125	Reduce dashboard first paint below 1.5s	IN PROGRESS	MR Maya Ruiz	13	5d ago

Select rows to enable bulk actions. Double-click or press Enter on a summary to edit it.

FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

No issues selected

Assign Move Delete

	Key	Summary	Status	Assignee	Points	Updated ↑
☐	DS-142	Migrate billing tables to new schema	In progress	MR Maya Ruiz	8	2h ago
☐	DS-139	Audit focus rings across admin console	In review	JO Jonas Ortiz	3	5h ago
☐	DS-137	Invoices API returns stale currency codes	Blocked	AK Aiko Kato	5	Yesterday
☐	DS-131	Add bulk export to reports view	To do	LS Liam Shah	2	2d ago
☐	DS-128	Rename workspace roles in settings	Done	PN Priya Nair	1	4d ago
☐	DS-125	Reduce dashboard first paint below 1.5s	In progress	MR Maya Ruiz	13	5d ago

Select rows to enable bulk actions. Double-click or press Enter on a summary to edit it.

APPLE-INSPIRED Minimal · refined

36px · r10/14 · 15px

No issues selected

Assign Move Delete

	Key	Summary	Status	Assignee	Points	Updated ↑
☐	DS-142	Migrate billing tables to new schema	In progress	MR Maya Ruiz	8	2h ago
☐	DS-139	Audit focus rings across admin console	In review	JO Jonas Ortiz	3	5h ago
☐	DS-137	Invoices API returns stale currency codes	Blocked	AK Aiko Kato	5	Yesterday
☐	DS-131	Add bulk export to reports view	To do	LS Liam Shah	2	2d ago
☐	DS-128	Rename workspace roles in settings	Done	PN Priya Nair	1	4d ago
☐	DS-125	Reduce dashboard first paint below 1.5s	In progress	MR Maya Ruiz	13	5d ago

Select rows to enable bulk actions. Double-click or press Enter on a summary to edit it.

04 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Space` Toggle row selection

`Enter / F2` Edit the focused cell

`Esc` Cancel editing

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Row checkboxes have hidden labels (“Select DS-142”). The select-all checkbox shows a mixed state. Editable cells are focusable and open with Enter or F2; Esc cancels.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Selected row	Tint fill	Tint fill + 3px brand edge	Solid tint row, white text
Bulk bar	Inline text + subtle buttons	Inline text + subtle buttons	Inline text + subtle buttons
Edit cell	Primary outline	Primary outline	Halo ring
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces

PROPERTY	ATLASSIAN	FLUENT	APPLE
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border` `--a-color-primary` `--a-color-primary-subtle` `--a-focus` `--a-separator` `--a-surface` `--a-surface-sunken` `--a-text` `--a-text-subtle`	`--f-color-primary` `--f-color-primary-subtle` `--f-divider` `--f-focus-inner` `--f-focus-outer` `--f-stroke` `--f-subtle-hover` `--f-subtle-pressed` `--f-surface` `--f-text`	`--p-border` `--p-color-primary` `--p-fill` `--p-focus-halo` `--p-hover` `--p-label` `--p-label-3` `--p-separator` `--p-surface`
Spacing	`--a-space-100`	`--f-space-m`	`--p-space-4`
Radius	`--a-radius-sm`	`--f-radius-sm`	`--p-radius-sm`
Sizing	`--a-height-md`	`--f-height-md`	`--p-height-md`

COMPONENTS · DATA DISPLAY

Card

A container for a single object: a project, a report, a person.

4 states — sizes **3** languages `.ds-card` `.ds-cards`

01 PURPOSE

A container for a single object: a project, a report, a person.

It is part of the **Data Display** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-card`	2 Container `.ds-cards`	3 Media `.ds-card__media`	4 Body `.ds-card__body`	5 Eyebrow `.ds-card__eyebrow`
6 Title `.ds-card__title`	7 Text `.ds-card__text`	8 Footer `.ds-card__foot`		

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Project · LED

Ledger Migration

Move billing to the v2 schema by end of Q3.

MR AK JO ON TRACK

Report · weekly

Sprint velocity

34 points completed, 6 above the 4-sprint average.

Updated today Open

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Project · LED

Ledger Migration

Move billing to the v2 schema by end of Q3.

MR AK JO On track

Report · weekly

Sprint velocity

34 points completed, 6 above the 4-sprint average.

Updated today Open

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Project · LED

Ledger Migration

Move billing to the v2 schema by end of Q3.

MR AK JO On track

Report · weekly

Sprint velocity










34 points completed, 6 above the 4-sprint average.

Updated today Open

04 STATES

Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	**Ledger Migration** Billing v2 schema.	**Ledger Migration** Billing v2 schema.	**Ledger Migration** Billing v2 schema.

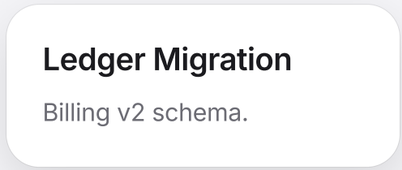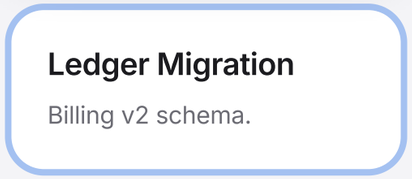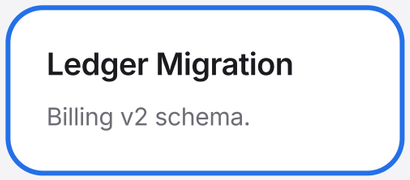STATE	ATLASSIAN	FLUENT	APPLE
Hover `:hover`			
Focus `:focus-visible`			
Selected `aria-selected`			

05 BEHAVIOUR

Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

06 ACCESSIBILITY

KEYBOARD

`Tab` Focus the card

`Enter` Open / select

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Cards are `article` elements with a heading. Clickable cards are focusable and respond to Enter; nested buttons keep their own names.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop ≥ 1180px

All columns, full density

Tablet 700–1179px

Tables scroll inside their container; secondary columns can be hidden

Mobile < 700px

Tables scroll; lists and cards stack in one column

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Padding	12px	16px	22px
Radius	4px	8px	20px
Separation	Raised shadow (1px)	Shadow 4 → 16 on hover	No shadow; contrast with grey background
Title	14px semibold	16px semibold	19px semibold, tight tracking
Hover	Overlay shadow	Lifts 1px	Scales 1% with soft float shadow
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-discovery` `--a-focus` `--a-separator` `--a-surface` `--a-text-subtle` `--a-text-subtlest`	`--f-color-primary` `--f-discovery` `--f-focus-inner` `--f-focus-outer` `--f-surface` `--f-text-2` `--f-text-3`	`--p-color-primary` `--p-focus-halo` `--p-label-2` `--p-label-3` `--p-purple` `--p-surface`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`
Radius	`--a-radius`	`--f-radius-lg`	`--p-radius-xl`
Elevation	`--a-shadow-overlay` `--a-shadow-raised`	`--f-shadow-16` `--f-shadow-2` `--f-shadow-4`	`--p-shadow-float`

COMPONENTS · DATA DISPLAY

List

A vertical list of similar items with leading media, text and trailing metadata.

— states — sizes 3 languages `.ds-list .ds-li`

01 PURPOSE

A vertical list of similar items with leading media, text and trailing metadata.

It is part of the **Data Display** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-list`	2 Container `.ds-li`	3 Primary text `.ds-li__main`	4 Title `.ds-li__title`	5 Secondary text `.ds-li__sub`
6 Trailing content `.ds-li__end`	7 Chevron `.ds-li__chev`			

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

- MR — Maya Ruiz assigned DS-142 to you — Migrate billing tables — 2m — 2
- AK — Aiko Kato commented on DS-137 — "Rollback plan attached" — 1h — 1
- JO — Jonas Ortiz requested review — Audit focus rings — 3h
- PN — Priya Nair closed DS-128 — Rename workspace roles — Yesterday

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

- MR — Maya Ruiz assigned DS-142 to you — Migrate billing tables — 2m — 2
- AK — Aiko Kato commented on DS-137 — "Rollback plan attached" — 1h — 1
- JO — Jonas Ortiz requested review — Audit focus rings — 3h
- PN — Priya Nair closed DS-128 — Rename workspace roles — Yesterday

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

- MR — Maya Ruiz assigned DS-142 to... — Migrate billing tables — 2m — 2 ›
- AK — Aiko Kato commented on DS-137 — "Rollback plan attached" — 1h — 1 ›
- JO — Jonas Ortiz requested review — Audit focus rings — 3h ›
- PN — Priya Nair closed DS-128 — Rename workspace roles — Yesterday ›

04 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move between items

`Enter` Select

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Selectable lists use `role="listbox"` with `option` items and `aria-selected`.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Row height	40px	52px	56px
Separators	Full-width lines	None (hover fills)	Inset, start after the avatar
Container	None	Card, shadow 4	Inset grouped, 14px radius
Trailing	Time + badge	Time + badge	Time + badge + disclosure chevron
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo

PROPERTY	ATLASSIAN	FLUENT	APPLE
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-color-primary-subtle` `--a-hover` `--a-separator` `--a-surface` `--a-text` `--a-text-subtlest`	`--f-color-primary` `--f-color-primary-subtle` `--f-divider` `--f-subtle-hover` `--f-subtle-pressed` `--f-surface` `--f-text` `--f-text-3`	`--p-color-primary` `--p-color-primary-subtle` `--p-hover` `--p-label` `--p-label-3` `--p-pressed` `--p-separator` `--p-surface`
Radius	–	`--f-radius-lg`	`--p-radius-lg`
Elevation	–	`--f-shadow-4`	–

COMPONENTS · DATA DISPLAY

Badge

Short status labels (lozenges) and numeric counts.

— states **3** sizes **3** languages `.ds-badge`

01 PURPOSE

Short status labels (lozenges) and numeric counts.

It is part of the **Data Display** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container
   `.ds-badge`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3–4 · 14px

TO DO IN PROGRESS DONE AT RISK BLOCKED BETA

LIVE PAUSED FAILED NEW

3 12 99+ Inbox 12

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

To do In progress Done At risk Blocked Beta

Live Paused Failed New

3 12 99+ Inbox 12

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

To do In progress Done At risk Blocked

Beta

Live Paused Failed New

3 12 99+ Inbox 12

04 SIZES Small, medium and large use each language's height scale.

SIZE	ATLASSIAN	FLUENT	APPLE
Small `--h-s`	IN PROGRESS DONE 12	In progress Done 12	In progress Done 12
Medium `--h-m`	IN PROGRESS DONE 12	In progress Done 12	In progress Done 12
Large `--h-l`	IN PROGRESS DONE 12	In progress Done 12	In progress Done 12

05 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

06 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Badges are text, not colour alone: every status has a word. Counts next to icons are included in the button's accessible name.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Status style	Uppercase bold lozenge, 3px radius	Rounded pill with tinted stroke	Coloured dot + plain text
Strong variant	Bold fill (yellow for warning)	Solid fill	Solid capsule
Counts	Grey pill	Grey pill	Red notification capsule
Height	18px	20px	22px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-on-primary --a-color-primary --a-danger --a-danger-bg --a-discovery --a-discovery-bg --a-info-bg --a-neutral --a-success --a-success-bg --a-text-subtle --a-warning --a-warning-bg --a-warning-bold`	`--f-color-on-primary --f-color-primary --f-danger --f-danger-bg --f-discovery --f-discovery-bg --f-info-bg --f-success --f-success-bg --f-surface --f-text-2 --f-warning --f-warning-bg`	`--p-color-on-primary --p-color-primary --p-fill --p-green --p-green-bg --p-info-bg --p-label-2 --p-label-3 --p-orange --p-orange-bg --p-purple --p-purple-bg --p-red --p-red-bg`
Radius	`--a-radius-sm`	—	—

COMPONENTS · DATA DISPLAY

Tag

Labels that categorise an object. Removable when the user can edit them.

— states — sizes 3 languages `.ds-tag .ds-tag__x`

01 PURPOSE

Labels that categorise an object. Removable when the user can edit them.

It is part of the **Data Display** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container
`.ds-tag`

2 Container
`.ds-tag__x`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Billing × Accessibility × Performance × Needs QA ×
v4.2 ×

Read-only Linked: DS-137

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Billing × Accessibility × Performance × Needs QA ×
v4.2 ×

Read-only Linked: DS-137

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Billing × Accessibility × Performance ×
Needs QA × v4.2 ×

Read-only Linked: DS-137

04 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move to remove button

`Enter` Remove the tag

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Each remove button is named “Remove <tag>”; after removal focus moves to the next tag, and a toast confirms.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shape	3px radius, grey	4px radius, 1px stroke	Capsule, soft fill
Height	20px	24px	26px
Remove button	Square 16px	Square 16px	Circle 16px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-discovery` `--a-discovery-bg` `--a-focus` `--a-hover` `--a-info-bg` `--a-neutral` `--a-success` `--a-success-bg` `--a-surface` `--a-text` `--a-warning` `--a-warning-bg`	`--f-color-primary` `--f-discovery` `--f-discovery-bg` `--f-focus-inner` `--f-focus-outer` `--f-info-bg` `--f-stroke` `--f-subtle-hover` `--f-success` `--f-success-bg` `--f-surface-sunken` `--f-text` `--f-warning` `--f-warning-bg`	`--p-color-primary` `--p-fill` `--p-focus-halo` `--p-green` `--p-green-bg` `--p-hover` `--p-info-bg` `--p-label` `--p-orange` `--p-orange-bg` `--p-purple` `--p-purple-bg`
Radius	`--a-radius-sm`	`--f-radius`	—

COMPONENTS · DATA DISPLAY

Chip

Toggleable filters and quick choices.

5 states — sizes **3** languages `.ds-chip`

01 PURPOSE

Toggleable filters and quick choices.

It is part of the **Data Display** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container `.ds-chip`
2. Selection tick `.ds-chip__tick`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

✓ Assigned to me | Due this week | ✓ High priority | Has attachments | Archived

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

✓ Assigned to me | Due this week | ✓ High priority | Has attachments | Archived

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

✓ Assigned to me | Due this week | ✓ High priority | Has attachments | Archived

04 STATES Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	High priority	High priority	High priority
Hover `:hover`	High priority	High priority	High priority
Focus `:focus-visible`	High priority	High priority	High priority
Selected `aria-selected`	✓ High priority	✓ High priority	✓ High priority
Disabled `:disabled`	High priority	High priority	High priority

05 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

06 ACCESSIBILITY

KEYBOARD

`Tab` Move to the control

`Space` Toggle

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Toggle chips are buttons with `aria-pressed`, grouped and labelled.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shape	3px radius, outlined	Pill, outlined	Capsule, filled
Selected	Tint + primary stroke	Solid brand	Inverted (dark)
Height	24px	28px	32px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces

PROPERTY	ATLASSIAN	FLUENT	APPLE
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border` `--a-color-primary` `--a-color-primary-subtle` `--a-focus` `--a-hover` `--a-surface` `--a-text-subtle`	`--f-color-on-primary` `--f-color-primary` `--f-focus-inner` `--f-focus-outer` `--f-stroke` `--f-subtle-hover` `--f-surface` `--f-text`	`--p-fill` `--p-fill-hover` `--p-focus-halo` `--p-label` `--p-surface`
Radius	`--a-radius-sm`	–	–

COMPONENTS · DATA DISPLAY

Avatar

Represents a person or a project, with optional presence.

— states **3** sizes **3** languages `.ds-av` `.ds-avgroup`

01 PURPOSE

Represents a person or a project, with optional presence.

It is part of the **Data Display** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.


1. Container — `.ds-av`
2. Container — `.ds-avgroup`
3. Container — `.ds-av__presence`
4. Presence away — `.ds-av__presence--away`
5. Presence busy — `.ds-av__presence--busy`
6. Presence off — `.ds-av__presence--off`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px



FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

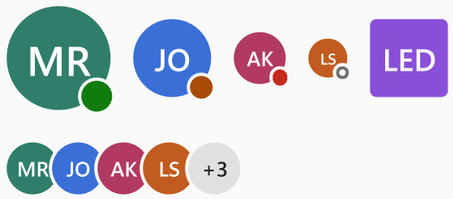

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px



04 SIZES Small, medium and large use each language's height scale.

SIZE	ATLASSIAN	FLUENT	APPLE
Small `--h-s`	MR LED	MR LED	MR LED
Medium `--h-m`	MR LED	MR LED	MR LED
Large `--h-l`	MR LED	MR LED	MR LED

05 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

06 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Avatars are `role="img"` with the person's name and presence in the label, so status is not conveyed by colour alone.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Sizes	24 / 32 / 40 / 56	24 / 32 / 48 / 64	28 / 36 / 48 / 72
Fill	Distinct colour per person	Distinct colour per person	Neutral grey gradient
Group overlap	−6px with white ring	−4px	−10px
Project avatar	Square, 4px radius	Square, 4px radius	Rounded square, 10px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces

PROPERTY	ATLASSIAN	FLUENT	APPLE
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-danger` `--a-neutral-pressed` `--a-success` `--a-surface` `--a-text` `--a-text-subtlest` `--a-warning`	`--f-canvas` `--f-color-primary` `--f-danger` `--f-neutral-pressed` `--f-success` `--f-text` `--f-text-3` `--f-warning`	`--p-canvas` `--p-color-primary` `--p-fill` `--p-fill-pressed` `--p-green` `--p-label` `--p-label-3` `--p-orange` `--p-red`
Radius	`--a-radius`	`--f-radius`	`--p-radius`

COMPONENTS · DATA DISPLAY

Timeline

A chronological list of events, such as issue activity or deployment history.

— states — sizes **3** languages `.ds-tl .ds-tl__item`

01 PURPOSE

A chronological list of events, such as issue activity or deployment history.

It is part of the **Data Display** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-tl`	2 Container `.ds-tl__item`	3 Container `.ds-tl__mark`	4 Day `.ds-tl__day`	5 Body `.ds-tl__body`
6 Header `.ds-tl__head`	7 Timestamp `.ds-tl__time`	8 Text `.ds-tl__text`		

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Maya Ruiz 10:42
moved DS-142 to In progress

Aiko Kato 09:15
attached rollback-plan.pdf

CI 08:03
Deploy #418 passed to staging

Jonas Ortiz Yesterday
created DS-142

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Maya Ruiz 10:42
moved DS-142 to In progress

Aiko Kato 09:15
attached rollback-plan.pdf

CI 08:03
Deploy #418 passed to staging

Jonas Ortiz Yesterday
created DS-142

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Today

Maya Ruiz 10:42
moved DS-142 to In progress

Aiko Kato 09:15
attached rollback-plan.pdf

CI 08:03
Deploy #418 passed to staging

Jonas Ortiz Yesterday
created DS-142

04 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

An ordered list with `time` elements. Icons are decorative; the text carries the event.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Marker	10px dot, key events in primary	28px circle with icon	12px ring, key events thicker
Time	Right-aligned	After the name	After the name
Grouping	None	None	Day headings
Spacing	12px	16px	22px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely

PROPERTY	ATLASSIAN	FLUENT	APPLE
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border-input` `--a-color-primary` `--a-separator` `--a-text-subtle` `--a-text-subtlest`	`--f-color-on-primary` `--f-color-primary` `--f-stroke` `--f-surface-sunken` `--f-text-2` `--f-text-3`	`--p-color-primary` `--p-label-2` `--p-label-3` `--p-separator` `--p-surface`

COMPONENTS · DATA DISPLAY

Accordion

Stacked sections that expand to reveal content. Good for checklists and long settings.

— states — sizes 3 languages `.ds-acc` `.ds-acc__btn`

01 PURPOSE

Stacked sections that expand to reveal content. Good for checklists and long settings.

It is part of the **Data Display** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-acc`
2. Container — `.ds-acc__btn`
3. Container — `.ds-acc__panel`
4. Item — `.ds-acc__item`
5. Chevron — `.ds-acc__chev`
6. Metadata — `.ds-acc__meta`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive 32px · r3-4 · 14px

Pre-release checks 3 of 4

Run the schema diff, confirm backups, notify finance, and freeze writes for 10 minutes.

Rollback plan Ready

Restore from the 06:00 snapshot and re-point the read replica. Owner: Aiko Kato.

Communication Draft

Status page update and in-app banner 24 hours before cut-over.

FLUENT-INSPIRED Structured · layered 32px · r4/8 · 14px

Pre-release checks 3 of 4

Run the schema diff, confirm backups, notify finance, and freeze writes for 10 minutes.

Rollback plan Ready

Restore from the 06:00 snapshot and re-point the read replica. Owner: Aiko Kato.

Communication Draft

Status page update and in-app banner 24 hours before cut-over.

APPLE-INSPIRED Minimal · refined 36px · r10/14 · 15px

Pre-release checks 3 of 4

Run the schema diff, confirm backups, notify finance, and freeze writes for 10 minutes.

Rollback plan Ready

Restore from the 06:00 snapshot and re-point the read replica. Owner: Aiko Kato.

Communication Draft

Status page update and in-app banner 24 hours before cut-over.

04 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move between headers

`Enter / Space` Expand or collapse

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Each header is a `button` inside a heading, with `aria-expanded` and `aria-controls`.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Header height	36px	48px	52px
Chevron	Left, rotates 90°	Right, rotates 180°	Right, rotates 90°
Container	None, divider lines	Card, shadow 4	Inset grouped, 14px radius
Motion	100ms	150ms	320ms
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-hover` `--a-separator` `--a-text` `--a-text-subtle` `--a-text-subtlest`	`--f-color-primary` `--f-divider` `--f-subtle-hover` `--f-surface` `--f-text` `--f-text-2` `--f-text-3`	`--p-color-primary` `--p-hover` `--p-label` `--p-label-2` `--p-label-3` `--p-separator` `--p-surface`
Radius	–	`--f-radius-lg`	`--p-radius-lg`
Elevation	–	`--f-shadow-4`	–

COMPONENTS · DATA DISPLAY

Statistic

A key number with a label, a trend and an optional sparkline.

— states — sizes **3** languages `.ds-stat .ds-stats`

01 PURPOSE

A key number with a label, a trend and an optional sparkline.

It is part of the **Data Display** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-stat`
2. Container — `.ds-stats`
3. Container — `.ds-spark`
4. Label — `.ds-stat__label`
5. Value — `.ds-stat__value`
6. Trend — `.ds-stat__delta`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

OPEN ISSUES
128
↘ -6% vs last week

CYCLE TIME
3.4 days
↘ -12% faster

ESCAPED BUGS
7
↗ +2% vs last sprint

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Open issues
128
↘ -6% vs last week

Cycle time
3.4 days
↘ -12% faster

Escaped bugs
7
↗ +2% vs last sprint

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Open issues
128
↘ -6% vs last week

Cycle time
3.4 days
↘ -12% faster

Escaped bugs
7
↗ +2% vs last sprint

04 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The trend is written in words ("−6% vs last week"), not only colour or arrow. Sparklines are decorative and hidden from screen readers.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Value	24px, 650 weight	28px semibold	38px light, tight tracking
Label	11px uppercase	14px semibold	13px medium
Container	1px border	Card, shadow 4	Borderless, 20px radius
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely

PROPERTY	ATLASSIAN	FLUENT	APPLE
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border` `--a-color-primary` `--a-danger` `--a-success` `--a-surface` `--a-text` `--a-text-subtle` `--a-text-subtlest`	`--f-color-primary` `--f-danger` `--f-success` `--f-surface` `--f-text` `--f-text-2` `--f-text-3`	`--p-color-primary` `--p-green` `--p-label` `--p-label-2` `--p-label-3` `--p-red` `--p-surface`
Spacing	`--a-space-100`	`--f-space-m`	`--p-space-4`
Radius	`--a-radius`	`--f-radius-lg`	`--p-radius-xl`
Elevation	–	`--f-shadow-4`	–

COMPONENTS · FEEDBACK

Alert

An inline message about the current context. Stays until the user dismisses it or the condition changes.

4 states — sizes **3** languages `.ds-alert`

01 PURPOSE

An inline message about the current context. Stays until the user dismisses it or the condition changes.

It is part of the **Feedback** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-alert`	2 Icon `.ds-alert__ic`	3 Body `.ds-alert__body`	4 Title `.ds-alert__title`	5 Text `.ds-alert__text`
6 Actions `.ds-alert__actions`	7 Close button `.ds-alert__close`			

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Sprint 42 starts tomorrow
Unestimated issues will be moved to the backlog at 09:00.
Review scope Dismiss

Migration dry run passed
All 1,284 invoices matched the v2 schema.
View report

Read replica is 40s behind
Reports may show slightly older numbers until it catches up.
Check status

Export failed
The CSV exceeded 50 MB. Narrow the date range and try again.
Retry Change range

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Sprint 42 starts tomorrow
Unestimated issues will be moved to the backlog at 09:00.
Review scope Dismiss

Migration dry run passed
All 1,284 invoices matched the v2 schema.
View report

Read replica is 40s behind
Reports may show slightly older numbers until it catches up.
Check status

Export failed
The CSV exceeded 50 MB. Narrow the date range and try again.
Retry Change range

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Sprint 42 starts tomorrow
Unestimated issues will be moved to the backlog at 09:00.
Review scope Dismiss

Migration dry run passed
All 1,284 invoices matched the v2 schema.
View report

Read replica is 40s behind
Reports may show slightly older numbers until it catches up.
Check status

Export failed
The CSV exceeded 50 MB. Narrow the date range and try again.
Retry Change range

04 STATES

Forced with state classes so every state is visible at once.

STATE	ATLASSIAN	FLUENT	APPLE
Default `rest`	**Sprint 42 starts tomorrow** Unestimated issues will be moved to the backlog at 09:00.	**Sprint 42 starts tomorrow** Unestimated issues will be moved to the backlog at 09:00.	**Sprint 42 starts tomorrow** Unestimated issues will be moved to the backlog at 09:00.

STATE	ATLASSIAN	FLUENT	APPLE
Error `.is-error`	**Export failed** The CSV exceeded 50 MB. Narrow the date range and try again.	**Export failed** The CSV exceeded 50 MB. Narrow the date range and try again.	**Export failed** The CSV exceeded 50 MB. Narrow the date range and try again.
Success `.is-success`	**Migration dry run passed** All 1,284 invoices matched the v2 schema.	**Migration dry run passed** All 1,284 invoices matched the v2 schema.	**Migration dry run passed** All 1,284 invoices matched the v2 schema.
Warning `.is-warning`	**Read replica is 40s behind** Reports may show slightly older numbers until it catches up.	**Read replica is 40s behind** Reports may show slightly older numbers until it catches up.	**Read replica is 40s behind** Reports may show slightly older numbers until it catches up.

05 BEHAVIOUR

Identical in all three languages.

Messages appear without stealing focus and are announced through live regions. Dismissible messages can be restored.

06 ACCESSIBILITY

KEYBOARD

`Tab` Reach actions and the dismiss button

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Errors use `role="alert"`; other variants use `role="status"`. Each variant has a distinct icon and title so meaning does not rely on colour.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop ≥ 1180px

Toasts in each language's corner

Tablet 700–1179px

Same

Mobile < 700px

Toasts span the width with a 16px gutter

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Background	Tinted fill	Light tint + tinted 1px stroke	White card; icon sits in a tinted circle
Layout	Title above body	Title and body inline, actions right	Title above body, generous padding
Radius	4px	4px	14px
Actions	Text links	Text links aligned right	Tint links
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary --a-danger --a-danger-bg --a-discovery --a-discovery-bg --a-info-bg --a-success --a-success-bg --a-text --a-warning --a-warning-bg`	`--f-color-primary --f-danger --f-danger-bg --f-discovery --f-discovery-bg --f-info-bg --f-success --f-success-bg --f-text --f-warning --f-warning-bg`	`--p-color-primary --p-green --p-green-bg --p-info-bg --p-label --p-label-2 --p-orange --p-orange-bg --p-purple --p-purple-bg --p-red --p-red-bg --p-surface`
Radius	`--a-radius`	`--f-radius`	`--p-radius-lg`
Elevation	–	–	`--p-shadow-soft`

COMPONENTS · FEEDBACK

Toast

A brief, non-blocking notification that confirms an action or reports a background event. Disappears on its own.

— states — sizes **3** languages `.ds-toast .ds-toasts`

01 PURPOSE

A brief, non-blocking notification that confirms an action or reports a background event. Disappears on its own.

It is part of the **Feedback** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-toast`	2 Label `.ds-label`	3 Icon `.ds-toast__ic`	4 Body `.ds-toast__body`	5 Title `.ds-toast__title`
6 Text `.ds-toast__text`	7 Actions `.ds-toast__acts`			

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Info toast | Success | Warning | Error

At rest

Issue created
DS-143 was added to the backlog.
View issue

Live toasts appear in each language's own corner: bottom-left, bottom-right, or top-centre.

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Info toast | Success | Warning | Error

At rest

Issue created
DS-143 was added to the backlog.
View issue

Live toasts appear in each language's own corner: bottom-left, bottom-right, or top-centre.

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Info toast | Success | Warning | Error

At rest

Issue created
DS-143 was added to the backlog.
View issue

Live toasts appear in each language's own corner: bottom-left, bottom-right, or top-centre.

04 BEHAVIOUR Identical in all three languages.

Messages appear without stealing focus and are announced through live regions. Dismissible messages can be restored.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach toast actions

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Toasts render into a `role="status"` live region so they are announced without stealing focus. Each has a dismiss button; important errors should also appear inline.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Toasts in each language's corner

Tablet `700–1179px`

Same

Mobile `< 700px`

Toasts span the width with a 16px gutter

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Position	Bottom-left ("flags")	Bottom-right	Top-centre, drops down
Surface	White, shadow overlay	White, shadow 28	Blur material, 18px radius
Entrance	Slide up, 200ms	Slide in from right, 300ms	Drop + scale, 450ms
Duration	4.5s	4.5s	4.5s
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces

PROPERTY	ATLASSIAN	FLUENT	APPLE
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-danger` `--a-success` `--a-surface-overlay` `--a-text` `--a-text-subtle` `--a-warning`	`--f-color-primary` `--f-danger` `--f-success` `--f-surface-overlay` `--f-text` `--f-text-2` `--f-warning`	`--p-color-primary` `--p-green` `--p-label` `--p-label-2` `--p-material` `--p-orange` `--p-red`
Radius	`--a-radius-lg`	`--f-radius-lg`	—
Elevation	`--a-shadow-overlay`	`--f-shadow-28`	`--p-shadow-float`

COMPONENTS · FEEDBACK

Snackbar

A one-line, dark message at the bottom of the screen, usually with a single undo action.

— states — sizes **3** languages `.ds-snack`

01 PURPOSE

A one-line, dark message at the bottom of the screen, usually with a single undo action.

It is part of the **Feedback** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-snack`
2. Act — `.ds-snack__act`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Archive 3 issues Delete comment

3 issues archived Undo

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Archive 3 issues Delete comment

3 issues archived Undo

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Archive 3 issues Delete comment

3 issues archived Undo

04 BEHAVIOUR Identical in all three languages.

Messages appear without stealing focus and are announced through live regions. Dismissible messages can be restored.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach the undo action

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Rendered in a polite live region. The undo action is a real button and the snackbar stays for 5 seconds.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Toasts in each language's corner

Tablet `700–1179px`

Same

Mobile `< 700px`

Toasts span the width with a 16px gutter

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shape	4px radius bar	4px radius bar	Capsule
Height	40px	44px	46px
Action colour	Light primary	Light brand	Light tint
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-focus` `--a-inverse` `--a-on-inverse` `--a-surface`	`--f-focus-inner` `--f-focus-outer` `--f-inverse` `--f-on-inverse`	`--p-focus-halo` `--p-inverse` `--p-on-inverse`
Radius	`--a-radius` `--a-radius-sm`	`--f-radius` `--f-radius-sm`	`--p-radius-sm`
Elevation	`--a-shadow-overlay`	`--f-shadow-16`	`--p-shadow-float`

COMPONENTS · FEEDBACK

Banner

A page- or app-level message, such as maintenance windows or account issues.

— states — sizes **3** languages `.ds-banner`

01 PURPOSE

A page- or app-level message, such as maintenance windows or account issues.

It is part of the **Feedback** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-banner`
2. Text — `.ds-banner__text`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Scheduled maintenance Sat 02:00–03:00 UTC. Billing is read-only during this window. Details ×

You are viewing Ledger as an admin. Switch role

Your trial ends in 2 days. Add billing details to keep your data. Add details

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Scheduled maintenance Sat 02:00–03:00 UTC. Billing is read-only during this window. Details ×

You are viewing Ledger as an admin. Switch role

Your trial ends in 2 days. Add billing details to keep your data. Add details

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Scheduled maintenance Sat 02:00–03:00 UTC. Billing is read-only during this window.

Details ×

You are viewing Ledger as an admin.

Switch role

Your trial ends in 2 days. Add billing details to keep your data.

Add details

04 BEHAVIOUR Identical in all three languages.

Messages appear without stealing focus and are announced through live regions. Dismissible messages can be restored.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Warnings and info use `role="status"`; account-blocking problems use `role="alert"`.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Toasts in each language's corner

Tablet `700–1179px`

Same

Mobile `< 700px`

Toasts span the width with a 16px gutter

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Warning style	Bold yellow, full bleed	Tinted bar with stroke	Soft tint, centred text
Info style	Dark inverse bar	Tinted bar	Grey fill
Radius	0 (edge to edge)	4px	10px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo

PROPERTY	ATLASSIAN	FLUENT	APPLE
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-danger` `--a-inverse` `--a-on-inverse` `--a-warning-bold`	`--f-color-primary` `--f-danger` `--f-danger-bg` `--f-info-bg` `--f-inverse` `--f-on-inverse` `--f-text` `--f-warning` `--f-warning-bg`	`--p-color-link` `--p-color-primary` `--p-fill` `--p-inverse` `--p-label` `--p-on-inverse` `--p-orange` `--p-orange-bg` `--p-red` `--p-red-bg`
Radius	–	`--f-radius`	`--p-radius`

COMPONENTS · FEEDBACK

Progress

Shows how far a task has progressed, or that work is happening when the duration is unknown.

— states **3** sizes **3** languages `.ds-prog .ds-ring`

01 PURPOSE

Shows how far a task has progressed, or that work is happening when the duration is unknown.

It is part of the **Feedback** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-prog`
2. Container — `.ds-ring`
3. Header — `.ds-prog__head`
4. Track — `.ds-prog__track`
5. Fill — `.ds-prog__bar`
6. Help — `.ds-prog__help`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Importing invoices 42%

539 of 1,284 records

Rebuilding search index

Backup Done

68% Run import

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Importing invoices 42%

539 of 1,284 records

Rebuilding search index

Backup Done

68% Run import

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Importing invoices 42%

539 of 1,284 records

Rebuilding search index

Backup Done

68% Run import

04 SIZES Small, medium and large use each language's height scale.

SIZE	ATLASSIAN	FLUENT	APPLE
Small `--h-s`			

SIZE	ATLASSIAN	FLUENT	APPLE
Medium `--h-m`			
Large `--h-l`			

05 BEHAVIOUR

Identical in all three languages.

Messages appear without stealing focus and are announced through live regions. Dismissible messages can be restored.

06 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

`role="progressbar"` with `aria-valuenow` for determinate bars; indeterminate bars omit the value.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

Toasts in each language's corner

Tablet `700–1179px`

Same

Mobile `< 700px`

Toasts span the width with a 16px gutter

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Bar thickness	6px	2px	4px

PROPERTY	ATLASSIAN	FLUENT	APPLE
Track	Neutral grey	Accessible stroke grey	Translucent fill
Label	12px bold above	14px semibold above + helper below	14px medium, percentage right
Indeterminate	Ease-in-out sweep	Ease-in-out sweep	Smooth sweep
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary --a-danger --a-neutral --a-neutral-hover --a-success --a-surface --a-text-subtlest --a-warning`	`--f-canvas --f-color-primary --f-danger --f-stroke --f-success --f-surface --f-text-3 --f-warning`	`--p-canvas --p-color-primary --p-fill --p-green --p-label-3 --p-orange --p-red`

COMPONENTS · FEEDBACK

Spinner

Indicates loading for short, indeterminate waits.

— states **3** sizes **3** languages `.ds-spin`

01 PURPOSE

Indicates loading for short, indeterminate waits.

It is part of the **Feedback** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-spin`
2. Activity spokes — `.ds-spin__spokes`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`



Loading issues...



FLUENT-INSPIRED Structured · layered — `32px · r4/8 · 14px`



Loading issues...



APPLE-INSPIRED Minimal · refined — `36px · r10/14 · 15px`



Loading issues...



04 SIZES Small, medium and large use each language's height scale.

SIZE	ATLASSIAN	FLUENT	APPLE
Small `--h-s`			
Medium `--h-m`			
Large `--h-l`			

05 BEHAVIOUR Identical in all three languages.

Messages appear without stealing focus and are announced through live regions. Dismissible messages can be restored.

06 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Spinners carry `role="status"` and a label. Pair with visible text when the wait could exceed a second.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

07 RESPONSIVE

Desktop `≥ 1180px`

Toasts in each language's corner

Tablet `700–1179px`

Same

Mobile `< 700px`

Toasts span the width with a 16px gutter

08 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Form	Thin ring, ¾ arc	Ring on a tinted track	Eight-spoke activity indicator
Colour	Subtle grey	Brand	Secondary grey
Sizes	16 / 24 / 48	20 / 32 / 56	16 / 24 / 40
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces

PROPERTY	ATLASSIAN	FLUENT	APPLE
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

09 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary --a-text-subtle`	`--f-color-primary`	`--p-color-primary --p-label-2`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`

COMPONENTS · FEEDBACK

Skeleton

Placeholder shapes that mirror the layout while content loads.

— states — sizes 3 languages `.ds-skel .ds-skel-card`

01 PURPOSE

Placeholder shapes that mirror the layout while content loads.

It is part of the **Feedback** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-skel`
2. Container — `.ds-skel-card`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Show loaded content

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Show loaded content

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Show loaded content

04 BEHAVIOUR Identical in all three languages.

Messages appear without stealing focus and are announced through live regions. Dismissible messages can be restored.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The loading region has `aria-busy="true"` and a label; shapes are decorative.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Toasts in each language's corner

Tablet `700–1179px`

Same

Mobile `< 700px`

Toasts span the width with a 16px gutter

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Animation	Opacity pulse	Shimmer wave	Slow, soft pulse
Shape radius	3px	4px	8px
Line height	12px	14px	14px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-neutral`	`--f-neutral-hover` `--f-surface`	`--p-fill`
Spacing	`--a-space-100`	`--f-space-m`	`--p-space-4`
Radius	`--a-radius-sm`	`--f-radius`	–

COMPONENTS · OVERLAYS

Modal

A focused task that blocks the page until the user completes or cancels it.

— states — sizes **3** languages `.ds-dialog .ds-backdrop`

01 PURPOSE

A focused task that blocks the page until the user completes or cancels it.

It is part of the **Overlays** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-dialog`
2. Header — `.ds-dialog__head`
3. Title — `.ds-dialog__title`
4. Close button — `.ds-dialog__close`
5. Body — `.ds-dialog__body`
6. Label — `.ds-label`
7. Footer — `.ds-dialog__foot`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Create issue

At rest

Create issue

Summary *

What needs to be done?

Story points

3

Assignee

Maya Ruiz

Cancel Create

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

+ Create issue

At rest

Create issue

Summary *

What needs to be done?

Story points

3

Assignee

Maya Ruiz

Create Cancel

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Create issue

At rest

Create issue

Summary *

What needs to be done?

Story points

3

Assignee

Maya Ruiz

Cancel Create

04 BEHAVIOUR Identical in all three languages.

Opening moves focus inside; Esc or an outside click closes; focus returns to the trigger.

05 ACCESSIBILITY

KEYBOARD

`Tab` Cycle focus inside the dialog

`Esc` Close and return focus to the trigger

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

`role="dialog"` with `aria-modal` and `aria-labelledby`. Focus moves inside on open, is trapped while open, and returns to the trigger on close. Esc and the backdrop close it.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`
Dialogs centred at fixed width; drawers from the edge

Tablet `700–1179px`
Same, max width 100% minus 32px

Mobile `< 700px`
Dialogs fill the width; drawers take most of the screen

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Width	480px	520px	380px
Radius	6px	8px	20px
Blanket	Dark navy, 54%	Black, 40%	Light, 22% + 2px blur
Surface	Opaque	Opaque, shadow 64	Translucent blur material
Buttons	Right: subtle Cancel, primary Create	Right: primary first, then Cancel	Full-width pair, centred text
Close (×)	No	Yes	No
Entrance	Slide up 8px, 150ms	Scale from 96%, 250ms	Scale from 108%, 300ms
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-blanket --a-danger --a-surface-overlay --a-text-subtle --a-warning`	`--f-blanket --f-danger --f-surface-overlay --f-text-2 --f-warning`	`--p-blanket --p-label-2 --p-material --p-orange --p-red`

CATEGORY	ATLASSIAN	FLUENT	APPLE
Spacing	`--a-space-100`	`--f-space-m`	`--p-space-4`
Radius	`--a-radius-lg`	`--f-radius-lg`	`--p-radius-xl`
Elevation	`--a-shadow-modal`	`--f-shadow-64`	`--p-shadow-sheet`

COMPONENTS · OVERLAYS

Confirmation Dialog

Asks the user to confirm a destructive or irreversible action. States the consequence plainly.

— states — sizes 3 languages `.ds-dialog--danger` `.ds-dialog__ic`

01 PURPOSE

Asks the user to confirm a destructive or irreversible action. States the consequence plainly.

It is part of the **Overlays** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-dialog--danger`
2. Container — `.ds-dialog__ic`
3. Container — `.ds-dialog__foot`
4. Label — `.ds-label`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Delete 3 issues

At rest

Delete 3 issues?

DS-131, DS-128 and DS-125 and their 14 comments will be permanently deleted. This can't be undone.

Cancel Delete

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Delete 3 issues

At rest

Delete 3 issues?

DS-131, DS-128 and DS-125 and their 14 comments will be permanently deleted. This can't be undone.

Delete Cancel

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Delete 3 issues

At rest

Delete 3 issues?

DS-131, DS-128 and DS-125 and their 14 comments will be permanently deleted. This can't be undone.

Cancel Delete

04 BEHAVIOUR Identical in all three languages.

Opening moves focus inside; Esc or an outside click closes; focus returns to the trigger.

05 ACCESSIBILITY

KEYBOARD

`Tab` Cycle focus inside the dialog

`Esc` Close and return focus to the trigger

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

`role="alertdialog"` with the consequence linked via `aria-describedby`. Focus starts on Cancel so Enter never deletes by accident.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Dialogs centred at fixed width; drawers from the edge

Tablet `700–1179px`

Same, max width 100% minus 32px

Mobile `< 700px`

Dialogs fill the width; drawers take most of the screen

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Icon	Warning icon beside the title	No icon, title carries meaning	Large icon above a centred title
Default focus	Cancel	Cancel	Cancel
Destructive button	Red, right	Red, first	Red, right of equal-width pair
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-danger` `--a-warning`	`--f-danger` `--f-warning`	`--p-orange` `--p-red`

COMPONENTS · OVERLAYS

Drawer

A panel that slides in from the edge to show details or a secondary task without leaving the page.

— states — sizes 3 languages `.ds-drawer .ds-layer--drawer`

01 PURPOSE

A panel that slides in from the edge to show details or a secondary task without leaving the page.

It is part of the **Overlays** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-drawer`	2 Header `.ds-drawer__head`	3 Body `.ds-drawer__body`	4 Label `.ds-label`	5 Footer `.ds-drawer__foot`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Open issue details

At rest

DS-142 details

Status IN PROGRESS
Assignee MR Maya Ruiz
Sprint Sprint 42
Points 8
Due Oct 25, 2026

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Open issue details

At rest

DS-142 details

Status In progress
Assignee MR Maya Ruiz
Sprint Sprint 42
Points 8
Due Oct 25, 2026

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Open issue details

At rest

DS-142 details

Status In progress
Assignee MR Maya Ruiz
Sprint Sprint 42
Points 8
Due Oct 25, 2026

04 BEHAVIOUR Identical in all three languages.

Opening moves focus inside; Esc or an outside click closes; focus returns to the trigger.

05 ACCESSIBILITY

KEYBOARD

`Tab` Cycle focus inside the dialog

`Esc` Close and return focus to the trigger

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Same dialog rules as the modal: labelled, focus trapped, Esc closes, focus returns to the trigger.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Dialogs centred at fixed width; drawers from the edge

Tablet `700–1179px`

Same, max width 100% minus 32px

Mobile `< 700px`

Dialogs fill the width; drawers take most of the screen

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Edge	Left	Right	Right, floating 12px from edges
Width	400px	420px	380px
Radius	0	0	20px
Header	No divider	No divider	Hairline divider
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely

PROPERTY	ATLASSIAN	FLUENT	APPLE
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-surface-overlay`	`--f-surface-overlay`	`--p-material --p-separator`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`
Radius	–	–	`--p-radius-xl`
Elevation	`--a-shadow-modal`	`--f-shadow-64`	`--p-shadow-sheet`

COMPONENTS · OVERLAYS

Popover

Rich, interactive content anchored to a trigger. Closes when the user clicks elsewhere.

— states — sizes 3 languages `.ds-popover`

01 PURPOSE

Rich, interactive content anchored to a trigger. Closes when the user clicks elsewhere.

It is part of the **Overlays** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container
`.ds-popover`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive 32px · r3-4 · 14px

Estimate

Story points

Use the Fibonacci scale. Anything above 13 should be split before the sprint starts.

Got it

FLUENT-INSPIRED Structured · layered 32px · r4/8 · 14px

Estimate

Story points

Use the Fibonacci scale. Anything above 13 should be split before the sprint starts.

Got it

APPLE-INSPIRED Minimal · refined 36px · r10/14 · 15px

Estimate

Story points

Use the Fibonacci scale. Anything above 13 should be split before the sprint starts.

Got it

04 BEHAVI

Opening mo focus returns to the trigger

05 ACCESSIBILITY

KEYBOARD

`Enter` Toggle the popover

`Esc` Close and return focus

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Trigger has `aria-expanded` and `aria-controls`; the popover is a labelled `dialog`. Esc or an outside click closes it.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Dialogs centred at fixed width; drawers from the edge

Tablet `700–1179px`

Same, max width 100% minus 32px

Mobile `< 700px`

Dialogs fill the width; drawers take most of the screen

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Beak	None	Yes	Yes
Surface	Flat, 4px radius	8px radius, shadow 16	Blur material, 14px radius
Offset	6px	10px	12px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-surface-overlay --a-text --a-text-subtle`	`--f-surface-overlay --f-text --f-text-2`	`--p-label --p-label-2 --p-material`
Radius	`--a-radius`	`--f-radius-lg`	`--p-radius-lg`
Elevation	`--a-shadow-overlay`	`--f-shadow-16`	`--p-shadow-float`

COMPONENTS · OVERLAYS

Tooltip

A short text label that explains an icon or control. Appears on hover and keyboard focus.

— states — sizes 3 languages `.ds-tip .ds-tipwrap`

01 PURPOSE

A short text label that explains an icon or control. Appears on hover and keyboard focus.

It is part of the **Overlays** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Tooltip bubble — `.ds-tip`
2. Tooltip anchor — `.ds-tipwrap`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Edit issue E

Watch What is a story point?

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Edit issue E

Watch What is a story point?

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Edit issue E

Watch

What is a story point?

04 BEHAVIOUR Identical in all three languages.

Opening moves focus inside; Esc or an outside click closes; focus returns to the trigger.

05 ACCESSIBILITY

KEYBOARD

`Tab` Show on focus

`Esc` Hide

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Linked with `aria-describedby`. Shows on focus as well as hover, stays while hovered, and Esc hides it (WCAG 1.4.13).

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Dialogs centred at fixed width; drawers from the edge

Tablet `700–1179px`

Same, max width 100% minus 32px

Mobile `< 700px`

Dialogs fill the width; drawers take most of the screen

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Surface	Dark inverse, 3px radius	Light, shadow 8, with beak	Light blur material, no beak
Delay	300ms	250ms	600ms
Text	12px	12px	12px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-inverse --a-on-inverse`	`--f-surface-overlay --f-text`	`--p-label --p-material`
Radius	`--a-radius-sm`	`--f-radius`	—
Elevation	—	`--f-shadow-8`	`--p-shadow-float`

COMPONENTS · OVERLAYS

Command Palette

Keyboard-first search across commands, navigation and recent items.

— states — sizes 3 languages `.ds-cmd .ds-cmd__input`

01 PURPOSE

Keyboard-first search across commands, navigation and recent items.

It is part of the **Overlays** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-cmd`
2. Container — `.ds-cmd__input`
3. Container — `.ds-cmd__list`
4. Footer — `.ds-cmd__foot`
5. Label — `.ds-label`
6. Section header — `.ds-menu__head`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Open command palette

At rest

go to Esc

NAVIGATION

Go to Backlog G B

Go to Board G O

Go to Reports G R

↑↓ to move Enter to run Esc to close

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

⌘ Open command palette

At rest

go to Esc

Navigation

Go to Backlog G B

Go to Board G O

Go to Reports G R

↑↓ to move Enter to run Esc to close

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Open command palette

At rest

go to Esc

Navigation

Go to Backlog G B

Go to Board G O

Go to Reports G R

↑↓ to move Enter to run Esc to close

04 BEHAVIOUR Identical in all three languages.

Opening moves focus inside; Esc or an outside click closes; focus returns to the trigger.

05 ACCESSIBILITY

KEYBOARD

`↑ / ↓` Move through results

`Enter` Run

`Esc` Close

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The input is a `combobox` controlling a `listbox`; the highlighted result is exposed with `aria-activedescendant`. Focus is trapped while open.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Dialogs centred at fixed width; drawers from the edge

Tablet `700–1179px`

Same, max width 100% minus 32px

Mobile `< 700px`

Dialogs fill the width; drawers take most of the screen

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Input size	14px, 44px row	16px, 52px row	22px light, 58px row (Spotlight-like)
Width	560px	600px	640px
Results	Dense rows	Rounded rows	Rows with solid tint highlight
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely

PROPERTY	ATLASSIAN	FLUENT	APPLE
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-separator --a-text --a-text-subtlest`	`--f-divider --f-text --f-text-3`	`--p-label --p-label-3 --p-separator`
Typography	`--a-font`	`--f-font`	`--p-font`

COMPONENTS · LAYOUT

Container

Constrains content width and applies the page gutter.

— states — sizes **3** languages `.ds-container`

01 PURPOSE

Constrains content width and applies the page gutter.

It is part of the **Layout** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container
   `.ds-container`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

Container · max-width 960px — padding: var(--pad)

Content area

FLUENT-INSPIRED Structured · layered — `32px · r4/8 · 14px`

Container · max-width 960px — padding: var(--pad)

Content area

APPLE-INSPIRED Minimal · refined — `36px · r10/14 · 15px`

Container · max-width 960px — padding: var(--pad)

Content area

04 BEHAVIOUR Identical in all three languages.

Presentational. Resizable parts support pointer and keyboard.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Purely presentational; use landmarks (`main`, `nav`) inside.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

12-column grid

Tablet `700–1179px`

Spans collapse to 6 + 6

Mobile `< 700px`

Single column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Page padding	16px	20px	28px
Max content width	1280px (wide tables)	1200px	980px (reading width)
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-surface`	`--f-surface`	`--p-surface`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`
Radius	`--a-radius`	`--f-radius`	`--p-radius`

COMPONENTS · LAYOUT

Grid

A 12-column grid. Gutters follow each language's density.

— states — sizes **3** languages `.ds-grid .ds-demo-box`

01 PURPOSE

A 12-column grid. Gutters follow each language's density.


It is part of the **Layout** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container
   `.ds-grid`
2. Container
   `.ds-demo-box`


03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

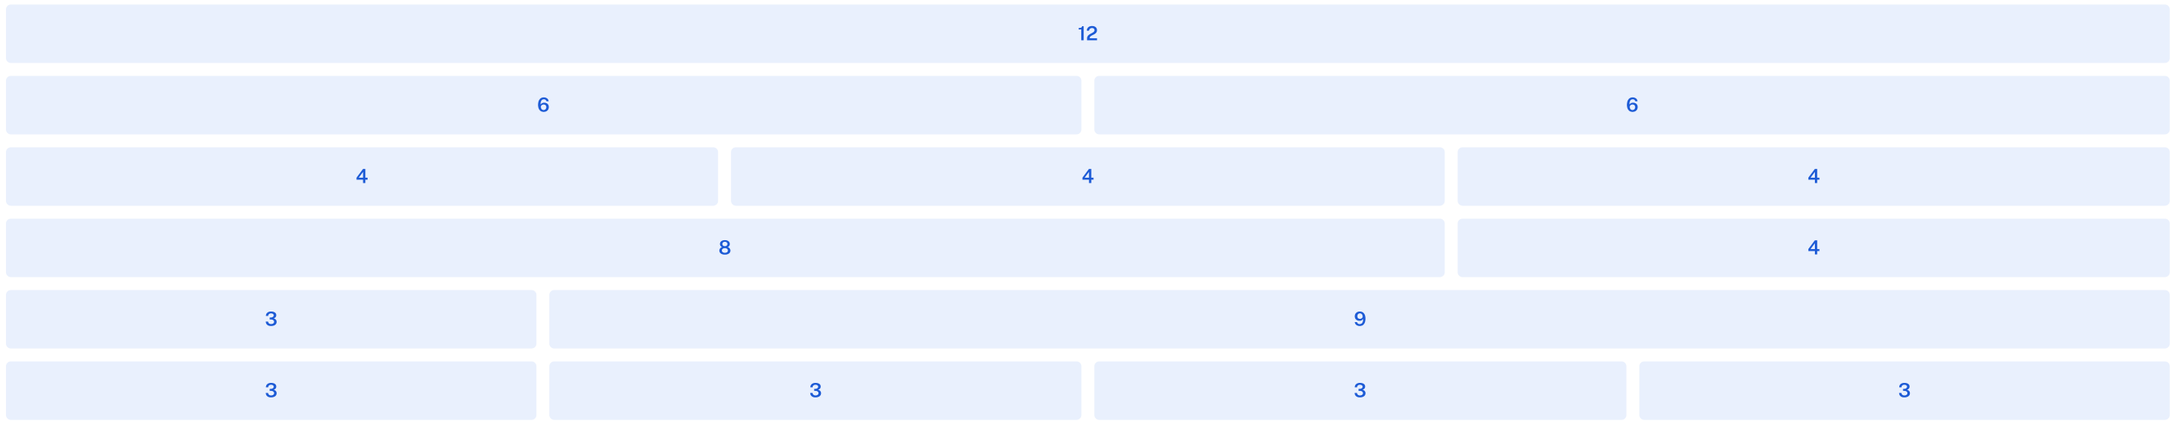


FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

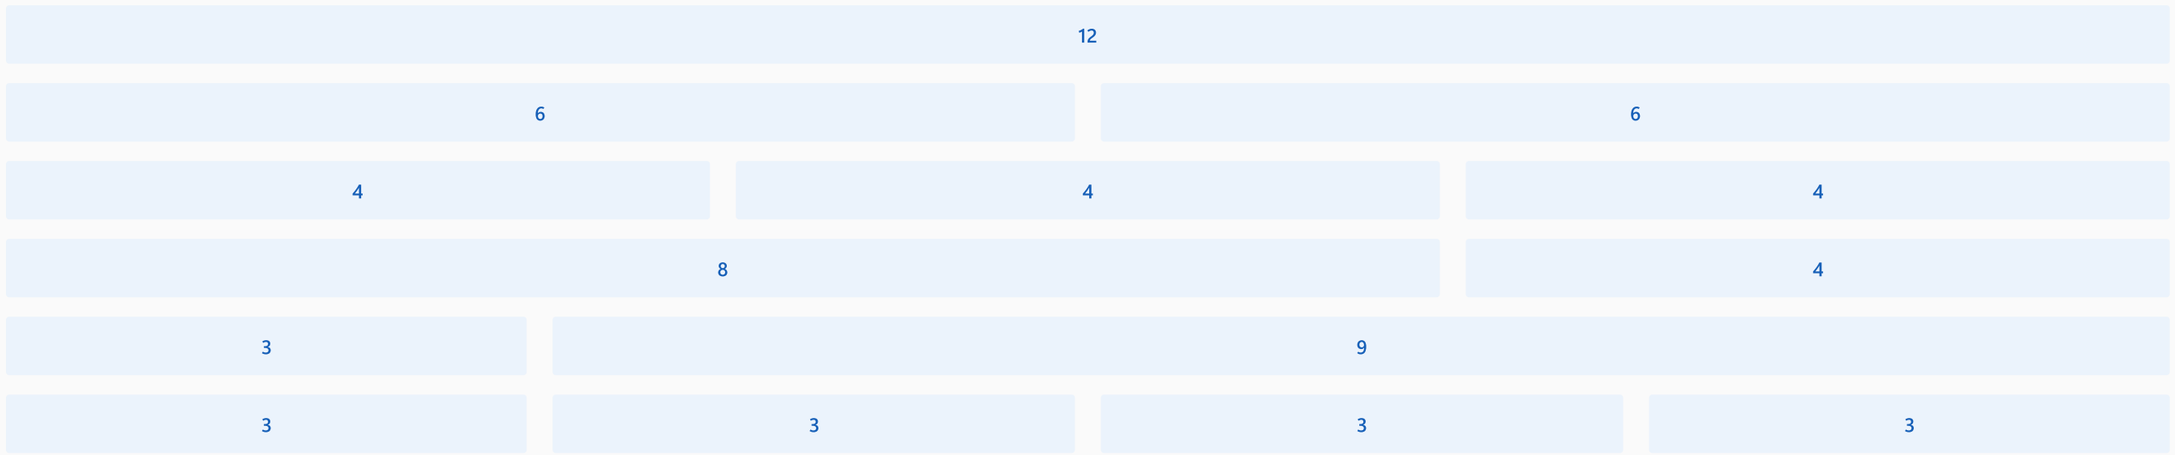

APPLE-INSPIRED Minimal · refined

36px · r10/14 · 15px

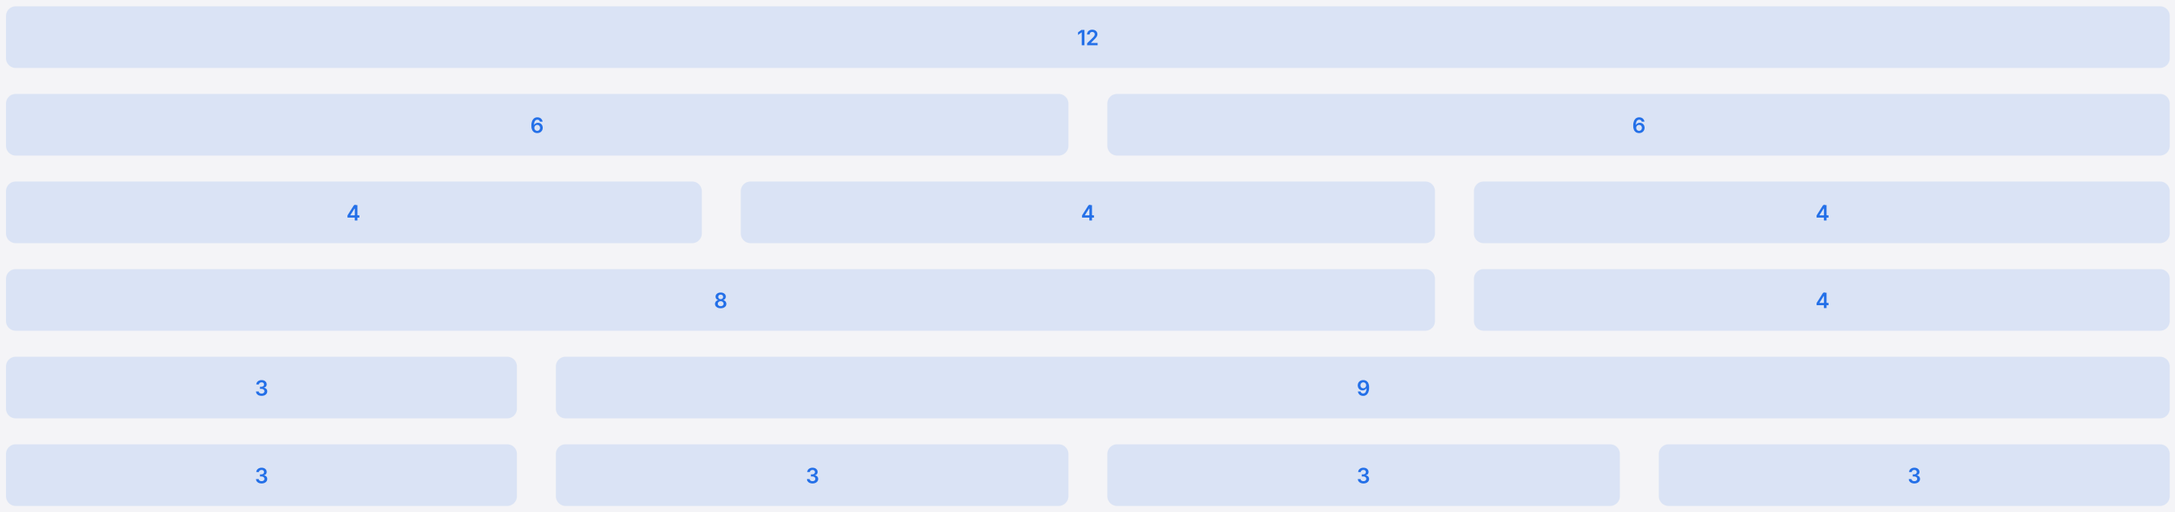

04 BEHAVIOUR

Identical in all three languages.

Presentational. Resizable parts support pointer and keyboard.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Visual order matches DOM order so reading and tab order stay logical.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

12-column grid

Tablet `700–1179px`

Spans collapse to 6 + 6

Mobile `< 700px`

Single column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Gutter	8px	16px	24px
Columns	12	12	12
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-color-primary-subtle`	`--f-color-primary` `--f-color-primary-subtle`	`--p-color-primary` `--p-color-primary-subtle`
Radius	`--a-radius-sm`	`--f-radius-sm`	`--p-radius-sm`

COMPONENTS · LAYOUT

Stack

Spaces children evenly along one axis using the gap tokens.

— states — sizes 3 languages `.ds-stack .ds-col`

01 PURPOSE

Spaces children evenly along one axis using the gap tokens.

It is part of the **Layout** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container `.ds-stack`
2. Container `.ds-col`
3. Container `.ds-row`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3–4 · 14px

Stack · var(--gap)

Item 1

Item 2

Item 3

Stack · var(--gap-l)

Section 1

Section 2

Section 3

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Stack · var(--gap)

Item 1

Item 2

Item 3

Stack · var(--gap-l)

Section 1

Section 2

Section 3

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Stack · var(--gap)

Item 1

Item 2

Item 3

Stack · var(--gap-l)

Section 1

Section 2

Section 3

04 BEHAVIOUR Identical in all three languages.

Presentational. Resizable parts support pointer and keyboard.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Presentational.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

12-column grid

Tablet `700–1179px`

Spans collapse to 6 + 6

Mobile `< 700px`

Single column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Gap	8px	12px	16px
Large gap	16px	20px	28px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Spacing	`--a-space-100 --a-space-200`	`--f-space-m --f-space-xl`	`--p-space-4 --p-space-6`

COMPONENTS · LAYOUT

Split Pane

Two resizable panes, for list-detail and editor-preview layouts.

— states — sizes **3** languages `.ds-split-pane` `.ds-split-pane__h`

01 PURPOSE

Two resizable panes, for list-detail and editor-preview layouts.

It is part of the **Layout** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1 Container `.ds-split-pane`	2 Container `.ds-split-pane__h`	3 First pane `.ds-split-pane__a`	4 Second pane `.ds-split-pane__b`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

Issues

DS-142
Migrate billing tables to new schema

DS-139
Audit focus rings across admin console

DS-137
Invoices API returns stale currency codes


DS-131

DS-142

Drag the divider, or focus it and use the arrow keys.


FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

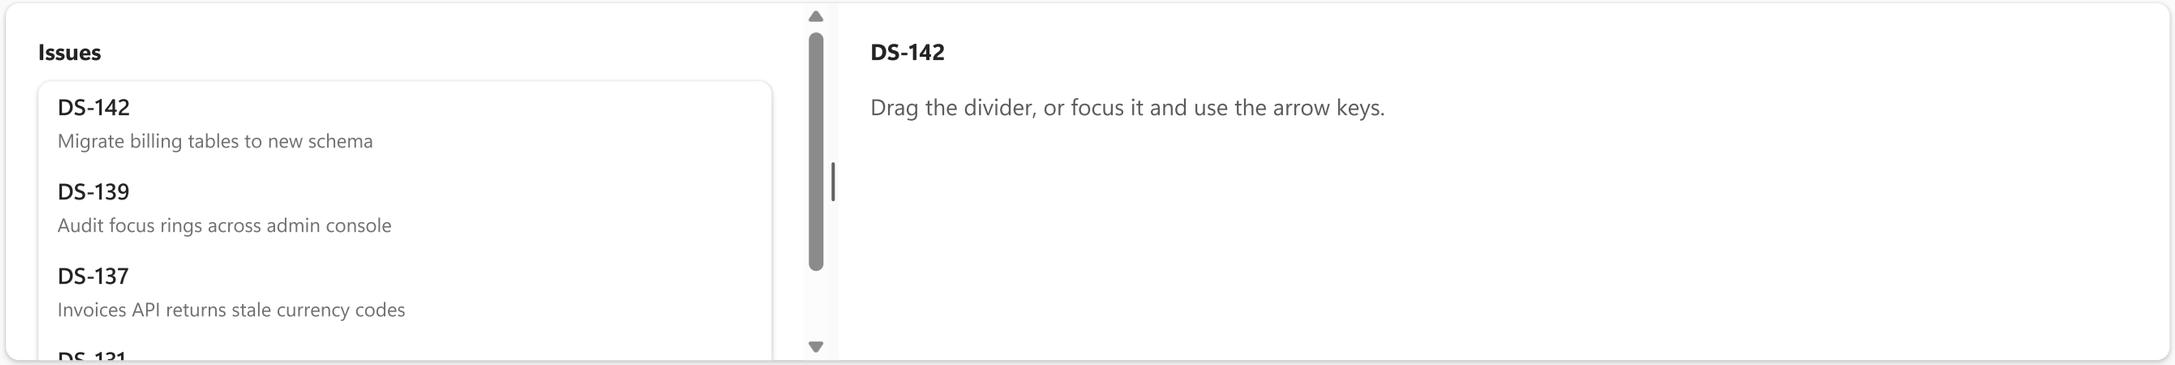

APPLE-INSPIRED Minimal · refined

36px · r10/14 · 15px

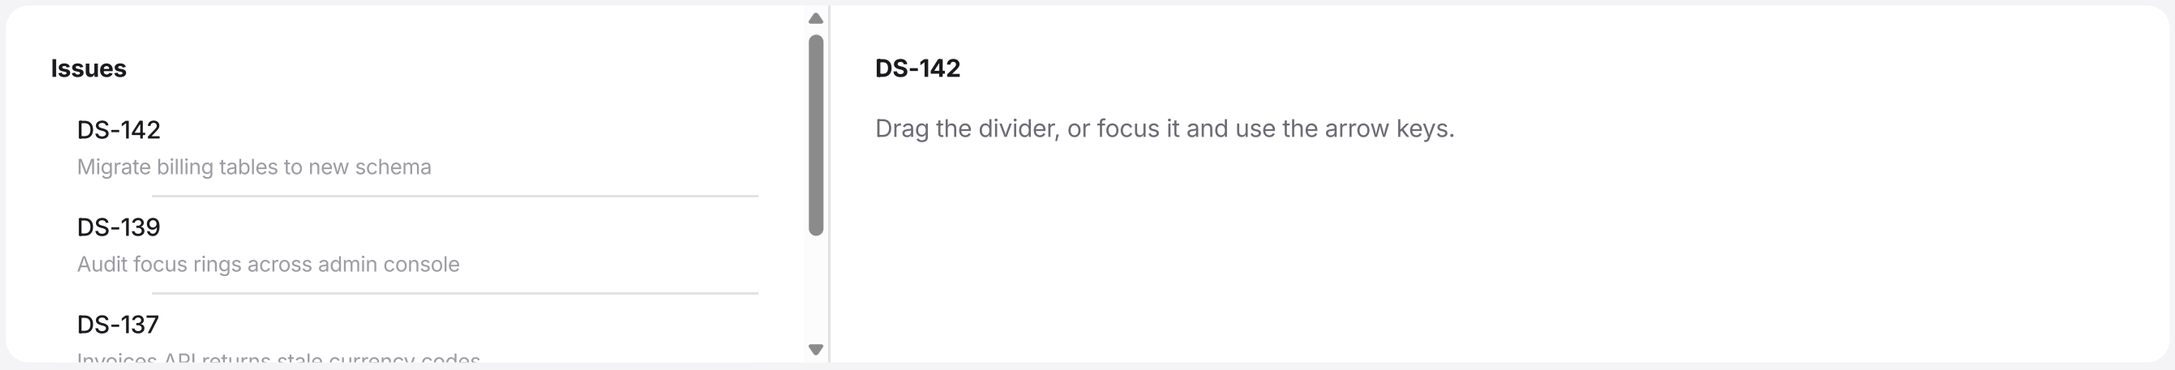

04 BEHAVIOUR Identical in all three languages.

Presentational. Resizable parts support pointer and keyboard.

05 ACCESSIBILITY

KEYBOARD

`← / →` Resize by 5%

`Home / End` Minimum / maximum

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The divider is a focusable `separator` with `aria-valuenow`; arrow keys resize in 5% steps.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

12-column grid

Tablet `700–1179px`

Spans collapse to 6 + 6

Mobile `< 700px`

Single column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Divider	2px line, primary on hover	6px gutter with grip	1px hairline, wide invisible hit area
Container	1px border	Card, shadow 4	Borderless
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border` `--a-color-primary` `--a-separator` `--a-surface`	`--f-canvas` `--f-stroke-accessible` `--f-subtle-hover` `--f-surface`	`--p-color-primary` `--p-separator` `--p-surface`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`
Radius	`--a-radius-lg`	`--f-radius-lg`	`--p-radius-lg`
Elevation	–	`--f-shadow-4`	–

COMPONENTS · LAYOUT

Divider

Separates content into groups.

— states — sizes 3 languages `.ds-divider` `.ds-divider-label`

01 PURPOSE

Separates content into groups.

It is part of the **Layout** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container
   `.ds-divider`
2. Container
   `.ds-divider-label`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Above

Below

or continue with

Left | Right

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Above

Below

or continue with

Left | Right

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Above

Below

or continue with

Left | Right

04 BEHAVIOUR Identical in all three languages.

Presentational. Resizable parts support pointer and keyboard.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Use `hr` or `role="separator"` when the division is meaningful.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

12-column grid

Tablet `700–1179px`

Spans collapse to 6 + 6

Mobile `< 700px`

Single column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Colour	Separator grey	Divider grey	Translucent separator
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-separator` `--a-text-subtlest`	`--f-divider` `--f-text-3`	`--p-label-3` `--p-separator`

COMPONENTS · LAYOUT

Toolbar

A row of related controls with groups and separators.

— states — sizes 3 languages `.ds-toolbar` `.ds-toolbar__sep`

01 PURPOSE

A row of related controls with groups and separators.

It is part of the **Layout** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container
   `.ds-toolbar`
2. Container
   `.ds-toolbar__sep`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.


ATLASSIAN-INSPIRED Dense · productive 32px · r3-4 · 14px



FLUENT-INSPIRED Structured · layered 32px · r4/8 · 14px



APPLE-INSPIRED Minimal · refined 36px · r10/14 · 15px



04 BEHAVIOUR Identical in all three languages.

Presentational. Resizable parts support pointer and keyboard.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move between controls

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

`role="toolbar"` with a label; separators use `role="separator"`.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`
12-column grid

Tablet `700–1179px`
Spans collapse to 6 + 6

Mobile `< 700px`
Single column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Surface	Bordered, 4px	Raised, shadow 4, 8px	Floating material, 14px
Control size	Small (24px)	Small (24px)	Small (28px)
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border --a-separator --a-surface`	`--f-canvas --f-divider --f-surface`	`--p-material --p-separator --p-surface`
Radius	`--a-radius`	`--f-radius-lg`	`--p-radius-lg`
Elevation	–	`--f-shadow-4`	`--p-shadow-float`

COMPONENTS · LAYOUT

Page Header

Top of a page: location, title, status, primary actions and local navigation.

— states — sizes **3** languages `.ds-phead`

01 PURPOSE

Top of a page: location, title, status, primary actions and local navigation.

It is part of the **Layout** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-phead`
2. Row — `.ds-phead__row`
3. Title — `.ds-phead__title`
4. Actions — `.ds-phead__actions`
5. Tab list — `.ds-tablist`
6. Selection indicator — `.ds-tabind`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

Projects / Ledger Migration

Ledger Migration

ON TRACK Lead: Maya Ruiz · Due Sep 30

Share | Create issue

Summary | Backlog | Board | Reports

FLUENT-INSPIRED Structured · layered — `32px · r4/8 · 14px`

Projects > Ledger Migration


Ledger Migration

On track Lead: Maya Ruiz · Due Sep 30

Share | + Create issue

Summary | Backlog | Board | Reports

● **APPLE-INSPIRED** Minimal · refined `36px · r10/14 · 15px`

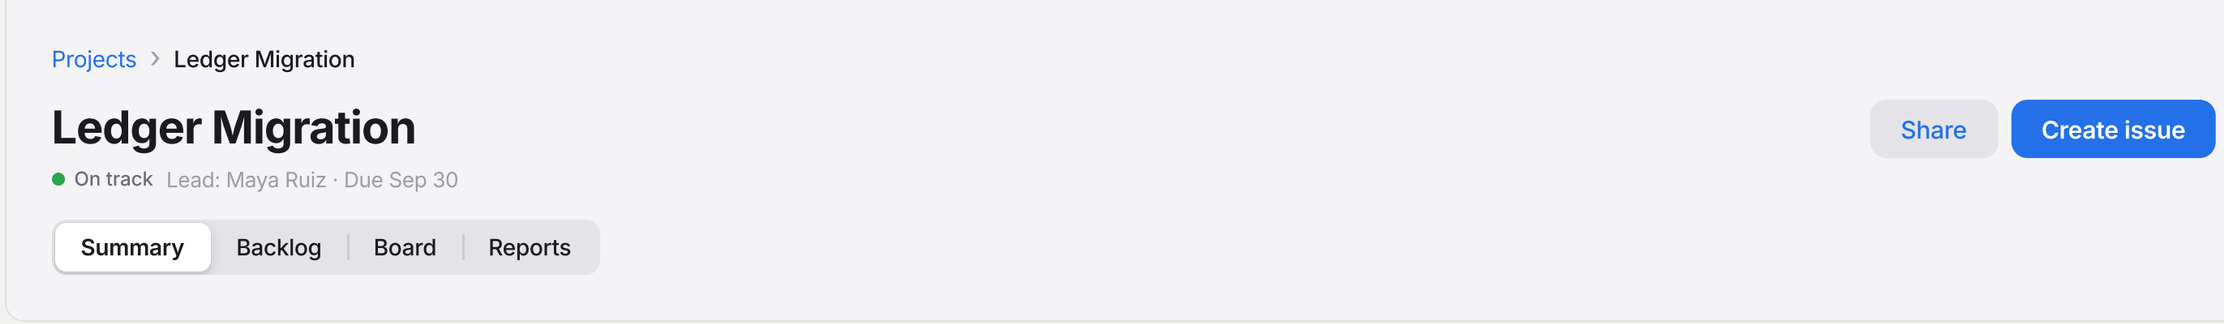

04 BEHAVIOUR Identical in all three languages.

Presentational. Resizable parts support pointer and keyboard.

05 ACCESSIBILITY

KEYBOARD

`Tab` Reach interactive children in order

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

One h1 per page; breadcrumb and tabs keep their own landmarks and patterns.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`
12-column grid

Tablet `700–1179px`
Spans collapse to 6 + 6

Mobile `< 700px`
Single column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Title	24px, 650	28px semibold	28px bold, tight tracking
Bottom edge	Tabs carry the line	Divider under the block	None
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	–	`--f-divider`	–

COMPONENTS · EDITORS

Rich Text Editor

Formatted text with a toolbar for emphasis, lists, quotes and links.

— states — sizes 3 languages `.ds-editor .ds-rte`

01 PURPOSE

Formatted text with a toolbar for emphasis, lists, quotes and links.

It is part of the **Editors** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container `.ds-editor`
2. Container `.ds-rte`
3. Container `.ds-ed-foot`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive 32px · r3-4 · 14px

Billing v2 cut-over

Move **invoices**, line items and tax tables to the v2 schema. Follow the runbook step by step.

- Freeze writes for 10 minutes
- Run the schema diff and compare totals

32 words Saved just now

FLUENT-INSPIRED Structured · layered 32px · r4/8 · 14px

Billing v2 cut-over

Move **invoices**, line items and tax tables to the v2 schema. Follow the runbook step by step.

- Freeze writes for 10 minutes
- Run the schema diff and compare totals

32 words Saved just now

APPLE-INSPIRED Minimal · refined 36px · r10/14 · 15px

Billing v2 cut-over

Move **invoices**, line items and tax tables to the v2 schema. Follow the runbook step by step.

- Freeze writes for 10 minutes
- Run the schema diff and compare totals

32 words Saved just now

04 BEHAVIOUR Identical in all three languages.

Editable regions keep native keyboard behaviour; toolbar toggles reflect the current selection.

05 ACCESSIBILITY

KEYBOARD

`Ctrl + B / I / U` Bold / italic / underline

`Tab` Leave the editor to the next control

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The editable region is a labelled multi-line `textbox`. Toolbar toggles expose `aria-pressed` that tracks the current selection. Native shortcuts (Ctrl+B / I / U) work.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Side-by-side panes where used

Tablet `700–1179px`

Panes stack when narrow

Mobile `< 700px`

Panes stack; toolbars wrap

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Toolbar	Flat, inside the border	Canvas-tinted bar	Same surface as text
Frame	1px border	Card with shadow 2	Borderless, soft shadow
Text padding	12px	16px	20px
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border` `--a-color-link` `--a-color-primary` `--a-separator` `--a-surface` `--a-text-subtlest`	`--f-canvas` `--f-color-link` `--f-color-primary` `--f-divider` `--f-stroke` `--f-surface` `--f-text-3`	`--p-color-link` `--p-focus-halo` `--p-label-3` `--p-separator` `--p-surface`
Radius	`--a-radius`	`--f-radius-lg`	`--p-radius-lg`
Elevation	–	`--f-shadow-2`	`--p-shadow-soft`

COMPONENTS · EDITORS

Code Editor

Editable code with line numbers and live syntax colouring.

— states — sizes 3 languages `.ds-code` `.ds-code__gutter`

01 PURPOSE

Editable code with line numbers and live syntax colouring.

It is part of the **Editors** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-code`
2. Container — `.ds-code__gutter`
3. Container — `.ds-code__body`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3–4 · 14px

reconcile.js — Format — Run

```
1  // Reconcile invoices after the schema migration
2  import { db } from './db';
3
4  export async function reconcile(batch = 500) {
5    const rows = await db.invoices.find({ schema: 'v1' }).limit(batch);
6    let matched = 0;
7    for (const row of rows) {
8      if (row.total === row.v2Total) matched++;
9    }
10   return { checked: rows.length, matched };
11 }
```

Ln 1, Col 1 — JavaScript · Spaces: 2 · Esc then Tab leaves the editor

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

reconcile.js — Format — Run

```
// Reconcile invoices after the schema migration
import { db } from './db';

export async function reconcile(batch = 500) {
  const rows = await db.invoices.find({ schema: 'v1' }).limit(batch);
  let matched = 0;
  for (const row of rows) {
    if (row.total === row.v2Total) matched++;
  }
  return { checked: rows.length, matched };
}
```

Ln 1, Col 1 — JavaScript · Spaces: 2 · Esc then Tab leaves the editor

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

reconcile.js — Format — Run

```
// Reconcile invoices after the schema migration
import { db } from './db';

export async function reconcile(batch = 500) {
  const rows = await db.invoices.find({ schema: 'v1' }).limit(batch);
  let matched = 0;
  for (const row of rows) {
    if (row.total === row.v2Total) matched++;
  }
  return { checked: rows.length, matched };
}
```

Ln 1, Col 1 — JavaScript · Spaces: 2 · Esc then Tab leaves the editor

04 BEHAVIOUR Identical in all three languages.

Editable regions keep native keyboard behaviour; toolbar toggles reflect the current selection.

05 ACCESSIBILITY

KEYBOARD

`Tab` Indent two spaces

`Esc, then Tab` Leave the editor

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

A labelled native `textarea` sits over the coloured text, so screen readers and IME input work normally. Tab indents; Esc then Tab moves focus out.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop ≥ 1180px

Side-by-side panes where used

Tablet 700–1179px

Panes stack when narrow

Mobile < 700px

Panes stack; toolbars wrap

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Theme	Product colours on white	Editor-classic palette	Xcode-like palette
Gutter	Sunken grey	Same surface, teal numbers	Same surface, grey numbers
Frame	1px border	Card, shadow 2	Borderless, soft shadow
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-surface` `--a-surface-sunken` `--a-text` `--a-text-subtlest`	`--f-color-primary` `--f-surface` `--f-text`	`--p-color-primary` `--p-label` `--p-label-3` `--p-surface`

COMPONENTS · EDITORS

JSON Viewer

Read structured data with collapsible objects and arrays.

— states — sizes **3** languages `.ds-json`

01 PURPOSE

Read structured data with collapsible objects and arrays.

It is part of the **Editors** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container
   `.ds-json`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive 32px · r3-4 · 14px

GET /issues/DS-142 Expand all Collapse all


```
{
  "issue": "DS-142",
  "status": "In progress",
  "points": 8,
  "blocked": false,
  "assignee": {
    "name": "Maya Ruiz",
    "team": "Billing"
  },
  "labels": [
    "billing",
    "migration"
  ],
  "links": [
    {
      "type": "blocks",
      "key": "DS-137"
    }
  ],
  "due": null
}
```


FLUENT-INSPIRED Structured · layered 32px · r4/8 · 14px

GET /issues/DS-142 Expand all Collapse all


```
{
  "issue": "DS-142",
  "status": "In progress",
  "points": 8,
  "blocked": false,
  "assignee": {
    "name": "Maya Ruiz",
    "team": "Billing"
  },
  "labels": [
    "billing",
    "migration"
  ],
  "links": [
    {
      "type": "blocks",
      "key": "DS-137"
    }
  ],
  "due": null
}
```


APPLE-INSPIRED Minimal · refined 36px · r10/14 · 15px

GET /issues/DS-142 Expand all Collapse all


```
{
  "issue": "DS-142",
  "status": "In progress",
  "points": 8,
  "blocked": false,
  "assignee": {
    "name": "Maya Ruiz",
    "team": "Billing"
  },
  "labels": [
    "billing",
    "migration"
  ],
  "links": [
    {
      "type": "blocks",
      "key": "DS-137"
    }
  ],
  "due": null
}
```


KEYBOARD

`Tab` Move between toggles

`Enter` Expand / collapse

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Toggles are buttons with `aria-expanded`; collapsed nodes show a summary (“2 keys”).

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop ≥ 1180px

Side-by-side panes where used

Tablet 700–1179px

Panes stack when narrow

Mobile < 700px

Panes stack; toolbars wrap

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Font	Mono 12.5px	Mono 12.5px	Mono 12.5px
Value colours	Product palette	Editor-classic	Xcode-like
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-focus` `--a-surface` `--a-text-subtlest`	`--f-focus-inner` `--f-focus-outer` `--f-text-3`	`--p-focus-halo` `--p-label-3`

COMPONENTS · EDITORS

Formula Editor

Write spreadsheet-style formulas with function suggestions, cell references and a live result.

— states — sizes **3** languages `.ds-fx .ds-sheet`

01 PURPOSE

Write spreadsheet-style formulas with function suggestions, cell references and a live result.

It is part of the **Editors** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container — `.ds-fx`
2. Container — `.ds-sheet`
3. Container — `.ds-fx-result`
4. Label — `.ds-label`
5. Function tag — `.ds-fx__tag`
6. Helper / error text — `.ds-help`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3–4 · 14px

Forecast formula

`fx =SUM(B2:B6)*1.2`

Functions: SUM, AVERAGE, MIN, MAX. Reference cells like B3 or ranges like B2:B6.

SUM() AVERAGE() MIN() MAX()

Result **84,912**

	A	B
1	Month	Revenue
2	Jan	12,400
3	Feb	13,850
4	Mar	12,990
5	Apr	15,420
6	May	16,100

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Forecast formula

`fx =SUM(B2:B6)*1.2`

Functions: SUM, AVERAGE, MIN, MAX. Reference cells like B3 or ranges like B2:B6.

SUM() AVERAGE() MIN() MAX()

Result **84,912**

	A	B
1	Month	Revenue
2	Jan	12,400
3	Feb	13,850
4	Mar	12,990
5	Apr	15,420
6	May	16,100

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Forecast formula

`fx =SUM(B2:B6)*1.2`

Functions: SUM, AVERAGE, MIN, MAX. Reference cells like B3 or ranges like B2:B6.

SUM() AVERAGE() MIN() MAX()

Result **84,912**

	A	B
1	Month	Revenue
2	Jan	12,400
3	Feb	13,850
4	Mar	12,990
5	Apr	15,420
6	May	16,100

04 BEHAVIOUR Identical in all three languages.

Editable regions keep native keyboard behaviour; toolbar toggles reflect the current selection.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move between fields

`Type` Edit the value

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The result is in a live region. Errors explain what is allowed instead of a generic “invalid formula”.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Side-by-side panes where used

Tablet `700–1179px`

Panes stack when narrow

Mobile `< 700px`

Panes stack; toolbars wrap

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Formula field	Same as text field	Same as text field	Underline field
Referenced cells	Tint + outline	Tint + outline	Tint + outline
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary` `--a-color-primary-subtle` `--a-separator` `--a-surface-sunken` `--a-text-subtlest`	`--f-color-primary` `--f-color-primary-subtle` `--f-divider` `--f-surface-sunken` `--f-text-3`	`--p-canvas` `--p-color-primary` `--p-color-primary-subtle` `--p-label-3` `--p-separator`

COMPONENTS · EDITORS

Markdown Editor

Write Markdown on the left and see the formatted result on the right as you type.

— states — sizes **3** languages `.ds-md .ds-md__out`

01 PURPOSE

Write Markdown on the left and see the formatted result on the right as you type.

It is part of the **Editors** group and behaves identically in all three design languages.

02 ANATOMY Parts, with the class that styles each one.

1. Container `.ds-md`
2. Container `.ds-md__out`

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

release-notes.md — Publish

```
## Release notes 4.2

Billing now runs on the **v2 schema**. Invoices load *twice as fast*.

- Bulk export for reports
- New `reconcile()` job
- Fixed stale currency codes

> Rollback stays available for 14 days.

Read the [migration guide](#)
```

Release notes 4.2

Billing now runs on the **v2 schema**. Invoices load *twice as fast*.

- Bulk export for reports
- New `reconcile()` job
- Fixed stale currency codes

> Rollback stays available for 14 days.

Read the migration guide.

FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

release-notes.md

Publish

```
## Release notes 4.2

Billing now runs on the **v2 schema**. Invoices load *twice as fast*.

- Bulk export for reports
- New `reconcile()` job
- Fixed stale currency codes

> Rollback stays available for 14 days.
```

Release notes 4.2

Billing now runs on the **v2 schema**. Invoices load *twice as fast*.

- Bulk export for reports
- New `reconcile()` job
- Fixed stale currency codes

> Rollback stays available for 14 days.

Read the migration guide.

APPLE-INSPIRED Minimal · refined

36px · r10/14 · 15px

release-notes.md

Publish

```
## Release notes 4.2

Billing now runs on the **v2 schema**. Invoices load *twice as fast*.

- Bulk export for reports
- New `reconcile()` job
- Fixed stale currency codes

> Rollback stays available for 14 days.

Read the [migration guide](#).
```

Release notes 4.2

Billing now runs on the **v2 schema**. Invoices load *twice as fast*.

- Bulk export for reports
- New `reconcile()` job
- Fixed stale currency codes

> Rollback stays available for 14 days.

Read the migration guide.

04 BEHAVIOUR

Identical in all three languages.

Editable regions keep native keyboard behaviour; toolbar toggles reflect the current selection.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move between fields

`Type` Edit the value

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The source is a labelled `textarea`; the preview is a labelled region that does not announce every keystroke.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

Side-by-side panes where used

Tablet `700–1179px`

Panes stack when narrow

Mobile `< 700px`

Panes stack; toolbars wrap

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Source pane	Sunken grey	Sunken grey	Grouped background
Preview type	Product body type	Product body type	Product body type, larger
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this component reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-link --a-neutral --a-separator --a-surface-sunken --a-text --a-text-subtle`	`--f-color-link --f-divider --f-surface --f-surface-sunken --f-text --f-text-2`	`--p-canvas --p-color-link --p-fill --p-label --p-label-2 --p-separator`

PATTERNS

CRUD

Create, read, update and delete records in a table, with a modal form, confirmation and undo.

— states — sizes 3 languages `.ds-table .ds-tbar`

01 PURPOSE

Create, read, update and delete records in a table, with a modal form, confirmation and undo.

02 COMPOSITION Components this pattern is built from.

Button Search Table Data Grid Stack

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3-4 · 14px`

Team members

Filter by name or role

Add member

Name	Role	Access	
MR Maya Ruiz	Engineering lead	ADMIN	
JO Jonas Ortiz	Product designer	MEMBER	
AK Aiko Kato	Backend engineer	MEMBER	
LS Liam Shah	QA analyst	VIEWER	
PN Priya Nair	Product manager	MEMBER	

No members match

Try another name, or clear the filter.

FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

Team members

Filter by name or role

+ Add member

Name	Role	Access	
MR Maya Ruiz	Engineering lead	Admin	✎ 🗑
JO Jonas Ortiz	Product designer	Member	✎ 🗑
AK Aiko Kato	Backend engineer	Member	✎ 🗑
LS Liam Shah	QA analyst	Viewer	✎ 🗑
PN Priya Nair	Product manager	Member	✎ 🗑

No members match

Try another name, or clear the filter.

● **APPLE-INSPIRED** Minimal · refined `36px · r10/14 · 15px`

Team members

Filter by name or role

Add member

Name	Role	Access	
MR Maya Ruiz	Engineering lead	Admin	✎ 🗑
JO Jonas Ortiz	Product designer	Member	✎ 🗑
AK Aiko Kato	Backend engineer	Member	✎ 🗑
LS Liam Shah	QA analyst	Viewer	✎ 🗑
PN Priya Nair	Product manager	Member	✎ 🗑

No members match

Try another name, or clear the filter.

04 BEHAVIOUR

Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move through rows and actions

`Enter` Activate

`Esc` Close dialogs

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Row actions are named with the record (“Edit Maya Ruiz”). Dialogs return focus to the button that opened them. Removal offers undo.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Table density	36px rows	44px rows	48px rows
Row actions	Icon buttons, always visible	Icon buttons, always visible	Icon buttons, always visible
Delete flow	Confirm dialog → snackbar undo	Confirm dialog → snackbar undo	Confirm alert → snackbar undo
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo

PROPERTY	ATLASSIAN	FLUENT	APPLE
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this pattern reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary-subtle` `--a-danger` `--a-separator` `--a-surface-overlay` `--a-surface-sunken` `--a-text` `--a-text-subtle` `--a-warning`	`--f-color-primary` `--f-color-primary-subtle` `--f-danger` `--f-divider` `--f-subtle-hover` `--f-subtle-pressed` `--f-surface-overlay` `--f-text` `--f-text-2` `--f-warning`	`--p-color-primary` `--p-fill` `--p-hover` `--p-label` `--p-label-2` `--p-label-3` `--p-material` `--p-orange` `--p-red` `--p-separator`
Spacing	`--a-space-100`	`--f-space-m`	`--p-space-4`
Radius	`--a-radius-lg`	`--f-radius-lg`	`--p-radius-xl`
Elevation	`--a-shadow-modal`	`--f-shadow-64`	`--p-shadow-sheet`
Sizing	`--a-height-md`	`--f-height-md`	`--p-height-md`

PATTERNS

Search

Global search with scopes, highlighted matches, result counts and a helpful empty state.

— states — sizes **3** languages `.ds-result .ds-results`

01 PURPOSE

Global search with scopes, highlighted matches, result counts and a helpful empty state.

02 COMPOSITION Components this pattern is built from.

Search Tabs Stack

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

billing

All | Issues | Docs | People

7 results for “billing”

Issue · Ledger Migration › Backlog

DS-142 Migrate billing tables to new schema

Move invoices, line items and tax tables to the v2 schema.

Issue · Ledger Migration › Sprint 42

DS-137 Invoices API returns stale currency codes

Currency codes are cached for 24h in the billing service.

Doc · Docs › Operations

Runbook: billing cut-over

Freeze writes, run the schema diff, compare totals, re-point replica.

Doc · Docs › Architecture

ADR-012 Billing schema v2

Why invoices move to a normalised line-item table.

Person · Backend engineer · Billing

Aiko Kato

Owns the invoices API and the rollback plan.

Doc · Docs › Releases

Release notes 4.2

Billing now runs on the v2 schema.

Person · Engineering lead · Billing

Maya Ruiz

Leads the Ledger Migration project.

FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

billing

All Issues Docs People

7 results for "billing"

Issue · Ledger Migration › Backlog

DS-142 Migrate billing tables to new schema

Move invoices, line items and tax tables to the v2 schema.

Issue · Ledger Migration › Sprint 42

DS-137 Invoices API returns stale currency codes

Currency codes are cached for 24h in the billing service.

Doc · Docs › Operations

Runbook: billing cut-over

Freeze writes, run the schema diff, compare totals, re-point replica.

Doc · Docs › Architecture

ADR-012 Billing schema v2

Why invoices move to a normalised line-item table.

Person · Backend engineer · Billing

Aiko Kato

Owns the invoices API and the rollback plan.

Doc · Docs › Releases

Release notes 4.2

Billing now runs on the v2 schema.

Person · Engineering lead · Billing

Maya Ruiz

Leads the Ledger Migration project.

● **APPLE-INSPIRED** Minimal · refined `36px · r10/14 · 15px`

billing

All | Issues | Docs | People

7 results for “billing”

Issue · Ledger Migration › Backlog

DS-142 Migrate billing tables to new schema

Move invoices, line items and tax tables to the v2 schema.

Issue · Ledger Migration › Sprint 42

DS-137 Invoices API returns stale currency codes

Currency codes are cached for 24h in the **billing** service.

Doc · Docs › Operations

Runbook: billing cut-over

Freeze writes, run the schema diff, compare totals, re-point replica.

Doc · Docs › Architecture

ADR-012 Billing schema v2

Why invoices move to a normalised line-item table.

Person · Backend engineer · Billing

Aiko Kato

Owns the invoices API and the rollback plan.

Doc · Docs › Releases

Release notes 4.2

Billing now runs on the v2 schema.

Person · Engineering lead · Billing

Maya Ruiz

Leads the Ledger Migration project.

04 BEHAVIOUR

Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Type` Results update as you type

`← / →` Change scope

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Result counts are announced politely. Matches are marked with `mark`, and the empty state suggests what to try next.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Search field	Box, large	Box, large	Filled rounded field
Scopes	Underlined tabs	Tabs with icons	Segmented control
Results	Flat rows with dividers	Raised cards	Borderless cards on grey

PROPERTY	ATLASSIAN	FLUENT	APPLE
Match highlight	Yellow marker	Bold brand text	Bold text
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this pattern reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-link` `--a-separator` `--a-text-subtlest` `--a-warning-bold`	`--f-color-primary` `--f-color-primary-subtle` `--f-surface` `--f-text` `--f-text-3`	`--p-fill` `--p-focus-halo` `--p-label` `--p-label-3` `--p-surface`
Spacing	`--a-space-100`	`--f-space-m`	`--p-space-4`
Radius	`--a-radius`	`--f-radius`	`--p-radius`
Elevation	–	`--f-shadow-2`	–

PATTERNS

Filtering

Narrow a list with faceted filters, quick chips and removable active-filter tags.

— states — sizes **3** languages `.ds-filter-layout .ds-facets`

01 PURPOSE

Narrow a list with faceted filters, quick chips and removable active-filter tags.

02 COMPOSITION Components this pattern is built from.

Checkbox Switch List Chip Stack

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — `32px · r3–4 · 14px`

Status
- [ ] To do (1)
- [ ] In progress (2)
- [ ] In review (1)
- [ ] Blocked (1)
- [ ] Done (1)

Assignee
- [ ] Maya Ruiz
- [ ] Jonas Ortiz
- [ ] Aiko Kato
- [ ] Liam Shah
- [ ] Priya Nair

Only 5+ points

Updated today | Large (8+)

6 of 6 issues

DS-142 Migrate billing tables to new schema Maya Ruiz · 8 pts · 2h ago	IN PROGRESS
DS-139 Audit focus rings across admin console Jonas Ortiz · 3 pts · 5h ago	IN REVIEW
DS-137 Invoices API returns stale currency codes Aiko Kato · 5 pts · Yesterday	BLOCKED
DS-131 Add bulk export to reports view Liam Shah · 2 pts · 2d ago	TO DO
DS-128 Rename workspace roles in settings Priya Nair · 1 pts · 4d ago	DONE
DS-125 Reduce dashboard first paint below 1.5s Maya Ruiz · 13 pts · 5d ago	IN PROGRESS

FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

Status

- [ ] To do (1)
- [ ] In progress (2)
- [ ] In review (1)
- [ ] Blocked (1)
- [ ] Done (1)

Assignee

- [ ] Maya Ruiz
- [ ] Jonas Ortiz
- [ ] Aiko Kato
- [ ] Liam Shah
- [ ] Priya Nair

Only 5+ points

Updated today | Large (8+)

6 of 6 issues

DS-142 Migrate billing tables to new schema
Maya Ruiz · 8 pts · 2h ago — In progress


DS-139 Audit focus rings across admin console
Jonas Ortiz · 3 pts · 5h ago — In review

DS-137 Invoices API returns stale currency codes
Aiko Kato · 5 pts · Yesterday — Blocked

DS-131 Add bulk export to reports view
Liam Shah · 2 pts · 2d ago — To do

DS-128 Rename workspace roles in settings
Priya Nair · 1 pts · 4d ago — Done

DS-125 Reduce dashboard first paint below 1.5s
Maya Ruiz · 13 pts · 5d ago — In progress

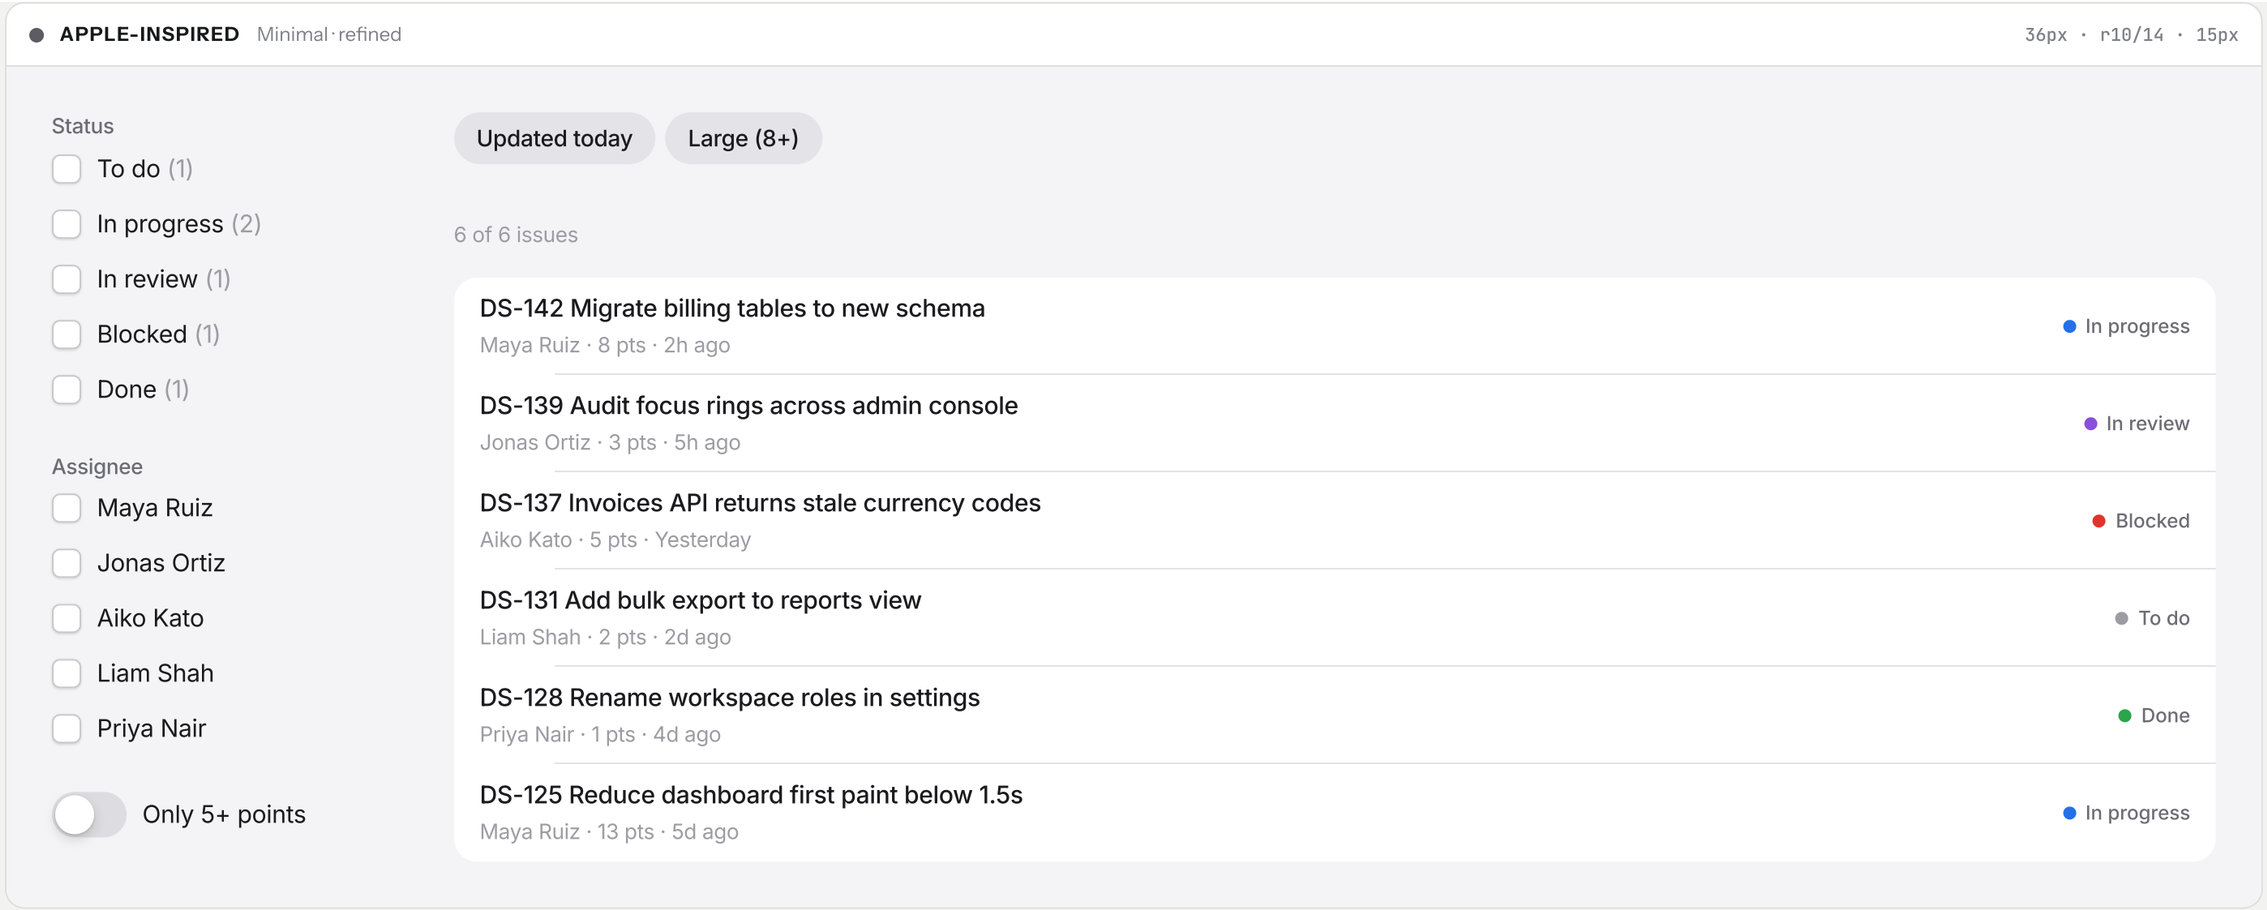

04 BEHAVIOUR

Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Space` Toggle a facet

`Enter` Remove an active filter tag

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Facets are grouped in fieldsets. Result counts are announced politely, and every active filter can be removed individually or all at once.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`
All columns, full density

Tablet `700–1179px`
Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`
Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Facet panel	Compact checkbox list	Checkbox groups with 8px rhythm	Spacious groups, 12px rhythm
Active filters	Square tags	Rounded tags with stroke	Capsules
Result list	Dense rows	Card list	Inset grouped list
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this pattern reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border --a-color-primary --a-color-primary-subtle --a-discovery --a-discovery-bg --a-focus --a-hover --a-info-bg --a-neutral --a-success --a-success-bg --a-surface --a-text --a-text-subtle --a-warning --a-warning-bg`	`--f-color-on-primary --f-color-primary --f-discovery --f-discovery-bg --f-focus-inner --f-focus-outer --f-info-bg --f-stroke --f-subtle-hover --f-success --f-success-bg --f-surface --f-surface-sunken --f-text --f-warning --f-warning-bg`	`--p-color-primary --p-fill --p-fill-hover --p-focus-halo --p-green --p-green-bg --p-hover --p-info-bg --p-label --p-orange --p-orange-bg --p-purple --p-purple-bg --p-surface`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`
Radius	`--a-radius-sm`	`--f-radius`	–

PATTERNS

Tables

A data-heavy table with column customisation, density, grouping, sorting and export. Inline editing lives on the Data Grid sheet.

— states — sizes **3** languages `.ds-table .ds-tbar`

01 PURPOSE

A data-heavy table with column customisation, density, grouping, sorting and export. Inline editing lives on the Data Grid sheet.

02 COMPOSITION Components this pattern is built from.

Button Button Group Combobox Switch Dropdown Table Data Grid

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3–4 · 14px`

Inventory · Warehouse 3

Columns | Comfortable | Compact | Group by status | Export

SKU	Item	Status	Owner	Qty	Updated
INV-1042	Laptop 14" (fleet)	LOW STOCK	Aiko Kato	12	Today
INV-1043	Docking station	IN STOCK	Liam Shah	148	Today
INV-1051	USB-C cable 2m	IN STOCK	Liam Shah	920	Yesterday
INV-1060	Monitor 27"	BACKORDERED	Priya Nair	0	2d ago
INV-1061	Keyboard, US layout	LOW STOCK	Aiko Kato	18	3d ago
INV-1077	Headset, wired	IN STOCK	Tomás Weber	260	5d ago

6 items · 6 of 6 columns

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Inventory · Warehouse 3

Columns | Comfortable | Compact | Group by status | Export

SKU	Item	Status	Owner	Qty	Updated
INV-1042	Laptop 14" (fleet)	Low stock	Aiko Kato	12	Today
INV-1043	Docking station	In stock	Liam Shah	148	Today
INV-1051	USB-C cable 2m	In stock	Liam Shah	920	Yesterday
INV-1060	Monitor 27"	Backordered	Priya Nair	0	2d ago
INV-1061	Keyboard, US layout	Low stock	Aiko Kato	18	3d ago
INV-1077	Headset, wired	In stock	Tomás Weber	260	5d ago

6 items · 6 of 6 columns

APPLE-INSPIRED Minimal · refined — 36px · r10/14 · 15px

Inventory · Warehouse 3

Columns | Comfortable | Compact | Group by status | Export

SKU	Item	Status	Owner	Qty	Updated
INV-1042	Laptop 14" (fleet)	Low stock	Aiko Kato	12	Today
INV-1043	Docking station	In stock	Liam Shah	148	Today
INV-1051	USB-C cable 2m	In stock	Liam Shah	920	Yesterday
INV-1060	Monitor 27"	Backordered	Priya Nair	0	2d ago
INV-1061	Keyboard, US layout	Low stock	Aiko Kato	18	3d ago
INV-1077	Headset, wired	In stock	Tomás Weber	260	5d ago

6 items · 6 of 6 columns

04 BEHAVIOUR

Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Enter` Open the Columns menu or sort a column

`Space` Toggle a column in the menu

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Column visibility uses `menuitemcheckbox`. Group rows are header cells with `scope="rowgroup"`. Sorting is disabled while grouped so the order stays predictable.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Row height (comfortable / compact)	36 / 28px	44 / 28px	48 / 28px
Group header	Sunken band	Sunken band	Sunken band
Column menu	Flat menu with checks	Rounded menu with checks	Material menu with checks
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces

PROPERTY	ATLASSIAN	FLUENT	APPLE
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this pattern reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-primary-subtle` `--a-separator` `--a-surface` `--a-surface-sunken` `--a-text` `--a-text-subtle`	`--f-color-primary` `--f-color-primary-subtle` `--f-divider` `--f-subtle-hover` `--f-subtle-pressed` `--f-surface` `--f-text`	`--p-color-primary` `--p-fill` `--p-hover` `--p-label` `--p-label-3` `--p-separator` `--p-surface`
Spacing	`--a-space-100`	`--f-space-m`	`--p-space-4`
Radius	–	`--f-radius-lg`	`--p-radius-lg`
Elevation	–	`--f-shadow-4`	–
Sizing	`--a-height-md`	`--f-height-md`	`--p-height-md`

PATTERNS

Forms

A complete “Create project” form: grouped sections, inline validation, an error summary and a success confirmation.

— states — sizes **3** languages `.ds-panel .ds-field`

01 PURPOSE

A complete “Create project” form: grouped sections, inline validation, an error summary and a success confirmation.

02 COMPOSITION

Components this pattern is built from.

Button Text Field Text Area Select Combobox Checkbox Radio Switch Date Picker Date Range Dropdown Stack

03 VARIANTS · LIVE EXAMPLE

Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive

32px · r3-4 · 14px

Create project

Projects group issues, boards and reports for one team.

DETAILS

Project name *

For example, Ledger Migration

Shown in navigation and reports

Key *

LED

2–5 capital letters, used in issue keys

Description

What is this project for?

PEOPLE & ACCESS

Project lead

Maya Ruiz

Start date

Oct 27, 2026

Visibility

- Private
  Only invited members
- Workspace
  Everyone in Ledger Inc.

Email the team when the project is created

Cancel

Create project

FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

Create project

Projects group issues, boards and reports for one team.

Details

Project name *

For example, Ledger Migration

Shown in navigation and reports

Key *

LED

2–5 capital letters, used in issue keys

Description

What is this project for?

People & access

Project lead

Maya Ruiz

Start date

Oct 27, 2026

Visibility

- ○ Private
  Only invited members
- ◉ Workspace
  Everyone in Ledger Inc.

Email the team when the project is created

Cancel

Create project

● **APPLE-INSPIRED** Minimal · refined `36px · r10/14 · 15px`

Create project

Projects group issues, boards and reports for one team.

Details

Project name *

For example, Ledger Migration

Shown in navigation and reports

Key *

LED

2–5 capital letters, used in issue keys

Description

What is this project for?

People & access

Project lead

Maya Ruiz

Start date

Oct 27, 2026

Visibility

- ○ Private
  Only invited members
- ◉ Workspace
  Everyone in Ledger Inc.

Email the team when the project is created

Cancel Create project

04 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move through fields

`Enter` Submit from any text field

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Errors are shown inline and summarised at the top; the summary receives focus and each entry links to its field. Fields use native validation attributes and `aria-invalid`.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Section headers	Small uppercase eyebrow	Semibold group label	Grey text, generous space above
Field rhythm	16px between fields	20px	28px
Error summary	Section message at top	Message bar at top	Card at top
Primary action	Bottom right	Bottom right	Bottom right
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely

PROPERTY	ATLASSIAN	FLUENT	APPLE
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this pattern reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border --a-color-primary --a-danger --a-danger-bg --a-discovery --a-discovery-bg --a-info-bg --a-success --a-success-bg --a-surface --a-text --a-warning --a-warning-bg`	`--f-color-primary --f-danger --f-danger-bg --f-discovery --f-discovery-bg --f-info-bg --f-success --f-success-bg --f-surface --f-text --f-warning --f-warning-bg`	`--p-color-primary --p-green --p-green-bg --p-info-bg --p-label --p-label-2 --p-orange --p-orange-bg --p-purple --p-purple-bg --p-red --p-red-bg --p-surface`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`
Radius	`--a-radius`	`--f-radius --f-radius-lg`	`--p-radius-lg --p-radius-xl`
Elevation	–	`--f-shadow-4`	`--p-shadow-soft`

PATTERNS

Dashboards

KPIs, a chart, a filter and drill-down into the records behind a bar.

— states — sizes **3** languages `.ds-stat .ds-panel`

01 PURPOSE

KPIs, a chart, a filter and drill-down into the records behind a bar.

02 COMPOSITION Components this pattern is built from.

Button Button Group Stack

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

Sales pipeline

Q2 Q3


PIPELINE
$5.1M
+21% vs last quarter

WIN RATE
34 %
+3% vs last quarter

AVG. DEAL
$61k
+5% vs last quarter

Closed-won deals by month

Select a bar for details

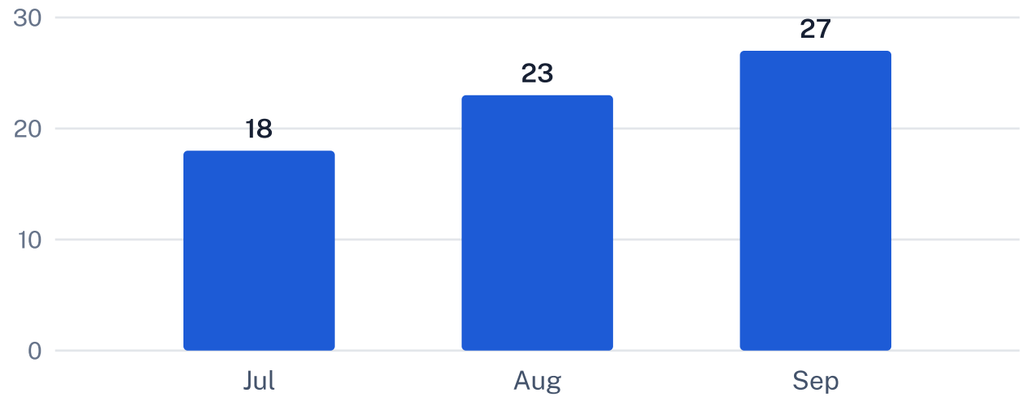

Select a month to see its deals.


Sales pipeline

Q2 Q3

Pipeline	Win rate	Avg. deal
$5.1M	34%	$61k
+21% vs last quarter	+3% vs last quarter	+5% vs last quarter

Closed-won deals by month

Select a bar for details

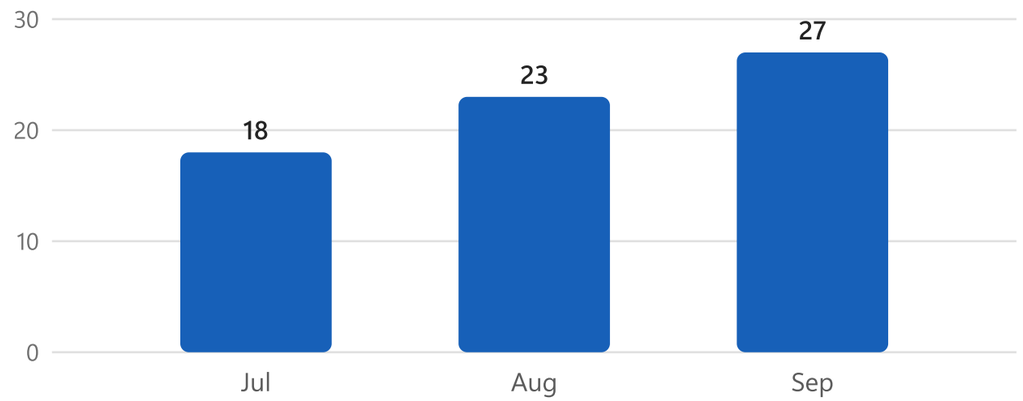

Select a month to see its deals.

● **APPLE-INSPIRED** Minimal · refined `36px · r10/14 · 15px`

Sales pipeline

Q2 Q3


Pipeline
$5.1M
+21% vs last quarter

Win rate
34%
+3% vs last quarter

Avg. deal
$61k
+5% vs last quarter

Closed-won deals by month

Select a bar for details

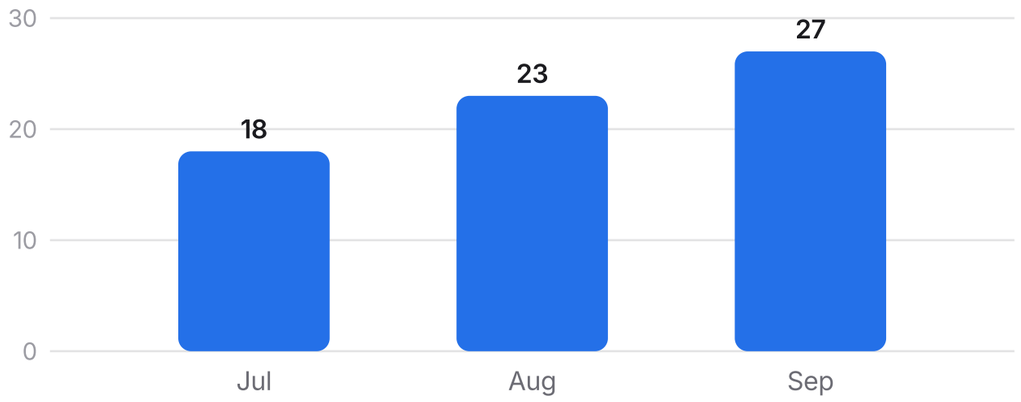

Select a month to see its deals.

04 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move between bars

`Enter / Space` Show the month's deals

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Each bar is a focusable button with its value in the label; Enter selects it and the detail list updates in a live region. Numbers appear as text, not only as bar heights.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
KPI tiles	Bordered, small numbers	Raised cards	Large light numerals
Chart surface	Bordered panel	Raised card	Borderless rounded panel
Drill-down	List below the chart	List below the chart	List below the chart
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this pattern reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border` `--a-danger` `--a-success` `--a-surface` `--a-text` `--a-text-subtle` `--a-text-subtlest`	`--f-danger` `--f-success` `--f-surface` `--f-text` `--f-text-2` `--f-text-3`	`--p-green` `--p-label` `--p-label-2` `--p-label-3` `--p-red` `--p-surface`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`
Radius	`--a-radius`	`--f-radius-lg`	`--p-radius-xl`
Elevation	–	`--f-shadow-4`	–

PATTERNS

Workflow

An approval workflow: status, progress, decisions, history and comments for a purchase order.

— states — sizes **3** languages `.ds-steps .ds-tl`

01 PURPOSE

An approval workflow: status, progress, decisions, history and comments for a purchase order.

02 COMPOSITION Components this pattern is built from.

Button · Text Field · Text Area · Stepper · Badge · Timeline · Stack · Markdown Editor

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3–4 · 14px

Procurement · PO-2291

48 laptops for the Lisbon office

Request changes | Reject | Approve

AWAITING FINANCE $86,400 · requested by Liam Shah

✓ Submitted — ✓ Manager — 3 Finance — 4 Ordered

History

- **Priya Nair** — approved as manager — Yesterday
- **Liam Shah** — submitted the request — 2d ago

Comment

Add context for the next approver

Add comment

FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

Procurement · PO-2291

48 laptops for the Lisbon office

Awaiting finance $86,400 · requested by Liam Shah

Request changes | Reject | ✓ Approve

1. Submitted — Liam Shah
2. Manager — Priya Nair
3. Finance — You
4. Ordered — Procurement

History


Priya Nair Yesterday
approved as manager

Liam Shah 2d ago
submitted the request

Comment

Add context for the next approver

Add comment

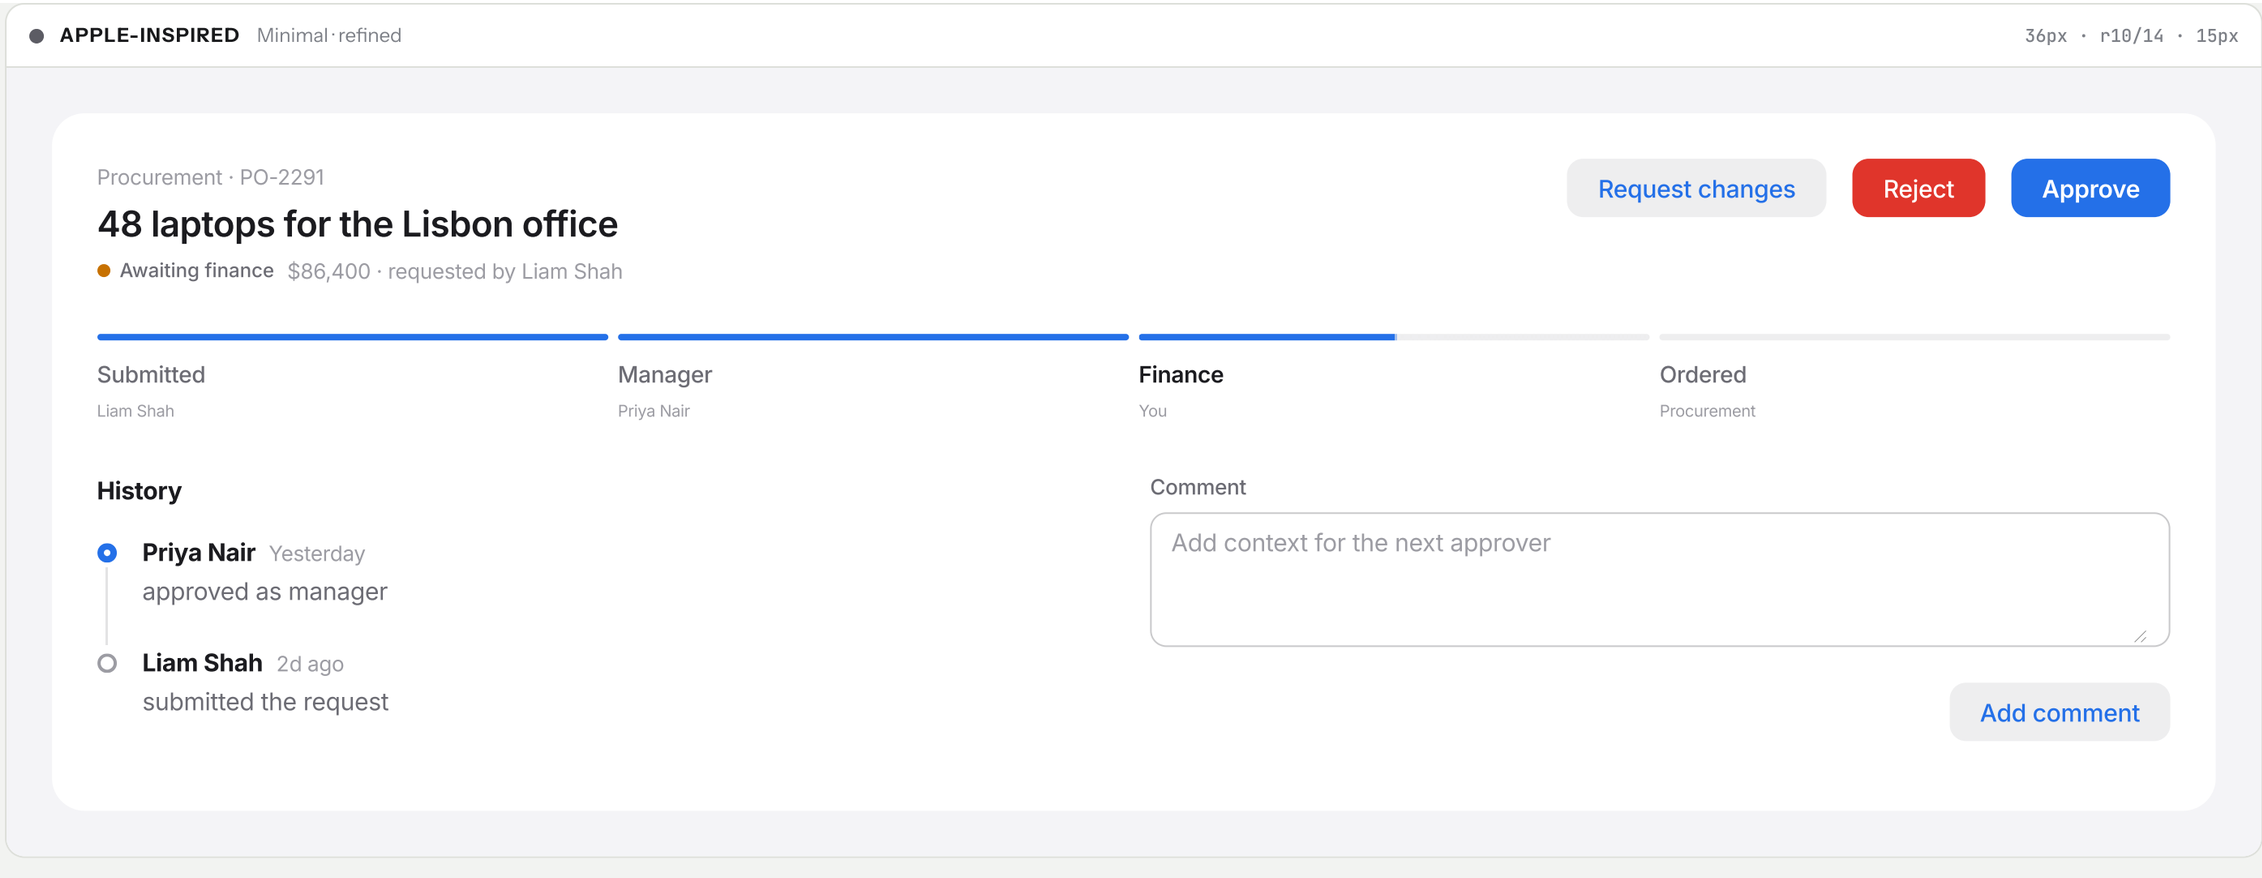

04 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move through actions and the comment box

`Esc` Cancel the rejection dialog

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Progress is an ordered list with `aria-current="step"`. Rejection requires a reason and explains why when it is missing. The status badge and history update together.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Progress	Inline numbered steps	Discs with labels	Segmented bar
History	Compact dots	Icon circles	Spacious rings
Reject	Confirm with required reason	Confirm with required reason	Confirm with required reason
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this pattern reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border --a-border-input --a-color-primary --a-separator --a-surface --a-text-subtle --a-text-subtlest`	`--f-color-on-primary --f-color-primary --f-stroke --f-surface --f-surface-sunken --f-text-2 --f-text-3`	`--p-color-primary --p-label-2 --p-label-3 --p-separator --p-surface`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`
Radius	`--a-radius`	`--f-radius-lg`	`--p-radius-xl`
Elevation	–	`--f-shadow-4`	–

PATTERNS

Authentication

A sign-in form with SSO, password visibility, validation and a remembered session. Demonstration only: nothing is sent anywhere.

— states — sizes **3** languages `.ds-panel .ds-field`

01 PURPOSE

A sign-in form with SSO, password visibility, validation and a remembered session. Demonstration only: nothing is sent anywhere.

02 COMPOSITION Components this pattern is built from.

Button Link Text Field Switch Stack Divider

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Ledger

Sign in

Demo form: nothing you type leaves this page.

Continue with company SSO

or

Work email

maya.ruiz@ledger.example

Password

Show

At least 8 characters

Keep me signed in Forgot password?

Sign in

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Ledger

Sign in

Demo form: nothing you type leaves this page.

Continue with company SSO

or

Work email

maya.ruiz@ledger.example

Password

Show

At least 8 characters

Keep me signed in Forgot password?

Sign in

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Ledger

Sign in

Demo form: nothing you type leaves this page.

Continue with company SSO

or

Work email

maya.ruiz@ledger.example

Password

Show

At least 8 characters

Keep me signed in Forgot password?

Sign in

04 BEHAVIOUR

Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`Tab` Move through fields

`Enter` Sign in

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Fields have visible labels and helpful errors. The show/hide control is a toggle button with `aria-pressed`. Autocomplete is off in this demo; a real form should use `autocomplete="username"` and `"current-password"`.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop ≥ 1180px

All columns, full density

Tablet 700–1179px

Tables scroll inside their container; secondary columns can be hidden

Mobile < 700px

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Card	Bordered panel	Raised card	Borderless rounded panel
Primary button	Full width, 40px	Full width, 40px	Full width, 44px
Error	Red frame + message	Red bar + message	Red underline + message
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this pattern reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-border` `--a-border-input` `--a-color-primary` `--a-danger` `--a-focus` `--a-hover` `--a-neutral` `--a-success` `--a-surface` `--a-surface-field` `--a-surface-sunken` `--a-text` `--a-text-disabled` `--a-text-subtle` `--a-text-subtlest` `--a-warning`	`--f-color-primary` `--f-danger` `--f-divider` `--f-focus-inner` `--f-focus-outer` `--f-stroke` `--f-stroke-accessible` `--f-stroke-hover` `--f-subtle-hover` `--f-success` `--f-surface` `--f-surface-sunken` `--f-text` `--f-text-2` `--f-text-3` `--f-text-disabled` `--f-warning`	`--p-border-strong` `--p-color-primary` `--p-fill` `--p-focus-halo` `--p-green` `--p-hover` `--p-label` `--p-label-2` `--p-label-3` `--p-label-disabled` `--p-orange` `--p-red` `--p-separator` `--p-surface`
Spacing	`--a-space-200`	`--f-space-xl`	`--p-space-6`
Typography	`--a-font`	`--f-font`	`--p-font`
Radius	`--a-radius` `--a-radius-sm`	`--f-radius` `--f-radius-lg`	`--p-radius` `--p-radius-xl`
Elevation	–	`--f-shadow-4`	–
Sizing	`--a-height-lg` `--a-height-md` `--a-height-sm`	`--f-height-lg` `--f-height-md` `--f-height-sm`	`--p-height-lg` `--p-height-md` `--p-height-sm`

PATTERNS

Notifications

A notification centre with unread state, filters, mark-as-read and live arrivals.

— states — sizes 3 languages .ds-list .ds-li

01 PURPOSE

A notification centre with unread state, filters, mark-as-read and live arrivals.

02 COMPOSITION Components this pattern is built from.

Button Tabs List Stack

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive 32px · r3-4 · 14px

Notifications 2 Mark all as read + Simulate new

All Mentions Approvals

- PN **Priya Nair approved PO-2291 as manager** — Approvals · 10m
- AK **Aiko Kato mentioned you in DS-137** — Mentions · 1h
- CI CI Deploy #418 passed to staging — System · 3h
- LS Liam Shah submitted expense report EXP-88 — Approvals · Yesterday

FLUENT-INSPIRED Structured · layered 32px · r4/8 · 14px

Notifications 2 Mark all as read + Simulate new

All Mentions Approvals

- PN **Priya Nair approved PO-2291 as manager** — Approvals · 10m
- AK **Aiko Kato mentioned you in DS-137** — Mentions · 1h
- CI CI Deploy #418 passed to staging — System · 3h
- LS Liam Shah submitted expense report EXP-88 — Approvals · Yesterday

APPLE-INSPIRED Minimal · refined 36px · r10/14 · 15px

Notifications 2 Mark all as read + Simulate new

All Mentions Approvals

- PN **Priya Nair approved PO-2291 as mana…** — Approvals · 10m
- AK **Aiko Kato mentioned you in DS-137** — Mentions · 1h
- CI CI Deploy #418 passed to staging — System · 3h
- LS Liam Shah submitted expense report EXP… — Approvals · Yesterday

04 BEHAVIOUR Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`← / →` Change filter

`Enter` Mark as read

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

Unread state is in each item's accessible name, not only in the dot. New arrivals are announced through the toast live region.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
Unread marker	Bold title + dot	Bold title + dot	Bold title + dot
Arrival	Flag bottom-left	Toast bottom-right	Banner top-centre
List	Dense rows	Card list	Inset grouped list
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo

PROPERTY	ATLASSIAN	FLUENT	APPLE
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this pattern reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-color-on-primary --a-color-primary --a-color-primary-subtle --a-danger --a-danger-bg --a-discovery --a-discovery-bg --a-hover --a-info-bg --a-neutral --a-separator --a-success --a-success-bg --a-surface --a-text --a-text-subtle --a-text-subtlest --a-warning --a-warning-bg --a-warning-bold`	`--f-color-on-primary --f-color-primary --f-color-primary-subtle --f-danger --f-danger-bg --f-discovery --f-discovery-bg --f-divider --f-info-bg --f-subtle-hover --f-subtle-pressed --f-success --f-success-bg --f-surface --f-text --f-text-2 --f-text-3 --f-warning --f-warning-bg`	`--p-color-on-primary --p-color-primary --p-color-primary-subtle --p-fill --p-green --p-green-bg --p-hover --p-info-bg --p-label --p-label-2 --p-label-3 --p-orange --p-orange-bg --p-pressed --p-purple --p-purple-bg --p-red --p-red-bg --p-separator --p-surface`
Radius	`--a-radius-sm`	`--f-radius-lg`	`--p-radius-lg`
Elevation	–	`--f-shadow-4`	–

PATTERNS

Master Detail

Browse a list on one side and see the selected record’s full detail on the other.

— states — sizes 3 languages `.ds-md-layout .ds-list`

01 PURPOSE

Browse a list on one side and see the selected record’s full detail on the other.

02 COMPOSITION Components this pattern is built from.

List Markdown Editor

03 VARIANTS · LIVE EXAMPLE Same markup and content in each language.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3–4 · 14px

DS-142
Migrate billing tables to new schema

DS-139
Audit focus rings across admin console

DS-137
Invoices API returns stale currency codes

DS-131
Add bulk export to reports view

DS-128
Rename workspace roles in settings

DS-125
Reduce dashboard first paint below 1.5s

DS-142

Migrate billing tables to new schema

Edit Resolve

Status IN PROGRESS
Assignee MR Maya Ruiz
Points 8
Updated 2h ago

Description Activity

Migrate billing tables to new schema. Acceptance: totals match within 0.01 and no customer-visible downtime.

FLUENT-INSPIRED Structured · layered

32px · r4/8 · 14px

DS-142
Migrate billing tables to new schema

DS-139
Audit focus rings across admin console

DS-137
Invoices API returns stale currency codes

DS-131
Add bulk export to reports view

DS-128
Rename workspace roles in settings

DS-125
Reduce dashboard first paint below 1.5s

DS-142

Migrate billing tables to new schema

Edit | Resolve

Status In progress
Assignee MR Maya Ruiz
Points 8
Updated 2h ago

Description | Activity

Migrate billing tables to new schema. Acceptance: totals match within 0.01 and no customer-visible downtime.

APPLE-INSPIRED Minimal · refined

36px · r10/14 · 15px

DS-142
Migrate billing tables to new schema ›

DS-139
Audit focus rings across admin console ›

DS-137
Invoices API returns stale currency c... ›

DS-131
Add bulk export to reports view ›

DS-128
Rename workspace roles in settings ›

DS-125
Reduce dashboard first paint below 1.... ›

DS-142

Migrate billing tables to new schema

Edit | Resolve

Status In progress
Assignee MR Maya Ruiz
Points 8
Updated 2h ago

Description | Activity

Migrate billing tables to new schema. Acceptance: totals match within 0.01 and no customer-visible downtime.

04 **BEHAVIOUR** Identical in all three languages.

Read-first. Interactive parts (sort, select, expand) are buttons with visible focus.

05 ACCESSIBILITY

KEYBOARD

`↑ / ↓` Move through the list and show details

`Tab` Move into the detail panel

FOCUS

Visible in every language: Atlassian 2px outline with offset, Fluent 2px inset ring, Apple 4px soft halo.

ARIA AND SEMANTICS

The list is a `listbox` with roving focus; selection updates the detail region, which is announced politely.

CONTRAST

Text and state colours come from semantic tokens. Check new token values against WCAG 4.5:1 for text and 3:1 for focus and borders.

06 RESPONSIVE

Desktop `≥ 1180px`

All columns, full density

Tablet `700–1179px`

Tables scroll inside their container; secondary columns can be hidden

Mobile `< 700px`

Tables scroll; lists and cards stack in one column

07 DESIGN LANGUAGE COMPARISON

PROPERTY	ATLASSIAN	FLUENT	APPLE
List width	280px, no gap	300px + 16px gap	300px + 20px gap
Selection	Tint + left bar	Tint fill	Tint fill + disclosure chevrons
Detail surface	Bordered panel	Raised card	Borderless rounded panel
Density	Compact	Medium	Spacious
Corner radius	3–4px	4px controls · 8px surfaces	10px controls · 14–20px surfaces
Borders	Visible, functional	Subtle, strong bottom edge on inputs	Hairline or none

PROPERTY	ATLASSIAN	FLUENT	APPLE
Shadow	Minimal, border-led	Layered elevation ramp	Soft, used rarely
Focus	2px outline, 2px offset	2px high-contrast inset ring	4px soft tint halo
Motion	~100ms, tint changes	150–250ms, decelerate	250–350ms, spring + scale

08 TOKEN USAGE

Design tokens this pattern reads, by category. Traced from the live stylesheet.

CATEGORY	ATLASSIAN	FLUENT	APPLE
Colour	`--a-surface --a-text-subtlest`	`--f-surface --f-text-3`	`--p-label-3 --p-surface`
Radius	–	`--f-radius-lg`	`--p-radius-lg`
Elevation	–	`--f-shadow-4`	–

GUIDELINES

Accessibility

Accessibility is part of each component's contract, identical in all three languages.

01 CHECKLIST What every component in this lab does, and how.

REQUIREMENT	HOW THE SYSTEM MEETS IT	EXAMPLE
Keyboard operable	Native elements first; ARIA patterns for composite widgets with roving focus	Tree, Tabs
Visible focus	Each language has a distinct, high-visibility focus treatment	Button
Names and roles	Labels, aria-label on icon buttons, roles on custom widgets	Icon Button
State is not colour alone	Status uses text and icons as well as colour	Badge
Announcements	Toasts, counts and sort changes use live regions	Toast, Table
Dialogs	Focus moves in, is trapped, and returns to the trigger	Modal
Reduced motion	Animations shorten to near zero when the OS asks	Motion

02 FOCUS TREATMENTS Same element, three focus styles.

ATLASSIAN-INSPIRED Dense · productive `32px · r3-4 · 14px`

Approve Cancel PO-2291

FLUENT-INSPIRED Structured · layered `32px · r4/8 · 14px`

Approve Cancel PO-2291

APPLE-INSPIRED Minimal · refined `36px · r10/14 · 15px`

Approve Cancel

PO-2291

03 CONTRAST

Text and state colours come from semantic tokens, so contrast is fixed in one place per language. Check any new token value against WCAG 2.2: 4.5:1 for body text, 3:1 for large text and for focus indicators and control borders.

GUIDELINES

Responsive

How layouts and density adapt from desktop to phone.

01 BREAKPOINTS

Desktop `≥ 1180px`

Full navigation. Comparisons show three columns side by side. Tables show all columns.

Tablet `700–1179px`

Navigation collapses to a menu. Comparisons scroll sideways, two languages in view. Secondary table columns can be hidden.

Mobile `< 700px`

One language in focus with sideways swipe to compare. Forms go single-column. Tables scroll inside their container.

02 TOUCH TARGETS

Small / medium / large control heights per language.

PROPERTY	ATLASSIAN	FLUENT	APPLE
Small	24px	24px	28px
Medium	32px	32px	36px
Large	40px	40px	44px
Touch-friendly default	Use Large on touch	Use Large on touch	Medium is already 36px; Large meets 44px

GUIDELINES

Content

How the interface speaks. The same words appear in all three languages.

01 PRINCIPLES

- Name things by what users recognise: “notifications”, not “webhook config”.
- Buttons say what happens: “Approve”, “Export CSV”, then confirm with “Approved”.
- Errors say what went wrong and how to fix it, without blame or apology.
- Sentence case everywhere except short labels like status lozenges.

02 EXAMPLES

CONTEXT	DO	DON’T
Primary button	Create issue	Submit
Error message	Key must be 2–5 capital letters, for example LED	Invalid input
Empty state	No issues match these filters. Clear all filters	No data
Destructive confirm	Delete 3 issues? This can’t be undone.	Are you sure?
Toast	DS-143 was added to the backlog	Success!

GUIDELINES

Interaction

Which feedback to use, and how fast it responds in each language.

01 FEEDBACK MODEL

SITUATION	USE	SHEET
Field is wrong	Inline error under the field	Text Field
Several fields are wrong	Error summary at the top, linked to fields	Forms
Action succeeded	Toast	Toast
Action can be undone	Snackbar with Undo	Snackbar
Action is destructive	Confirmation dialog	Confirmation Dialog
Page-level condition	Banner	Banner
Work in progress	Progress or spinner	Progress

02 STATE MODEL

Every interactive component supports the same states.

Default, hover, focus, active (pressed), selected, disabled, loading, and where relevant error, success and warning. Each component sheet shows its states side by side.

03 PER LANGUAGE

PROPERTY	ATLASSIAN	FLUENT	APPLE
Response time	~100ms	150–250ms	250–350ms
Pressed feedback	Darker fill	Darker fill + stroke	Scale to 97%
Hover	Tint	Tint	Minimal

GUIDELINES

Keyboard

Every keyboard interaction in the lab, collected from the component sheets.

01 GLOBAL

/	Focus page search
Esc	Close the open menu, popover or dialog and return focus
Tab	Move between controls in reading order

02 BY COMPONENT

KEY	ACTION	USED ON
Enter / Space	Activate	Button, Icon Button, Button Group, File Upload, Stepper, Accordion, Dashboards
Esc	Hide the tooltip	Icon Button, Split Button, Search, Select, Multi Select, Combobox, Date Picker, Date Range +13
Enter / ↓	Open the menu and focus the first item	Split Button, Menu, Dropdown
↑ / ↓ · Home / End	Move between items	Split Button, Menu, Dropdown, Context Menu
Enter	Follow the link	Link, Search, Select, Multi Select, Combobox, Date Picker, Date Range, Time Picker +16
Type	Edit the value	Text Field, Text Area, Formula Editor, Markdown Editor, Search
/	Focus search (app-level)	Search
↓ / ↑	Open and move through options	Select, Multi Select, Combobox, Time Picker
Backspace	Remove the last tag when the input is empty	Multi Select
Space	Toggle	Checkbox, Switch, Data Grid, Chip, Filtering, Tables
↑ / ↓	Select previous / next option	Radio, Tree, Command Palette, Master Detail
← / →	Decrease / increase by one step	Slider, Tabs, Split Pane, Search, Notifications
Home / End	Minimum / maximum	Slider, Tabs, Split Pane
Page Up / Down	Larger steps	Slider, Date Picker
← → ↑ ↓	Move by day / week	Date Picker, Date Range, Color Picker
Shift + F10	Open the context menu	Context Menu
→	Expand, then move to first child	Tree

KEY	ACTION	USED ON
←	Collapse, then move to parent	Tree
`Enter / F2`	Edit the focused cell	Data Grid
`Ctrl + B / I / U`	Bold / italic / underline	Rich Text Editor
`Esc, then Tab`	Leave the editor	Code Editor

GUIDELINES

Do / Don’t

Common mistakes when building with the system, shown in the language selected in the top bar (Fluent-inspired when comparing all three).

ONE PRIMARY ACTION PER AREA

DO

Cancel Approve

One clear next step; the rest are secondary.

DON’T

Save Approve Send

Several primaries make every action look equally important.

STATUS WITH WORDS

DO

Blocked Done

Colour plus a word works for everyone.

DON’T

Colour alone fails colour-blind users and screen readers.

HELPFUL ERRORS

DO

Key

led

Use 2–5 capital letters, for example LED

Say what is wrong and how to fix it.

DON’T

Key

led

Invalid

Generic errors leave the user guessing.

ARCHITECTURE

Principles

Ten principles that keep the system consistent as it grows.

DESIGN PRINCIPLES

01 Consistency over customization

A screen should look like the rest of the product before it looks unique.

02 Reuse before recreation

Compose existing components; add new ones only when a pattern repeats.

03 Accessibility by default

Keyboard, focus, ARIA and text alternatives are built into every component.

04 Responsive by design

Layouts reflow from three columns to a single focused column.

05 Keyboard-first enterprise interaction

Every action is reachable without a mouse; menus, grids and dialogs follow ARIA patterns.

06 Data density without visual overload

Density is a token decision, not a reason to remove hierarchy.

07 Clear hierarchy

One primary action per area; type and spacing do the ranking.

08 Predictable component behavior

The same component behaves the same way in every language.

09 Token-driven styling

Components read semantic tokens only; no hard-coded values.

10 Visual language separated from component architecture

Switching a scope class changes the look, never the markup.

MATURITY

Level 01
Foundations
Visual rules

Level 02
Tokens
Named, themeable values

Level 03
Components
Reusable UI elements

Level 04
Composed components
Built from core parts

Level 05
Patterns
Repeatable solutions

Level 06
Enterprise flows
End-to-end tasks

Level 07
Application experience
Whole products

ARCHITECTURE

Tokens

Three token tiers. Components read only the middle tier, so a language swap never touches component CSS.

01 TIERS

TIER	EXAMPLE	OWNED BY
Design tokens	`--a-color-primary` , `--f-shadow-16` , `--p-radius-lg`	Each language, light and dark
Semantic aliases	`--pri` , `--fg` , `--bd` , `--r` , `--h-m` , `--sh-2`	Shared contract, mapped per language
Component tokens	`--btn-bg` , `--in-bd` , `--tab-h`	Component, defaulted from aliases

02 RESOLUTION CHAINS Traced live from the stylesheet.

ATLASSIAN-INSPIRED Dense · productive — 32px · r3-4 · 14px

Primary action · --pri → --a-color-primary → #1D5BD6
Body text · --fg → --a-text → #172033
Border · --bd → --a-border → #DCDFE4
Control radius · --r → --a-radius → 4px
Control height · --h-m → --a-height-md → 32px
Popover shadow · --sh-2 → --a-shadow-overlay → 0 8px 12px rgba(23,43,77,.15),0 0 1px rgba(23,43,77,.32)
Focus ring · --ring → 0 0 0 2px var(--bg),0 0 0 4px var(--a-focus)
Motion · --dur → .1s

FLUENT-INSPIRED Structured · layered — 32px · r4/8 · 14px

Primary action · --pri → --f-color-primary → #1760B8
Body text · --fg → --f-text → #242424
Border · --bd → --f-stroke → #D1D1D1
Control radius · --r → --f-radius → 4px
Control height · --h-m → --f-height-md → 32px
Popover shadow · --sh-2 → --f-shadow-16 → 0 0 2px rgba(0,0,0,.12),0 8px 16px rgba(0,0,0,.14)
Focus ring · --ring → inset 0 0 0 1px var(--f-focus-inner),0 0 0 2px var(--f-focus-outer)
Motion · --dur → .15s

APPLE-INSPIRED Minimal · refined

36px · r10/14 · 15px

Primary action · --pri → --p-color-primary → #2470E8

Body text · --fg → --p-label → #1B1B1F

Border · --bd → --p-border → rgba(60,60,67,.12)

Control radius · --r → --p-radius → 10px

Control height · --h-m → --p-height-md → 36px

Popover shadow · --sh-2 → --p-shadow-float → 0 10px 30px rgba(0,0,0,.12),0 0 0 .5px rgba(0,0,0,.08)

Focus ring · --ring → 0 0 0 4px var(--p-focus-halo)

Motion · --dur → .32s

ARCHITECTURE

Components

Core components are single-purpose; composed components are assembled from them.

01 LAYERS

CORE · 18

- Button
- Icon Button
- Link
- Text Field
- Text Area
- Checkbox
- Radio
- Switch
- Slider
- Badge
- Tag
- Chip
- Avatar
- Spinner
- Divider
- Tooltip
- Progress
- Skeleton

COMPOSED · 48

- Button Group
- Split Button
- Search
- Select
- Multi Select
- Combobox
- Date Picker
- Date Range
- Time Picker
- File Upload
- Color Picker
- Header
- Sidebar
- Breadcrumb
- Tabs
- Pagination
- Stepper
- Menu
- Dropdown
- Context Menu
- Tree
- Table
- Data Grid
- Card
- List
- Timeline
- Accordion
- Statistic
- Alert
- Toast
- Snackbar
- Banner
- Modal
- Confirmation Dialog
- Drawer
- Popover
- Command Palette
- Container
- Grid
- Stack
- Split Pane

- Toolbar
- Page Header
- Rich Text Editor
- Code Editor
- JSON Viewer
- Formula Editor
- Markdown Editor

02 COMPOSITION EXAMPLE How Data Grid is built.

01
Data Grid
Composed component

02
Table + sortable headers
Composed

03
Checkbox, Badge, Avatar, Button
Core

04
Snackbar for undo
Feedback

05
Tokens: --row, --tr-sel, --th-fw
Semantic + component tokens

03 DOCUMENTATION CONTRACT Every component sheet follows the same structure.

Purpose · Anatomy · Variants and live example · States · Behaviour · Accessibility · Responsive · Design language comparison · Token usage. Code for each language (HTML, CSS, tokens) is generated from the live stylesheet.

ARCHITECTURE

Patterns

How components combine into enterprise workflows, and what is demonstrated today.

PATTERN COVERAGE Demonstrated: a working example exists. Composable: built from existing parts but not shown as a pattern. Not yet built: on the roadmap.

CATEGORY	PATTERN	STATUS	WHERE
Data management	List	DEMONSTRATED	List
	Search	DEMONSTRATED	Search
	Filter	DEMONSTRATED	Filtering
	Sort	DEMONSTRATED	Table
	Pagination	DEMONSTRATED	Pagination
	Bulk actions	DEMONSTRATED	Data Grid
CRUD	Create	DEMONSTRATED	CRUD
	Edit	DEMONSTRATED	CRUD
	View	DEMONSTRATED	Master Detail
	Delete	DEMONSTRATED	CRUD
	Duplicate	COMPOSABLE	Menu
Forms	Single-column	DEMONSTRATED	Forms
	Two-column	DEMONSTRATED	Forms
	Sections	DEMONSTRATED	Forms
	Validation	DEMONSTRATED	Forms
	Wizard	COMPOSABLE	Stepper
	Dynamic fields	NOT YET BUILT	—

CATEGORY	PATTERN	STATUS	WHERE
Workflow	Approval	DEMONSTRATED	Workflow
	Status	DEMONSTRATED	Workflow
	Actions	DEMONSTRATED	Workflow
	History	DEMONSTRATED	Timeline
	Comments	DEMONSTRATED	Workflow
	Activity	DEMONSTRATED	Notifications
Data-heavy	Tables	DEMONSTRATED	Tables
	Dense tables	DEMONSTRATED	Tables
	Column customisation	DEMONSTRATED	Tables
	Inline editing	DEMONSTRATED	Data Grid
	Grouping	DEMONSTRATED	Tables
	Export	DEMONSTRATED	Tables
Dashboard	KPIs	DEMONSTRATED	Dashboards
	Charts	DEMONSTRATED	Dashboards
	Widgets	COMPOSABLE	Statistic
	Filters	DEMONSTRATED	Dashboards
	Drill-down	DEMONSTRATED	Dashboards
Enterprise navigation	Sidebar	DEMONSTRATED	Sidebar
	Mega navigation	NOT YET BUILT	—
	Breadcrumbs	DEMONSTRATED	Breadcrumb
	Tabs	DEMONSTRATED	Tabs
	Context navigation	DEMONSTRATED	Context Menu

ARCHITECTURE

Theming

A language is a scope class. Switching the class changes the look; the markup stays the same.

01 LIVE SWITCH

The same markup below. Only the class on the wrapper changes.

.sys-a | .sys-f | .sys-p

Ledger Migration > Backlog > DS-142

Migrate billing tables to new schema

In progress · Updated 2h ago by Maya Ruiz

Save changes | Assign | ···

Details | Activity 12 | Linked

Move invoices, line items and tax tables to the v2 schema without downtime.

Summary *

Migrate billing tables

Assignee

Maya Ruiz

02 HOW IT WORKS

```
/* 1. Each language maps its tokens onto shared aliases */
.sys-f { --f-color-primary: #1760B8; --pri: var(--f-color-primary); }

/* 2. Dark mode redefines only the language tokens */
:root[data-theme="dark"] .sys-f { --f-color-primary: #1F6FC5; }

/* 3. Components read aliases only */
.ds-btn--primary { --btn-bg: var(--pri); }

/* 4. Structural differences live in scoped rules */
.sys-p .ds-control { border-width: 0 0 1px; }
```

ARCHITECTURE

Implementation

How the system is packaged, adopted and governed. This is a proposal, not a shipped package.

01 PACKAGE STRUCTURE

```
tokens/
  atlassian.css     --a-*   light + dark
  fluent.css        --f-*   light + dark
  apple.css         --p-*   light + dark
semantic.css        --pri, --fg, --bd, --r, --h-m, --sh-2 … per .sys-* scope
components/         .ds-btn, .ds-control, .ds-tab … (read aliases only)
languages/          .sys-a / .sys-f / .sys-p structural overrides
patterns/           CRUD, Filtering, Workflow, Dashboard …
```

02 USING IT IN AN APPLICATION

```
<body class="sys-f">            ←!— the chosen language —→
  <button class="ds-btn ds-btn--primary"><span>Approve</span></button>
</body>
```

03 ADOPTION ROADMAP

1. **Decide:** pick the language per product using the Decision Framework.
2. **Foundations:** publish tokens and semantic aliases; wire light and dark.
3. **Core components:** replace hand-built buttons, fields and badges first.
4. **Composed components and patterns:** tables, forms, dialogs, workflows.
5. **Govern:** one owner team, a contribution process, and a changelog per release.

04 ENTERPRISE COVERAGE

AREA	REPRESENTATIVE SCREENS	PATTERNS AND COMPONENTS USED
ERP **Finance**	Invoice lists, journal entries, period close	Tables · Formula Editor · Data Grid · Confirmation Dialog
ERP **Procurement**	Purchase orders and approvals	Workflow · Stepper · Timeline
ERP **Sales**	Orders, quotes, price changes	CRUD · Forms · Date Picker
ERP **Inventory**	Stock levels, transfers, low-stock alerts	Tables · Filtering · Badge

AREA	REPRESENTATIVE SCREENS	PATTERNS AND COMPONENTS USED
ERP **HR**	Employee directory, leave requests	Master Detail · Avatar · Workflow
ERP **Projects**	Backlogs, sprints, milestones	Table · Tabs · Stepper
ERP **Administration**	Users, roles, settings, sign-in	CRUD · Switch · Tree · Authentication
CRM **Customers**	Account lists and customer profiles	Master Detail · Search · List
CRM **Leads**	Lead queues with quick filters	Filtering · Tag · Chip
CRM **Opportunities**	Pipeline KPIs and drill-down	Dashboards · Statistic
CRM **Activities**	Calls, meetings and history	Timeline · Notifications
CRM **Communication**	Emails, notes, templates	Rich Text Editor · Markdown Editor · Toast
CRM **Service**	Cases, SLAs, escalations	Search · Workflow · Alert