




PowerShell Scripting

Cybersecurity

Windows Administration and Hardening Day 2



7.1: Windows Admin - Powershell

Class Preparation

1. Check into BCS
2. Update your git repository with ``git pull``
3. Login to your Azure account
 - *Note: You do not need to start your VM as it will auto-start at 6:30. If you want to work in it prior to the class activities feel free to manually start it*

Homeworks Due

- Unit 6 (Bash): due Sunday November 8
- Unit 7 (Windows): due Sunday November 15

Upcoming Units

- Weeks 8 & 9: *Networking* (11/9 - 11/21)
- Week 10: *Network Security*

Schedule Notes

Thanksgiving Break - No Class

- Off: Wed 11/25 & Sat 11/28
- Return on Monday 11/30

Project 1 (Individual; Required)

- Mon 12/14 - Sat 12-19

Winter Break - No Class

- Last class on Sat 12/19
- Off: Mon 12/21 - Sat 1/02
- Return on Monday 1/04

Schedule Change

- Crypto delayed until after Winter Break

Class Objectives

By the end of today's class, you will be able to:



Use basic PowerShell cmdlets to navigate Windows and manage directories and files.



Use PowerShell pipelines to retrieve Windows system event logs.



Combine various shell-scripting concepts such as cmdlets, parameters, piping, conditions, and importing files with data structures.

Let's Review

Last class, we learned how to use CMD to execute many Windows sysadmin tasks:



How to audit processes with Task Manager.



Using CMD to create files.



Creating a report with `wmic` in the command line.



Auditing unwanted startup applications and services.



Enumerating local users, groups, and current local password policies.




Creating new regular and administrative users and setting local password policies.



Scheduling tasks using Task Scheduler.

While CMD is short, simple and easy to learn, it isn't designed for complex operations and procedures.

On the other hand, PowerShell was designed as a powerful language used to execute, automate, and customize the most demanding and difficult tasks.

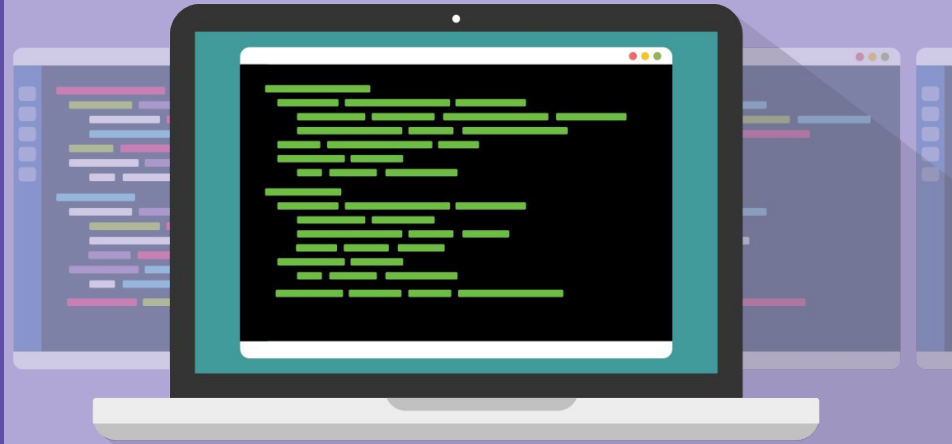

PowerShell in system administration

PowerShell can be used to manage everything in a Microsoft enterprise environment, including:

Windows Server: Microsoft's central server for domain and networking services.

Windows 10: Microsoft's personal and professional computer operating system. The operating system used by most people and within many large enterprise environments.



PowerShell in system administration

PowerShell can be used to manage everything in a Microsoft enterprise environment, including:

Office365: Microsoft's line of subscription office services, included Microsoft Word, Excel and PowerPoint.


Azure: Microsoft's cloud services, offering a wide variety of cloud services, such as virtual private clouds and cloud based VMs.



PowerShell in Cybersecurity

Defensive security: PowerShell can be used to manage audit logs. There are many commands for interacting with Windows Event logs. We will be looking at these later.


- PowerShell can also be used to harden the security on Windows hosts and servers.
- There are many modules and scripts that extend PowerShell's powerful functionality to enforce cybersecurity policy.

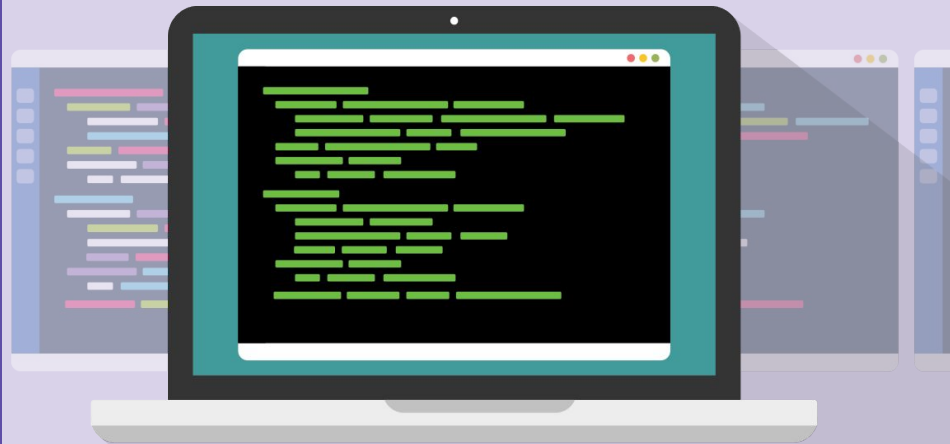

PowerShell in Cybersecurity

Offensive security: PowerShell is often used as a "living off the land" tool, meaning it exists on the target's computer and can be leveraged by attackers.

- Once a system is breached, PowerShell is often used to retrieve a range of information within a network, such as user and server names.
- It can also be used to access and maintain access to other networked machines, if they are not properly secured.

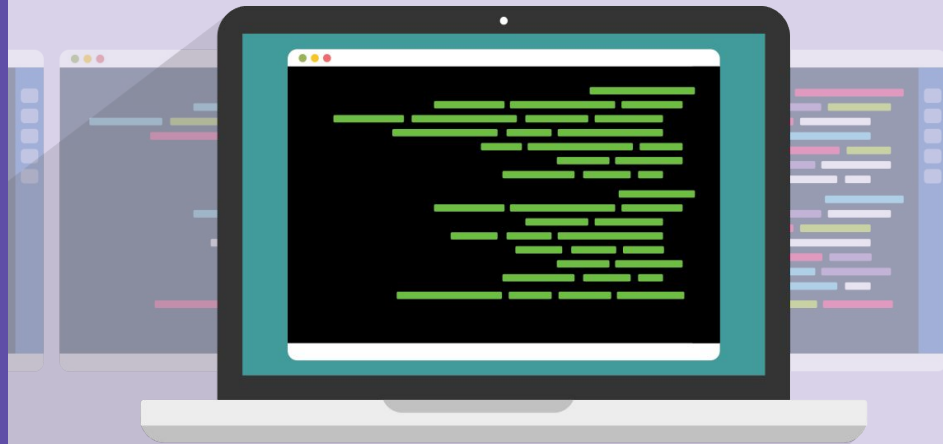

So, What is PowerShell?

PowerShell is a powerful scripting language we can use to locally and remotely manage Microsoft's line of products.

➡ Microsoft enterprise products are the most widely used by organizations, so it is critical that system administrators and security professionals know PowerShell.

➡ PowerShell can be used to lock down and harden enterprise networks, leveraged by offensive security professionals, and exploited by malicious actors.



PowerShell vs. CMD

PowerShell provides clearly defined, universal parameters for commands.



Based on the language used in the following commands, what do you think they do?

```
Stop-Computer -Confirm
```

```
Stop-Computer -Force
```

PowerShell vs. CMD

PowerShell provides clearly defined, universal parameters for commands.



Based on the language used in the following commands, what do you think they do?

Stop-Computer -Confirm

Shuts down the machine with a confirmation prompt verifying that you want to shut it down.

Stop-Computer -Force

Immediately shuts down the machine.

PowerShell vs. CMD

We can use PowerShell piping for operations that CMD doesn't support. To find all files and subdirectories in C:\Windows\System, we use a complex batch file consisting of the following:

```
@echo off
set size=0
for /r %%x in (System\*) do set /a size+=%%~zx
echo %size% Bytes
```

PowerShell can do this with a simple pipe (|):

```
dir C:\Windows\System -Recurse | Measure-Object -Sum Length
```

- `dir C:\Windows\System -Recurse`: Grabs all the current directory and subdirectory contents.
- `Measure-Object -Sum Length`: The output is piped into this command, which measures files.



Objects are a very important PowerShell concept. We'll look at them next.

What Are Objects?

“Object” is Microsoft’s name for every component in a system that PowerShell recognizes and interacts with.

If we run `ls C:\Windows`:

- All the files and directories in `C:\Windows` are processed by PowerShell. Each is an object, with its own properties.
- `C:\Documents\Recipes\Guacamole.doc`
 - `Guacamole.doc` is the `file.name` property of the file (the object).

What Are Objects?

Understanding everything as objects with properties allows us to use more specific commands to target the results we want.

For example: We can use a pipe to retrieve only objects containing the word “system”:

```
ls C:\Windows | Where-Object {$_.name -like "*system*"}
```

- Lists contents of C:\Windows in which the .name property contains “system.”
- `$_`: Indicates the previous object, referring to C:\Windows.

We'll cover syntax in more depth later.

More PowerShell Benefits



We can confirm we're using the right commands with PowerShell's extensive internal documentation system.



PowerShell uses **aliases** to mimic Unix commands, like **ls** and **cat**.



Despite being a Microsoft product, PowerShell is open source and available on GitHub. By contrast, there's no source code available for CMD, and writing tools are limited to batch scripts.

PowerShell Commands:

cmdlet	Function	Equivalent Command
Set-Location	Changes to specified directory	cd
Get-ChildItem	Returns current directory contents	ls, dir
New-Item	Makes new file or directory	mkdir, touch
Remove-Item	Deletes file or directory	rm, rmdir
Get-Location	Retrieves path to current directory	pwd
Get-Content	Returns file content	cat, type
Copy-Item	Copies a file from one location to another	cp
Move-Item	Moves item from one location to another	mv
Write-Output	Prints output	echo
Get-Alias	Shows aliases from the current session	alias
Get-Help	Retrieves information about command	man
Get-Process	Retrieves processes running on machine	ps
Stop-Process	Stops specific process	kill
Get-Service	Retrieves list of services	service --status-all

Verbs-Nouns

Consider the following scenario:

- User **Alex** left the company.
- We want to remove their user account from the system, but we want to keep the reports they were working on.
- We need to move the reports files from their user desktop directory to a directory outside of the user.
- Along the way, we'll explore some other useful PowerShell commands.

We'll use the following commands:

Set-Location, Move-Item, Get-ChildItem, New-Item, Remove-Item





Instructor Demonstration

Verbs-Nouns


Parameters

Now, we'll use parameters to customize the commands.

Instead of using **New-Item** to create another file, we can add parameters to the **New-Item** command and create a directory, with a specific name and location:

```
New-Item -Path "C:\\" -Name "Logs" -ItemType "Directory"
```

- **Path**: Parameter specifying the location of this new directory.
- **-Name**: Parameter specifying the directory's name.
- **-ItemType**: Parameter specifying the type of item we want to create.
If we don't specify **"Directory"**, it will default to a file.



Let's
take a look
at some more
parameters...



Instructor Demonstration

Parameter Examples



Activity: Moving and Creating Directories

In this activity, you will work as a junior sysadmin to vet a process to create Windows Event logs.


First we need to create directories to store our information. We'll run PowerShell commands to create, rename, and move items.

Suggested Time:
10 Minutes



Generating Windows Event Log Files with Parameters and Pipelines

Now we'll continue building on parameters by chaining commands with pipelines.

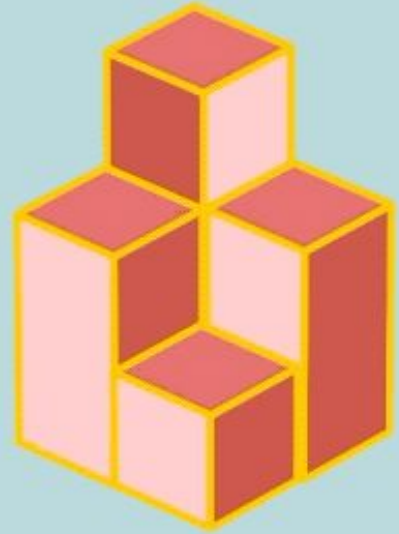



Pipeline Demo Setup

In the following demo, we're continuing our role as a junior sysadmin.

Our CIO asked us to retrieve multiple types of logs from our Windows 10 machine and save them as JSON files in our newly created **C:\Logs** directory. They will later be imported to a Splunk SIEM for analysis.

Use your cheatsheet to follow along.

Piping Logs to JavaScript Object Notation with ConvertTo-Json

Now that we've used parameters to get the logs we need, we will output them to a file that can be later used by log analysis applications.

This is where **pipelines** come in.





Instructor Demonstration

PowerShell Parameters



Activity: Generating Windows Event Log Files

In this activity, you will create and save log files to **C: /Logs**.

Suggested Time:
15 Minutes




Scripting with PowerShell

The Importance of Scripting (Again)

We've emphasized the importance and convenience of scripting in our past sysadmin units.

- Scripts allow sysadmins and security professionals to automate and execute basic to advanced procedures and operations.
- Scripts can be used for everything from setting basic firewall rules to standing up entire cloud virtual machine environments with networking, storage, and users.

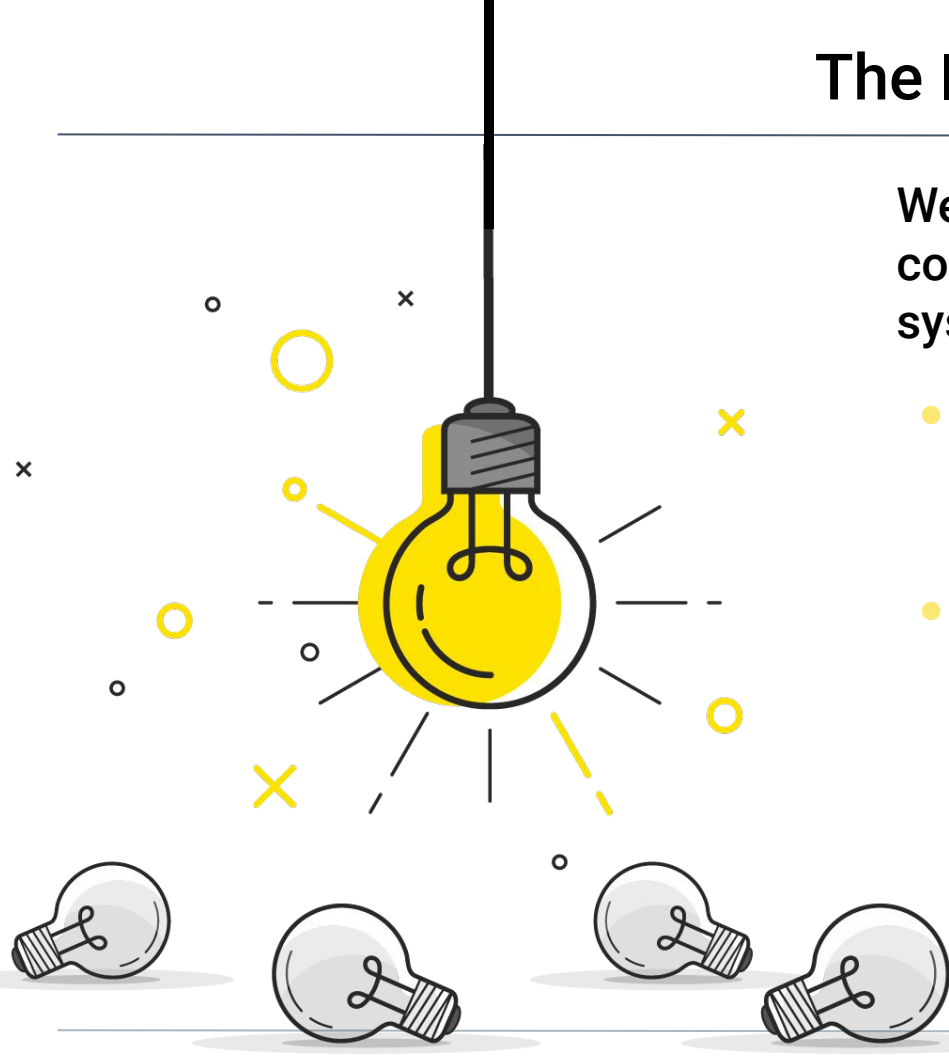


Scripting with PowerShell

Like Linux, PowerShell allows us to script many commands in sequence:

For example, suppose you need to set up Windows workstations for users in the accounting department. You could create a script that does the following, in order:

1. Pulls sensitive accounting data and files from a file server to a specified directory.
2. Downloads AppLocker, a program for limiting and controlling access to files for certain users and groups.
3. Deploys application control policies for AppLocker to restrict user access to the directory so only people in the accounting group can access it.

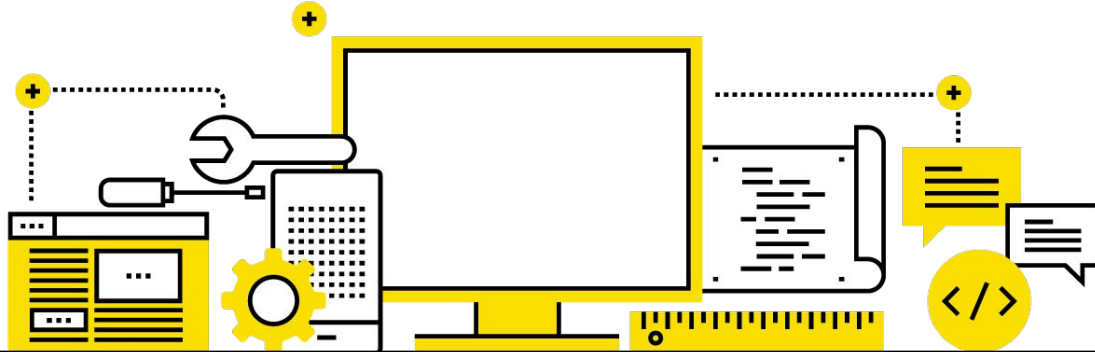

Scripting Demo Scenario

In this demonstration, we will create a script to remove Skype.

This Windows workstation has been created to simulate a previous user having installed applications that are considered largely unnecessary and potential vectors of attack

- Some of these settings include telemetry tracking and advertising IDs. The default installed applications include Skype.
- We want to remove these applications to reduce the attack surface area for this workstation. Instead of trusting our users to not use these apps, we're going to remove the possibility.



Scripting Demo Scenario

In this demonstration, we will complete the following steps:

- Create a PowerShell script file and execute it.
- Use a cmdlet to import various items to interact with in a PowerShell script.
- Use a foreach loop to go through each item in an imported CSV file.





Instructor Demonstration

PowerShell Scripts and Removing Skype

We've just deleted a useless app from our machine. While we could remove the Windows Store apps one-by-one, it would be more efficient to create a script that loops through a **list** of the apps and uninstalls them all at once.



CSV Files

More specifically, we can loop through **comma-separated values (CSV)** files.

- CSVs are plain text files that contain simply structured data (fields) separated by commas.
- The top line of a CSV file contains the header—the row that describes each field.

Sysadmins and security professionals use CSV files containing lists of items they need to parse through.

- A system administrator may use a CSV file to maintain a list of employee email addresses and usernames.
- A penetration tester might have a list of IP addresses and corresponding domain and subdomain names to use in a test.

CSV File

```
appxpkg,name,description
"Microsoft.ZuneMusic","Zune","Microsoft's Zune Music Player"
"Microsoft.Music.Preview","Music Preview", "Microsoft's Music Preview"
"Microsoft.XboxGameCallableUI","Xbox Gaming GUI", "Microsoft's Xbox Overlay"
[CSV contents truncated]
```




appxpkg	name	description
Microsoft.ZuneMusic	Zune	Microsoft's Zune Music Player
Microsoft.Music.Preview	Music Preview	Microsoft's Music Preview
Microsoft.XboxIdentityProvider	Xbox ID Provider	Microsoft's Xbox Live Account Management

foreach Loops

We can use foreach loops to iterate through these files' items.

- The **foreach** loop in PowerShell is similar to the **for** loop in Linux, but it is mainly used for looping through files or read-only structured data that you need to loop through.




appxpkg	name	description
Microsoft.ZuneMusic	Zune	Microsoft's Zune Music Player
Microsoft.Music.Preview	Music Preview	Microsoft's Music Preview
Microsoft.XboxIdentityProvider	Xbox ID Provider	Microsoft's Xbox Live Account Management

foreach Loops and CSV Files


Sysadmins and security professionals will use CSV and foreach loops together:

A system administrator may use a CSV file to maintain a list of employee email addresses and usernames.



They can use a **foreach** loop to loop through each item and change the passwords.

A penetration tester might have a list of IP addresses and corresponding domain and subdomain names to use in a test.



They can use a **foreach** loop to try out each password with a known username.



Now, we will continue our demo scenario. We will use the `Import-Csv` PowerShell cmdlet to source the CSV file `demo.csv` to run with a demo PowerShell script.

If the CSV file is constructed with the standard header and record setup, `Import-Csv` will prepare the fields to be called by PowerShell.



Instructor Demonstration

Using `Import-Csv` with a `foreach` Loop



Activity: Removing Unnecessary Packages with PowerShell Scripts

In this activity, you'll use PowerShell and a CSV file to create a script that removes unwanted applications.

Suggested Time:
15 Minutes





Shut Down Your Machines



Everyone must shut down their Windows RDP Host Machine.
You will need the remaining hours to complete your
homework.