
USER INTERFACE SPECIFICATION

for

Boomaga-IPP

Version 0.1.0
(Draft Baseline)

Prepared by Gary S. Martin
with AI tool assistance

Boomaga-IPP Community

June 10, 2026

Revision History

Name	Date	Reason For Changes	Version
G. S. Martin	2026-06-10	Draft Baseline Release	0.1.0

Legal and Regulatory Requirements

Adobe[®] is a registered trademark of Adobe, Inc.

ARCH LINUX[™] is a recognized trademark owned by Levente Polyák and Judd Vinet on behalf of the *Arch Linux Project*.

Cargo[®] is a registered trademark of The Rust Foundation.

CLAUDE[®] is a registered trademark of Anthropic PBC.

GhostScript[®] is a registered trademark of Artifex Software, Inc.

GitHub[®] is a registered trademark of GitHub, Inc., a subsidiary of Microsoft Corporation.

IPP Everywhere[™] is a recognized trademark owned by the [Institute of Electrical and Electronic Engineers \(IEEE\) Industry Standards and Technology Organization \(ISTO\)](#). The [IEEE ISTO](#) filed an application for the use of *IPP Everywhere*[™] as a registered trademark in the U.S. on January 15, 2014, and abandoned this application as of September 11, 2017.

Linux[®] is a registered trademark of Linus Torvalds in the U.S. and other countries.

LLAMA[®] is a registered trademark of Meta Platforms, Inc.

opencode[®] is a registered trademark of Anomaly Innovations Inc.

POSTSCRIPT[®] is a registered trademark of Adobe, Inc.

RUST[®] is a registered trademark of The Rust Foundation.

UNIX[®] is a registered trademark of The Open Group.

Contents

1. Introduction	9
1.1. Purpose	9
1.2. Document Conventions	9
1.3. Intended Audience and Reading Suggestions	10
1.4. Overview	10
1.5. Basic Goals	10
1.6. Using the Program — The Big Picture	10
1.7. Common Use Scenarios	12
1.7.1. Previewing a Set of Documents	12
1.7.2. Manipulating Pages	12
1.7.3. Selecting Desired Imposition (Layout)	13
1.7.4. Selecting Desired Downstream Printer and Printing	14
1.8. References	14
2. System Concept	17
2.1. Product Perspective	17
2.2. Product Functions	18
2.3. User Classes and Characteristics	20
2.4. Operating Environment	20
2.5. Design and Implementation Constraints	20
2.6. User Documentation	21
2.7. Assumptions and Dependencies	21
3. User Interface Features	23
3.1. User Interface Feature 1: JOB_STORE_CONTENTS_LISTING	24
3.1.1. Description and Priority	24
3.1.2. Stimulus/Response Sequences	24
3.1.3. Functional Requirements	24
3.2. User Interface Feature 2: JOB_STORE_PDF_PREVIEW	25
3.2.1. Description and Priority	25
3.2.2. Stimulus/Response Sequences	25
3.2.3. Functional Requirements	25
3.3. User Interface Feature 3: Imposition (Layout) Controls	25
3.3.1. Description and Priority	25
3.3.2. Stimulus/Response Sequences	26
3.3.3. Functional Requirements	26
3.4. User Interface Feature 4: Downstream Printer Controls and Settings	26
3.4.1. Description and Priority	26

3.4.2.	Stimulus/Response Sequences	26
3.4.3.	Functional Requirements	26
4.	Handling of Erroneous Input	27
4.1.	Handling of Erroneous User Option Selections	27
5.	Menu Bar	29
5.1.	<u>F</u> ile Menu	29
5.1.1.	Print and Close (Ctrl+P)	29
5.1.2.	<u>P</u> rint	30
5.1.3.	Print with Options... (Ctrl+Shift+P)	30
5.1.4.	O <u>p</u> en... (Ctrl+O)	30
5.1.5.	R <u>e</u> cent Files →	31
5.1.6.	S <u>a</u> ve (Ctrl+S)	31
5.1.7.	S <u>a</u> ve as... (Ctrl+Shift+S)	31
5.1.8.	<u>E</u> xport to PDF... (Ctrl+E)	32
5.1.9.	<u>E</u> xit	32
5.2.	<u>E</u> dit Page Menu	33
5.2.1.	Start new booklet from this page	33
5.2.2.	Rotate page counterclockwise	34
5.2.3.	Rotate page clockwise	34
5.2.4.	Insert blank page before this page	34
5.2.5.	Insert blank page after this page	34
5.2.6.	Delete this page	34
5.2.7.	Delete pages to the end of the job	35
5.2.8.	Undo delete →	35
5.3.	<u>E</u> dit Job Menu	35
5.3.1.	R <u>e</u> name Job	35
5.3.2.	Rotate job counterclockwise	36
5.3.3.	Rotate job clockwise	36
5.3.4.	C <u>l</u> one job...	36
5.3.5.	Undo delete page →	36
5.3.6.	D <u>e</u> lete current job	37
5.4.	<u>P</u> references Menu	37
5.4.1.	<u>P</u> references...	37
5.5.	H <u>e</u> lp Menu	37
5.5.1.	A <u>b</u> out Boomaga-IPP	38
6.	Context Specific Menus	39
6.1.	Context Specific Edit Page Menu	39
6.2.	Context Specific Edit Job Menu	39
7.	Miscellaneous Interface Elements	40
7.1.	Application Window Decoration	40

8. Integration with the Operating System	41
8.1. <i>IPP EverywhereTM</i> Integration	41
8.2. <i>JOB_STORE</i> Interaction	41
8.3. <i>CUPS</i> Integration	41
9. Special Considerations	42
9.1. Translation Requirements	42
9.2. Reuse Requirements	42
Appendices	43
A. Glossary	43
B. Acronyms	49
C. Analysis Models	51
Appendix C.1. Component Diagram	51
Appendix C.2. Class Diagram	52
Appendix C.3. Sequence Diagram	53
Appendix C.4. Use Case Diagram	54
D. To Be Determined (TBD) List	55

1. Introduction

1.1. Purpose

The purpose of the *Boomaga-IPP Virtual Printer* system is to replace the venerable, but now orphaned *Boomaga*¹ virtual printer (Sokolov et al., 2013b; Sokolov et al., 2013a) with a free, open-source, memory-safe, and type-safe virtual printer system for current *Linux*[®] computer systems. The *Boomaga-IPP Virtual Printer* system is intended to conform to the current standards of the IEEE ISTO Printer Working Group (PWG): Internet Printing Protocol (IPP) Version 2.0 (IPP/2.0) and *IPP Everywhere*[™]. *Boomaga-IPP* is targeted at *systemd*-managed *Linux*[®] systems with *Wayland* display environments. It is to be written completely in the *RUST*[®] programming language and is to use the *Xilem graphical user interface (GUI)* toolkit.

1.2. Document Conventions

The format of this document is adapted from the *LT_EX template for IEEE Software Requirements Specifications* (Eisenbarth, 2014-09-06/2026). M. Eisenbarth's template is partially derived from the code of Yiannis Lazarides and the template of Karl E. Wiegers. The document template is based upon and employs the document conventions of *IEEE 830-1998, Recommended Practice for Software Requirements Specifications* (IEEE Computer Society, 1998). *IEEE 830-1998* is a standard of the IEEE Computer Society, and is not freely available. While it was used in the development of the *LT_EX template*, it was not referenced directly in the production of this document.

The use of the word “shall” in this document connotes a requirement. Each requirement herein is numbered as a Level 2 (*L2*) *UI* Requirement and is sequentially numbered based on its order of occurrence in the initial draft of the document. To ensure traceability, requirements will not be renumbered if the document changes. Any requirements that are deleted will result in gaps in the numbering and any new requirements added will have higher numbers than previously numbered requirements regardless of their place in the specification or their precedence.

All requirements specified in this *user interface specification (UIS)* are derived from the *Boomaga-IPP software requirements specification (SRS)* (Martin and Boomaga-IPP Project Team, 2026-03-12/2026b). Within this *UIS*, the priorities of higher-level parent requirements are assumed to be inherited by their detailed child requirements unless otherwise specified. In the event of any discrepancy between the *SRS* and the *UIS*, the *SRS* shall be the governing document. (*L2-UI-001*)

¹Boomaga is a portmanteau of “BOOklet MANager”

1.3. Intended Audience and Reading Suggestions

This [UIS](#) is intended for use by any and all members of the [Boomaga-IPP](#) Project Team, including the project manager, software developers, alpha and beta testers, and documentation writers. This [UIS](#) establishes all functional and nonfunctional requirements governing the development of the [Boomaga-IPP Virtual Printer](#) system [user interface \(UI\)](#). Any and all [Boomaga-IPP](#) team members should familiarize themselves with the entirety of this specification. Technically inclined [Boomaga-IPP](#) users may also wish to familiarize themselves with any sections of this [UIS](#) that interest them.

1.4. Overview

The objective of the [Boomaga-IPP](#) project is to deliver a fully-functional, easily-installable, free, and open-source virtual printer system for current [Linux](#)[®] computer systems. This virtual printer system is intended to provide the same or greater functionality as the original [Boomaga](#) virtual printer system with greater reliability and the same or greater ease of use. This virtual printer system shall be comprised of both software and documentation.[\(L2-UI-002\)](#) The [Boomaga-IPP](#) project team intends to maintain the software and documentation for at least five years from initial release or until the system is replaced by a virtual printer system providing the same or greater functionality for the majority of common [Linux](#)[®] desktop environments.

1.5. Basic Goals

This [UIS](#) establishes the basic requirements and development processes that shall be used to produce the [Boomaga-IPP GUI](#).[\(L2-UI-003\)](#) These development processes shall require the use of any software tools specified in the [SRS](#) or in this [UIS](#).[\(L2-UI-004\)](#) This [UIS](#) shall conform to the requirements of the [Boomaga-IPP SRS](#).[\(L2-UI-005\)](#) The [SRS](#) is available from the [Boomaga-IPP Project Repository](#) [\(Martin & Boomaga-IPP Project Team, 2026-03-03/2026a\)](#).

The [Boomaga-IPP GUI](#) shall be designed to provide a simple and intuitive graphical interface to its user.[\(L2-UI-006\)](#) It shall provide the primary functions enumerated in Table [1.1](#).[\(L2-UI-007\)](#) All provided [GUI](#) functions shall be available via keyboard commands as well as via graphical controls and displays.[\(L2-UI-008\)](#) The major common component libraries that the [Boomaga-IPP GUI](#) depends upon are enumerated in Table [1.2](#).

1.6. Using the Program — The Big Picture

[Boomaga-IPP](#) is designed to perform the functions of previewing, imposing (laying out), and printing a set of documents in a single [GUI](#) session. Consequently, its single [GUI](#) use case is *Preview, Imposition (Lay Out), and Print a Set of Documents*. The textual form of the use case is shown as Table [1.3](#). The Unified Modeling Language (UML) use case diagram is shown as Figure [1.1](#). Additionally, the UML component diagram, class diagram, sequence diagram, and use case diagram for the [Boomaga-IPP Virtual Printer](#) system are included in Appendix [C, Analysis Models](#), as Figures [C.1](#), [C.2](#), [C.3](#), and [C.4](#), respectively.

Table 1.1.: *Boomaga-IPP* GUI Primary Functions.

Boomaga-IPP GUI shall:

1. Preview one or more files to be printed as it or they will appear coming out of the printer,
2. Rotate selected pages clockwise or counterclockwise, if desired,
3. Delete selected pages from a set of documents, if desired,
4. Add blank pages at selected locations to a set of documents, if desired,
5. Print the edited document file in half-page booklet format, if desired,
6. Print the edited document file with a user-selected number of pages per sheet, if booklet format is not desired,
7. Print the final output file to any suitable *CUPS* printer selected by the user.

(L2-UI-007)

Table 1.2.: *Boomaga-IPP* GUI Common Library Dependencies.

Library	Author	Minimum Version	Provided Function
<i>Linebender Xilem GUI Framework</i>	Linebender Organization	0.4.0	Graphical Design
<i>Poppler-rs</i>	Dröge et al.	1.92.0	PDF Rendering

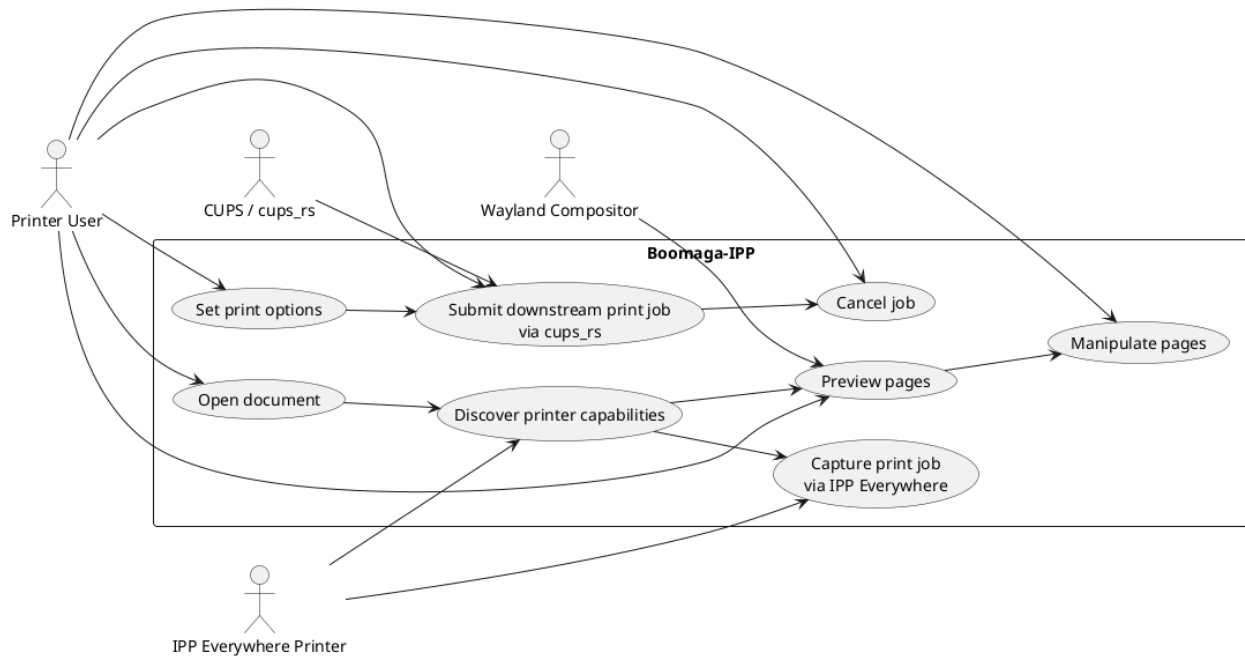


Figure 1.1.: *Boomaga-IPP* Use Case.

Table 1.3.: *Boomaga-IPP* Use Case.

Preview, Impose (Lay Out), and Print a Set of Documents

Goal Level: Sea Level

MAIN SUCCESS SCENARIO:

1. Print one or more documents to *Boomaga-IPP*.
 2. Preview the resulting print job or jobs.
 3. Manipulate Pages as required:
 - a) Rotate pages as required.
 - b) Delete pages as required.
 - c) Add Blank Pages as required.
 4. Select desired *imposition* (layout).
 5. Select desired downstream printer.
 6. Print job or jobs.
-

EXTENSIONS:

- 6a: Select desired PDF output file:
- .1 Select “Print to File (PDF)” or “CUPS-PDF.” (if CUPS-PDF is installed)
 - .2 Select Filename and Folder from printer dialog.
-

1.7. Common Use Scenarios

1.7.1. Previewing a Set of Documents

In the *Boomaga-IPP* GUI display window, any print job or sequential set of print jobs captured by the *Boomaga-IPP Virtual Printer* shall be displayed one full *imposed page* at a time (for N-Up *imposition*) or one full *printer spread* at a time (for booklet *imposition*).^(L2-UI-009) The user shall be able to view the current *imposition* (layout) of any desired *imposed page* or *printer spread* in the captured print job (or sequential set of captured print jobs) by scrolling to it via the user’s choice of GUI commands, keyboard commands, or mouse commands.^(L2-UI-195)

1.7.2. Manipulating Pages

The user shall be able to manipulate selected individual *document pages* or groups of *document pages*, including entire print jobs, through the use of GUI commands, keyboard commands, or mouse commands.^(L2-UI-196) Commanded manipulations shall include: 1) rotating individual *document pages* or groups of *document pages*, including entire print jobs, clockwise or counterclockwise, 90 degrees at a time; 2) deleting *document pages* or groups of *document pages*, including entire print jobs; and 3) inserting blank pages before or after a selected *document page* or group of *document pages*.^(L2-UI-010)

Rotating Pages

The user shall be able to command clockwise or counterclockwise 90 degree at a time rotation of individual *document pages* or groups of *document pages*, including entire print jobs.^(L2-UI-011) Page

rotation commands shall be available through the user's choice of GUI commands, keyboard commands, or mouse commands.(L2-UI-012)

Deleting Pages

The user shall be able to command the deletion of individual document pages or groups of document pages, including entire print jobs.(L2-UI-013) Page deletion commands shall be available through the user's choice of GUI commands, keyboard commands, or mouse commands.(L2-UI-014)

Inserting Blank Pages

The user shall be able to command the insertion of blank document pages before or after selected individual document pages or groups of document pages.(L2-UI-015) Page insertion commands shall be available through the user's choice of GUI commands, keyboard commands, or mouse commands.(L2-UI-016)

1.7.3. Selecting Desired Imposition (Layout)

The user shall be able to select the desired imposition (layout) of the Boomaga-IPP output.(L2-UI-017) Imposition commands shall be available through the user's choice of GUI commands, keyboard commands, or mouse commands.(L2-UI-018) Imposition (Layout) commands shall accommodate both portrait and landscape printing orientations.(L2-UI-019)

Imposition of a User-Selected Number of Pages Per Sheet (N-up)

The user shall be able to command that the Boomaga-IPP output be imposed into the following formats: one document page per imposed page (1-up), two document pages per imposed page (2-up), four document pages per imposed page (4-up), and eight document pages per imposed page (8-up).(L2-UI-024) These N-up page imposition commands shall accommodate both portrait and landscape printing orientations.(L2-UI-025) The N-up imposition commands shall be available through the user's choice of GUI commands, keyboard commands, or mouse commands.(L2-UI-026) The user shall be able to select simplex (single-sided / one imposed page per sheet) or duplex (double-sided / two imposed pages per sheet) printing of the output.(L2-UI-027) If the selected Downstream Printer is not duplex capable, the Boomaga-IPP IMPOSITION_ENGINE shall arrange the output for manual duplex printing.(L2-UI-028) When the user selects N-up Imposition, the Boomaga-IPP JOB_STORE_PDF_PREVIEW Window shall display the single imposed page selected by the user.(L2-UI-197)

Imposition of Half-Page Booklets

The user shall be able to command imposition of the Boomaga-IPP output into a four pages per sheet booklet format.(L2-UI-020) Booklet layout commands shall accommodate both portrait and landscape printing orientations.(L2-UI-021) Booklet imposition commands shall be available through the user's choice of GUI commands, keyboard commands, or mouse commands.(L2-UI-022) Booklet format shall assume duplex double-sided/two imposed pages per sheet) printing.(L2-UI-023) When the user selects Booklet Imposition, the Boomaga-IPP JOB_STORE_PDF_PREVIEW Window shall display the printer spread selected by the user.(L2-UI-198)

1.7.4. Selecting Desired Downstream Printer and Printing

The user shall be able to select any suitable *CUPS* printer as the downstream printer through integration of the *GUI* with the host system's *CUPS* server.(L2-UI-029)

1.8. References

- Adobe, Inc. (nodate). *PostScript* (Version 3). Retrieved 2026-05-13, from <https://www.adobe.com/products/postscript.html>
- Anomaly Innovations Inc. (nodate). *OpenCode*. Retrieved 2026-05-13, from <https://opencode.ai/>
- Anthropic PBC. (nodate-a). *Claude* (Version Opus 4.7). Retrieved 2026-05-12, from <https://claude.com/product/overview>
- Anthropic PBC. (nodate-b). *Claude Code* (Version Opus 4.7). Retrieved 2026-05-12, from <https://claude.com/product/claude-code>
- Artifex Software, Inc. (nodate). *Ghostscript*. Retrieved 2026-05-12, from <https://www.ghostscript.com/index.html>
- Berkenbilt, J., & Holger, M. (nodate). *QPDF*. Retrieved 2026-05-13, from <https://qpdf.sourceforge.io/>
- Bruno, L., & Khan, Z. A. (2026-03-28). *Zbus_systemd library crate* (Version 0.26000.0). crates.io. Retrieved 2026-05-25, from https://crates.io/crates/zbus_systemd
- Dröge, S., Wenger, A., Elmoussaoui, B., & Maximiliano. (2026-02-21). *Poppler-rs* (Version 0.26.0). crates.io. Retrieved 2026-04-22, from <https://crates.io/crates/poppler-rs>
- Eisenbarth, J.-P. (2026-01-20). *SRS-TeX: A LaTeX template for ISO/IEEE Software Requirements Specifications*. Retrieved 2026-01-26, from <https://github.com/jpeisenbarth/SRS-TeX>
- Gettys, J., Scheifler, B., & The X.org Project. (nodate). *X.Org Stack* (Version X11R7.7). Retrieved 2026-05-13, from <https://x.org/wiki/>
- GitHub, Inc. (A subsidiary of Microsoft Corporation). (2026). *GitHub*. GitHub. Retrieved 2026-05-12, from <https://github.com/>
- Høgsberg, K., & The Poppler Project. (nodate). *Poppler* (Version 26.05.0). Retrieved 2026-03-10, from <https://poppler.freedesktop.org/>
- Høgsberg, K., & The Wayland Project. (nodate). *Wayland*. Retrieved 2026-05-13, from <https://wayland.freedesktop.org/>
- IEEE Computer Society. (1998-10-20). *IEEE Recommended Practice for Software Requirements Specifications | IEEE 830-1998*. Retrieved 2026-02-08, from https://store.accuristech.com/standards/ieee-830-1998?vendor_id=1222&product_id=14024
- ISO/IEC JTC 1/SC 22/WG 9 - Ada. (2023-05). *ISO/IEC 8652:2023*. Retrieved 2026-05-12, from <https://www.iso.org/standard/83621.html>
- ISO/TC 171/SC 2. (2008). *ISO 32000-1:2008* (2008th ed.). Retrieved 2026-06-10, from <https://www.iso.org/standard/51502.html>
- KDE Community. (nodate). *Plasma Desktop* (Version 6). Retrieved 2026-05-13, from <https://kde.org/plasma-desktop/>
- KDE Community. (2026-05-14). *KDE Community*. KDE Community. Retrieved 2026-05-12, from <https://kde.org/>
- Khan, Z. A. (2026-04-26). *Zbus library crate* (Version 5.15.0). crates.io. Retrieved 2026-03-11, from <https://crates.io/crates/zbus>

Levien, R., Rofls, C., & Kuut, K. (2023-02-28). *Druid* (Version 0.8.3). Retrieved 2026-05-12, from <https://crates.io/crates/druid>

Linebender Organization. (nodate-a). *Linebender*. Linebender. Retrieved 2026-03-11, from <https://linebender.org/>

Linebender Organization. (nodate-b). *Linebender Xilem Development*. Xilem. Retrieved 2026-04-02, from <https://www.xilem.dev/>

Linebender Organization. (2026-03-08). *Xilem Library Crate*. crates.io. Retrieved 2026-03-10, from <https://crates.io/crates/xilem>

Linus Torvalds, Linux Kernel Organization PBC, & Linux Foundation. (nodate). *Linux Kernel* (Version 7.0). Retrieved 2026-05-12, from <https://www.kernel.org/>

Linux Foundation. (nodate). *Linux Foundation*. Linux Foundation. Retrieved 2026-05-13, from <https://www.linuxfoundation.org>

Martin, G. S., & Boomaga-IPP Project Team. (2026a-03-06). *Boomaga-IPP Project Repository*. github.com. Retrieved 2026-03-11, from <https://github.com/GaryScottMartin/Boomaga-IPP>

Martin, G. S., & Boomaga-IPP Project Team. (2026b-03-24). *Boomaga-IPP Software Requirements Specification*. Tehachapi, CA, USA. Retrieved 2026-03-24, from https://github.com/GaryScottMartin/Boomaga-IPP/blob/main/docs/SW-Reqmnts-Spec_v0.1.0_draft.pdf

Meta AI. (nodate). *Llama Family of AI Models*. Retrieved 2026-05-15, from <https://www.llama.com/>

Pennington, H., Larsson, A., Carlsson, A., & D-Bus Project. (nodate). *D-Bus*. Retrieved 2026-05-12, from <https://www.freedesktop.org/wiki/Software/dbus/>

Poettering, L., & Sievers, K. (nodate). *System and Service Manager (systemd)*. Retrieved 2026-05-12, from <https://systemd.io/>

Printer Working Group. (2020-05-15). *IPP Everywhere™*. Retrieved 2026-05-11, from <https://ftp.pwg.org/pub/pwg/candidates/cs-ippeve11-20200515-5100.14.pdf>

Roques, A., & PlantUML Contributors. (2026-05). *PlantUML*. Retrieved 2026-05-15, from <https://plantuml.com/>

Rust Foundation. (nodate-a). *The Cargo Book*. The Cargo Book. Retrieved 2026-05-12, from <https://doc.rust-lang.org/cargo/>

Rust Foundation. (nodate-b). *The Rust Package Registry (crates.io)*. The Rust community's crate registry. Retrieved 2026-03-11, from <https://crates.io/>

Rust Foundation. (nodate-c). *The Rust Programming Language*. The Rust Programming Language. Retrieved 2026-05-13, from <https://doc.rust-lang.org/stable/book/>

Sokolov, A., famo, Ip, C., Moskvina, A., Devendra, Pérez Meyer, L. D. N., Borisenko, L., Ekhlakov, O., SDDM, Infiaskas, R., & Kernozhitsky, A. (2013a-01-26). *Boomaga*. Retrieved 2026-02-08, from <https://github.com/Boomaga/boomaga>

Sokolov, A., famo, Ip, C., Moskvina, A., Devendra, Pérez Meyer, L. D. N., Borisenko, L., Ekhlakov, O., SDDM, Infiaskas, R., & Kernozhitsky, A. (2013b-01-26). *Boomaga - Virtual Printer - Project Web Site*. Retrieved 2026-01-26, from <https://www.boomaga.org/>

Srinivas, A., Yarats, D., Ho, J., Konwinski, A., & Perplexity Ai, Inc. (nodate). *Perplexity.ai*. Retrieved 2026-05-15, from <https://www.perplexity.ai/>

Sweet, M. R., & OpenPrinting. (nodate). *OpenPrinting CUPS*. Retrieved 2026-05-12, from <https://openprinting.github.io/cups/>

The Open Group. (nodate). *UNIX®*. Retrieved 2026-05-13, from <https://www.unix.org/>

Torvalds, L., Hamano, J., & Git Community. (nodate). *Git*. Retrieved 2026-05-23, from <https://git-scm.com/>

Vinet, J., Griffin, A., Polyák, L., Carlier, L., Fleischer, L., Gauduin, M., Gregory, A., Haase, S.-H., Hesse, C., Hötzel, J., Linderud, M., Löthberg, J., Luttringer, S., McRae, A., Pomozov, A., Powalowski, T., Radke, A., Razzolini, G., Rojas, A., ... Yan, F. (nodate). *Arch Linux*. Retrieved 2026-05-12, from <https://archlinux.org/>

2. System Concept¹

2.1. Product Perspective

Boomaga is a virtual printer for viewing a document before printing it out to either a physical printer or another virtual printer on *Linux*[®]-based computer systems. It is also capable of printing booklets and other arrangements of multiples pages per sheet, and of combining multiple documents into a single print job. *Boomaga* is an open source software project mainly distributed under the GPLv2 license, although some files are distributed under the LGPLv2+ license. The *Boomaga* project began in 2012 and the first software release was Dec 14, 2013. The final release of *Boomaga*, version 3.0.0, was on March 13, 2019. On February 20, 2022, a patch to provide compatibility with *GhostScript*[®] V9.54 was merged with the *Boomaga* source code, but no release was issued. *Boomaga* has been unmaintained since that date.

Basic compatibility with *Wayland* was added to *Boomaga* in v3.0.0 in 2019, but *Boomaga* was primarily designed to work under *X11* graphical environments (which either have been or are actively being replaced by *Wayland* environments in most popular *Linux*[®] distributions). In addition, the *D-Bus* mechanism used by *Boomaga* for communication between its user-space GUI and the host computer's root-level *CUPS* print driver has proven unreliable for many users, preventing the GUI from automatically starting when the user prints a file to *Boomaga*. A number of recent minor issues have also arisen from incompatibilities between *Boomaga* and regular version updates in the tool chain and library packages used to build and install it on current *Linux*[®] distributions.

Boomaga-IPP was conceived in late 2025 as a replacement for *Boomaga*. It will not reuse *Boomaga* code, but will be written from scratch in a high reliability language to provide enhanced security through type safety and memory safety. *Ada* was initially considered (based on the project manager's familiarity and experience with it), but was ultimately rejected due the lack of existing *Ada* language bindings to the library systems needed by *Boomaga-IPP*. Subsequently, it was decided that *Boomaga-IPP* will be written in the *RUST*[®] programming language, as the needed *RUST*[®] language bindings are readily available. *Boomaga-IPP* is targeted at *Linux*[®] systems employing *Wayland* display architectures and will use an *IPP Everywhere*[™] client in place of a printer driver. *Boomaga-IPP* is intended to provide the same or greater functionality as the original *Boomaga*. Development of *Boomaga-IPP* began in February 2026 with the assistance of newly available artificial intelligence coding tools including *CLAUDE*[®] *Code*, *opencode*[®], *Perplexity.ai*, and several open-source, locally-run large language models (LLMs) developed for coding.

¹ For the sake of completeness of the documents, this chapter is included as the second chapter of both the Software Requirements Specification and the User Interface Specification.

2.2. Product Functions

The top-level functional requirements of the *Boomaga-IPP Virtual Printer* system are allocated to the following major software components:

Boomaga-IPP Capture_Daemon A daemon that captures input print jobs through an *IPP Everywhere*TM client and adds them to the *Boomaga-IPP JOB_STORE*.


Boomaga-IPP GUI A desktop application launched by and operating in cooperation with the *Boomaga-IPP IMPOSITION_ENGINE*. The *Boomaga-IPP GUI Application* allows the user to select the desired *imposition* settings, preview the output PDF (print job), select the desired downstream printer, select the desired downstream printer settings, and request the printing of the output print job.

Boomaga-IPP Imposition_Engine A daemon that constructs the output print job by imposing the input print job(s) according to the *imposition* settings and *document page* manipulation requests received from the user through the *Boomaga-IPP GUI Application*. The *IMPOSITION_ENGINE* also sends the output print job to the *GUI JOB_STORE_PDF_PREVIEW* feature and the *Boomaga-IPP DOWNSTREAM_PRINTER_DAEMON* in response to *Boomaga-IPP Virtual Printer* requests.

Boomaga-IPP Downstream_Printer_Daemon A daemon that manages the interface between the *Boomaga-IPP Virtual Printer* and the host computer's *CUPS* server, enabling the *Boomaga-IPP* user, through the *Boomaga-IPP GUI Application*, to select a *CUPS*-backed printer, change printer settings of the selected printer, and submit the output print job to the selected downstream printer. The downstream *CUPS* printer may be a physical printer or another virtual printer such as *CUPS-PDF*.

A *Unified Modeling Language (UML)* component diagram of these software components is displayed below in Figure 2.1. Additionally, the UML component diagram, class diagram, sequence diagram, and use case diagram for the *Boomaga-IPP Virtual Printer* system are included in Appendix C, *Analysis Models*, as Figures C.1, C.2, C.3, and C.4, respectively.

1. The *Boomaga-IPP CAPTURE_DAEMON* will allow *Boomaga-IPP Virtual Printer* users to print through the host computer's *CUPS* server to the *Boomaga-IPP Virtual Printer* via a provided *IPP Everywhere*TM client. The *IPP Everywhere*TM client will:
 - a) Interface through *CUPS*,
 - b) Queue the printed file to the virtual printer,
 - c) Provide document merging and batch printing, and
 - d) Launch the *Boomaga-IPP GUI* application on the user's desktop.

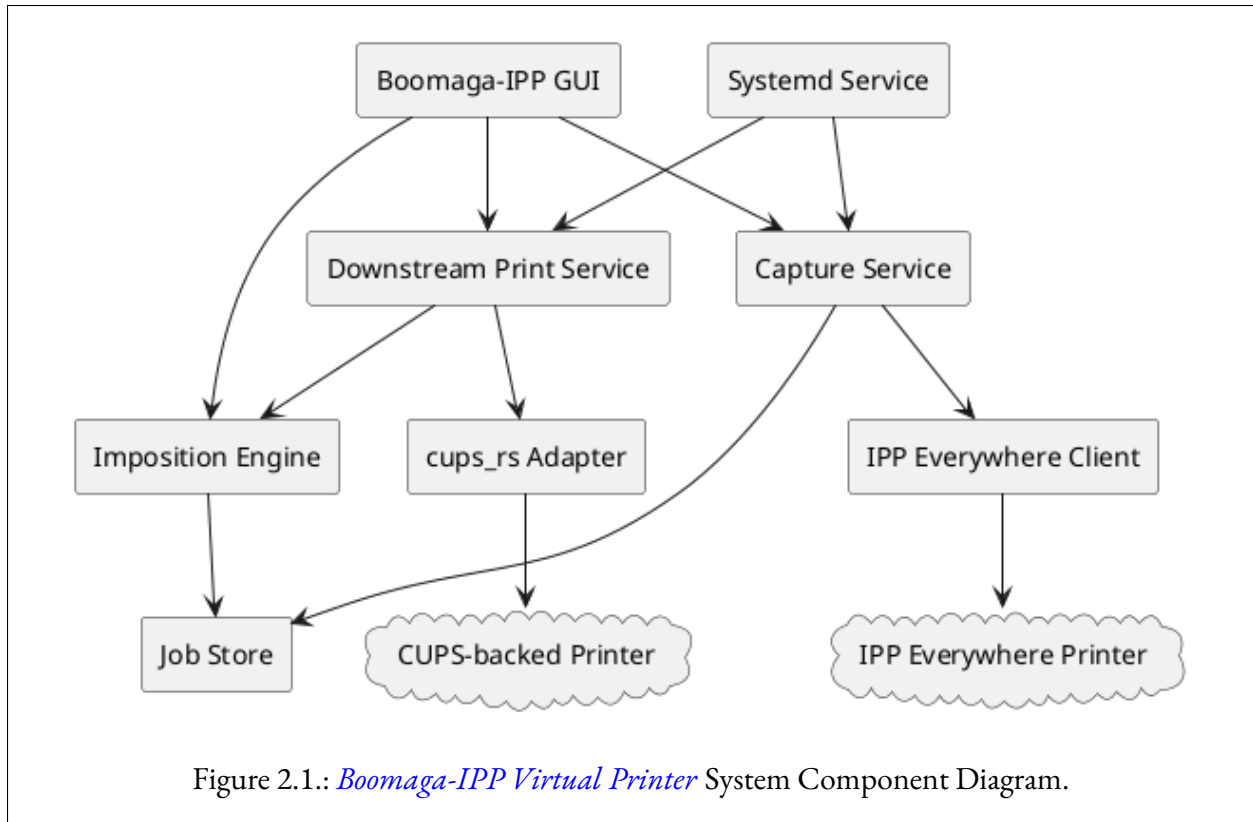

2. The *Boomaga-IPP Virtual Printer* will present a **GUI** to the user once an input job is received by the **CAPTURE_DAEMON** and added to the **IMPOSITION_ENGINE JOB_STORE**. The *Boomaga-IPP GUI Application* will:
 - a) Preview prints to the user prior to physical printing,
 - b) Allow the user to select any other **CUPS** printer for the virtual printer output,
 - c) Allow the user to print booklets with automatic page arrangement,
 - d) Allow the user to print multiple pages per sheet (1, 2, 4, 8 pages per sheet),
 - e) Provide duplex printing for both duplex-capable and manual duplex printers, and
 - f) Send the virtual printer output to the downstream **CUPS** printer in the form selected by the user via the *Boomaga-IPP DOWNSTREAM_PRINTER_DAEMON* daemon.
3. The *Boomaga-IPP Virtual Printer* will provide inter-process communication between the *Boomaga-IPP* software components described above as required to execute the functions of the *Boomaga-IPP Virtual Printer*, including printing the user's desired output to the downstream **CUPS** printer.

2.3. User Classes and Characteristics

A single class of *Boomaga-IPP Virtual Printer* users is envisioned. All users are expected to install the *Boomaga-IPP Virtual Printer* using the provided package manager of their *Linux*[®] distribution whenever it is available through that channel. After installation, users will employ *Boomaga-IPP* by selecting it from the menu provided by *CUPS* to the various applications installed on the users' systems and print a single file or a series of files to the *Boomaga-IPP Virtual Printer*. Printing a file to the *Boomaga-IPP Virtual Printer* will cause the *Boomaga-IPP GUI Application* to launch automatically on the user's desktop. Using the *Boomaga-IPP GUI Application*, users will be able to:

1. Manipulate pages as desired,
2. Select the desired *imposition* format,
3. Select the downstream *CUPS* printer and change its settings, and
4. Print the output to the selected downstream printer.

The *Boomaga-IPP* user experience is expected to be very similar to the experience currently provided by *Boomaga*.

2.4. Operating Environment

Boomaga-IPP's initial development will take place on an x86-64 computer system running current versions of the *ARCH LINUX*[™] distribution, *Wayland*, and *KDE Plasma*. The x86-64 architecture is the primary target architecture for the *Boomaga-IPP Virtual Printer* system. The software environment necessary to support *Boomaga-IPP* is identified in Table 2.1 (including the versions in use as of the date of this document). It is expected that any ARM-64 system capable of hosting a robust modern *Linux*[®] distribution and *Wayland* display environment should also be capable of compiling the *Boomaga-IPP* system. The *Boomaga-IPP* team intends to test the system on an ARM-64 architecture computer system at a later time.

2.5. Design and Implementation Constraints

All *Boomaga-IPP* software will be released under the GNU General Public License, version 3 (GPLv3). All *Boomaga-IPP* software will be written in the *RUST*[®] programming language. The *Boomaga-IPP Virtual Printer* system will be initially targeted at modern x86-64 computer systems running a *Linux*[®] version 7 or later kernel, the *Wayland* display architecture, and *systemd* for system administration. The *Boomaga-IPP GUI* will be based on the *Linebender Organization Xilem GUI toolkit* (Linebender Organization, nodate-a, nodate-b, 2022-11-16/2026). *Boomaga-IPP* will use *Poppler-rs* (Dröge et al., 2026; Høgsberg & The Poppler Project, nodate) for document rendering. *Boomaga-IPP* will use *D-Bus/zbus* (Khan, 2026; Pennington et al., nodate) and *zbus_systemd* (Bruno & Khan, 2026) for interprocess communications.

2.6. User Documentation

The primary user documentation will be the [README.md file on the Boomaga-IPP github archive](#) (Martin & Boomaga-IPP Project Team, 2026-03-03/2026a). At a later time, a [frequently asked questions \(FAQ\)](#) page will be added to the [wiki on the Boomaga-IPP github archive](#). Any supplemental documentation developed will be hosted there, as well.

2.7. Assumptions and Dependencies

Successful implementation of *Boomaga-IPP* relies upon two immature technologies: [artificial intelligence \(AI\)](#) coding assistance and the *Linebender Xilem GUI* toolkit. The project initiator had virtually no knowledge of the *RUST*[®] programming language at the start of the project. As a result, a heavy reliance is being placed on AI assistance. *CLAUDE*[®] *Code*, *opencode*[®], and *Perplexity.ai* were used to establish the initial project requirements and system architecture. Cost limitations soon dictated the use of the *GLM-4.7-flash* local [LLM](#) together with *CLAUDE*[®] *Code* to author the prototype code. The code was further developed with the *Meta-Llama-3.1-8B-Instruct* model because of its superior speed. It is expected that additional [AI](#) tools will be used as they emerge and mature. A number of local and cloud-based options are being assessed for code review and testing. The maturity and cost of the various options will have a substantial impact on the quality and functionality of the final code and may well determine whether or not the *Boomaga-IPP* project produces a usable virtual printer implementation.

The selection of the *Linebender Organization*'s *Xilem GUI* toolkit for use in the development of the *Boomaga-IPP GUI* was made because it was judged to be the best option for producing a maintainable *RUST*[®] based system over the long term. The original choice was the *Linebender Druid* toolkit, also written entirely in *RUST*[®]. However, *Druid* is deprecated and no longer under development by the *Linebender Organization*. As one of the goals of this project is to produce a virtual printer system that is maintainable over a decade or more, it was decided to move from *Druid* to *Xilem* even though *Xilem* is alpha level code as of the date of this document. Consequently, the maintainability of the *Boomaga-IPP* system depends upon the *Linebender Organization* continuing its development of the *Xilem* toolkit through beta testing and into a stable production framework.

Table 2.1.: *Boomaga-IPP* Software Environment.

Core System Software		Rust crates			
Required Software	Version	Required Software	Version	Required Software	Version
Linux kernel	7.0.9	GUI		Logging	
glibc	2.43	xilem	0.4	tracing	0.1.44
Wayland	1.25.0	kurbo	0.13.1	tracing-subscriber	0.3.23
systemd	260.1	winit	0.30.13		
poppler-glib	26.05.0	cairo-rs	0.22.0		
qpdf	12.3.2				
		Document Rendering		Configuration	
		poppler-rs	0.26.0	config	0.15.23
		libc	0.2.186	directories	6.0
		IPC		Time	
		zbus	5.15.0	chrono	0.4.44
		Async Runtime		URL	
		tokio	1.52.3	url	2.5.8
		async-trait	0.1.89		
		Serialization		Temporary Files	
		serde	1.0.228	tempfile	3.27.0
		serde_json	1.0.149		
		Error Handling		UUID	
		thiserror	2.0.18	uuid	1.23.1
		anyhow	1.0.102		

3. User Interface Features

The *Boomaga-IPP* GUI shall emulate the *Boomaga* GUI with differences as described in the *UI* feature sections that follow.(L2-UI-030) An annotated screen shot of the *Boomaga* UI is shown in Figure 3.1. The colored boxes and accompanying text annotations indicate the *Boomaga* UI features assuming the architecture adopted for *Boomaga-IPP* and described below.

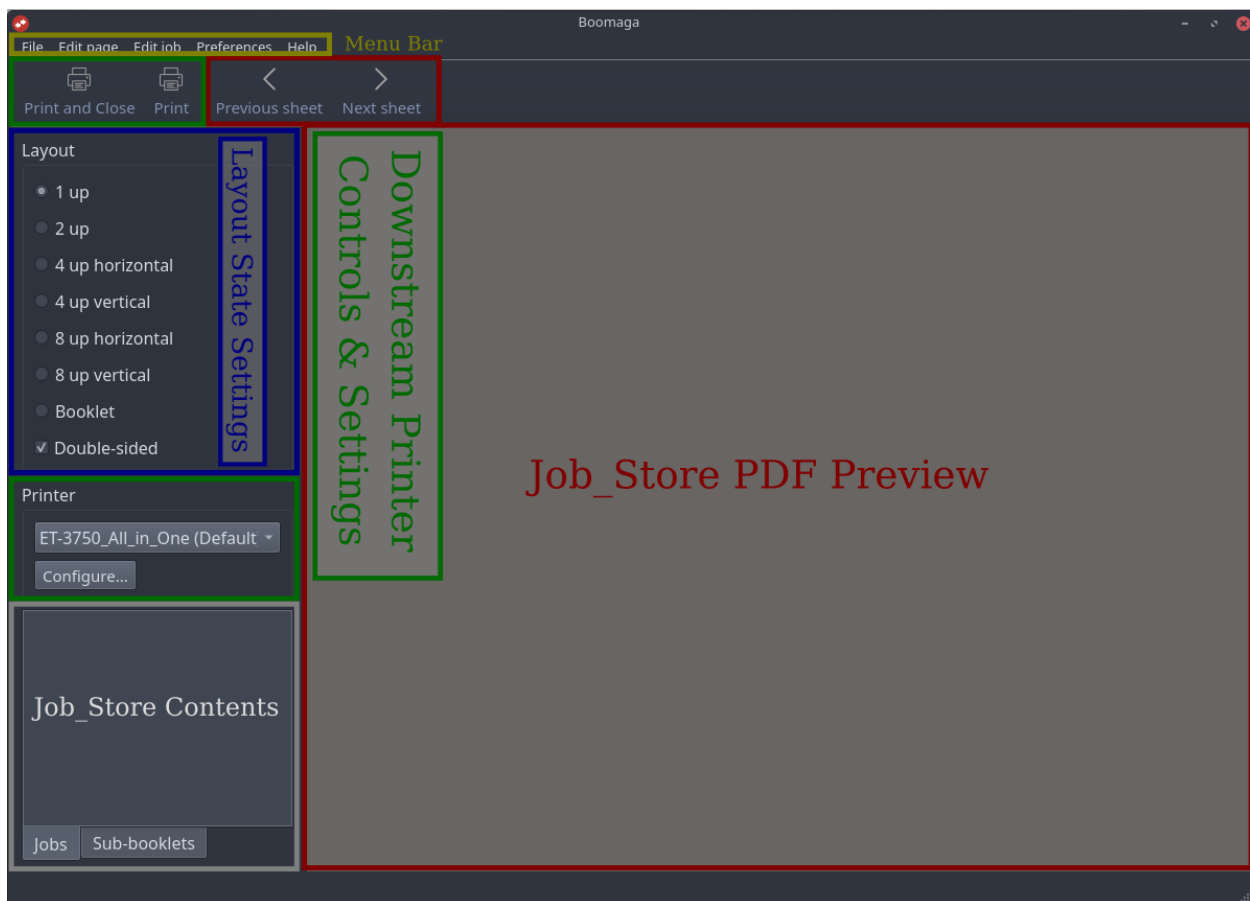


Figure 3.1.: *Boomaga* Screenshot with *Boomaga-IPP* UI Feature Annotations.

The *UI* features are listed in the following sections in the order of priority to be given them in the *Boomaga-IPP* UI. The first and primary feature shall be the *JOB_STORE_CONTENTS_LISTING* display (annotated in grey).(L2-UI-031) The next feature in priority order shall be the *JOB_STORE_PDF_PREVIEW* window and associated page view controls (annotated in red).(L2-UI-032) Third shall be the Commanded *Imposition* (Layout) State Setting Controls (annotated in blue).(L2-UI-033) Fourth shall be the Downstream Printer Controls and Settings (annotated in green).(L2-UI-034) After these features in

priority shall come the standard Menu Bar (annotated in mustard), Content Specific Menus (not shown here), and Window Decoration (partially shown, not annotated) UI elements.(L2-UI-035)

3.1. User Interface Feature 1: **Job_Store_Contents_Listing**

3.1.1. Description and Priority

The **JOB_STORE_CONTENTS_LISTING** shall have two user selectable display modes: “Jobs” and “Sub-booklets.”(L2-UI-036) The default mode shall be the “Jobs” mode.(L2-UI-037) In the “Jobs” mode, the content listing display shall show, in order, all the jobs received through the *IPP Everywhere™* Client and added to the **JOB_STORE**.(L2-UI-038) In the “Sub-booklets” mode, the content listing display shall show, in order, all the Sub-booklets as they will be built upon a print command from the user using the current **JOB_STORE**, current output sequence state object, and current Sub-booklet settings.(L2-UI-039)

3.1.2. Stimulus/Response Sequences

The *Boomaga-IPP GUI* shall permit the user to select either the “Jobs” tab or the “Sub-booklets” tab.(L2-UI-040) Selecting the “Jobs” tab shall switch the **JOB_STORE** Content Listing to “Jobs” mode.(L2-UI-041) Selecting the “Sub-booklets” tab shall switch the **JOB_STORE** Content Listing to the “Sub-booklets” mode.(L2-UI-042)

In “Jobs” mode, the **GUI** shall permit the the user to select one or more of the jobs displayed in the **JOB_STORE** content listing with the mouse.(L2-UI-043) The user shall be able to command deletion of selected jobs using the Menu Bar, a context menu via mouse command, and the Delete key of the keyboard.(L2-UI-044)

In “Sub-booklets” mode, the **GUI** shall permit the user to select one or more of the Sub-booklets displayed in the **JOB_STORE** content listing with the mouse.(L2-UI-045) The user shall be able to command deletion of selected sub-booklets using the Menu Bar, a context menu via mouse command, and the Delete key of the keyboard.(L2-UI-046)

3.1.3. Functional Requirements

The **GUI** shall not modify the contents of the **JOB_STORE**, but shall maintain a state object which shall fully describe the output sequence of pages of the **JOB_STORE** as they are to be previewed and printed.(L2-UI-047) During the initial loading of the **JOB_STORE**, both the input sequence state and the output sequence state shall be constructed.(L2-UI-048) The output sequence state object shall be identical to the input sequence state object until the user commands a change in the output sequence state.(L2-UI-049) The output sequence state object shall be updated as each command to delete a Job or a Sub-booklet is received from the user through the **GUI**.(L2-UI-050) The **JOB_STORE** Content listing and the **JOB_STORE_PDF_PREVIEW** page shall be updated as commanded by the user immediately following the output sequence user state update.(L2-UI-051)

3.2. User Interface Feature 2: **Job_Store_PDF_Preview**

3.2.1. Description and Priority

The **JOB_STORE_PDF_PREVIEW** feature shall display a single **imposed page** when N-up **imposition** is selected and a single **printer spread** when Booklet **Imposition** is selected.(L2-UI-052) The page view controls shall permit the user to page forward or backward through the **JOB_STORE** one **imposed page** or **printer spread** at a time.(L2-UI-053) In *Boomaga*, the page view controls are at the top of the **JOB_STORE_PDF_PREVIEW** window. In *Boomaga-IPP*, the page view controls shall be centered beneath the **JOB_STORE_PDF_PREVIEW** window between it and the standard window decoration.(L2-UI-054) When an **imposed page** or **printer spread** is first displayed the first **document page** shall be set as the selected **document page**.(L2-UI-199) The user shall be able to change the selection to any other visible **document page** with the mouse or keyboard.(L2-UI-200)

3.2.2. Stimulus/Response Sequences

Pressing the page forward control button shall advance the **imposed page** or **printer spread** displayed in the **JOB_STORE_PDF_PREVIEW** display by a single **imposed page** or **printer spread**.(L2-UI-055) Pressing the page back control button shall cause the **imposed page** or **printer spread** displayed in the **JOB_STORE_PDF_PREVIEW** display to go back by a single **imposed page** or **printer spread**.(L2-UI-056) Page forward and page back shall also be commanded by use of the mouse scroll wheel and the keyboard arrow keys.(L2-UI-057)

3.2.3. Functional Requirements

The **GUI** shall not modify the contents of the **JOB_STORE**, but shall command updates to a state object which shall fully describe the output sequence of the **imposed pages** or **printer spreads** of the **JOB_STORE** as they are to be previewed and printed.(L2-UI-058) The state for each **imposed page** or **printer spread** in the sequence shall indicate the commanded placement and orientation of the previewed/printed **imposed page** / **printer spread** in the output sequence of the **JOB_STORE**.(L2-UI-059) The page forward and page back commands shall move the displayed **imposed page** / **printer spread** by one in the desired direction through the output sequence of **JOB_STORE** pages.(L2-UI-060) During the initial loading of the **JOB_STORE**, both the input sequence state and the output sequence state shall be constructed.(L2-UI-061) The output sequence state object shall be identical to the input sequence state object until the user commands a change in the output state.(L2-UI-062) The output sequence state object shall be updated as each command to add, delete, rotate, or impose **document pages** is received from the user through the **GUI**.(L2-UI-063) The page view shall be updated as commanded by the user immediately following the output sequence user state update.(L2-UI-064)

3.3. User Interface Feature 3: **Imposition (Layout) Controls**

3.3.1. Description and Priority

The **Imposition (Layout) Controls** shall permit the user to specify the format of the output **imposed pages** or **printer spreads** to be sent to *Boomaga-IPP* **DOWNSTREAM_PRINTER_DAEMON** as spec-

ified above in Subsection 1.7.3.(L2-UI-065) The Downstream Printer selection and settings shall be consolidated into a single screen area in *Boomaga-IPP*, rather than being separated in two non-contiguous areas as they are in *Boomaga*.(L2-UI-066) Consequently, the **Imposition** (Layout) Controls shall be placed below the Downstream Printer selection and settings controls in *Boomaga-IPP*.(L2-UI-067)

3.3.2. Stimulus/Response Sequences

The user shall command the desired file layout by selecting the desired **imposition** (layout) state through **UI** option buttons or equivalent functionality.(L2-UI-068)

3.3.3. Functional Requirements

The **GUI** shall not modify the contents of the **JOB_STORE**, but shall command updates to an output sequence state object which shall fully describe the desired output PDF file (print job) **imposition** (layout).(L2-UI-069) The output sequence state object shall be updated whenever the user changes the desired file **imposition** (layout) state through the **GUI**.(L2-UI-070)

3.4. User Interface Feature 4: Downstream Printer Controls and Settings

3.4.1. Description and Priority

The *Boomaga-IPP* Downstream Printer Selection and Settings Controls shall be consolidated into a single contiguous region of the **GUI** screen immediately below the Menu Bar.(L2-UI-071)

3.4.2. Stimulus/Response Sequences

The Downstream Printer Selection and Settings controls shall emulate the standard menu structure of the *Linux*[®] system and its installed desktop environment as much as possible within the constraints of *Xilem*'s currently available widget functionality.(L2-UI-072)

3.4.3. Functional Requirements

The Downstream Printer Selection and Settings controls shall permit the user to select the desired Downstream Printer and permit the user to adjust its settings through **CUPS**-provided functionality.(L2-UI-073) These controls shall permit the user to select any suitable Downstream Printer available through **CUPS**.(L2-UI-074)

4. Handling of Erroneous Input

The *Boomaga-IPP GUI* shall prevent erroneous input by disallowing the selection of incompatible options by the user through the *GUI*.(L2-UI-075) When user selection of an option is disallowed, an error message shall be displayed to explain the incompatibility.(L2-UI-076)

4.1. Handling of Erroneous User Option Selections

Specific *UI* user option selection scenarios to be prevented are still *to be determined (TBD)* at this time (TBD-UIS-001)¹.

¹See Appendix D, *To Be Determined (TBD) List*, for all current *UIS TBDs*.

5. Menu Bar

The menu structure described in this chapter shall be a hierarchical menu of the type commonly incorporated into the window decoration of modern windowing systems.(L2-UI-077) The File, Edit Page, Edit Job, Preferences, and Help tabs shall be the top-level tabs in this menu structure and shall be constantly displayed on the menu bar in the order listed.(L2-UI-078) When any of these top level tabs are selected by the user using the mouse or from the keyboard, the menu of items available immediately below that tab in the menu tree structure shall be displayed.(L2-UI-079) The *Boomaga* menu bar is shown below in Figure 5.1. The *Boomaga* menus shown in this chapter are examples only and are not to be interpreted as prescribed requirements for *Boomaga-IPP* except as described explicitly in the text below.




Figure 5.1.: *Menu Bar*.

The items listed in the subsections below the top-level tab sections shall be user-selectable menu items.(L2-UI-080) Each menu item described in the subsections in this chapter shall initiate the action described in its subsection when selected by the user with the mouse or from the keyboard.(L2-UI-081)

When selected by the user, menu items with names followed by an ellipsis (...) shall produce a separate popup menu window from which the user may make further selections.(L2-UI-082) Menu item names followed by a right arrow (➔) shall produce a nested list within the menu bar menu tree structure from which the user may make selections while they are displayed.(L2-UI-083) Letters that are underlined in menu item names indicate that the keyboard combination `[alt] + [underlined_key]` shall open that particular menu item (e.g., `[alt] + [F]` from `File` opens the File Menu).(L2-UI-084) Keyboard shortcuts for menu items other than `[alt] + [shortcut_key]` are fully specified and enclosed in parentheses following the name of the menu item and shall open that menu item.(L2-UI-085)

5.1. File Menu

The `File` menu shall be opened by selecting the `File` tab from the menu bar with the mouse or by typing `Alt+F` from the keyboard.(L2-UI-086) The *Boomaga* `File` menu is shown below in Figure 5.2.

5.1.1. Print and Close (Ctrl+P)

Selecting this item from the menu or typing `Ctrl+P` from the keyboard shall immediately cause the *imposition* of the output print job as specified by the output sequence state object followed by the submission of the output print job to the downstream printer.(L2-UI-087) Upon successful submission, the *Boomaga-IPP* GUI shall clear the `JOB_STORE`.(L2-UI-088) Upon a successful clearing of the `JOB_STORE`, the *Boomaga-IPP* GUI shall quit.(L2-UI-088)

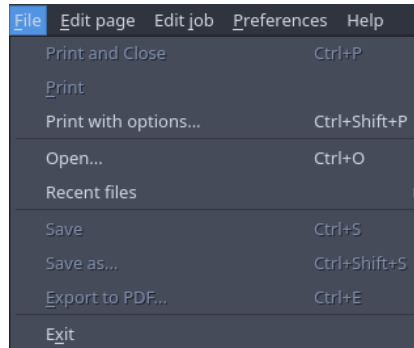


Figure 5.2.: *File Menu.*

5.1.2. Print

Selecting this item from the menu or typing Alt+P from the keyboard shall immediately cause the **imposition** of the output print job as specified be the output sequence state object followed by the submission of the output print job to the downstream printer.(L2-UI-089) The **JOB_STORE** and its state shall be unchanged by this action.(L2-UI-090)

5.1.3. **Print with Options... (Ctrl+Shift+P)**

Selecting this item from the menu or typing Ctrl+Shift+P from the keyboard shall immediately open the downstream printer options dialogue box (see Figure 5.3).(L2-UI-091) The print options dialogue box shall allow the user to select the number of copies of the output print job to be printed and to select collated or uncollated copies.(L2-UI-092) After selecting the desired printer options the user shall be able to select the ☒ OK button or the ☒ Cancel button.(L2-UI-093) Selecting the ☒ Cancel button shall close the printer options dialog, leaving the **JOB_STORE** state unchanged.(L2-UI-094) Selecting the ☒ OK button shall immediately modify and save the state of the **JOB_STORE** in accordance with the options selected by the user.(L2-UI-095) Upon successful update of the **JOB_STORE** state, the **imposition** of the output print job as specified be the output sequence state object shall be performed, immediately followed by the submission of the output print job to the downstream printer.(L2-UI-096) The **JOB_STORE** shall maintain its state at the conclusion of this action.(L2-UI-097)




Figure 5.3.: *Printer Options Dialog Box.*

5.1.4. **Open... (Ctrl+O)**

Selecting this item from the menu or typing Ctrl+O from the keyboard shall immediately open the file selection dialogue box (see Figure 5.4).(L2-UI-098) The file selection dialogue box shall allow the

user to select the button or to select any previously saved *Boomaga-IPP* `JOB_STORE` and state information file (.boo file) using the mouse.(L2-UI-099) Selecting the button shall close the file selection dialog, leaving the `JOB_STORE` state unchanged.(L2-UI-100) If the user has selected a .boo file, selecting the button or typing Alt+O from the keyboard shall cause the GUI to command the immediate loading of the selected file into the `JOB_STORE`.(L2-UI-101) Upon successful loading of the file into the `JOB_STORE`, the file selection dialogue box shall immediately close.(L2-UI-102)

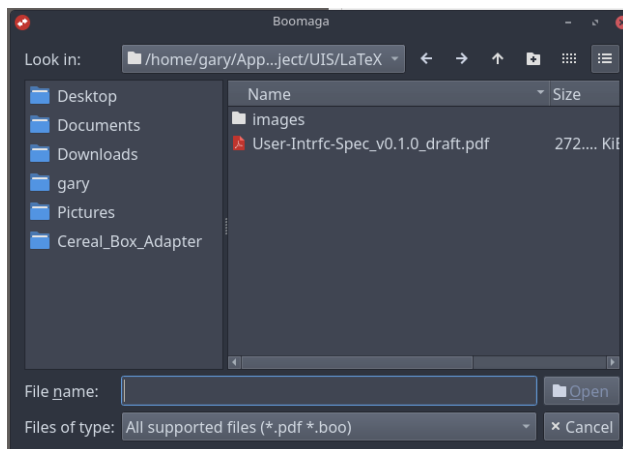


Figure 5.4.: File Selection Dialogue Box.

5.1.5. Recent Files →

If the user has not recently saved any .boo files, this menu item shall be greyed out and unavailable for selection.(L2-UI-103) If the user has recently saved any .boo files and the user selects this menu item, the *Boomaga-IPP* UI shall display a pick list of recent .boo files.(L2-UI-104) If the user selects a file from the pick list, the UI shall command that the selected .boo file be immediately added to the current `JOB_STORE`.(L2-UI-105)

5.1.6. Save (Ctrl+S)

If the current `JOB_STORE` is null (empty) or if the user has not previously saved the current `JOB_STORE` using the Save As menu item, this item shall be grayed out and unavailable for selection.(L2-UI-106) If this item is available and the user selects it with the mouse or types Ctrl+S from the keyboard, the *Boomaga-IPP* UI shall command the immediate saving of the `JOB_STORE` and associated state information to the previously created .boo file, overwriting it.(L2-UI-107)

5.1.7. Save as... (Ctrl+Shift+S)

If the current `JOB_STORE` is null (empty), this item shall be grayed out and unavailable for selection.(L2-UI-108) Selecting this item from the menu or typing Ctrl+Shift+S from the keyboard shall immediately open the file save dialogue box (see Figure 5.5).(L2-UI-109) The file save dialogue box shall allow the user to select the button or to select a folder and type a filename for saving the *Boomaga-IPP*

JOB_STORE and state information file (.boo file) using the mouse and keyboard.(L2-UI-110) Selecting the button shall close the file save dialog, leaving the **JOB_STORE** state unchanged.(L2-UI-111) If the user has selected a folder and typed a filename for the .boo file, selecting the button or typing Alt+S from the keyboard shall cause the *Boomaga-IPP* UI to command the immediate saving of the current **JOB_STORE** and associated state information into the desired file.(L2-UI-112) Upon successful saving of the **JOB_STORE** and state into the file, the file save dialogue box shall immediately close.(L2-UI-113)

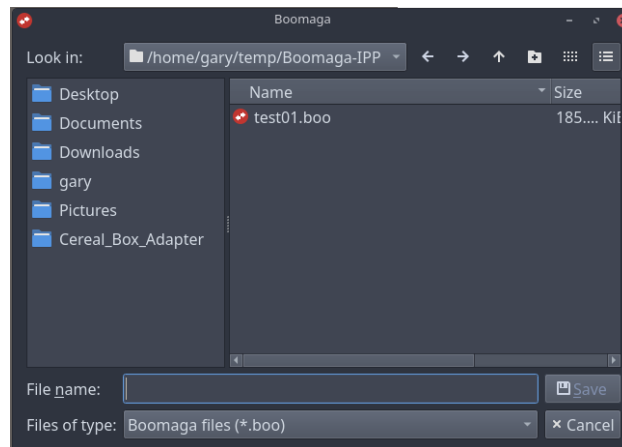


Figure 5.5.: File Save Dialogue Box.

5.1.8. Export to PDF... (Ctrl+E)

If the current **JOB_STORE** is null (empty), this item shall be grayed out and unavailable for selection.(L2-UI-114) If this menu item is available and selected by the user with the mouse or by typing Ctrl+E from the keyboard, the *Boomaga-IPP* UI shall immediately open the file export dialogue box (see Figure 5.6).(L2-UI-115) The file export dialogue box shall allow the user to select the button or to select a folder, type a filename, and enter metadata for saving the *Boomaga-IPP* output to a PDF file using the mouse and keyboard.(L2-UI-116) Selecting the button shall close the file export dialog, leaving the **JOB_STORE** state unchanged.(L2-UI-117) If the user has selected a folder and typed a filename for the PDF file, selecting the button shall cause the *Boomaga-IPP* UI to command the immediate saving of the imposed output of the current **JOB_STORE** into the desired file.(L2-UI-118) Upon successful saving of the output into the PDF file, the file export dialogue box shall immediately close.(L2-UI-119)

5.1.9. Exit

If this menu item is selected by the user with the mouse or by typing Alt+X from the keyboard, the *Boomaga-IPP* UI shall immediately save its current state information to the **JOB_STORE** temporary storage location.(L2-UI-120) Upon successful saving of the state information, it shall immediately exit.(L2-UI-121)

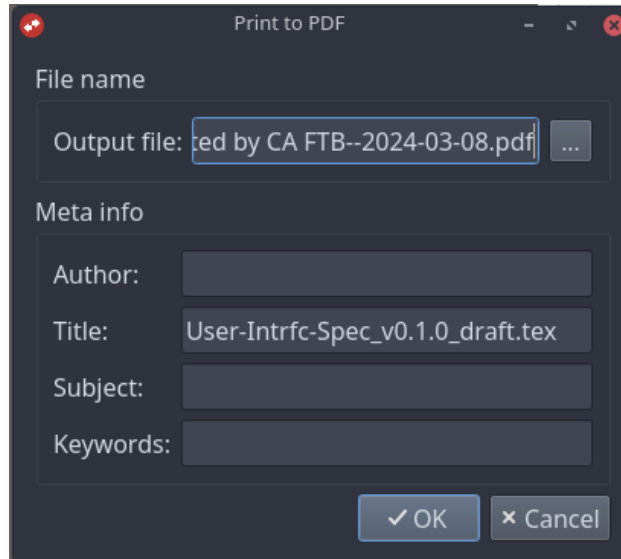


Figure 5.6.: *File Export Dialogue Box.*

5.2. Edit Page Menu

The Edit Page Menu shall be opened by selecting the Edit Page tab from the menu bar with the mouse or by typing Alt+E from the keyboard.(L2-UI-122) All Edit Page Menu commands shall act on, immediately preceding, or immediately following the currently selected [document page](#) or [document pages](#), as appropriate to the selected command.(L2-UI-201) The *Boomaga* Edit page menu is shown below in Figure 5.7.

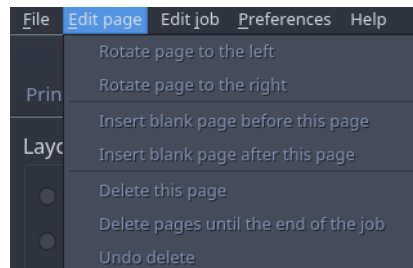


Figure 5.7.: *Edit Page Menu.*

5.2.1. Start new booklet from this page

This menu item shall be grayed out and unavailable for selection unless 1) the [JOB_STORE](#) is non-null and 2) the user has selected an output page from the [JOB_STORE](#) other than the first [document page](#) of the first job.(L2-UI-123) If the user has first selected a [document page](#) other the first [document page](#) of the first job from the [JOB_STORE](#), and then selected this menu item with the mouse, the *Boomaga-IPP* UI shall immediately update the [JOB_STORE](#) current state information to reflect the creation of a new sub-booklet starting with the currently selected page.(L2-UI-124) The sub-booklets tab of the [JOB_STORE](#) Contents display shall then be updated to reflect the updated state of the [JOB_STORE](#).(L2-UI-125)

5.2.2. Rotate page counterclockwise

This menu item shall be grayed out and unavailable for selection unless the **JOB_STORE** is non-null.(L2-UI-126) If the user has selected this menu item with the mouse, the *Boomaga-IPP* UI shall immediately update the **JOB_STORE** current state information to reflect the 90 degree counterclockwise rotation of the currently selected **document page** from its previous state.(L2-UI-127) The **JOB_STORE_PDF_PREVIEW** shall then be updated to reflect the updated state of the the selected **document page** of the **JOB_STORE**.(L2-UI-128)

5.2.3. Rotate page clockwise

This menu item shall be grayed out and unavailable for selection unless the **JOB_STORE** is non-null.(L2-UI-129) If the user has selected this menu item with the mouse, the *Boomaga-IPP* UI shall immediately update the **JOB_STORE** current state information to reflect the 90 degree clockwise rotation of the currently selected **document page** from its previous state.(L2-UI-130) The **JOB_STORE_PDF_PREVIEW** shall then be updated to reflect the updated state of the the selected **document page** of the **JOB_STORE**.(L2-UI-131)

5.2.4. Insert blank page before this page

This menu item shall be grayed out and unavailable for selection unless the **JOB_STORE** is non-null.(L2-UI-132) If the user has first selected this menu item with the mouse, the *Boomaga-IPP* UI shall immediately update the **JOB_STORE** current state information to reflect the addition of a blank page immediately preceding the currently selected **document page**.(L2-UI-133) The **JOB_STORE_PDF_PREVIEW** shall then be updated to reflect the addition of the blank page to the **JOB_STORE**.(L2-UI-134)

5.2.5. Insert blank page after this page

This menu item shall be grayed out and unavailable for selection unless the **JOB_STORE** is non-null.(L2-UI-135) If the user has selected this menu item with the mouse, the *Boomaga-IPP* UI shall immediately update the **JOB_STORE** current state information to reflect the addition of a blank page immediately following the currently selected **document page**.(L2-UI-136) The **JOB_STORE_PDF_PREVIEW** shall then be updated to reflect the addition of the blank page to the **JOB_STORE**.(L2-UI-137)

5.2.6. Delete this page

This menu item shall be grayed out and unavailable for selection unless the **JOB_STORE** is non-null.(L2-UI-138) If the user has selected this menu item with the mouse, the *Boomaga-IPP* UI shall immediately update the **JOB_STORE** current state information to reflect the deletion of the previously selected **document page** from the **JOB_STORE**.(L2-UI-139) The **JOB_STORE_PDF_PREVIEW** shall then be updated to reflect the deletion of the **document page** from the **JOB_STORE**.(L2-UI-140) The **document page** selected shall be updated to the **document page** preceding the deleted **document page**, or to the first **document page** if there was no preceding **document page**.(L2-UI-141)

5.2.7. Delete pages to the end of the job

This menu item shall be grayed out and unavailable for selection unless the **JOB_STORE** is non-null.(L2-UI-142) If the user has selected this menu item with the mouse, the *Boomaga-IPP* UI shall immediately update the **JOB_STORE** current state information to reflect the deletion of all **document pages** in the **JOB_STORE** from the previously selected **document page** through the end of the current job.(L2-UI-143) The **JOB_STORE_PDF_PREVIEW** shall then be updated to reflect the deletion of these pages from the **JOB_STORE**.(L2-UI-144) The **document page** selected shall be updated to the **document page** preceding the first deleted **document page**.(L2-UI-145)

5.2.8. Undo delete →

This menu item shall be grayed out and unavailable for selection unless the **JOB_STORE** is non-null and the user has previously deleted one or more **document pages**.(L2-UI-146) If the user has selected this menu item with the mouse, the *Boomaga-IPP* UI shall immediately list the the previously deleted **JOB_STORE document pages** in the order of their original appearance in the **JOB_STORE**.(L2-UI-147) If the user then selects one of the previously deleted **document pages** from the list with either the mouse or the keyboard arrow and carriage return keys, the **JOB_STORE** state shall immediately be updated to show that page as restored to its original position in the **JOB_STORE**.(L2-UI-148) The **JOB_STORE_PDF_PREVIEW** shall then be updated to reflect the undeletion of the **document page** from the **JOB_STORE**.(L2-UI-149) The undelete pages list shall also be updated to remove the undeleted **document page** from the list.(L2-UI-150)

5.3. Edit Job Menu

The Edit job menu shall be opened by selecting the Edit job tab from the menu bar with the mouse or by typing Alt+J from the keyboard.(L2-UI-151) The *Boomaga* Edit job menu is shown below in Figure 5.8.

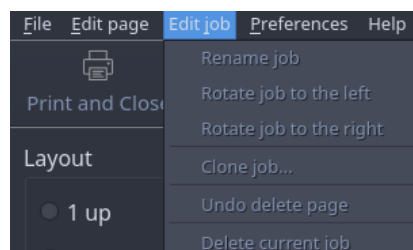


Figure 5.8.: *Edit Job Menu.*

5.3.1. Rename Job

This menu item shall be grayed out and unavailable for selection unless the **JOB_STORE** is non-null.(L2-UI-152) If the **JOB_STORE** is non-null and the user has selected this menu item with the mouse, the *Boomaga-IPP* GUI shall immediately display the Rename Job menu for the selected print job, allowing the user to enter a new name for that print job.(L2-UI-153) Upon the user entering a new name and

then selecting the ☒ OK button, the `JOB_STORE` state shall be immediately updated with the user provided name and the `JOB_STORE_CONTENTS_LISTING` shall then be updated to reflect the renaming of the selected print job.(L2-UI-154) The *Rename Job* menu is shown below in Figure 5.9.

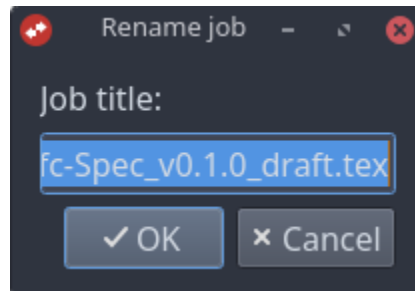


Figure 5.9.: *Rename Job Menu*.

5.3.2. Rotate job counterclockwise

This menu item shall be grayed out and unavailable for selection unless the `JOB_STORE` is non-null.(L2-UI-155) If the `JOB_STORE` is non-null and the user has selected this menu item with the mouse, the *Boomaga-IPP* GUI shall immediately update the `JOB_STORE` state for all `document pages` in the selected print job to reflect a 90 degree counterclockwise rotation from the previous orientation of each affected `document page`.(L2-UI-156) The `JOB_STORE_PDF_PREVIEW` shall then be updated to display the revised rotation of the `document pages` of the selected print job.(L2-UI-157)

5.3.3. Rotate job clockwise

This menu item shall be grayed out and unavailable for selection unless the `JOB_STORE` is non-null.(L2-UI-155) If the `JOB_STORE` is non-null and the user has selected this menu item with the mouse, the *Boomaga-IPP* GUI shall immediately update the `JOB_STORE` state for all `document pages` in the selected print job to reflect a 90 degree clockwise rotation from the previous orientation of each affected `document page`.(L2-UI-156) The `JOB_STORE_PDF_PREVIEW` shall then be updated to display the revised rotation of the `document pages` of the selected print job.(L2-UI-157)

5.3.4. Clone job...

This menu item shall be grayed out and unavailable for selection unless the `JOB_STORE` is non-null.(L2-UI-161) If the `JOB_STORE` is non-null and the user has selected this menu item with the mouse, the *Boomaga-IPP* GUI shall immediately command the cloning of a copy of the selected print job onto the end of the `JOB_STORE`.(L2-UI-162) The `JOB_STORE_CONTENTS_LISTING` and the `JOB_STORE_PDF_PREVIEW` shall then be updated to display the newly cloned print job following the print job that was previously last in the `JOB_STORE`.(L2-UI-163)

5.3.5. Undo delete page →

This menu item shall be grayed out and unavailable for selection unless 1) the `JOB_STORE` is non-null and 2) the user has previously deleted an output page from the selected print job of the `JOB_STORE`.(L2-UI-

164) If the user has first deleted a page from the selected print job, and then selected this menu item with the mouse, the *Boomaga-IPP* GUI shall immediately list the the previously deleted document pages in the order of their original appearance in the `JOB_STORE`.(L2-UI-165) If the user then selects one of the previously deleted document pages from the list with either the mouse or the keyboard arrow and carriage return keys, the `JOB_STORE` state shall immediately be updated to show that document page as restored to its original position in the `JOB_STORE`.(L2-UI-166) The `JOB_STORE_PDF_PREVIEW` shall then be updated to reflect the restoration of the page to the `JOB_STORE`.(L2-UI-167) The undelete pages list shall also be updated to remove the undeleted document page from the list.(L2-UI-168)

5.3.6. Delete current job

This menu item shall be grayed out and unavailable for selection unless the `JOB_STORE` is non-null.(L2-UI-169) If the `JOB_STORE` is non-null and the user has selected this menu item with the mouse, the *Boomaga-IPP* GUI shall immediately command the deletion of the selected print job from the `JOB_STORE`.(L2-UI-170) The `JOB_STORE_CONTENTS_LISTING` and the `JOB_STORE_PDF_PREVIEW` shall then be updated to reflect the removal of the print job from the `JOB_STORE`.(L2-UI-171)

5.4. Preferences Menu

The Preferences menu shall be opened by selecting the Preferences tab from the menu bar with the mouse or by typing Alt+P from the keyboard as shown in Figure 5.10.(L2-UI-172)




Figure 5.10.: Preferences Tab.

5.4.1. Preferences...

From the Preferences Menu, the user shall be able to select the following option boxes: 1) Print as sub-booklets, 2) AutoSave the recent sessions, 3) Right-to-left direction, and 4) Allow negative page margins.(L2-UI-173) If the user selects “Print as sub-booklets,” then they shall be able to set the number of “Sheets per sub-booklet.”(L2-UI-174) The default value of “Sheets per sub-booklet” shall be 20.(L2-UI-175) If the user selects “AutoSave the recent sessions,” then they shall be able to select the directory in which recent session files are saved using the display environment’s standard means of selecting a directory through its GUI.(L2-UI-176) The *Boomaga* Preferences menu is shown below in Figure 5.11.

5.5. Help Menu

The Help menu shall be opened by selecting the Help tab from the menu bar with the mouse as shown in Figure 5.12.(L2-UI-177)

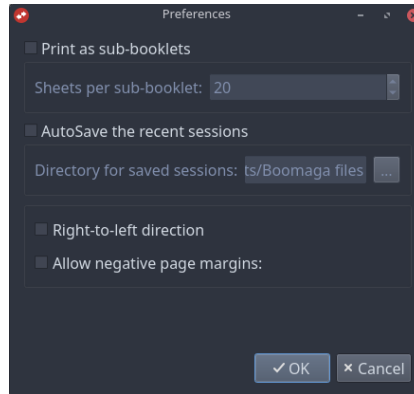


Figure 5.11.: *Preferences Menu.*




Figure 5.12.: *Help Menu.*

5.5.1. About Boomaga-IPP

The About *Boomaga-IPP* menu window shall be opened by selecting “About *Boomaga-IPP*” from the “Help” menu.(*L2-UI-178*) The window shall provide information on *Boomaga-IPP* including version number, copyright information, project software location, software license information, a list of authors, a list of acknowledgements, information about available translations, and any other *TBD* information (*TBD-UIS-002*)¹ that the *Boomaga-IPP* team should decide to include.(*L2-UI-179*) The About *Boomaga* pop-up window is shown as an example in Figure 5.13.

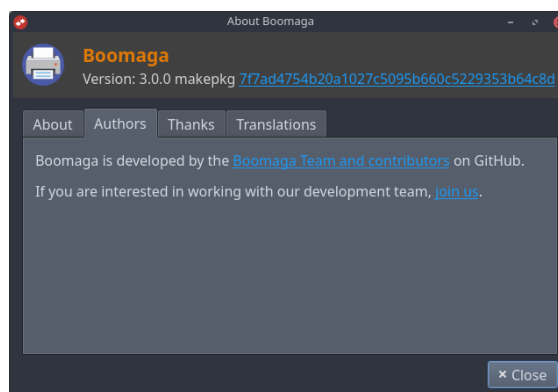


Figure 5.13.: *About Boomaga Menu.*

¹See Appendix D, *To Be Determined (TBD) List*, for all current *UIS TBDs*.

6. Context Specific Menus

6.1. Context Specific Edit Page Menu

The user shall be able to open a context specific Edit page menu with a “right click” of the mouse over the page displayed in the [JOB_STORE_PDF_PREVIEW](#) Feature.(L2-UI-180) The context specific Edit page menu and its items shall be identical in function to the those of the menu bar Edit page menu described in Section 5.2.(L2-UI-181) An example context specific Edit page menu is shown in Figure 6.1.

6.2. Context Specific Edit Job Menu

The user shall be able to open a context specific Edit job menu with a “right click” of the mouse over a print job displayed in the [JOB_STORE_CONTENTS_LISTING](#) Feature.(L2-UI-182) The context specific Edit job menu and its items shall be identical in function to the those of the menu bar Edit job menu described in Section 5.3.(L2-UI-183) An example context specific Edit job menu is shown in Figure 6.2.

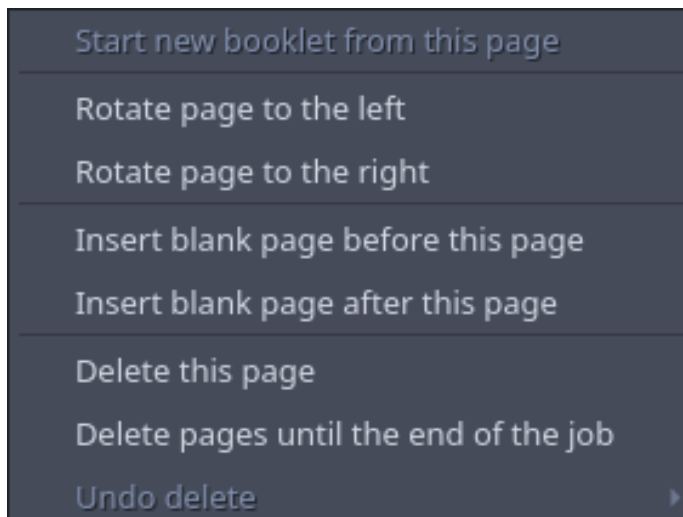


Figure 6.1.: Context Specific Edit Page Menu.

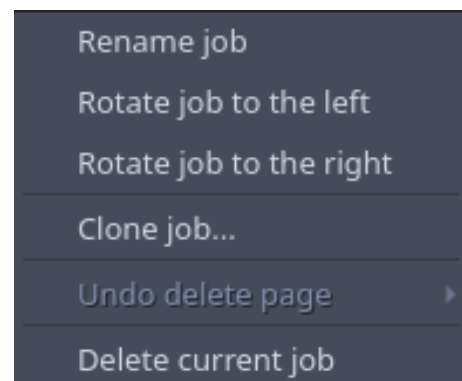


Figure 6.2.: Context Specific Edit Page Menu.

7. Miscellaneous Interface Elements

7.1. Application Window Decoration

The application window decoration shall display the name of the program, *Boomaga-IPP*, centered on the top border of the application window.(L2-UI-184) The application window decoration shall display the following information right justified in the bottom border of the application window: 1) The number of the *imposed page* currently displayed in *JOB_STORE_PDF_PREVIEW* Feature out of the total number of *imposed pages* in the *JOB_STORE*, 2) The number of the *document page* currently selected out of the total number of *document pages* in the *JOB_STORE*, and 3) The total number of sheets to be printed in the *JOB_STORE*.(L2-UI-185) The above information shall be updated as required whenever the user makes a change to the imposition controls or adds or removes a *document page*.(L2-UI-186) An example of this information as displayed by *Boomaga* is shown in Figure 7.1.

A screenshot of the Boomaga application window's bottom-right corner. It shows a dark gray rectangular area containing white text. The text is split into two parts: "Sheet 1 of 13" and "Page 1 of 22 (6 sheets)". There is a small icon to the right of the text.

Sheet 1 of 13 Page 1 of 22 (6 sheets)

Figure 7.1.: *Page Number Information in Boomaga Bottom-Right Window Frame.*

8. Integration with the Operating System

8.1. *IPP Everywhere*TM Integration

The *Boomaga-IPP IPP Everywhere*TM client shall launch the *Boomaga-IPP GUI* application on the user's desktop whenever the user prints to *Boomaga-IPP*.(L2-UI-187)

8.2. *Job_Store* Interaction

The *Boomaga-IPP GUI* shall not manipulate the *JOB_STORE* directly, but shall communicate with the *Boomaga-IPP IMPOSITION_ENGINE*, which shall manipulate the *JOB_STORE* as directed by the user via the *GUI*.(L2-UI-188) The *Boomaga-IPP GUI* shall communicate user-desired changes to the state of the *JOB_STORE* and access the updated *JOB_STORE* state in order to display the correct and up-to-date *JOB_STORE_PDF_PREVIEW* and *JOB_STORE_CONTENTS_LISTING* to the user.(L2-UI-189)

8.3. *CUPS* Integration

The *Boomaga-IPP GUI* application shall communicate with the *Boomaga-IPP DOWNSTREAM_PRINTER_DAEMON* to print the imposed *JOB_STORE* to the user-selected downstream printer.(L2-UI-190) If the option is selected by the user, the *Boomaga-IPP GUI* shall request that the *JOB_STORE* be flushed and the *Boomaga-IPP GUI* application quit upon successful printing of the imposed *JOB_STORE*.(L2-UI-191)

9. Special Considerations

9.1. Translation Requirements

Boomaga-IPP shall be designed to allow the [GUI](#) to display text in languages other than English.([L2-UI-192](#))

9.2. Reuse Requirements

The *Boomaga-IPP Virtual Printer* system shall use existing well documented and well maintained software libraries whenever possible so as ease development difficulty and improve reliability.([L2-UI-193](#)) These libraries shall include non-*RUST*[®] libraries with safe *RUST*[®] bindings, such as *Poppler*, *qpdf*, and *D-Bus*.([L2-UI-194](#)) The *Boomaga-IPP JOB_STORE_PDF_PREVIEW* feature shall be designed to support its reuse in a stand-alone PDF file viewer.([L2-UI-202](#)) The *Boomaga-IPP CAPTURE_DAEMON* shall be designed to support its reuse in other printer or virtual printer applications.([L2-UI-203](#))

Appendix A.

Glossary

Ada A modern programming language designed for large, long-lived applications – and embedded systems in particular – where reliability and efficiency are essential. It was most recently updated in 2022. Those revisions, known as Ada 2022, have been published as the International Standard ISO/IEC 8652:2023(E). For additional information, see Section 1.8. References: [ISO/IEC JTC 1/SC 22/WG 9 - Ada](#), 2023.

Adobe® A registered trademark of Adobe, Inc..

ARCH LINUX™ A simple, lightweight [Linux®](#) distribution™. For additional information, see Section 1.8. References: [Vinet et al.](#), nodate.

Boomaga-IPP GUI Application The application software that provides the [GUI](#) between the user and the *Boomaga-IPP Virtual Printer*. For additional information, see Section 1.8. References: [Martin and Boomaga-IPP Project Team](#), 2026-03-03/2026a.

Boomaga An orphaned virtual [CUPS](#) printer system for [Linux®](#) computers. The last release, v3.0.0, was issued Mar 13, 2019. A patch to the v3.0.0 source code was merged into the *Boomaga* source code on February 20, 2022 with no subsequent release. *Boomaga* has been unmaintained since that date. For additional information, see Section 1.8. References: [Sokolov et al.](#), 2013b.

Boomaga-IPP An *IPP Everywhere™* / [CUPS](#) virtual printer development project for [Linux®](#) computers. For additional information, see Section 1.8. References: [Martin and Boomaga-IPP Project Team](#), 2026-03-03/2026a.

Boomaga-IPP Virtual Printer An *IPP Everywhere™* / [CUPS](#) virtual printer software system for [Linux®](#) computers using [Wayland](#) display environments and managed via [systemd](#); written entirely in [RUST®](#). For additional information, see Section 1.8. References: [Martin and Boomaga-IPP Project Team](#), 2026-03-03/2026a.

Capture_Daemon The *Boomaga-IPP* client/server software component responsible for receiving (capturing) input print jobs as PDF files through an *IPP Everywhere™* client and adding them to the [JOB_STORE..](#)

Cargo® The official package manager and build system for the [RUST®](#) programming language. For additional information, see Section 1.8. References: [Rust Foundation](#), nodate-a.

CLAUDE[®] A series of [LLMs](#) developed by Anthropic PBC and first released in 2023. [CLAUDE[®]](#) is used for software development via [CLAUDE[®] Code](#). For additional information, see Section 1.8. [References](#): [Anthropic PBC](#), nodate-a.

CLAUDE[®] Code An agentic AI coding tool developed by Anthropic PBC that reads entire codebases, edits files, runs commands, and manages git workflows through natural language prompts. It operates autonomously across multiple files to execute tasks such as building features, fixing bugs, and refactoring, while requiring explicit user permission for file modifications and command execution. For additional information, see Section 1.8. [References](#): [Anthropic PBC](#), nodate-b.

crates.io The [RUST[®]](#) community’s shared software crate registry. For additional information, see Section 1.8. [References](#): [Rust Foundation](#), nodate-b.

CUPS A modular printing system for Unix-like computer operating systems which allows a computer to act as a print server. Formerly an acronym for Common UNIX Printing System. For additional information, see Section 1.8. [References](#): [Sweet and OpenPrinting](#), nodate.

D-Bus A desktop message bus system, a simple way for applications to talk to one another. *D-Bus* provides interprocess communication and helps coordinate process lifecycle; it makes it simple and reliable to code a “single instance” application or daemon, and to launch applications and daemons on demand when their services are needed. For additional information, see Section 1.8. [References](#): [Pennington et al.](#), nodate.

document page A single page of a source PDF document (an input print job) captured by the [Boomaga-IPP CAPTURE_DAEMON](#). Equivalent to a [logical page](#).

Downstream_Printer_Daemon The [Boomaga-IPP](#) client software component that manages the interface between the [Boomaga-IPP Virtual Printer](#) and the host computer’s [CUPS](#) server. On request, it submits the imposed [Boomaga-IPP JOB_STORE](#) to the user-selected downstream printer.

Druid A data-first, [RUST[®]](#)-native [UI](#) design toolkit designed to offer a polished user experience for cross-platform desktop applications. While the project is no longer under active development by the *Linebender Organization*, version 0.8.3 remains available on [crates.io](#) and on [GitHub[®]](#) for bug fixes and documentation improvements. For additional information, see Section 1.8. [References](#): [Levien et al.](#), 2023.

GhostScript[®] A suite of software based on an interpreter for [Adobe[®]](#)’s [POSTSCRIPT[®]](#) and [Portable Document Format \(PDF\)](#) page description languages. Its main purposes are the rasterization of documents in these languages, the display or printing of [document pages](#), and conversion between [POSTSCRIPT[®]](#) and [PDF](#) files. For additional information, see Section 1.8. [References](#): [Artifex Software, Inc.](#), nodate.

git A free and open source distributed version control system designed to handle everything from small to very large projects with speed and efficiency. For additional information, see Section 1.8. [References](#): [Torvalds et al.](#), nodate.

GitHub® A proprietary developer platform that allows developers to create, store, manage, and share their code. It uses [git](#) to provide distributed version control and *GitHub* itself provides access control, bug tracking, software feature requests, task management, continuous integration, and wikis for every project. For additional information, see Section 1.8. References: [GitHub, Inc. \(A subsidiary of Microsoft Corporation\)](#), 2026.

imposed Arranged onto a set of facing [pages](#) (a [printer spread](#)) in a specified orientation and order so as to produce a desired output from a printer.

imposed page A single page of a PDF output document (a print job) arranged and oriented as specified by the [Boomaga-IPP](#) user and ready to be submitted to the [Boomaga-IPP DOWNSTREAM-PRINTER_DAEMON](#). A set of facing imposed pages is referred to as a [printer spread](#).

imposition The process of arranging and orienting (imposing) [document pages](#) onto [printer spreads](#) for printing.

Imposition_Engine The [Boomaga-IPP](#) client/server software component responsible for managing the [JOB_STORE](#) and its associated state information. The IMPOSITION_ENGINE serves the imposed [JOB_STORE](#) to the [Boomaga-IPP GUI Application JOB_STORE_PDF_PREVIEW](#) feature and to the [Boomaga-IPP DOWNSTREAM_PRINTER_DAEMON](#) on demand.

IPP Everywhere™ An extension of IPP to support network printing without vendor-specific driver software, including the transport, various discovery protocols, and standard document formats. For additional information, see Section 1.8. References: [Printer Working Group](#), 2020.

Job_Store The [Boomaga-IPP](#) software component containing the [JOB_STORE](#) data structure and related access methods. Print jobs received through the [IPP Everywhere™](#) client are added to the [JOB_STORE](#). The [Boomaga-IPP GUI](#) accesses and modifies the user-commanded output state of the [JOB_STORE](#). The [Boomaga-IPP DOWNSTREAM_PRINTER_DAEMON](#) requests the [imposed JOB_STORE](#) and relays it to the user-selected downstream printer on request.

Job_Store_Contents_Listing The [JOB_STORE_CONTENTS_LISTING](#) FEATURE OF THE [BOOMAGA-IPP GUI \(UI FEATURE 1\)](#).

Job_Store_PDF_Preview The [JOB_STORE_PDF_PREVIEW](#) feature of the [Boomaga-IPP GUI Application \(UI Feature 2\)](#).

KDE An international community developing high-quality, free, and open-source software. KDE was originally an acronym for the K Desktop Environment, a wordplay on the pre-existing *Common Desktop Environment*. For additional information, see Section 1.8. References: [KDE Community](#), 2026.

L2 Designates a Level 2 requirement within a requirement ID of the form LX-SS-nnn. LX would be L1 for Level 1 Requirements, L2 for Level 2, etc. SS is the subsystem: SYS for System Wide, UI for User Interface, etc.

Linebender Organization “A friendly group of people who share an interest in 2D graphics and user interface design, with everything that entails.” Most *Linebender* projects are developed in the Rust programming language. For additional information, see Section 1.8. References: [Linebender Organization](#), nodate-a.

Linux[®] A very large family of *UNIX*[®]-like operating systems based on a kernel first produced by Linus Torvalds in 1991. For additional information, see Section 1.8. References: [Linus Torvalds et al.](#), nodate and [Linux Foundation](#), nodate.

LLAMA[®] A family of *AI* models produced by *Meta AI*, a division of *Meta Platforms, Inc.* For additional information, see Section 1.8. References: [Meta AI](#), nodate.

logical page A single page of a source PDF document (an input print job) captured by the *Boomaga-IPP CAPTURE_DAEMON*. Equivalent to a [document page](#).

opencode[®] An open source AI coding agent produced by Anomaly Innovations Inc. For additional information, see Section 1.8. References: [Anomaly Innovations Inc.](#), nodate.

page One side of a sheet of paper. Within this document, logical page or document page refers to a single page of a source PDF document (a print job) captured by *Boomaga-IPP CAPTURE_DAEMON*. **Imposed page** refers to a single page imposed for submission to the *Boomaga-IPP DOWNSTREAM_PRINTER_DAEMON*.

PDF A file format developed by Adobe in 1993 and standardized as ISO 32000 in 2008. The *PDF* format is used to present documents, including text formatting and images, in a manner independent of application software, hardware, and operating systems. Based on the PostScript language, a *PDF* file encapsulates a complete description of a fixed-layout document, including the text, fonts, vector graphics, raster images and other information needed to display it. For additional information, see 1.8. References: [ISO/TC 171/SC 2](#), 2008.

Perplexity.ai A worldwide web based tool for querying various online AI models, primarily its own search engine, known as Sonar, based on a Meta *LLAMA*[®] model. A product of *Perplexity AI, Inc.* For additional information, see Section 1.8. References: [Srinivas et al.](#), nodate.

PlantUML An open-source tool allowing users to create diagrams from a plain text language. Besides various UML diagrams, PlantUML has support for various other software development related formats (such as Archimate, Block diagram, BPMN, C4, Computer network diagram, ERD, Gantt chart, Mind map, and WBD), as well as visualisation of JSON and YAML files. For additional information, see Section 1.8. References: [Roques and PlantUML Contributors](#), 2026.

Plasma KDE’s desktop environment. For additional information, see Section 1.8. References: [KDE Community](#), nodate.

Poppler a PDF rendering library based on the xpdf-3.0 code base. For additional information, see Section 1.8. References: [Høgsberg and The Poppler Project](#), nodate.

Poppler-rs A high-level (safe) set of Rust bindings for *Poppler*'s glib interface. *Poppler* is a PDF rendering library with a *cairo* backend. For additional information, see Section 1.8. References: Dröge et al., 2026.

POSTSCRIPT[®] A page description language and dynamically typed, stack-based programming language. For additional information, see Section 1.8. References: Adobe, Inc., nodate.

printer spread An imposed *spread* ready for submission to a printer.

qpdf A command-line tool and C++ library that performs content-preserving transformations on PDF files. It supports linearization, encryption, and numerous other features. It can also be used for splitting and merging files, creating PDF files (but you have to supply all the content yourself), and inspecting files for study or analysis. For additional information, see Section 1.8. References: Berkenbilt and Holger, nodate.

RUST[®] A general-purpose programming language noted for its emphasis on performance, type safety, concurrency, and memory safety. For additional information, see Section 1.8. References: Rust Foundation, nodate-c.

spread A set of facing pages in a book or booklet..

systemd A software suite for system and service management on *Linux*[®] built to unify service configuration and behavior across *Linux*[®] distributions. For additional information, see Section 1.8. References: Poettering and Sievers, nodate.

UI A subsystem identifier in the *Boomaga-IPP* requirements numbering scheme; used to identify user interface requirements. Also an acronym for user interface.

UNIX[®] A family of multi-tasking, multi-user computer operating systems that derive from the original AT&T Unix, the development of which started in 1969 at the Bell Labs research center by Ken Thompson, Dennis Ritchie, and others. For additional information, see Section 1.8. References: The Open Group, nodate.

Wayland A replacement for the X11 window system protocol and architecture with the aim to be easier to develop, extend, and maintain. *Wayland* is the language (protocol) that applications can use to talk to a display server in order to make themselves visible and get input from the user (a person). A *Wayland* server is called a “compositor.” Applications are *Wayland* clients. For additional information, see see Section 1.8. References: Høgsberg and The Wayland Project, nodate.

X11 A windowing system for bitmap displays, common on Unix-like operating systems. X originated as part of Project Athena at Massachusetts Institute of Technology (MIT) in 1984. The X protocol has been at version 11 (hence “X11”) since September 1987. For additional information, see Section 1.8. References: Gettys et al., nodate.

Xilem An experimental, high-performance *RUST[®] GUI Framework* under development by the Linebender community, designed to create cross-platform desktop and mobile applications. Inspired by *SwiftUI*, *Flutter*, and *Elm*, it utilizes a reactive architecture. For additional information, see Section 1.8. References: Linebender Organization, 2022-11-16/2026 and Linebender Organization, nodate-b.

zbus A *RUST[®]* implementation of *D-Bus* for inter-process communication (IPC). For additional information, see Section 1.8. References: Khan, 2026.

zbus_systemd A *RUST[®]* library for communication with *systemd* processes. For additional information, see Section 1.8. References: Bruno and Khan, 2026.

Appendix B.

Acronyms

AI artificial intelligence.

FAQ frequently asked questions.

GUI graphical user interface.

IEEE Institute of Electrical and Electronic Engineers.

IPC inter-process communication.

IPP Internet Printing Protocol.

ISTO Industry Standards and Technology Organization.

LLM large language model.

PDF Portable Document Format.

PWG Printer Working Group.

SRS software requirements specification.

TBD to be determined.

UI user interface.

UIS user interface specification.

UML Unified Modeling Language.

Appendix C.

Analysis Models

Perplexity.ai was used to produce the following UML models based on the synthesis of the *Boomaga* virtual printer as currently implemented and the initial *Boomaga-IPP* top level requirements. *PlantUML* was then used to generate UML diagrams from the models.

Appendix C.1. Component Diagram

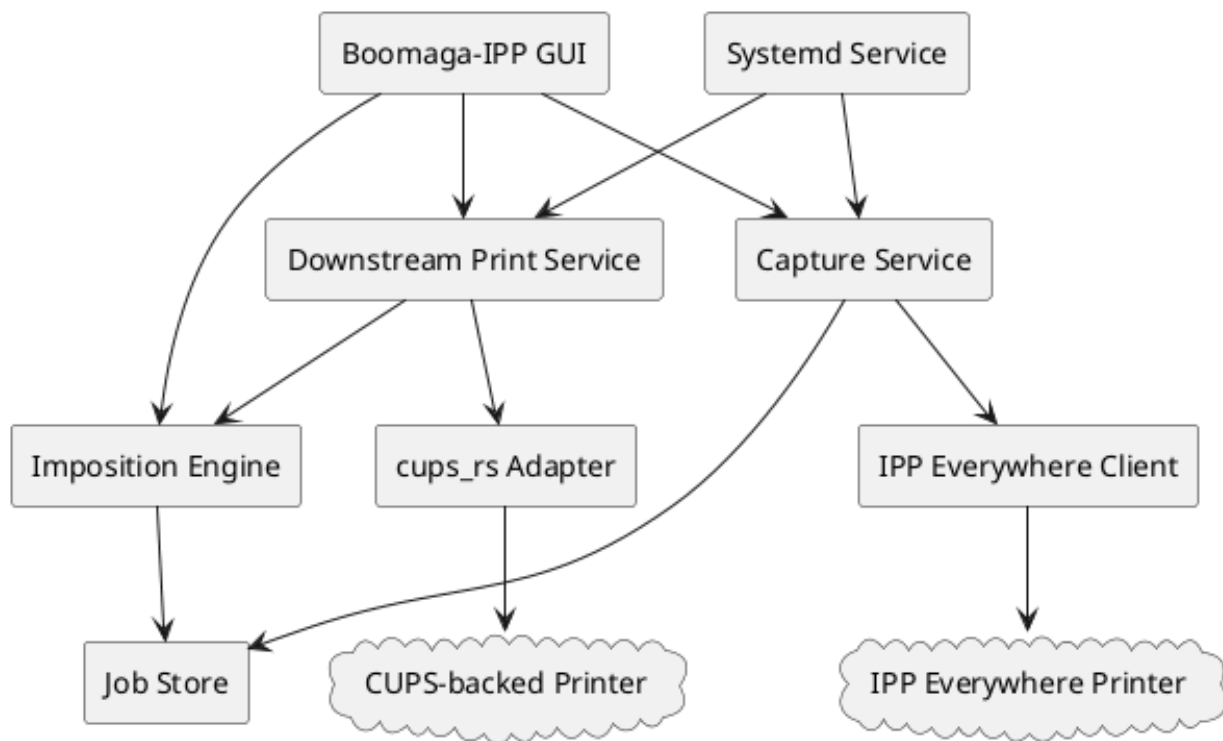


Figure C.1.: *Boomaga-IPP Virtual Printer* System Component Diagram.

Appendix C.2. Class Diagram

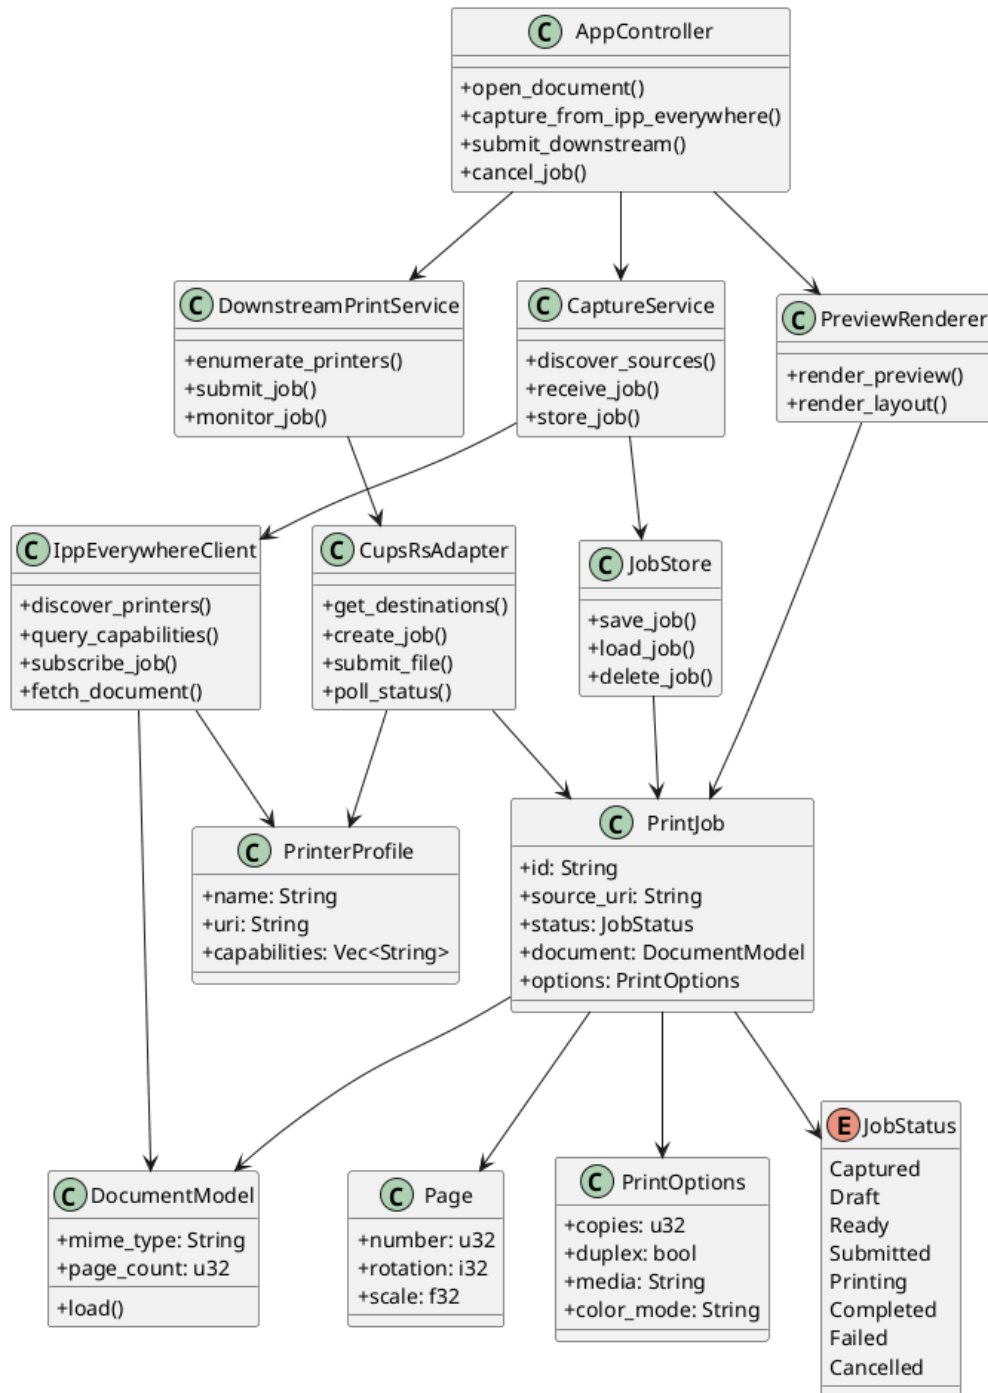


Figure C.2.: *Boomaga-IPP Virtual Printer* System Class Diagram.

Appendix C.3. Sequence Diagram

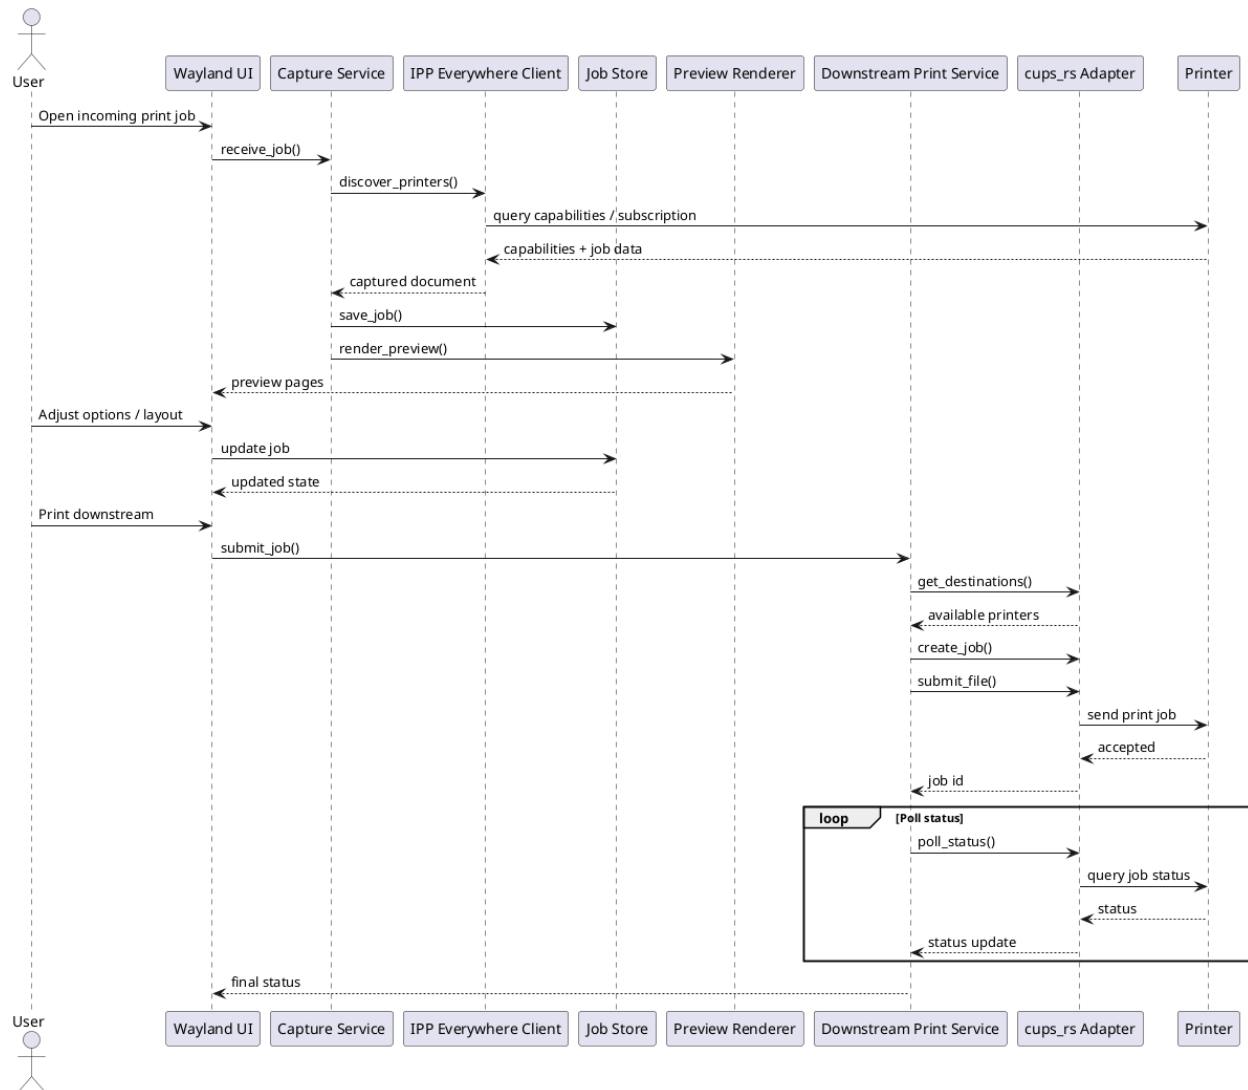


Figure C.3.: *Boomaga-IPP Virtual Printer* System Sequence Diagram.

Appendix C.4. Use Case Diagram

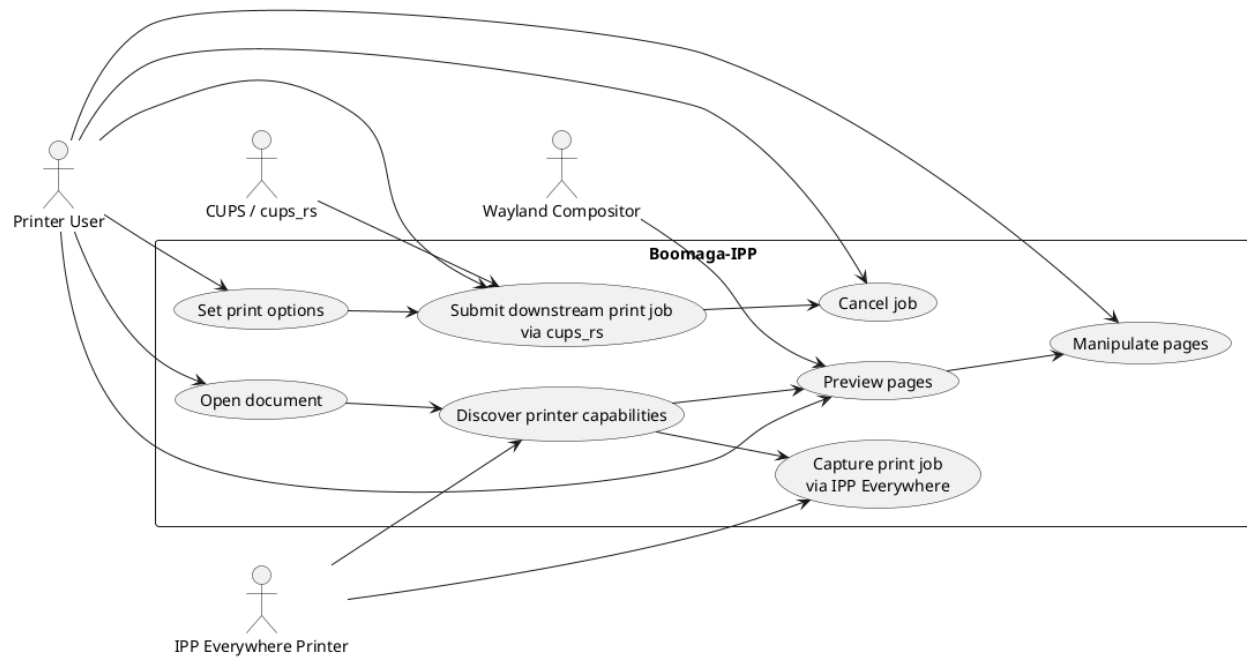


Figure C.4.: *Boomaga-IPP* Use Case.

Appendix D.

To Be Determined (TBD) List

TBD-UIS-001 Specific *UI* user option selection scenarios to be prevented. See Section 4.1, [Handling of Erroneous User Option Selections](#).

TBD-UIS-002 Additional information to be included on the About *Boomaga-IPP* pop-up menu. See Section 5.5.1, [About Boomaga-IPP](#).