

I/O redirection



Standard input , standard output

Standard input (stdin) device is the keyboard ,voice assistant , file



Standard output (stdout) device is the monitor



Use of redirection

- Output can save from file



- Output can send to mail




- Output can discard



Standard input , standard output, standard error

- Standard input (channel 0) reads input from the Keyboard
- Standard output (channel 1) sends normal output to the terminal
- Standard error (channel 2) sends error messages to the terminal

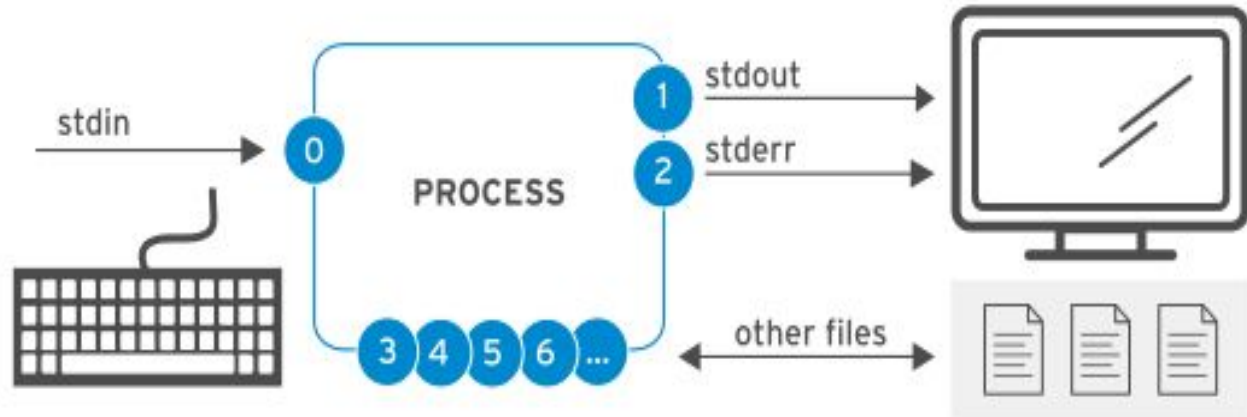

I/O redirection

- I/O redirection changes how the process gets its input or output
- you can use redirection to discard output or errors, so they are not displayed on the terminal or saved.
- If you want to discard messages, the special file `/dev/null` quietly discards channel output redirected to it and is always an empty file.

Output redirection Operators

| | |
|------------------------------|---|
| <code>> file</code> | redirect stdout to overwrite a file |
| <code>>> file</code> | redirect stdout to append to a file |
| <code>2> file</code> | redirect stderr to overwrite a file |
| <code>2> /dev/null</code> | discard stderr error messages by redirecting to /dev/null |

| | |
|---|---|
| <code>> file 2>&1</code> <code>&> file</code> | redirect stdout and stderr to overwrite the same file redirect stdout and stderr to append to the same file |
| <code>>> file 2>&1</code> <code>&>> file</code> | redirect stdout and stderr to append to the same file |

Example of Output redirection

Save a time for later reference


```
[user@host ~]$ date > /tmp/saved-timestamp
```

Concatenate four files into one

```
[user@host ~]$ cat file1 file2 file3 file4 > /tmp/all-four-in-one
```


Constructing pipelines

- A pipeline is a sequence of one or more commands separated by the pipe character (|). A pipe
- connects the standard output of the first command to the standard input of the next command.

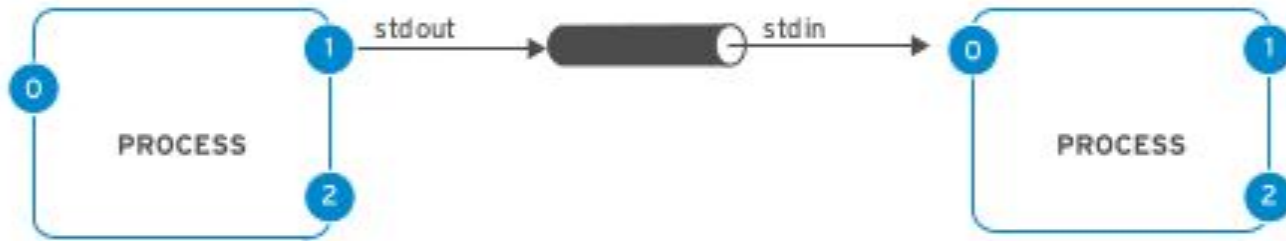

Pipeline with redirection

head will output the first 5 lines of output from ip a , with the final result redirected to a file.

```
[user@host ~]$ ip a | head -n 5 > /tmp/io.txt
```

Example of pipeline

- The output of the `ls` command is piped to `wc -l`, which counts the number of lines received from `ls` and prints that to the terminal.

```
[user@host ~]$ ls | wc -l
```