


```
return ListView.builder(  
  itemCount: items.length,  
  itemBuilder: (BuildContext context, int index) {  
    return ListTile(title: items[index].title);  
  },  
);
```

```
return ListView.builder(  
  itemCount: items.length,  
  itemBuilder: (BuildContext context, int index) {  
    return ShowItem(item: items[index]);  
  },  
);
```

Can we make the ShowItem widget  
a const widget?

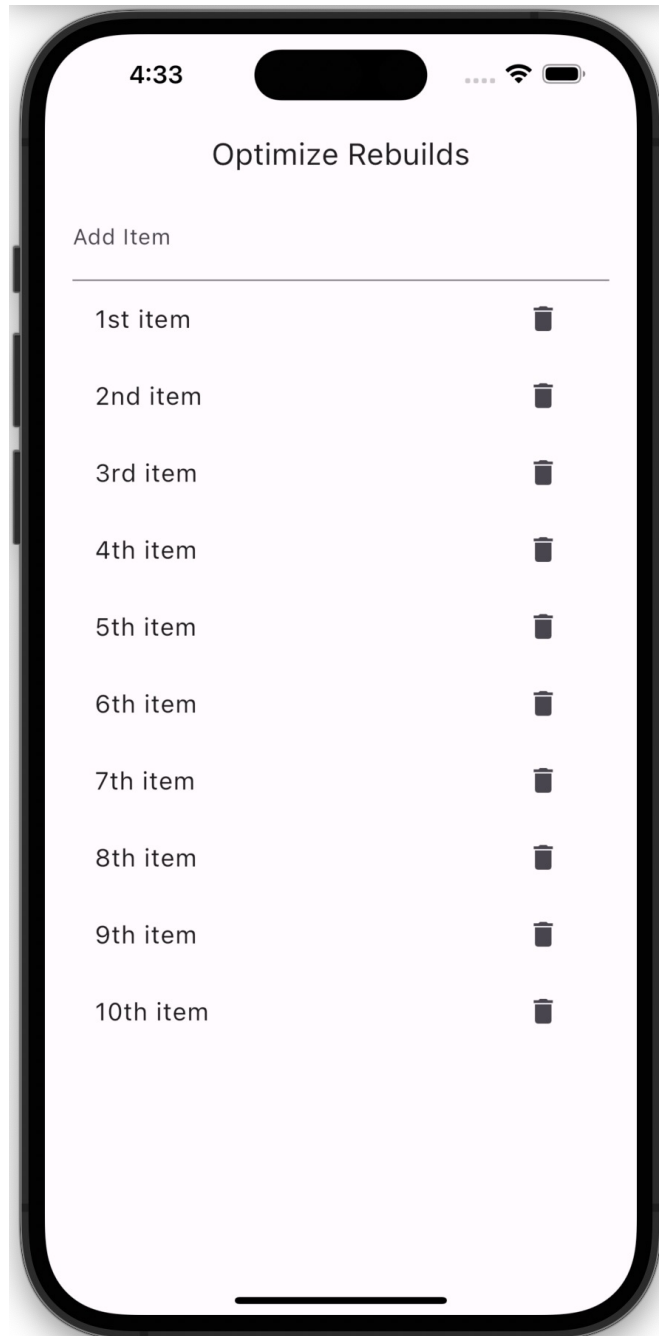

+

11th item

```
return ListView.builder(  
    itemCount: items.length,  
    itemBuilder: (BuildContext context, int index) {  
        return ShowItem(item: items[index]);  
    },  
);
```

```
return ListView.builder(  
    itemCount: items.length,  
    itemBuilder: (BuildContext context, int index) {  
        final item = items[index];  
        return ProviderScope(  
            overrides: [currentItemProvider.overrideWithValue(item)],  
            child: const ShowItem(),  
        )  
    },  
);
```