


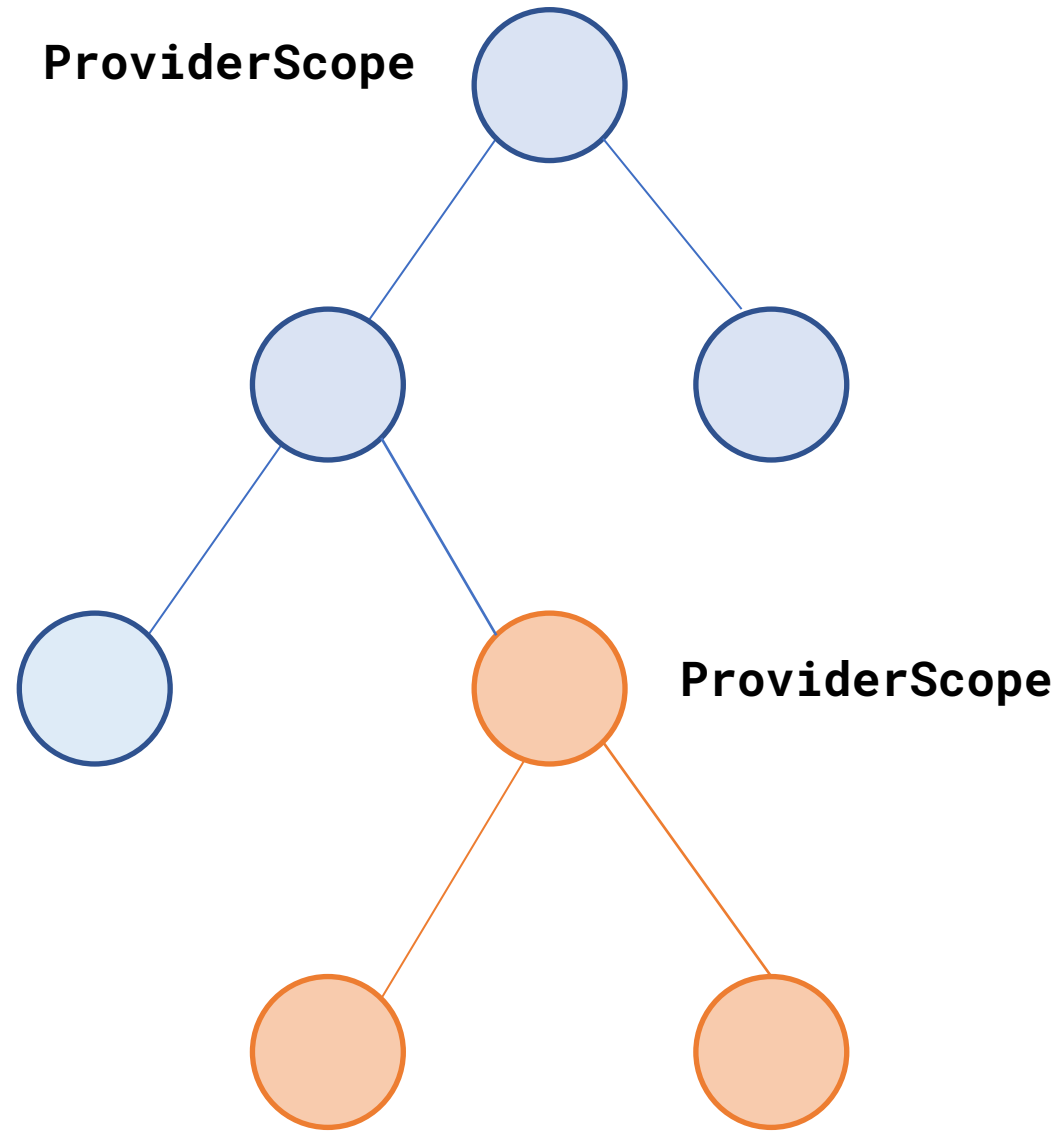

- Powerful
- Typical
- Some use cases are rarely used

Scopes – usages

1. Widget rebuild optimization
 - by removing parameters from Widget constructors → const constructors
2. Creating synchronous providers for normally async APIs
 - by replacing the value that the synchronous providers return
3. Allowing Dialogs and Overlays to inherit the state of providers from the widget subtree that causes them to be shown
 - Riverpod allows you to create a ProviderScope that can access the state of all providers in a parent scope
4. Override the state of providers for a specific subtree
 - Use subtree scoping to make providers behave independently or differently in specific widget subtrees