


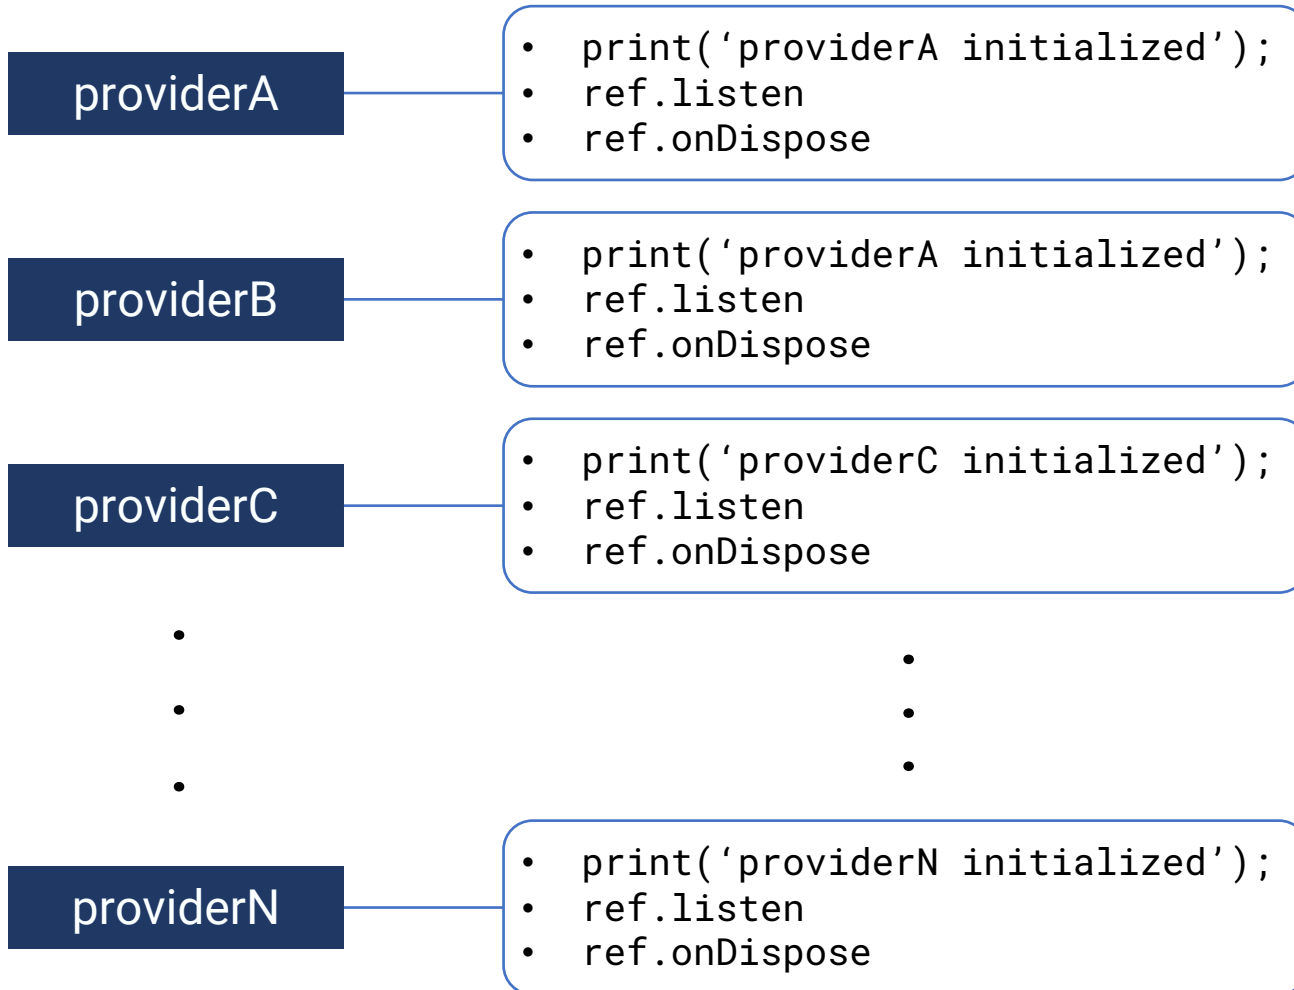

ProviderObserver

- when a provider is initialized
- when it is disposed of
- how its state has changed

```
class Logger extends ProviderObserver {  
    @override  
    void didAddProvider(  
        ProviderBase<Object?> provider,  
        Object? value,  
        ProviderContainer container,  
    ) {  
        // TODO  
        super.didAddProvider(provider, value, container);  
    }  
  
    @override  
    void didDisposeProvider(  
        ProviderBase<Object?> provider,  
        ProviderContainer container,  
    ) {  
        // TODO  
        super.didDisposeProvider(provider, container);  
    }  
  
    @override  
    void didUpdateProvider(  
        ProviderBase<Object?> provider,  
        Object? previousValue,  
        Object? newValue,  
        ProviderContainer container,  
    ) {  
        // TODO  
        super.didUpdateProvider(provider, previousValue, newValue, container);  
    }  
}
```

didAddProvider

didDisposeProvider

didUpdateProvider

didAddProvider

Add a new parameter to define ourselves the provider name with `@riverpod` annotation #2244

<https://github.com/rrousselGit/riverpod/issues/2244>

```
@override
void didAddProvider(
  ProviderBase<Object?> provider,
  Object? value,
  ProviderContainer container,
) {
  print(''
{
  "provider": "${provider.name ?? provider.runtimeType} initialized",
  "value exposed": "$value"
}''');
  super.didAddProvider(provider, value, container);
}
```

didDisposeProvider

```
@override
void didDisposeProvider(
    ProviderBase<Object?> provider,
    ProviderContainer container,
) {
    print(' '
{
    "provider": "${provider.name ?? provider.runtimeType} disposed",
}' ' ');
    super.didDisposeProvider(provider, container);
}
```

didUpdateProvider

```
@override
void didUpdateProvider(
  ProviderBase<Object?> provider,
  Object? prevValue,
  Object? newValue,
  ProviderContainer container,
) {
  print(''
{
  "provider": "${provider.name ?? provider.runtimeType} disposed",
  "previous value": "$previousValue",
  "new value": "$newValue",
}'');
  super.didUpdateProvider(provider, prevValue, newValue, container);
}
```