


FutureProvider

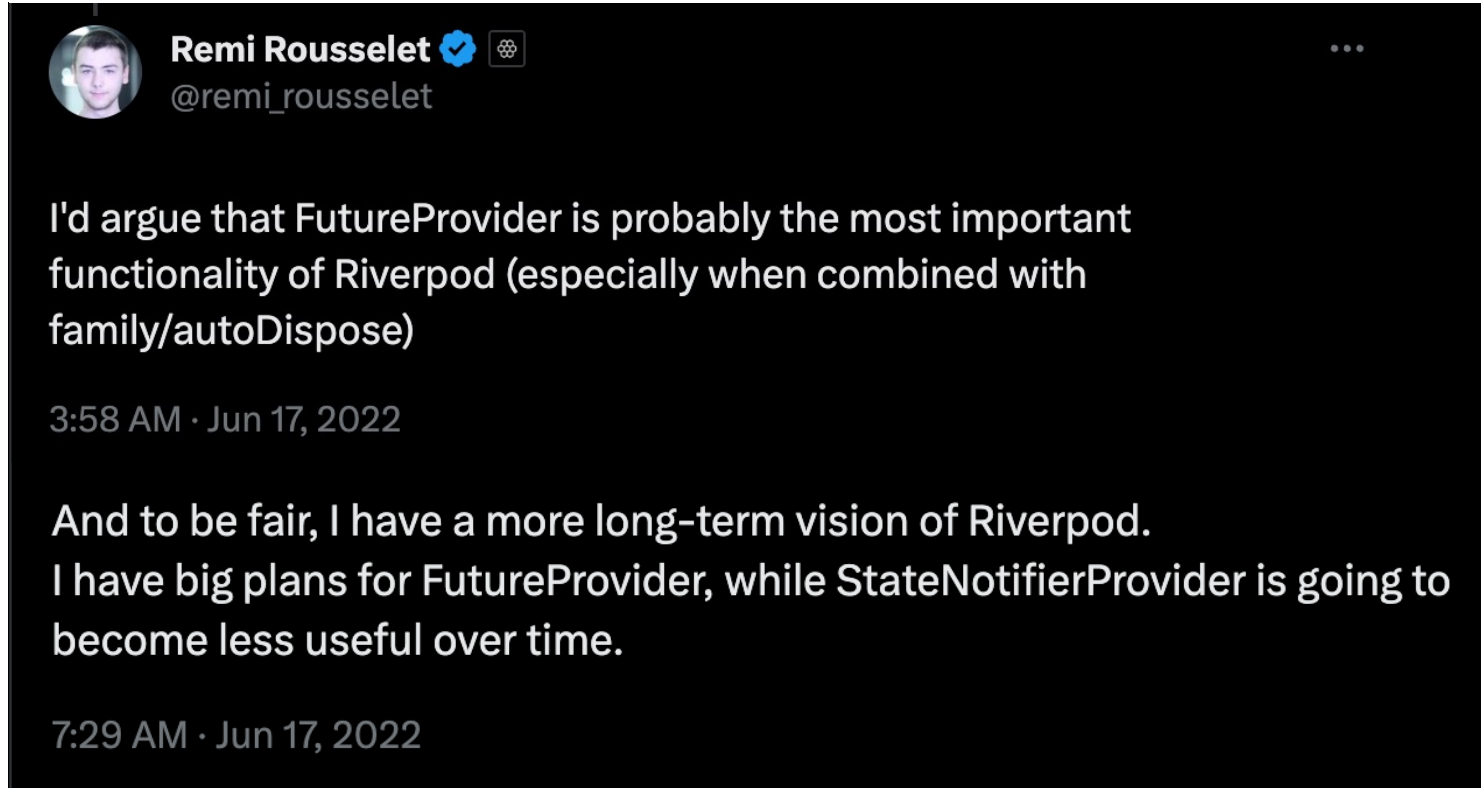


https://twitter.com/remi_rousselet/status/1537510035265404930

https://twitter.com/remi_rousselet/status/1537563116220952578

FutureProvider in provider package

AsyncValue

FutureBuilder in Flutter

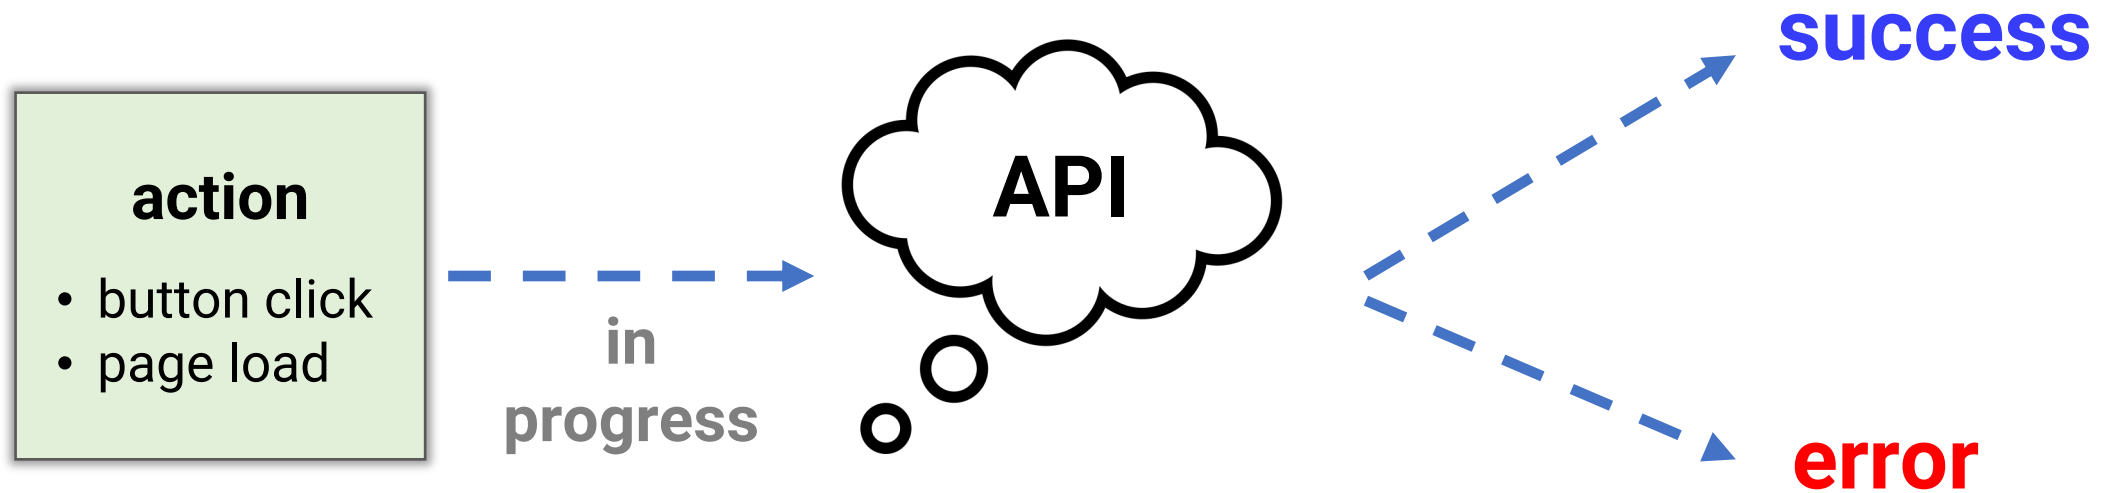

AsyncValue<T> class

A utility for safely manipulating asynchronous data.

By using **AsyncValue**, you are guaranteed that you cannot forget to handle the loading/error state of an asynchronous operation.

It also exposes some utilities to nicely convert an **AsyncValue** to a different object. For example, a Flutter Widget may use **when** to convert an **AsyncValue** into either a progress indicator, an error screen, or to show the data:

implementers	• AsyncData • AsyncError • AsyncLoading
extensions	• AsyncValueX
annotations	• sealed • immutable

AsyncValue<T> class

A utility for safely manipulating asynchronous data.

By using **AsyncValue**, you are guaranteed that you cannot forget to handle the loading/error state of an asynchronous operation.

It also exposes some utilities to nicely convert an **AsyncValue** to a different object. For example, a Flutter Widget may use **when** to convert an **AsyncValue** into either

a progress indicator, an error screen, or to show the data:

AsyncLoading

AsyncError

AsyncData

constructors

- AsyncValue.data
- AsyncValue.error
- AsyncValue.loading

```
const factory AsyncValue.data(T value) = AsyncData<T>;
```

```
const factory AsyncValue.error(Object error, StackTrace stackTrace)  
= AsyncError<T>;
```

```
const factory AsyncValue.loading() = AsyncLoading<T>;
```

```
@sealed
@immutable
abstract class AsyncValue<T> {
    const AsyncValue._();

    const factory AsyncValue.data(T value) = AsyncData<T>;


    const factory AsyncValue.loading() = AsyncLoading<T>;

    const factory AsyncValue.error(Object error, StackTrace stackTrace) =
        AsyncError<T>;

    ...
}
```

in Riverpod 3.0, AsyncValue will be true sealed class

```
extension AsyncValueX<T> on AsyncValue<T> {
    ...
}
```

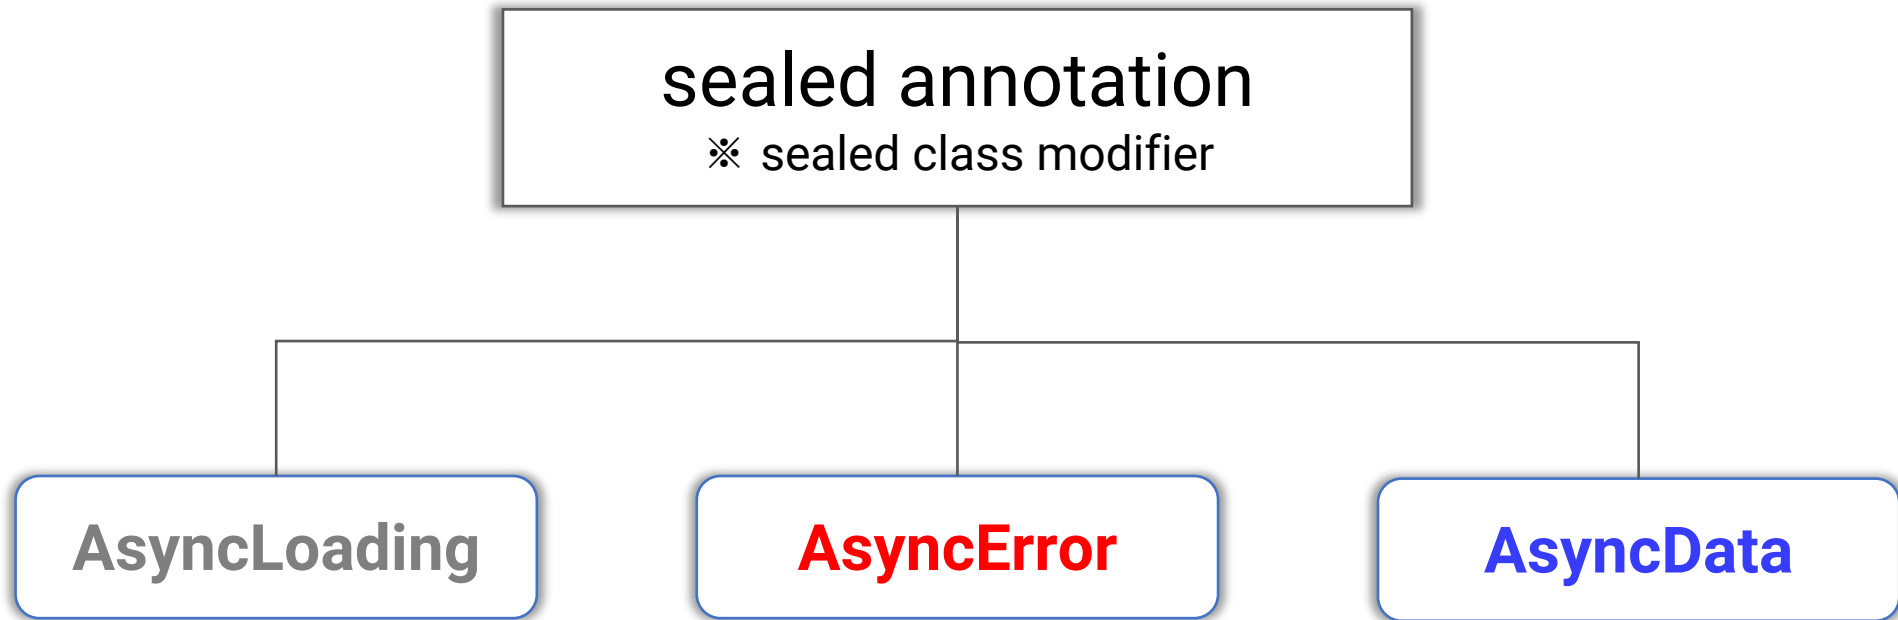- switch statement/expression (Dart 3)
 - when, map, ... (Riverpod)

```
R when<R>( {  
  skipLoadingOnReload = false,  
  skipLoadingOnRefresh = true,  
  skipError = false,  
  required R Function(T data) data,  
  required R Function(Object error, StackTrace stackTrace) error,  
  required R Function() loading,  
})
```

FutureProvider + AsyncValue

StreamProvider + AsyncValue

AsyncNotifierProvider + AsyncValue