


How Gemini is wired

Slack text never goes to Gemini as a prompt. It is wrapped as untrusted notes, ranked in memory, then discarded. FastAPI on Cloud Run is the only `google.genai` client. A security edge sits in front of every hop.

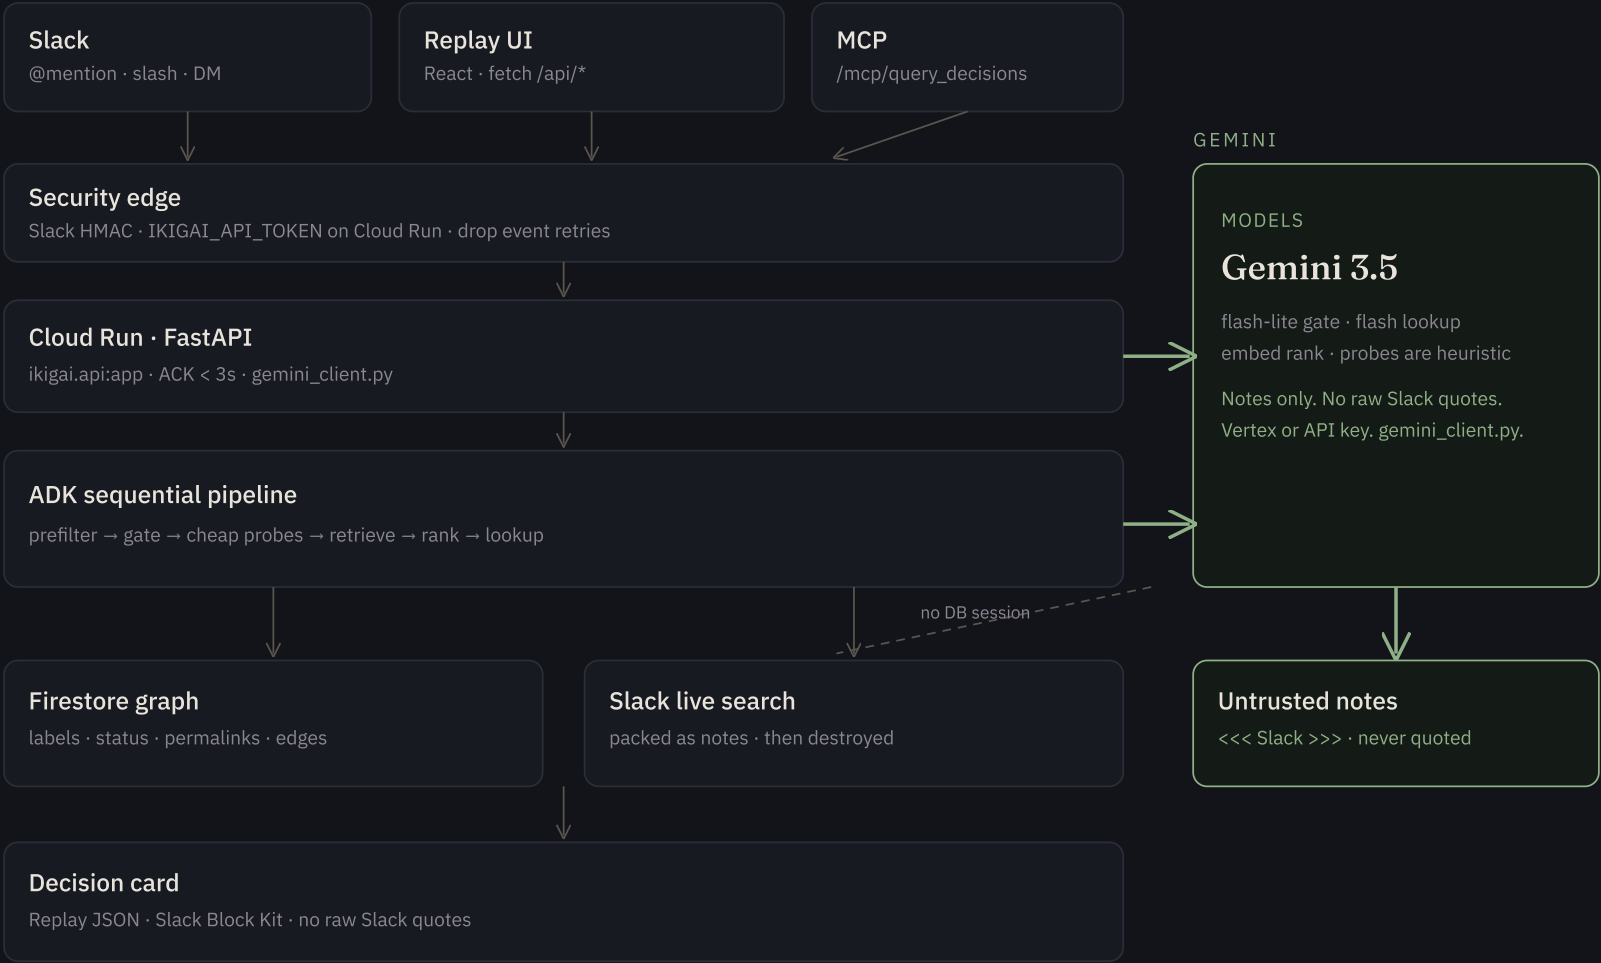

Who talks to whom

Gemini is a backend RPC. Slack text reaches it only as untrusted notes. It has no session to the UI or Firestore.

FROM	TO	HOW
Replay UI	FastAPI	fetch POST /api/run — no Gemini key in the browser
Slack	Guard	HMAC v0 signature · drop x-slack-retry-num · then Bolt ACK
MCP / Replay	Guard	IKIGAI_API_TOKEN on Cloud Run for /api and /mcp
FastAPI	Gemini 3.5	untrusted notes via gemini_client.py — not raw Slack quotes
FastAPI	Firestore	graph().upsert · labels, status, permalinks, edges
FastAPI	Slack search	packed as notes, discarded after the request
Gemini	Replay UI	Never — the browser only reads the JSON card from FastAPI
Gemini	Firestore	Never — the pipeline writes derived metadata after lookup

Request path

- 1
- Guard: Slack HMAC, Cloud Run API token, drop Events API retries. Then /api/run, /slack/*, or /mcp/.*
- 2
- Prefilter drops chatter with no model. Watcher gate uses Flash-Lite on untrusted text. Commands skip the gate.
- 3
- Cheap probes are heuristic — no Gemini. Retrieve Slack + Firestore, then pack thread notes.
- 4
- embed() ranks in memory and drops vectors. Flash lookup reads notes only. Never a raw Slack quote.
- 5
- FastAPI writes derived labels to Firestore and returns a card. Gemini never sees the database.

What crosses the database

STORED	NEVER STORED
+ derived labels	× Slack message text
+ status	× Slack user IDs
+ confidence	× content embeddings
+ permalinks	× a persistent vector index
+ edges	

Models

Gate (watcher)	gemini-3.5-flash-lite
Probes	heuristic — no model
Lookup / briefing	gemini-3.5-flash
Transient rank	gemini-embedding-001